




## METRIC FEMALE 24° CONE - 90° ELBOW - L TYPE (2)

FEMMINA 90° METRICA DKOL CON O-RING 24°  
 FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L  
 DKO-L 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS  
 HEMBRA GIRATORIA A 90° MÉTRICA CON O-RING CONO 24° - SERIE L

\* CRIMPED NUT  
 DADO PINZATO

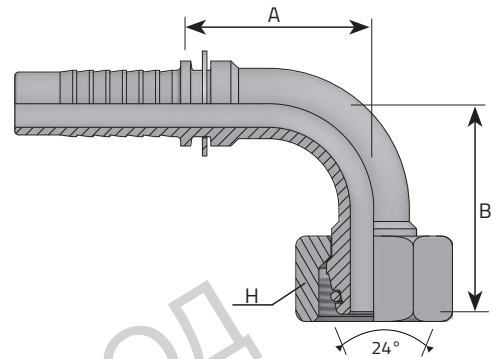

Code	Tube		Thread	Dimensions				Pressure		
	D.N.	Hose		Diam	T	D	H	B	A	Bar
		Inch	mm	mm	mm	mm	mm	mm		
F90E1026L18	-10	5/8"	16	M26 x 1.5	18	32	50.5	48.5	160	2320
F90E1030L22	-10	5/8"	16	M30 x 2	22	36	53	48.5	160	2320
* F90E1226L18	-12	3/4"	19	M26 x 1.5	18	32	63.5	53.5	160	2320
F90E1230L22	-12	3/4"	19	M30 x 2	22	36	55.5	56.5	160	2320
F90E1636L28	-16	1"	25.4	M36 x 2	28	41	72.5	73	100	1450
F90E2045L35	-20	1.1/4"	31.8	M45 x 2	35	50	86.5	92	100	1450
F90E2452L42	-24	1.1/2"	38.1	M52 x 2	42	60	94	99	100	1450