




METRIC FEMALE 24° CONE - L TYPE (1)

FEMMINA 90° METRICA DKOL CON O-RING 24°
 FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L
 DKO-L 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA GIRATORIA MÉTRICA CON O-RING CONO 24° - SERIE L

* CRIMPED NUT
 DADO PINZATO

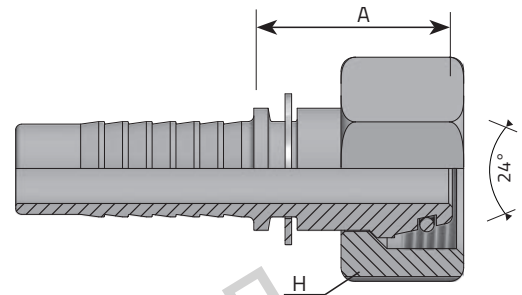

| Code | Tube | | Thread | | Dimensions | | | Pressure | |
|-------------|------|-------|--------|-----------|------------|----|------|----------|------|
| | D.N. | Hose | Diam | T | D | H | A | Bar | Psi |
| | Inch | | mm | mm | mm | mm | mm | | |
| FE0312L6 | -3 | 3/16" | 4.8 | M12 x 1.5 | 6 | 14 | 25.5 | 250 | 3626 |
| FE0314L8 | -3 | 3/16" | 4.8 | M14 x 1.5 | 8 | 17 | 25.5 | 250 | 3626 |
| * FE0412L6 | -4 | 1/4" | 6.4 | M12 x 1.5 | 6 | 17 | 21 | 250 | 3626 |
| FE0414L8 | -4 | 1/4" | 6.4 | M14 x 1.5 | 8 | 17 | 23.5 | 250 | 3626 |
| FE0416L10 | -4 | 1/4" | 6.4 | M16 x 1.5 | 10 | 19 | 26 | 250 | 3626 |
| FE0418L12 | -4 | 1/4" | 6.4 | M18 x 1.5 | 12 | 22 | 26 | 250 | 3626 |
| * FE0514L8 | -5 | 5/16" | 7.9 | M14 x 1.5 | 8 | 19 | 21.5 | 250 | 3626 |
| FE0516L10 | -5 | 5/16" | 7.9 | M16 x 1.5 | 10 | 19 | 26 | 250 | 3626 |
| FE0518L12 | -5 | 5/16" | 7.9 | M18 x 1.5 | 12 | 22 | 26 | 250 | 3626 |
| * FE0616L10 | -6 | 3/8" | 9.5 | M16 x 1.5 | 10 | 19 | 23.5 | 250 | 3626 |
| FE0618L12 | -6 | 3/8" | 9.5 | M18 x 1.5 | 12 | 22 | 26.5 | 250 | 3626 |
| FE0622L15 | -6 | 3/8" | 9.5 | M22 x 1.5 | 15 | 27 | 27 | 250 | 3626 |
| * FE0818L12 | -8 | 1/2" | 12.8 | M18 x 1.5 | 12 | 22 | 25.5 | 250 | 3626 |
| FE0822L15 | -8 | 1/2" | 12.8 | M22 x 1.5 | 15 | 27 | 27.5 | 250 | 3626 |
| FE0826L18 | -8 | 1/2" | 12.8 | M26 x 1.5 | 18 | 32 | 28 | 160 | 2320 |
| FE1026L18 | -10 | 5/8" | 16 | M26 x 1.5 | 18 | 32 | 30 | 160 | 2320 |