




## METRIC FEMALE 24° CONE - L TYPE (1)

FEMMINA 90° METRICA DKOL CON O-RING 24°  
 FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L  
 DKO-L 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS  
 HEMBRA GIRATORIA MÉTRICA CON O-RING CONO 24° - SERIE L

\* CRIMPED NUT  
 DADO PINZATO

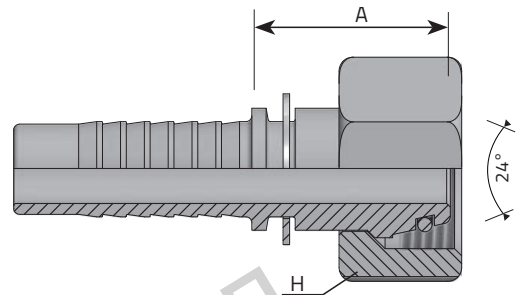

Code	Tube		Diam	Thread	Dimensions			Pressure	
	D.N.	Hose			T	D	H	A	Bar
	Inch	mm	mm	mm	mm	mm	mm		
FE0312L6	-3	3/16"	4.8	M12 x 1.5	6	14	25.5	250	3626
FE0314L8	-3	3/16"	4.8	M14 x 1.5	8	17	25.5	250	3626
* FE0412L6	-4	1/4"	6.4	M12 x 1.5	6	17	21	250	3626
FE0414L8	-4	1/4"	6.4	M14 x 1.5	8	17	23.5	250	3626
FE0416L10	-4	1/4"	6.4	M16 x 1.5	10	19	26	250	3626
FE0418L12	-4	1/4"	6.4	M18 x 1.5	12	22	26	250	3626
* FE0514L8	-5	5/16"	7.9	M14 x 1.5	8	19	21.5	250	3626
FE0516L10	-5	5/16"	7.9	M16 x 1.5	10	19	26	250	3626
FE0518L12	-5	5/16"	7.9	M18 x 1.5	12	22	26	250	3626
* FE0616L10	-6	3/8"	9.5	M16 x 1.5	10	19	23.5	250	3626
FE0618L12	-6	3/8"	9.5	M18 x 1.5	12	22	26.5	250	3626
FE0622L15	-6	3/8"	9.5	M22 x 1.5	15	27	27	250	3626
* FE0818L12	-8	1/2"	12.8	M18 x 1.5	12	22	25.5	250	3626
FE0822L15	-8	1/2"	12.8	M22 x 1.5	15	27	27.5	250	3626
FE0826L18	-8	1/2"	12.8	M26 x 1.5	18	32	28	160	2320
FE1026L18	-10	5/8"	16	M26 x 1.5	18	32	30	160	2320