


Нож стругарски със сменяеми твърдосплавни пластини 90° STGCR/L

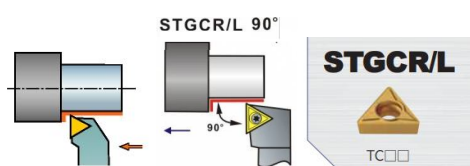

За Външна Обработка

Държач : регулиране на ъгъла 90°

Държач : Тв. пл. -тип ТС*


Държач със Система със закрепващ винт

Codice	Lato	Stelo	Vite	Bussola	Base	Inserto (non incluso)
STGCR16/11	Dx/R 16 x 16 mm T8 / M2,5 mm	-----	-----	-----	-----	TCMT110204N
STGCL16/11	Sx/L 16 x 16 mm T8 / M2,5 mm	-----	-----	-----	-----	TCMT110204N
STGCR20	Dx/R 20 x 20 mm T15 / M3,5 mm BU3550	-----	-----	-----	BSTG16	TCMT16T304N - TCMT16T308N
STGCL20	Sx/L 20 x 20 mm T15 / M3,5 mm BU3550	-----	-----	-----	BSTG16	TCMT16T304N - TCMT16T308N
STGCR25	Dx/R 25 x 25 mm T15 / M3,5 mm BU3550	-----	-----	-----	BSTG16	TCMT16T304N - TCMT16T308N
STGCL25	Sx/L 25 x 25 mm T15 / M3,5 mm BU3550	-----	-----	-----	BSTG16	TCMT16T304N - TCMT16T308N


P S K N R 25 25 - M 12

1 Clamping Method of Insert 2 Insert Shape 3 Holder Style 4 Clearance Angle of Insert 5 Hand 6 Height of Shank 7 Width of Shank 8 Length of Holder 9 Length of Insert Cutting Edge


1 Clamping Method of Insert

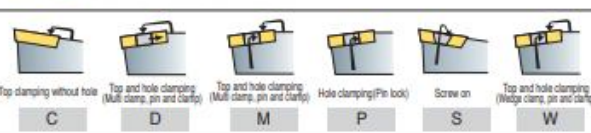


2 Insert Shape




3 Holder Style

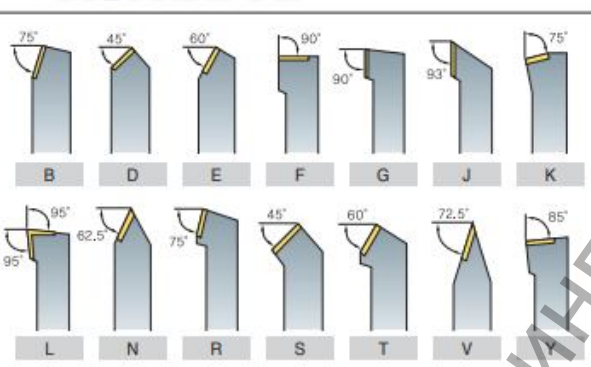


4 Clearance Angle of Insert




5 Hand



6 Height of Shank



7 Width of Shank



8 Length of Holder

A - 32	H - 100	Q - 180	X-Special Item
B - 40	J - 110	R - 200	
C - 50	K - 125	S - 250	
D - 60	L - 140	T - 300	
E - 70	M - 150	U - 350	
F - 80	N - 160	V - 400	
G - 90	P - 170	W - 450	

9 Length of Insert Cutting Edge

