


VELOS

NEW BLACK EDITION

QK-V600	230Vac	max 600kg
QK-V600B	24Vdc	
QK-V600FX	230Vac HIGH SPEED	

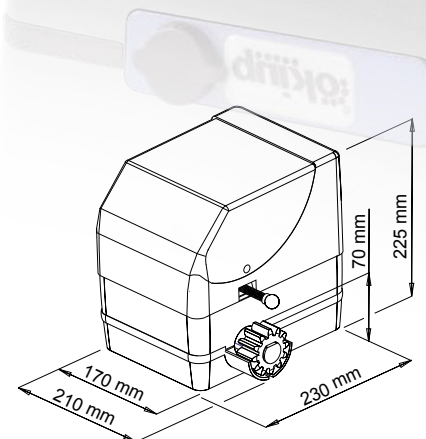

Manual release system
Sblocco manuale
Déblocage manuel



Long lasting gears
Ingranaggi lunga durata
Engrenages longue durée

TECHNICAL FEATURES	DATI TECNICI	DONNEES TECHNIQUES	QK-V600 QK-V600FX	QK-V600B
Power supply	Alimentazione	Alimentation	230Vac 50 / 60Hz	24Vdc
Current absorbed (motor) (A)	Assorbimento motore (A)	Intensité moteur (A)	1,3	8
Power absorbed (W)	Potenza assorbita (W)	Puissance absorbée (W)	250	210
Capacitor (µF)	Condensatore (µF)	Condensateur (µF)	-	-
Protection level (IP)	Grado di protezione (IP)	Indice de protection (IP)	54	54
Motor speed (rpm)	Velocità motore (rpm)	Vitesse moteur (rpm)	1400 2800	1800
Gate speed (m/min)	Velocità cancello (m/min)	Vitesse portail (m/min)	12 20 HIGH SPEED	12
Max. gate weight (kg)	Peso max. cancello (kg)	Poids maxi portail (kg)	600	600
Working temp. (°C Min/Max)	Temp. di esercizio (°C Min/Max)	Temp. de service (°C Min/Max)	-30/+70	-30/+70
Thermal protection (°C)	Termoprotezione (°C)	Protection thermique (°C)	150	-
Insulation class	Classe di isolamento	Classe d'isolation	F	F
Working cycle (%)	Ciclo di lavoro (%)	Cycle de travail (%)	50	100
Weight (kg)	Peso (kg)	Poids (kg)	9	9

KIT

QK-V600KIT
QK-V600BKIT

230Vac max 600kg
24Vdc max 600kg

QK-V600KITFX 230Vac max 600kg
HIGH SPEED 20 m/MIN

50 PCS
PALLET




Gearmotor with control board and 433,92MHz receiver
+ Antenna + Counterplate + 4 channel transmitter +
Pair of IR photocells + Flashing lamp + Key switch

Motoriduttore con centrale e radiricevente 433,92MHz
+ Antenna + Contropiastra + Telecomando quadricanale
+ Coppia di fotocellule IR + Lampeggiante + Selettore
a chiave

Motorréducteur avec logique de commande et récepteur
radio 433,92MHz + Antenne + Patte de fixation +
Émetteur 4 canaux + Jeu de photocellules IR + Feu
clignotant + Sélecteur à clé

The content of the package may vary; consult the retailer
Il contenuto della confezione potrebbe variare; contattare il rivenditore
Le contenu du paquet peut varier; contactez revendeur

OPTIONALS



QK-CE2204UNI

230V control board with
433,92MHz radioreceiver
(replacement)

Centrale 230V con
radiorecivente 433,92MHz
(ricambio)

Logique de commande
230V avec récepteur
433,92MHz (rechange)



QK-CE24AQ

24V control board with
433,92MHz radioreceiver
(replacement)

Centrale 24V con
radiorecivente 433,92MHz
(ricambio)

Logique de commande
24V avec récepteur
433,92MHz (rechange)



QK-BPACK1

2 x 12V batteries

2 batterie 12V

2 batteries 12V



QK-CPV

Counterplate

Contropiastra

Patte de fixation




QK-CRN

22x22x1000 nylon rack
(M4). Screw mount

Cremagliera in nylon
22x22x1000 (M4).
Ad avvitare

Crémaillière nylon
22x22x1000 (M4).
À visser




QK-CRF3012

30x12x1000 iron rack
(M4). Screw mount

Cremagliera in ferro
30x12x1000 (M4).
Ad avvitare

Crémaillière acier
30x12x1000 (M4).
À visser



QK-CRF2222

22x22x1000 iron rack
(M4). Weld mount

Cremagliera in ferro
22x22x1000 (M4).
A saldare

Crémaillière acier
22x22x1000 (M4).
À souder

