REMS

www.rems.de




Innovative
manufacturer of
machines and tools
for pipe working

2014

Catalogue

Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

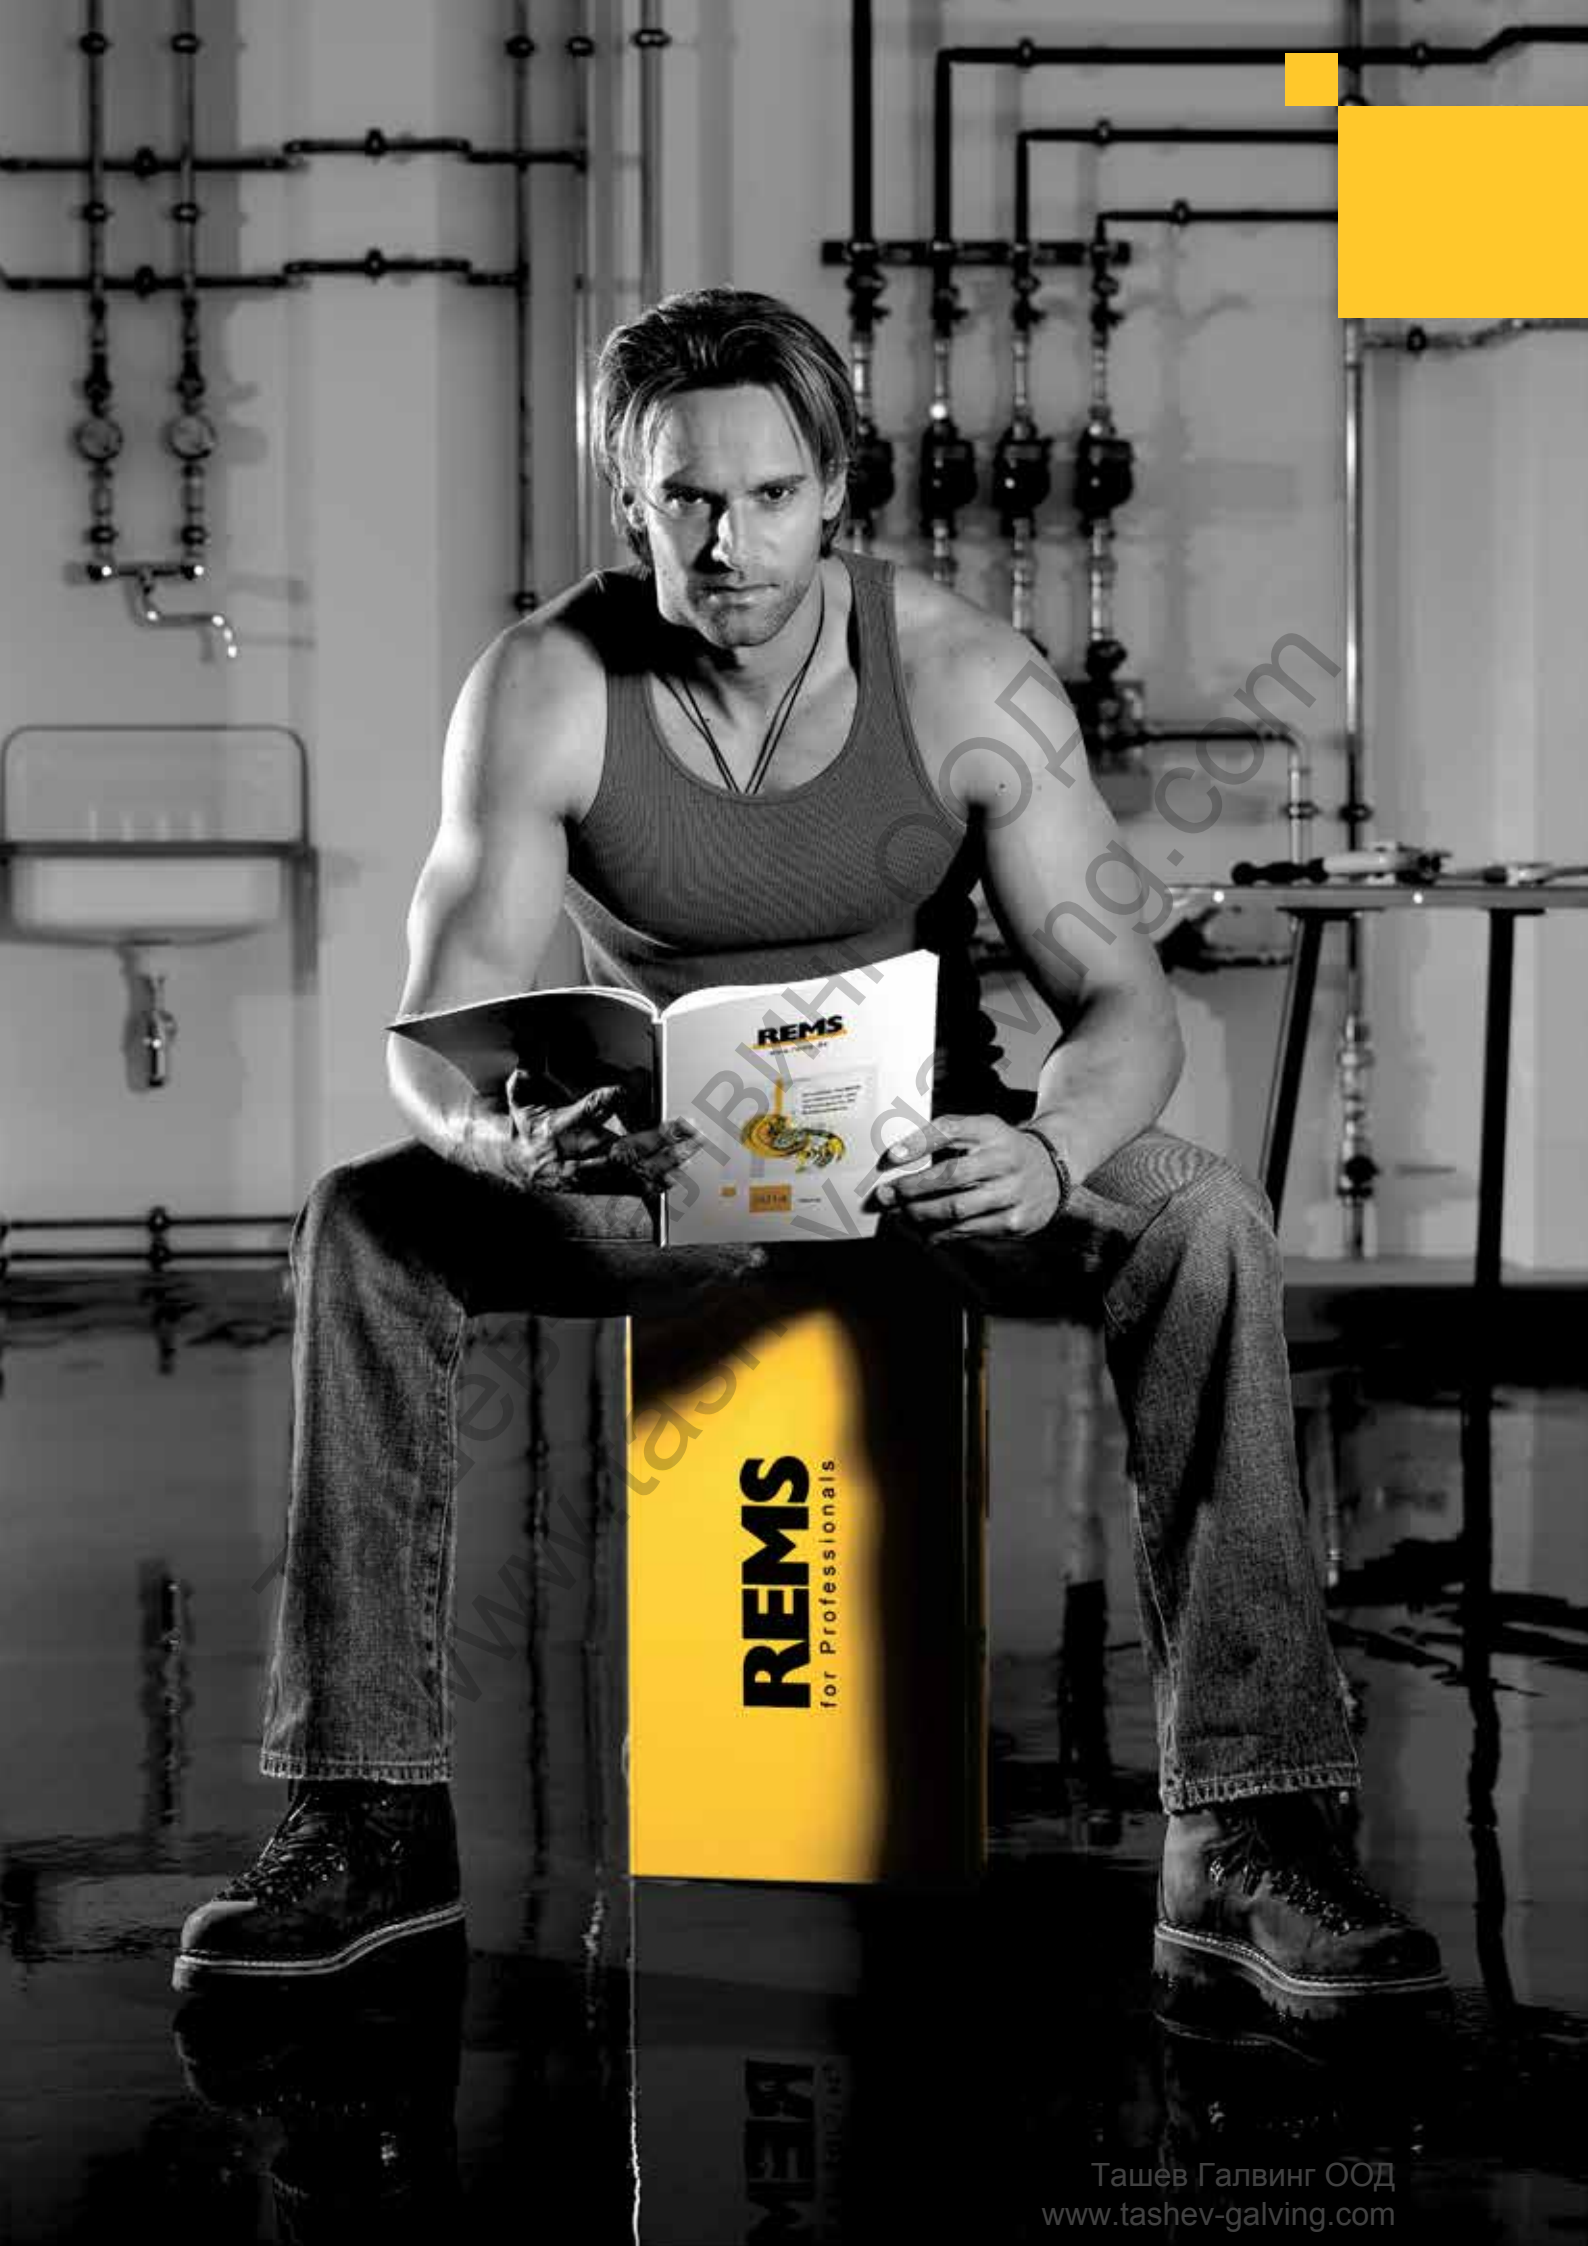

Ташев Галвинг ООД
www.tashev-galving.com

Contents


Threading
Roll Grooving 22


Sawing 54


Cutting, Chamfering,
Deburring 68


Assembling, Testing,
Filling, Flushing 90


Bending 106


Radial Press Jointing 118


Axial Press Jointing 162


Expanding, Extracting 170


Soldering, Brazing 184


Freezing 190


Pipe and Drain Inspection /
Pipe and Drain Cleaning 194


Plastic Pipe Welding 208


Diamond Core Drilling
Diamond chasing saws 218

We deliver exclusively on the basis of our general conditions of sale and delivery.

The prices stated in this catalogue are valid for one piece respectively for one set (e.g. dies) or one pack (e.g. saw blades). Prices do not include any value added tax (VAT) and are subject to change without notice. These prices supersede all previous prices.

Drawings, illustrations, dimensions, weights, standards and other data stated in this catalogue are not binding and are subject to alteration. All power data stated to be understood as the rated power input. Subject to alternation. All rights reserved, particularly for translations, reproductions, illustrations, radio transmission, photomechanic reproductions or similar and storage of data in computers, including utilization in extracts.

© Copyright 2014
REMS GmbH & Co KG, Waiblingen.

Sale through specialist dealers.

Ташев-Галвинг ООД
www.tashev-galving.com



They are creative and have plenty of practical experience, they continuously find possibilities for improvement of the work of the installation professional: REMS development engineers are innovative and therefore important factors in the success of the company.

Ташев-Галвинг ООД
www.tashev-galving.com

At the forefront of technical advance. Development is never finished.

Since its foundation in 1909 REMS has been developing products for the pipe working, especially for sanitary and heating installers. At first, hand tools and then subsequently machines and electric power tools. The stipulation of the company founder Christian Föll ”REMS must be superior” has always been the benchmark for our actions. Today REMS is a leading manufacturer of machines and tools for the pipe working.

REMS development engineers have persuasive, groundbreaking ideas which ease the daily routines of the installations professional. They have all the significant requirements in their focus and use all their comprehensive practical experience. Experts from all areas of industry ensure that every possibility for improvement is integrated in the new development. In this way the perfect tools for the tough demands of the building site are created. The REMS products are highly valued because of their innovative technology as well as their high standards of quality and are being used everywhere in the world. Both trade and user profit in this way.

Again and again REMS is able to maintain its position at the forefront of technical progress as a result of its innovative products. Many valid national and international patents prove this.

Ташев-Галвинг ООД
www.tashev-galving.com



Through the application of modern construction and development techniques, the quality of REMS products has been to the fore from the beginning: Safe use, robust design, simple operation, durability.



New ideas, technical progress and REMS belong together: e.g. REMS Amigo, REMS Tiger, REMS Curvo, REMS Mini-Press ACC – products, which have revolutionised the application technology.



Fully automatic 3D measuring machines are a part of the comprehensive quality control system at REMS. The accuracy of measurements at 0.001 mm guarantees the highest precision.

Ташев Галвинг ООД
www.tashev-galving.com

Highly modern production – guarantor for REMS quality products.

Made in Germany. Our own production plant is located in Waiblingen near Stuttgart, in the centre of Germany's high-tech industrial region. There highly modern equipment and facilities are available for research and development, for production and quality control. In addition to this there is a permanent staff of highly-qualified employees, who in part represent the 4th generation of service at REMS. They have the special level of knowledge and experience that is essential for the manufacture of quality products.

Quality means much more to REMS than simply dimensional accuracy and function. It is backed up by a comprehensive quality control system, which begins as early as the assessment of market needs and which is ever present during the product development and manufacture and continues with systematic quality analysis in the market. Furthermore the quality of the production processes is regularly monitored and affirmed by the testing agency that awards the GS safety sign.

All REMS products correspond with safety and accident prevention regulations and fulfil the respective appropriate European standards according to the terms of the EU directives. Additionally, with the exception of a few hand tools which are not safety relevant, all REMS products are checked and approved by independent testing agencies. All REMS products thereby meet an especially high standard with regard to work safety, functional safety and operational safety.



Permanent innovations in processes as well as investments in efficient CNC manufacturing systems engineering ensure that REMS products are amongst the best in the world.






Flexible assembly lines allow adjustment to the requirements of the customer at any time.

REMS is evaluated as having the largest number of training staff in the region. So it is able to maintain its own know-how at a high level.



Tightly defined test intervals during the whole manufacturing process as well as comprehensive function and safety checks after completion of the assembly ensure that no faulty product leaves the plant.

Ташев Галвинг ООД
www.tashev-galving.com

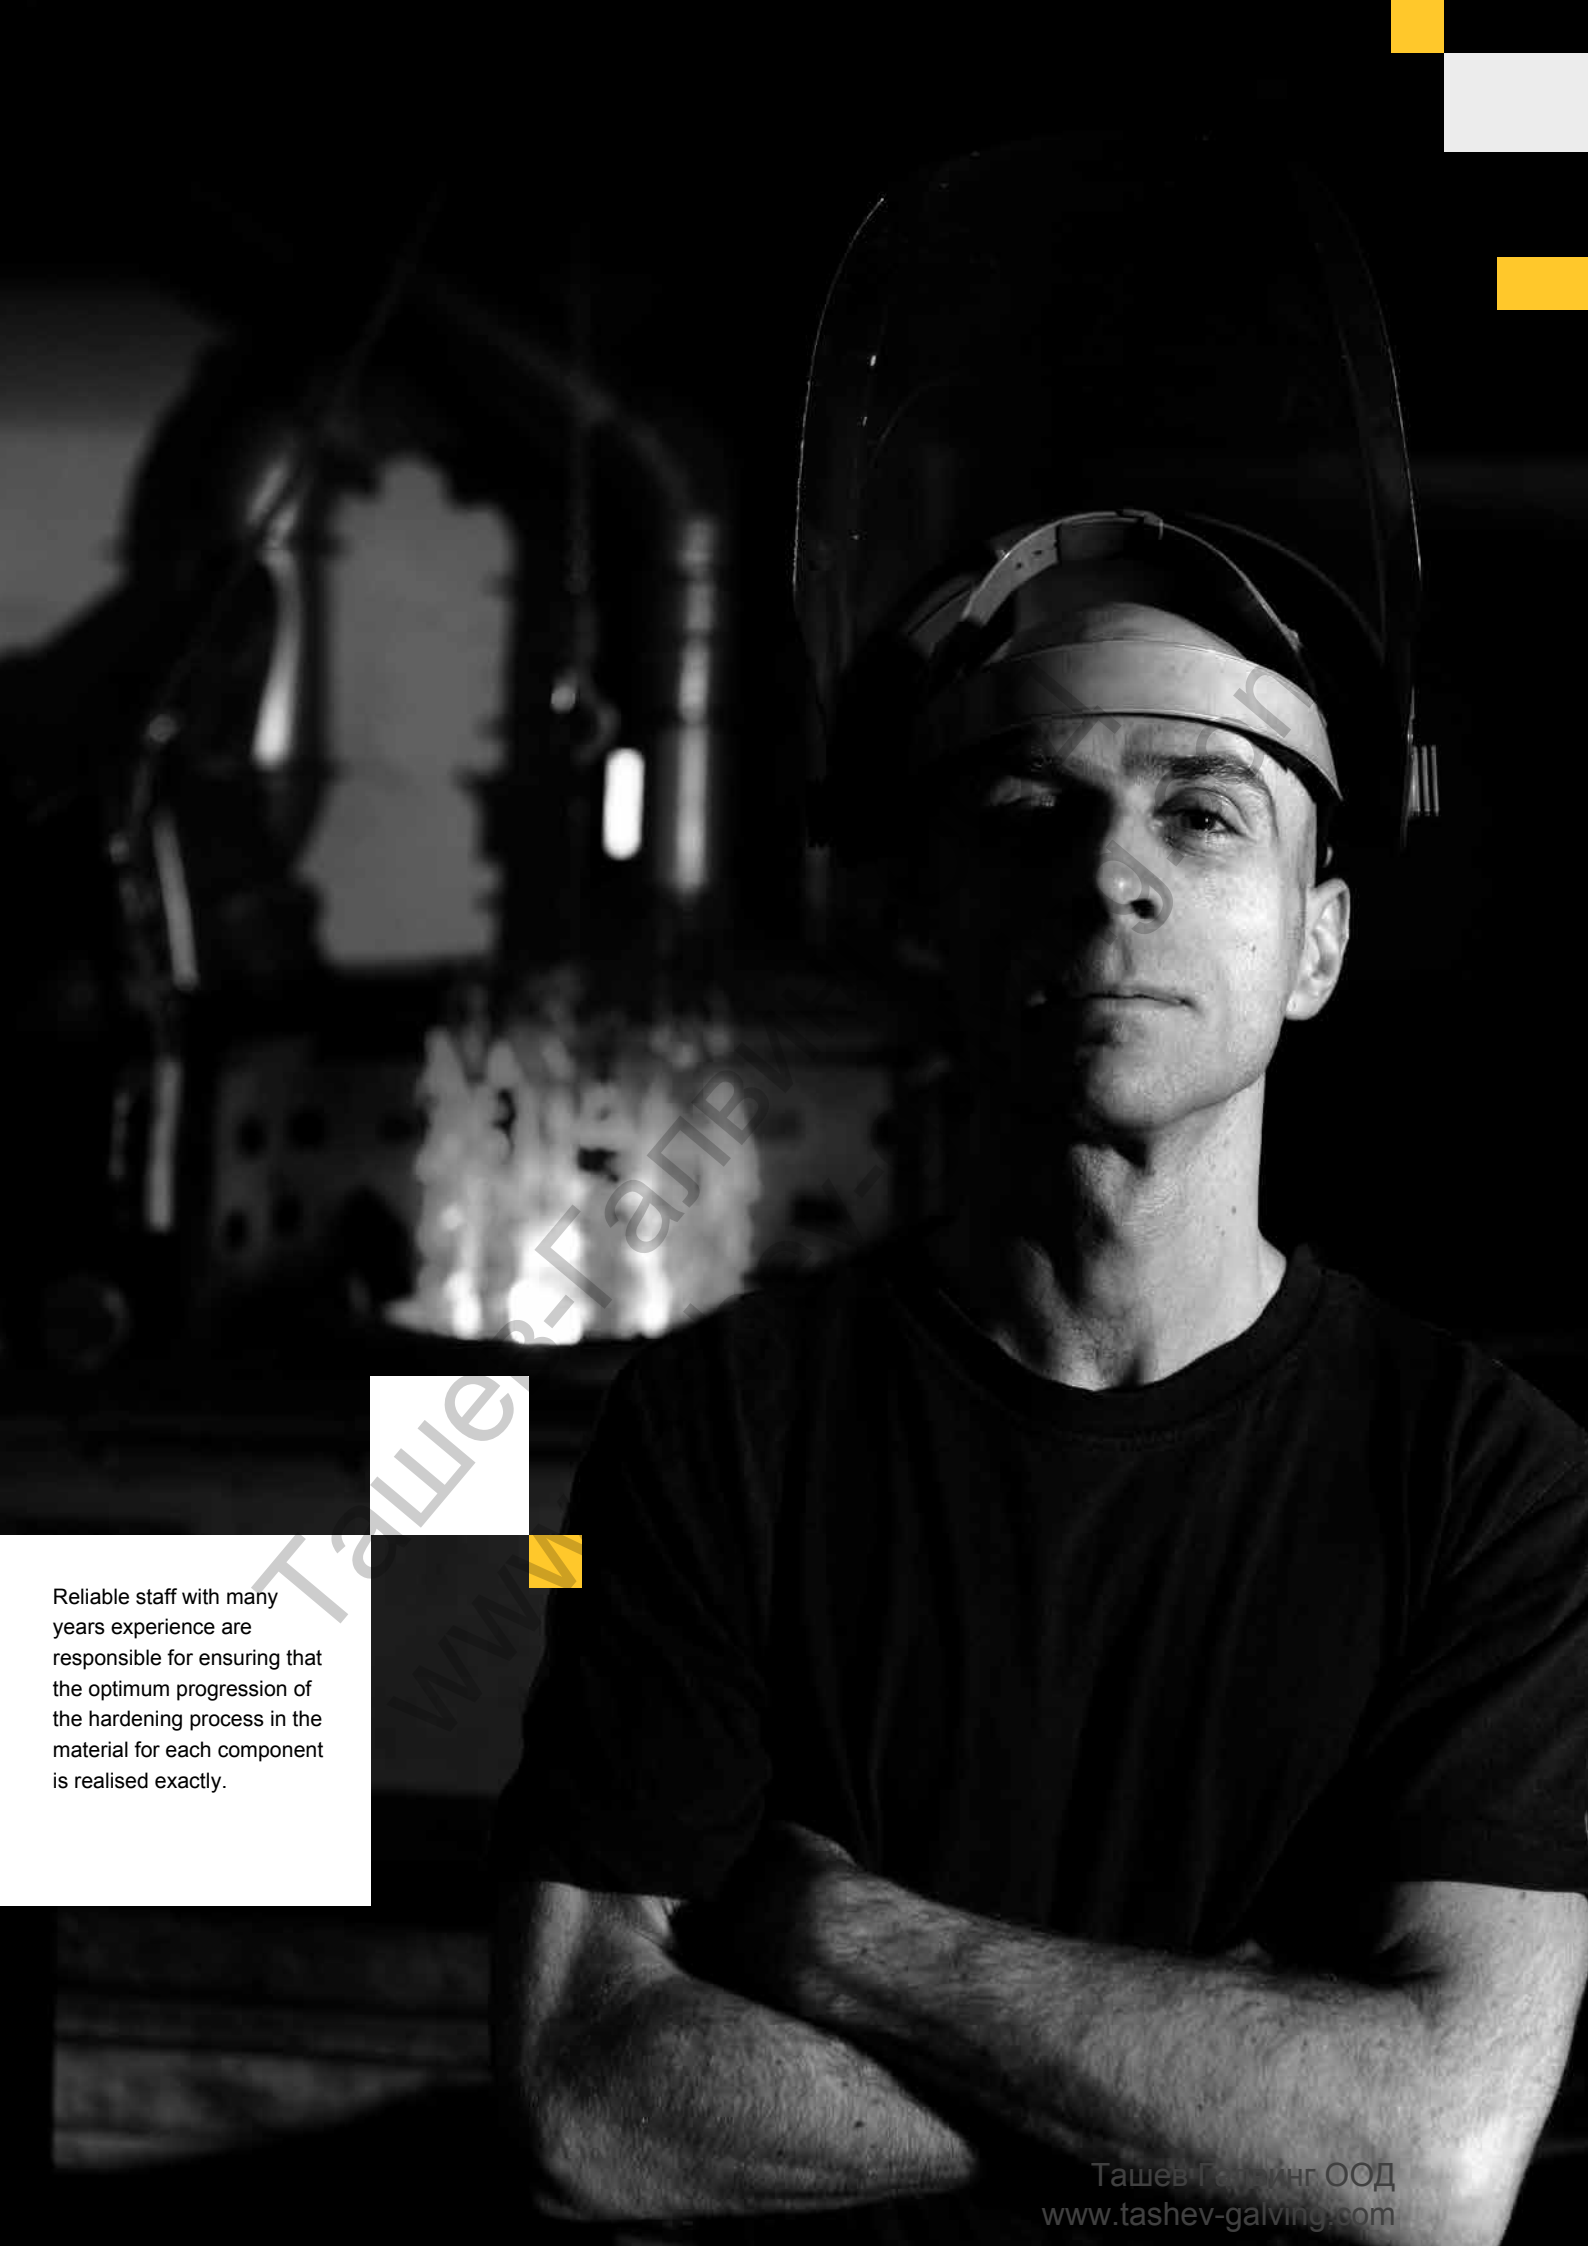

Reliable staff with many years experience are responsible for ensuring that the optimum progression of the hardening process in the material for each component is realised exactly.

Ташев-Галвинг ООД
www.tashev-galving.com

Nobody hardens metal better than us. Therefore, we do it ourselves.



Our own heat treatment shop – an important aspect of the know-how and the secret of REMS quality tools.

Highly durable, safe in application and extremely resilient – a tool can only meet such demands if the components are perfectly hardened.

An important cornerstone for the quality of REMS tools is laid in our own heat treatment shop. The decades of experience has provided important know-how and is the secret of REMS quality tools. The special heat treatment leads to an ideal combination of solidity and robustness and to an especially long durability, as, for example for threading dies, cutter wheels and pressing tongs. The heat treatment process is automatically monitored and permanently recorded by efficient computer technology. This allows a uniformly high product quality.



The proven, indestructible REMS quality threading dies. Of robust, especially hardened special steel.



REMS cutter wheels complement the special demands of the various materials. In particular the special hardening process determines the durability of the REMS cutter wheels.



The art of hardening:
It creates extremely resilient components for the highest demands.

Ташев Галвинг ООД
www.tashev-galving.com



Only two from every 45 employees in the logistics industry know that time is money. Speed and absolute reliability are the most important factors for delivery and service.

Ташев Галвинг ООД
www.tashev-galving.com

REMS – for professionals.
Excellent service. On location everywhere.

REMS produces machines and tools for professionals – the demands required are high. REMS fulfils its tasks with competence, responsibility and a first-rate service. This also includes the swift delivery as well as maintenance and repair work. A high degree of flexibility and absolute reliability are the basis for the excellent service.

The whole logistics organisation is oriented towards the needs of our customers. In order to be able deliver promptly REMS keeps more than 10,000 items ready in the central storage facility. All wear and replacement parts are always available. A service that keeps down-times to a minimum.

In the case of a repair the area-wide network of contracted customer service workshops is available for a rapid and professional repair. Highly-qualified and well-trained staff repair and maintain the machines and tools for our customers. After completion of the repair or Inspection the products are returned again to the customer by the fastest means.



Speed is a question of logistics. REMS keeps wear and replacement parts in stock in a 14,000 m² storage facility.



The demands at the building site are extreme – wear parts are worn, the need for repairs arises. The REMS customer services department is ready and flexible. There is an extensive service organisation in more than 25 countries.



Service is extremely important for REMS:
All demonstration vehicles for the more than 200 REMS specialist advisors are fitted with testing equipment with which the function test and force of pressure measurement for REMS radial presses can be carried out on location everywhere.

Ташев Галвинг ООД
www.tashev-galving.com



Product training in the REMS training centre: Become familiar with, compare, evaluate.

Ташев Галвинг ООД
www.tashev-galving.com

REMS – business partner to the trade. Excellent advice for contented customers.

Only those who receive competent advice when purchasing find the individually best, economic solution for the tasks ahead. For this reason REMS assigns great significance to the product training of its own REMS specialist advisors and also the staff in the specialist stores.

In the REMS training centre, modern and fully-fitted demonstration, training and conference rooms are available in an area of 1,600 m². The practical-oriented training gives the staff of the specialist stores, in an understandable form, a broad basis and high specialist competence for product advice and successful sale. The detailed sales documentation with information relating to all necessary product specifications facilitate a swift product selection and are the basis for the simple and time-saving generation of offers.

This partnership with the specialist store also guarantees the user qualified, comprehensive product advice and excellent service.



REMS training centre in Waiblingen near Stuttgart.



Modern and fully-fitted demonstration rooms:
REMS creates many opportunities for the specialist-store staff to become familiar with the products.

Ташев Галвинг ООД
www.tashev-galving.com

Jens Schiek, one of more than 200 qualified REMS specialist advisors is flexible and, when needed, swiftly on location for training courses and presentations.



ТашБългалвинг ООД
www.tashev-galving.com

REMS – Market strength through a consistent product and sales philosophy.

REMS' basis for market strength is technically-advanced and high-quality products as well as a product range tightly concentrated on high turnover units and highly competitive prices thanks to the rational, economical in-house production.

At the centre of the sales philosophy the principle has always been that REMS products are sold exclusively via specialist dealers. These are supported by REMS in many ways. REMS specialist advisors equipped with demonstration vehicles carry out product training on location and demonstrate the REMS products at on-site visits, counter demonstrations and at in-house exhibitions. They advise in the selection of the tools and find the most comfortable, reliable and economical solution in each individual situation.



The consistent sales philosophy is designed for long-term results, trust and predictability.



This is how installation professional become familiar with the product range in practice: The REMS specialist advisors are on the road with demonstration vehicles and demonstrate the machines and tools in real situations, directly on the building site.

Ташев Галвинг ООД
www.tashev-galving.com



The REMS product presentation system – the ideal opportunity for the specialist stores to optimally present the REMS products: touch – compare – select.

Ташев Галвинг ООД
www.tashev-galving.com

Touch. Compare. Select.
Promoting the mutual sale.

The participation at many national and international trade fairs, the advertising in trade magazines and the direct mail marketing to the user is highly valued by trade outlets as sales-promotion measures.

The attractive REMS product presentation system provides the trade outlet with an optimal presentation of the REMS products: Touch, compare, select. The individual stocking with REMS products is carried out with close cooperation between the REMS specialist advisors and the trade outlet.

The online information system at www.rems.de offers extensive opportunities to find out information about the REMS group, the REMS products and their application possibilities and operation. Furthermore, the user has access to the complete online catalogue and detailed technical documentation, information about current trade fair appearances and addresses of REMS contracted customer service workshops, download opportunities of sales documentation, operating instructions, parts lists, product illustrations and product films, opportunities to order sales documentation in various languages for postal dispatch, e-mail addresses for REMS contacts and much more.



The REMS products are exhibited and demonstrated at many national and international trade fairs.



Practical for the trade, clear for the customers – the REMS product presentation system.





The online information system at www.rems.de

Ташев Галвинг ООД
www.tashev-galving.com



Katrin and René Pflüger:

“High quality tools from REMS are our first choice for installation that conforms to standards.”

Ташев-Галвинг ООД
www.tashev-galving.com

One of more than 500,000 satisfied customers. With REMS products through the history of the company.


Pflüger Sanitär & Heizungstechnik GmbH was founded in 2002 by René Pflüger and he has managed the company ever since. The company very quickly became a reliable partner in the region. The range of services includes heating, ventilation and sanitary installations in administration, commercial and industrial buildings as well as in single family homes and apartment buildings. 27 highly qualified employees are available for competent consulting, meticulous planning and careful, on-time and, above all, budget-conscious execution.

“I had already worked successfully with machines and tools from REMS during my training. The easy handling and high quality of the products always impressed me so that it was only natural that my employees and I rely on the REMS brand in my newly founded company. We can use the wide range of products flexibly for our work and they always meet our high demands.”



“The demanding heating and sanitary installation in our projects require professional and reliable tools.”

Ташев Галвинг ООД
www.tashev-galving.com

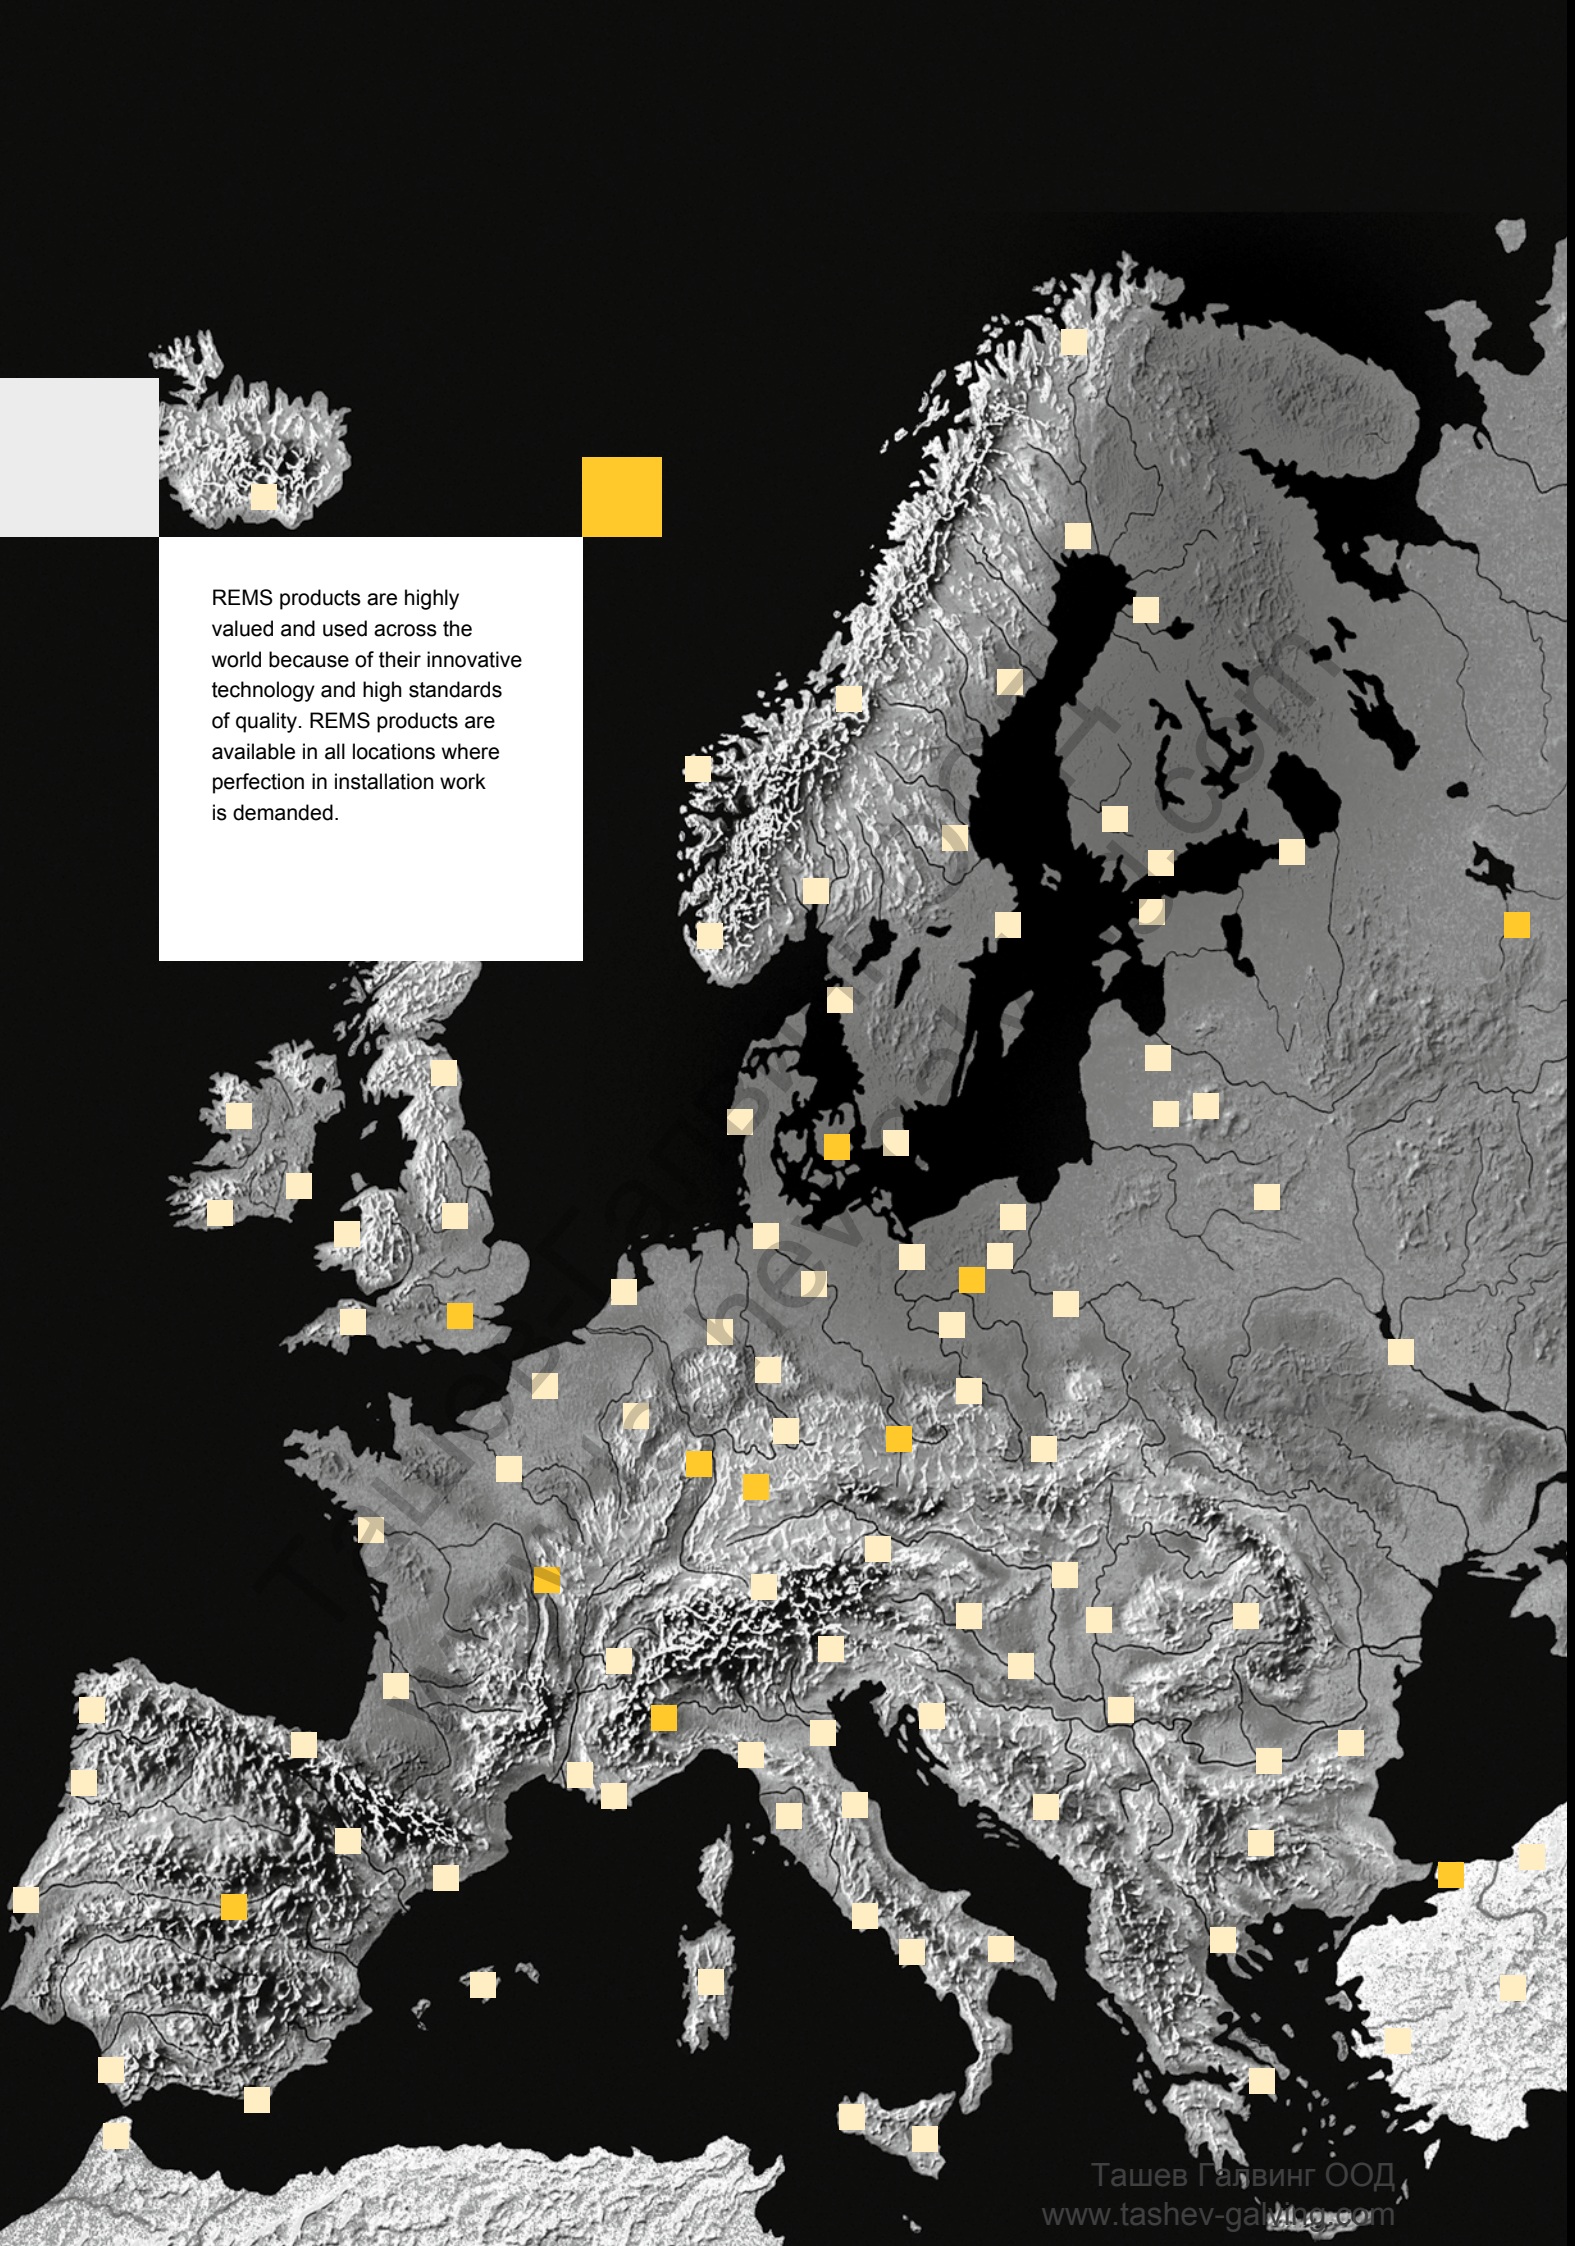

REMS products are highly valued and used across the world because of their innovative technology and high standards of quality. REMS products are available in all locations where perfection in installation work is demanded.

Ташев Галвинг ООД
www.tashev-galving.com

More than 20,000 trade partners in Europe: REMS products are available locally everywhere.

Innovative products and a high standard of quality open new markets for REMS. In the last years the market area has been continuously build-up and extended. Reliable trade partners throughout Europe and beyond guarantee that ever more customers can be persuaded of the quality of REMS.



REMS sets benchmarks for quality throughout Europe – the sales are carried out through the tight network of reliable trade partners in the whole of Europe which are in turn supported by more than 200 well trained REMS specialist advisors.



Sales subsidiaries in many countries deliver optimum conditions for users and trade outlets.

Ташев Галвинг ООД
www.tashev-galving.com



Ташев-Галвинг ООД
www.tashev-galving.com

Threading
Roll Grooving

	Hand die stocks	24
	Quick-change die heads S	25
	Electric die stocks	26
	Threading machines	32
	Threading attachment	41
	Semi-automatic threading machines	42
	Pipe nipple chucks	48
	Thread-cutting oil	49
	Roll grooving attachments	50
	Roll grooving machines	52

Ташев-Галвинг ООД
www.tashevgalving.com

REMS eva

Hand die stock with
quick-change die heads

Proven quality die stock with excellent threading capabilities.

Pipe threads	⅛–2", 16–50 mm
Bolt threads	6–30 mm, ¼–1"

Thread types see page 30, 31.



REMS eva – the plumber's die stock.
Excellent start-cutting and threading.
Steel ratchet lever, thickly plastic coated.
Only one type of quick-change die heads.
Indestructible quality dies.

System advantage
Large working range up to 1¼" and up to 2" with only **one** ratchet lever. Only **one** type of small, compact quick-change die heads and only **one** type of dies. The same quick-change die heads fit all REMS die stocks and other suitable makes of die stocks. Efficient and easy stocking. No confusion possible.

Ratchet lever
Robust. Ratchet lever in steel, thickly plastic coated, for convenient operation. Serrated plastic handle for secure grip. Easy adjustment of ratchet rotation. Perfect, secure seating of quick-change die heads, fast and easy change.

Quick-change die heads
Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads. Quick-change die heads S for cutting pipe threads in hard-to-reach areas (page 25).

Dies
The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading
Efficient with REMS Nippelspanner ⅜–2" (page 48).

German Quality Product



Supply format

REMS eva Set. Hand die stock with quick-change die heads. For pipe threads ⅛–2", 16–50 mm, bolt threads 6–30 mm, ¼–1". For right and left-hand threads. 1 ratchet lever for the complete work range. Quick-change die heads with dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to EN 60423 M. In sturdy steel case or in a cardboard box.

Description/Size	Art.-No.
REMS eva Set in steel case	
R ½-¾-1	520014
R ½-¾-1-1¼	520015
R ⅜-½-¾-1-1¼	520013
R ½-¾-1-1¼-1½-2	520017
R ⅜-½-¾-1-1¼-1½-2	520016
M 16-20-25-32 (M × 1.5)	520010
M 20-25-32-40 (M × 1.5)	520009
REMS eva Set in cardboard box	
R ½-¾	520008
R ½-¾-1	520004
R ⅜-½-¾-1-1¼	520003

REMS eva Sets for left-hand threads and right and left-hand threads as well as for NPT threads available.



Accessories

Description	Art.-No.	
Ratchet lever for complete work range	522000	
Quick-change die heads S see page 25.		
Quick-change die heads, dies, attachment heads for button dies, see page 30–31.		
Steel case with inlay, for REMS eva ⅜–2"	526050	
Thread-cutting oil see page 49.		
REMS Nippelspanner ⅜–2" see page 48.		
REMS Aquila 3B, pipe workstation with chain pipe vice on folding tripod stand, see page 94.		
REMS Aquila WB, chain pipe vice for workbench, see page 94.		



Ташев Галвинг ООД
www.tashev-galving.com

For cutting pipe threads in hard-to-reach areas,
e.g. caved wall, lay bare pipes, trench.
Ideal for repair and renovation.

Pipe threads ⅜–1¼"

REMS quick-change die heads S – the trouble shooter for hard-to-reach areas.

Quick-change die heads S with specially mounted dies.

Additional, precise pipe guidance at the cover side (Patent EP 0 875 327) ensure perfect pipe centering and easy start-cutting.

Extension of ratchet drive REMS eva for threading in caved areas.

Quick-change die heads S and extension fit into the ratchet lever REMS eva and other suitable die stocks.



German Quality Product



Supply format

Die heads S Set. choice of quick-change die heads S for pipe threads tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT) respectively Taper Pipe Thread ASME B1.20.1, Extension 300 mm. In sturdy steel case.

Description	Art.-No.	
Set R ⅜-½-¾	520025	
Set R ½-¾-1	520026	
Set NPT ½-¾-1	520056	



Accessories

Description	Size	Art.-No.	
Ratchet lever for complete work range		522000	
Quick-change die heads S Pipe threads tapered, right ISO 7-1, EN 10226 (DIN 2999, BSPT)	R ⅜ R ½ R ¾ R 1 R 1¼	521026 521036 521046 521056 521066	
Extension 300 mm		522051	
Steel case with inlay for ratchet lever, 4 quick-change die heads S and extension.		526052	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Amigo E

Electric die stock with
quick-change die heads

Powerful, super handy electric tools for threading with unique support bracket. Ready to use anywhere, without vice. Ideal for repair, renovation, job site.

Pipe threads	⅛–1", 16–32 mm

Thread types see page 30, 31.



German Quality Product

Tested by electrosuisse

REMS Amigo E – the fastest, strongest and lightest up to 1".

System advantage
Only **one** type of small, compact quick-change die heads and only **one** type of dies for all REMS die stocks. Thus efficient and easy stocking. No confusion possible.

Support bracket
Solid, easy to use, supports the die stock against torque in both directions. Secure clamping through angular clamping spindle with self-supporting effect. Very simple mounting of die stock onto support bracket and pipe.

Design
Compact, robust, job site-proven. Can be used anywhere, even without vice. Slender design for working in confined areas. Drive unit only 3.4 kg, without die head. No heavy top, therefore single-hand operation possible. Perfect, secure seating of quick-change die heads.

Drive
Solid, compact, maintenance-free gear. Robust, powerful 950 W universal motor with 30 % power increase thanks to automatic carbon brush adjustment while changing the direction of rotation. Peak power input up to 1500 W. Fast threading time 35–27 rpm. Safety tip switch.

Quick-change die heads
Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads.

Dies
The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading
Efficient with REMS Nippelspanner ⅜–1" (2") (page 48).

Supply format

REMS Amigo E Set. Electric die stock with quick-change die heads. For pipe threads ⅛–1", 16–32 mm, bolt threads 6–30 mm, ¼–1". For right and left-hand threads. Drive unit with maintenance-free gear, powerful universal motor 230 V or 110 V, 50–60 Hz, 950 W, safety tip switch, power increase thanks to automatic carbon brush adjustment. Peak power input up to 1500 W. Right and left-hand rotation. Support bracket for both directions. REMS eva quick-change die heads for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to EN 60423 M.
In sturdy steel case.

Description	Art.-No.	
Set R ½-¾-1	530013	
Set M 20-25-32	530014	

REMS Amigo E Set for NPT threads available.



Accessories

Description	Art.-No.	
Quick-change die heads, dies, attachment heads for button dies, see page 30–31.		
REMS Amigo E drive unit	530003	
Support bracket	533000	
REMS REG St ¼–2", pipe deburrer, see page 87.	731700	
Dual purpose holder for threading and sawing with REMS Amigo E, Amigo, Amigo 2 and REMS Tiger ANC	543100	
Ratchet lever see page 24.	522000	
Thread-cutting oil see page 49.		
REMS Nippelspanner ⅜–2" see page 48.		
Steel case with inlay	536000	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Amigo

Electric die stock with quick-change die heads

Powerful, easy-to-operate electric tool for threading with unique support bracket. Ready for use anywhere, without vice. Ideal for repair, renovation, job site.

Pipe threads	⅛–1¼", 16–40 mm
Bolt threads	6–30 mm, ¼–1"

Thread types see page 30, 31.



German Quality Product

Tested by electrosuisse

REMS Amigo – the smallest, lightest, strongest and fastest up to 1¼".

System advantage
Only **one** type of small, compact quick-change die heads and only **one** type of dies for all REMS die stocks. Thus efficient and easy stocking. No confusion possible.

Support bracket
Solid, easy to use, supports the die stock against torque in both directions. Secure clamping through angular clamping spindle with self-supporting effect. Very simple mounting of die stock onto support bracket and pipe.

Design
Compact, robust, job site-proven. Can be used anywhere, even without vice. Slender design for working in confined areas. Drive unit only 3.5 kg, without die head. No heavy top, therefore single-hand operation possible. Perfect, secure seating of quick-change die heads.

Drive
Solid, compact, maintenance-free gear. Robust, powerful 1200 W universal motor with 30 % power increase thanks to automatic carbon brush adjustment while changing the direction of rotation. Peak power input up to 1800 W. Fast threading time 35–27 rpm. Safety tip switch.

Quick-change die heads
Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads.

Dies
The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading
Efficient with REMS Nippelspanner ⅜–1¼" (2") (page 48).

Supply format

REMS Amigo Set. Electric die stock with quick-change die heads. For pipe threads ⅛–1¼", 16–40 mm, bolt threads 6–30 mm, ¼–1". For right and left-hand threads. Drive unit with maintenance-free gear, powerful universal motor 230 V or 110 V, 50–60 Hz, 1200 W, safety tip switch, power increase thanks to automatic carbon brush adjustment. Peak power input up to 1800 W. Right and left-hand rotation, overload protection switch. Support bracket for both directions. REMS eva quick-change die heads for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to EN 60423 M. In sturdy steel case.

Description	Art.-No.	
Set R ½-¾-1-1¼	530020	
Set M 16-20-25-32 (M × 1,5)	530022	
Set M 20-25-32-40 (M × 1,5)	530023	

REMS Amigo Set for NPT threads available.



Accessories

Description	Art.-No.	
Quick-change die heads, dies, attachment heads for button dies, see page 30–31.		
REMS Amigo drive unit	530000	
Support bracket	533000	
REMS REG St ¼–2", pipe deburrer, see page 87.	731700	
Dual purpose holder for threading and sawing with REMS Amigo E, Amigo, Amigo 2 and REMS Tiger ANC	543100	
Ratchet lever see page 24.	522000	
Thread-cutting oil see page 49.		
REMS Nippelspanner ⅜–2" see page 48.		
Steel case with inlay	536000	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Amigo 2

Electric die stock with
quick-change die heads

Powerful, easy-to-operate electric tool for threading with unique support bracket. Ready for use any-where, without vice. Ideal for repair, renovation, job site.

Pipe threads	⅛–2", 16–50 mm
Bolt threads	6–30 mm, ¼–1"
Pipe threads with REMS 4" automatic die head	2½–4"

Thread types see page 30, 31.



German Quality Product



Tested by electrosuisse

REMS Amigo 2 – extremely strong up to 2".

System advantage
Only **one** type of small, compact quick-change die heads and only **one** type of dies for all REMS die stocks. Thus efficient and easy stocking. No confusion possible.

Support bracket
Solid, easy to use, supports the die stock against torque in both directions. Secure clamping through angular clamping spindle with self-supporting effect. Very simple mounting of die stock onto support bracket and pipe.

Design
Compact, robust, job site-proven. Can be used anywhere, even without vice. Slender design for working in confined areas. Drive unit only 6.5 kg, without die head. Perfect seating of quick-change die heads.

Drive
Solid, maintenance-free gear. Robust 1700 W universal motor with 30 % power increase thanks to automatic carbon brush adjustment while changing the direction of rotation. Fast threading time 30–18 rpm. Safety tip switch.

Quick-change die heads
Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads.

Dies
The proven, industructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading
Efficient with REMS Nippelspanner ⅜–1" (2") (page 48).

Supply format

REMS Amigo 2 Set. Electric die stock with quick-change die heads. For pipe threads ⅛–2", 16–50 mm, bolt threads 6–30 mm, ¼–1". For right and left-hand threads. Drive unit with maintenance-free gear, powerful universal motor 230 V or 110 V, 50–60 Hz, 1700 W, safety tip switch, power increase thanks to automatic carbon brush adjustment, right and left-hand rotation. Support bracket for both directions. REMS eva quick-change die heads for pipe threads, tapered, ISO 7–1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to EN 60423 M. In sturdy steel case.

Description	Art.-No.	
Set R ½-¾-1-1¼-1½-2	540020	
Set M 20-25-32-40-50 (M × 1.5)	540022	

REMS Amigo 2 Set for NPT threads available.
Other voltages on request.



Accessories

Description	Art.-No.	
Quick-change die heads, dies, attachment heads for button dies, see page 30–31.		
REMS Amigo 2 drive unit	540000	
Support bracket Amigo 2	543000	
REMS REG St ¼–2", pipe deburrer, see page 87.	731700	
Dual purpose holder for threading and sawing with REMS Amigo E, Amigo, Amigo 2 and REMS Tiger ANC	543100	
Ratchet lever see page 24.	522000	
Thread-cutting oil see page 49.		
REMS Nippelspanner ⅜–2" see page 48.		
REMS 4" automatic die head, 2½–4", see page 41.		
Steel case with inlay	546000	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Amigo 2 Compact

Electric die stock with quick-change die heads

Powerful, easy-to-operate electric tool for threading with unique support bracket. Ready for use any-where, without vice. Ideal for repair, renovation, job site.

Pipe threads	⅛–2", 16–50 mm
Bolt threads	6–30 mm, ¼–1"

Thread types see page 30, 31.



German Quality Product



Tested by electrosuisse

REMS Amigo 2 Compact – The smallest and lightest up to 2".

System advantage
Only **one** type of small, compact quick-change die heads and only **one** type of dies for all REMS die stocks. Thus efficient and easy stocking. No confusion possible.

Support bracket
Solid, easy to use, supports the die stock against torque in both directions. Secure clamping through angular clamping spindle with self-supporting effect. Very simple mounting of die stock onto support bracket and pipe.

Design
Compact, robust, job site-proven. Can be used anywhere, even without vice. Slender design for working in confined areas. Drive unit only 4.9 kg, without die head. Perfect seating of quick-change die heads.

Drive
Solid, maintenance-free gear. Robust 1200 W universal motor with 30 % power increase thanks to automatic carbon brush adjustment while changing the direction of rotation. Peak power input up to 1800 W. Fast threading time 30–18 rpm. Safety tip switch.

Quick-change die heads
Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads.

Dies
The proven, industructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading
Efficient with REMS Nippelspanner ⅜–1" (2") (page 48).

Supply format

REMS Amigo 2 Compact Set. Electric die stock with quick-change die heads. For pipe threads ⅛–2", 16–50 mm, bolt threads 6–30 mm, ¼–1". For right and left-hand threads. Drive unit with maintenance-free gear, powerful universal motor 230 V or 110 V, 50–60 Hz, 1200 W, safety tip switch, power increase thanks to automatic carbon brush adjustment. Peak power input up to 1800 W. Right and left-hand rotation. Overload protection. Support bracket for both directions. REMS eva quick-change die heads for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to DIN DN 60423 M. In sturdy steel case.

Description	Art.-No.	
Set R ½-¾-1-1¼	540023	
Set R ½-¾-1-1¼-1½-2	540024	
Set M 20-25-32-40-50 (M × 1,5)	540025	

REMS Amigo 2 Compact Set for NPT threads available.
Other voltages on request.



Accessories

Description	Art.-No.	
Quick-change die heads, dies, attachment heads for button dies, see page 30–31.		
REMS Amigo 2 Compact drive unit	540001	
Support bracket Amigo 2 Compact	543010	
REMS REG St ¼–2", pipe deburrer, see page 87.	731700	
Ratchet lever see page 24.	522000	
Thread-cutting oil see page 49.		
REMS Nippelspanner ⅜–2" see page 48.		
Steel case with inlay	546000	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS quick-change die heads

REMS quick-change die heads

Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads.

Thread type	Size	Art.-No.
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R ⅛ R ¼ R ⅜ R ½ R ¾ R 1 R 1¼ R 1½ R 2	521000 521010 521020 521030 521040 521050 521060 521070 521080
Pipe threads R tapered, left-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R ⅛ LH R ¼ LH R ⅜ LH R ½ LH R ¾ LH R 1 LH R 1¼ LH R 1½ LH R 2 LH	521100 521110 521120 521130 521140 521150 521160 521170 521180
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT ⅛ NPT ¼ NPT ⅜ NPT ½ NPT ¾ NPT 1 NPT 1¼ NPT 1½ NPT 2	521200 521210 521220 521230 521240 521250 521260 521270 521280
Threads M for electric conduit EN 60423	M 16 × 1.5 M 20 × 1.5 M 25 × 1.5 M 32 × 1.5 M 40 × 1.5 M 50 × 1.5	521300 521310 521320 521330 521340 521350



Right-hand pipe thread



Left-hand pipe thread

German Quality Product

REMS dies

REMS dies

The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.


Thread type	Size	Art.-No.
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R ⅛ R ¼ R ⅜ R ½ R ¾ R 1 R 1¼ R 1½ R 2	521002 521012 521022 521032 521042 521052 521062 521072 521082
Pipe threads R tapered, left-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R ⅛ LH R ¼ LH R ⅜ LH R ½ LH R ¾ LH R 1 LH R 1¼ LH R 1½ LH R 2 LH	521102 521112 521122 521132 521142 521152 521162 521172 521182
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT ⅛ NPT ¼ NPT ⅜ NPT ½ NPT ¾ NPT 1 NPT 1¼ NPT 1½ NPT 2	521202 521212 521222 521232 521242 521252 521262 521272 521282
Threads M for electric conduit EN 60423	M 16 × 1.5 M 20 × 1.5 M 25 × 1.5 M 32 × 1.5 M 40 × 1.5 M 50 × 1.5	521302 521312 521322 521332 521342 521352



German Quality Product

Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

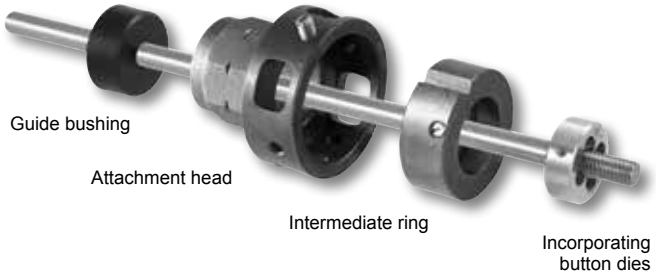



Attachment heads

Attachment heads for incorporating standard, round button dies of all thread types. Locking of button dies to the attachment head with stud bolt.

Description	Size	Art.-No.
Attachment head for button dies	Ø 65 mm	731200
Attachment head for button dies	G 1¼	731250
Attachment head for button dies	Ø 105 mm	541401



Intermediate rings

Intermediate rings for different outside diameters of button dies.

Description	Size	I.D. mm	Art.-No.
Intermediate rings to attachment head 731200 without intermediate ring	M 6–9	20/25	731205
	M 10–11	30	731210
	M 12–14 (Pg 7–9)	38	731220
	M 16–20 (Pg 11–13.5)	45	731230
	M 22–24 (Pg 16)	55	731240
	M 27–30 (Pg 21–29)	65	
Intermediate rings to attachment head 541401 without intermediate ring	Ø 65/105 (Pg 21–29)	65	541404
	Ø 75/105	75	541406
	Ø 90/105 (Pg 36)	90	541410
	Pg 42–48	105	



Guide bushings

Guide bushings for easy and concentric start-cutting.

Description	Size	Art.-No.
Guide bushings to attachment head 731200	Ø 6	731301
	Ø 8	731302
	Ø 10	731303
	Ø 12	731304
	Ø 14	731305
	Ø 16	731306
	Ø 18	731307
	Ø 20	731308
	Ø 22	731309
	Ø 24	731310
	Ø 27	731311
	Ø 30	731312
	Ø 12.8 (Pg 7)	731320
	Ø 15.5 (Pg 9)	731321
	Ø 18.9 (Pg 11)	731322
	Ø 20.7 (Pg 13.5)	731323
	Ø 22.8 (Pg 16)	731324
	Ø 28.6 (Pg 21)	731325
	Ø 37.3 (Pg 29)	731326
Guide bushings to attachment head 541401	Ø 28.6 (Pg 21)	541413
	Ø 37.3 (Pg 29)	541414
	Ø 47.3 (Pg 36)	541415
	Ø 54.3 (Pg 42)	541416



German Quality Product

Ташев Галвинг ООД
www.tashev-galving.com

REMS Tornado

Threading machine

Proven high performance machine for threading, cutting, deburring, threading of nipples, roll grooving. For installation, metalworking, industry. For job site and workshop.	
Pipe threads	(1/16) 1/8–2", 16–63 mm
Bolt threads	(6) 10–60 mm, 1/4–2"
Pipe threads with REMS 4" automatic die head	2 1/2–4"
Thread types see page 40.	
Pipe grooving with REMS roll grooving attachment	DN 25–300 1–12"

REMS Tornado – a class of its own.
Automatic chuck. Universal automatic die head.
Automatic lubrication and cooling.

Operating principle
Rotating material - stationary tools.

Design
Robust, job site-proven. Favourable size and weight, e.g. REMS Tornado 2000 complete only 50 kg. Large work and chip compartment. Easy handling of chip tray. Adjustable height material support.
2 versions:
– Portable version with 3 tubular legs, with removable large oil basin and chip tray.
– Version T with integrated, even larger oil basin and chip tray. For workbench. Stand, collapsible wheel stand or wheel stand with material shelf, as an accessory, for easy transport, optimum working height and stable positioning.

Drive
Extremely powerful and fast, e.g. R 2" thread in only 15 s.
Completely maintenance-free gear which runs in a sealed oil bath.

Choice of 3 powerful motors:
– Strong universal motor, 1700 W. verload protection. Spindle speed 53 rpm.
– Pole-reversible capacitor motor, 2100 W. Overload protection. 2 spindle speeds 52 and 26 rpm, also under full load. **Extremely quiet running.**
– Pole-reversible 3~induction motor, 2000 W. Overload protection. 2 spindle speeds 52 and 26 rpm, also under full load. **Extremely quiet running.**

Operator-friendly safety foot switch with emergency-stop, 2-step. Foot switch, can be loaded with the full body weight during operation.

Automatic chuck
2 automatic chucks with self-centering clamping jaws for easy and fast clamping and release of the material. Self-tightening, hence maximum clamping force. No slipping of pipes.

Automatic lubrication and cooling
Robust, proven oil pump with high pumping volume. Optimized oil distribution directly onto the threading point through the die head ensures clean threads and long service life of dies, gear and motor.

Universal automatic die head
Only **one** universal automatic die head for all threads, including long threads; automatic opening with automatic thread-length-stop for tapered threads. Fast and easy adjustment of thread size. Easy-to-read thread-size scale. Simple and fast change of dies through lock-in positioning in die holder.

Dies
The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Pipe cutter
Self centering. Robust body made of forged steel. Ergonomic, wide handle for powerful infeed of spindle. Specially hardened cutter wheel in tough-hard REMS die-steel ensures long service life.

Inner pipe deburrer
Robust, easy-to-handle deburring device with adjustable deburring positioning. Specially hardened and designed deburring blade ensures easy deburring and extremely long service life. Two cutting edges for optimum chip flow, specially for small diameters.

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

REMS 4"automatic die head
for pipe threads 2 1/2–4" (page 41).



German Quality Product





Choice of 3 powerful motors.



Ташев Галвинг ООД
www.tashev-galving.com

REMS Tornado

Threading machine

Nipple-threading

Efficient with the automatic internal clamping REMS Nippelfix ½–2" (4") or with the manual internal clamping REMS Nippelspanner ⅜–2" (page 48).

REMS roll grooving attachment

Robust, compact roll grooving attachment with oil hydraulic in-feed for pipe grooving of grooved coupling systems DN 25–300, 1–12" (page 50).



Supply format

REMS Tornado. Threading machine for pipe threads (1/16) ⅛–2", 16–63 mm, bolt threads (6) 10–60 mm, ¼–2". With maintenance-free gear, safety foot switch with emergency-stop, 2 automatic chucks, automatic lubrication and cooling. With tool set consisting of one universal automatic die head for all threads, also long threads, automatic opening, with automatic thread-length-stop for tapered threads. Dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R ½–¾" and R 1–2" right-hand, pipe cutter, inner pipe deburrer, pressing lever, adjustable height material support. Choice of 3 motors. Portable version with 3 tubular legs, with removable, large oil and chip tray. Version T with integrated, even bigger oil tray and chip tray, for workbench, stand, collapsible wheel stand or wheel stand with material shelf. In a carton.

Description	Version	Art.-No.	
2000	Universal motor 230 V or 110 V, 50–60 Hz, 1700 W. 53 rpm. Portable, 3 legs.	340200	
2010	Pole-reversible capacitor, motor 230 V, 50 Hz, 2100 W. 52/26 rpm, also under full load. Extremely quiet running. Portable, 3 legs.	340201	
2020	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 52/26 rpm, also under full load. Extremely quiet running. Portable, 3 legs.	340202	
2000 T	Universal motor 230 V or 110 V, 50–60 Hz, 1700 W. 53 rpm For work bench, stand or wheel stand.	340206	
2010 T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 52/26 rpm, also under full load. Extremely quiet running. For work bench, stand or wheel stand.	340207	
2020 T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 52/26 rpm, also under full load. Extremely quiet running. For work bench, stand or wheel stand.	340208	

Other voltages and NPT versions on request.



Wheel stand (accessory)

Accessories

Description	Art.-No.	
Stand	344105	
Collapsible wheel stand	344150	
Wheel stand with material shelf	344100	
Dies see page 40.		
Universal automatic die head 1/16–2" quick-change die head instead of changing the dies	341000	
REMS 4"automatic die head for pipe threads 2½–4", see page 41.		
REMS cutter wheel St ⅛–4", s 8	341614	
Thread-cutting oil see page 49.		
Nipple holder see page 48.		
REMS Herkules material supports, see page 96.		
REMS roll grooving attachment for pipe grooving, see page 50.	347000	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Magnum (up to 2") Threading machine

Robust, compact high performance machine for threading, cutting, deburring, threading of nipples, roll grooving. For installation, metalworking, industry. For job site and workshop.

Pipe threads	(1/16) ⅛–2", 16–63 mm
Bolt threads	(6) 8–60 mm, ¼–2"
Pipe threads with REMS 4" automatic die head	2½–4"
Thread types see page 40.	
Grooving of pipes with REMS roll grooving attachment	DN 25–300 1–12"



German Quality Product

REMS Magnum – the compact up to 2".

Operating principle
Rotating material – stationary tools.

Design
Robust, compact, job site-proven design. Favorable size and weight, e.g. REMS Magnum 2000 L-T only 57 kg. Large work and chip compartment. Tool support.
2 versions:
– Light version L-T with removable large oil basin and chip tray.
– Version T with integrated, even larger oil basin and chip tray.
For workbench. Stand, collapsible wheel stand or wheel stand with material shelf, as an accessory, for easy transport, optimum working height and stable positioning.

Drive
Extremely powerful and fast, e.g. thread R 2" in only 15 s.
Completely maintenance-free gear which runs in a sealed oil bath.

Choice of 3 powerful motors:
– Strong universal motor, 1700 W.
  Overload protection. Spindle speed 53 rpm.
– Pole-reversible capacitor motor, 2100 W.
  Overload protection. 2 spindle speeds 52 and 26 rpm, also under full load. **Extremely quiet running.**
– Pole-reversible 3~ induction motor, 2000 W.
  Overload protection. 2 spindle speeds 52 and 26 rpm, also under full load. **Extremely quiet running.**

Operator-friendly safety foot switch with emergency-stop, 2-step. Foot switch, can be loaded with the full body weight during operation.

Chuck
Proven quick-action hammer chuck, self-tightening. No slipping of pipes. Large space between chuck and centering device ensures secure clamping of long pipes. Rear centering device for alignment of the material.

Automatic lubrication and cooling
Robust, proven oil pump with high pumping volume. Optimized oil distribution directly onto the threading point through the die head ensures clean threads and long service life of dies, gear and motor.

Universal automatic die head
Only **one** universal automatic die head for all threads, including long threads; automatic opening with automatic thread-length-stop for tapered threads. Fast and easy adjustment of thread size. Simple and fast change of dies through lock-in positioning in die holder.

Dies
The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Pipe cutter
Self centering. Robust body made of forged steel. Ergonomic, wide handle for powerful infeed of spindle. Specially hardened cutter wheel in tough-hard REMS die-steel ensures long service life.

Inner pipe deburrer
Robust, easy-to-handle deburring device for adjustable deburring positioning. Specially hardened and designed deburring blade ensures easy deburring and extremely long service life. Two cutting edges for optimum chip flow, specially for small diameters.

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

REMS 4"automatic die head
for pipe threads 2½–4" (page 41).

Nipple-threading
Efficient with automatic internal clamping REMS Nippelfix ½–2" (4") or with manual internal clamping REMS Nippelspanner ⅜–2" (page 48).

REMS roll grooving attachment
Robust, compact roll grooving attachment with oil hydraulic in-feed for pipe grooving of grooved coupling systems DN 25–300, 1–12" (page 50).



Choice of 3 powerful motors.



Ташев Галвинг ООД
www.tashev-galving.com

REMS Magnum (up to 2") Threading machine



Stand
(Accessory)



Wheel stand
(accessory)

Supply format

REMS Magnum. Threading machine for pipe threads (1/16) 1/8–2", 16–63 mm, bolt thread (6) 8–60 mm, 1/4–2". With maintenance-free gear, safety foot switch with emergency-stop, self-tightening quick-action hammer chuck, rear centering device, automatic lubrication and cooling. With complete tool set consisting of one universal automatic die head for all threads, also long threads; automatic opening, with automatic thread-length-stop for tapered threads, dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R 1/2–3/4" and R 1–2" right-hand, pipe cutter, inner pipe deburrer, pressing lever. Tool support. Choice of 3 motors. Version L-T with removable large oil basin and chip tray. Version T with integrated, even bigger oil tray and chip tray, for workbench, stand, collapsible wheel stand or wheel stand with material shelf. In a carton

Description	Version	Art.-No.	
2000 L-T	Universal motor 230 V or 110 V, 50–60 Hz, 1700 W. 53 rpm.	340226	
2010 L-T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 52/26 rpm, also under full load. Extremely quiet running.	340227	
2020 L-T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 52/26 rpm, also under full load. Extremely quiet running.	340228	
2000 T	Universal motor 230 V or 110 V, 50–60 Hz, 1700 W. 53 rpm.	340220	
2010 T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 52/26 rpm, also under full load. Extremely quiet running.	340221	
2020 T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 52/26 rpm, also under full load. Extremely quiet running.	340222	

Other voltages and NPT versions on request.



Collapsible wheel stand
(Accessory)

Accessories

Description	Art.-No.	
Stand	344105	
Collapsible wheel stand	344150	
Wheel stand with material shelf	344100	
Dies see page 40.		
Universal automatic die head 1/16–2" quick-change die head instead of changing the dies	341000	
REMS 4" automatic die head for pipe threads 2 1/2–4", see page 41.		
REMS cutter wheel St 1/8–4", s 8	341614	
Thread-cutting oil see page 49.		
Nipple holder see page 48.		
REMS Herkules material supports, see page 96.		
REMS roll grooving attachment for pipe grooving, see page 50.	347000	



Ташев Галвинг ООД
www.tashev-galving.com

REMS Magnum (up to 3") Threading machine

Robust, compact high performance machine for threading, cutting, deburring, threading of nipples, roll grooving. For installation, metalworking, industry. For job site and workshop.

Pipe threads	(1/16) ⅛–3", 16–63 mm
Bolt threads	(6) 20–60 mm, ½–2"
Thread types see page 40.	
Pipe grooving with REMS roll grooving attachment	DN 25–300 1–12"



REMS Magnum – the super machine up to 3". Exceptionally round and clean threads up to 3" by using 5 threading dies.

Operating principle
Rotating material – stationary tools.

Design
Robust, compact, job site-proven design. Favorable size and weight, e.g. REMS Magnum 3000 L-T only 79 kg. Large work and chip compartment. Tool support.
2 versions:
– Light version L-T with removable large oil basin and chip tray.
– Version T with integrated, even larger oil basin and chip tray.
For workbench. Stand or wheel stand with material support, as accessory, for easy transport, optimum work height and secure standing.

Drive
Extremely powerful and fast. Completely maintenance-free gear which runs in a sealed oil bath.

Choice of 3 powerful motors:
– Strong universal motor, 1700 W.
  Overload protection. Spindle speed 23 rpm.
– Pole-reversible capacitor motor, 2100 W.
  Overload protection. 2 spindle speeds 20 and 10 rpm, also under full load. **Extremely quiet running.**
– Pole-reversible 3~ induction motor, 2000 W.
  Overload protection. 2 spindle speeds 20 and 10 rpm, also under full load. **Extremely quiet running.**

Operator-friendly safety foot switch with emergency-stop, 2-step.
Foot switch,can be loaded with the full body weight during operation.

Chuck
Proven quick-action hammer chuck, self-tightening. No slipping of pipes. Large space between chuck and centering device ensures secure clamping of long pipes. Rear centering device for alignment of the material.

Automatic lubrication and cooling
Robust, proven oil pump with high pumping volume. Optimized oil distribution directly onto the threading point through the die head ensures clean threads and long service life of dies, gear and motor.

Universal automatic die head
Only 1 universal automatic die head each for the sizes 1/16–2" and 2½–3" for all threads, including long threads; automatic opening with automatic thread-length-stop for tapered threads. 5 dies 2½–3" ensure a favourable distribution of the cutting force onto the pipe, hence round and clean threads. Fast and easy adjustment of thread size. Simple and fast change of dies through lock-in positioning in die holder.

Dies
The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Pipe cutter
Self centering. Robust body made of forged steel. Ergonomic, wide handle for powerful infeed of spindle. Specially hardened cutter wheel in tough-hard REMS die-steel ensures long service life.

Inner pipe deburrer
Robust, easy-to-handle deburring device for adjustable deburring positioning. Specially hardened and designed deburring blade ensures easy deburring and extremely long service life. Two cutting edges for optimum chip flow, specially for small diameters.

Tool sets
For 2½–3" and ¼–2" one complete tool set each adapted to the work range with universal die head, pipe cutter, inner-pipe-deburring device, pressing lever, dies.

German Quality Product



Choice of 3 powerful motors.



Ташев Галвинг ООД
www.tashev-galving.com

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading
Efficient with automatic internal clamping REMS Nippelfix ½–3" (4") or with manual internal clamping REMS Nippelspanner (page 48).

REMS roll grooving attachment
Robust, compact roll grooving attachment with oil hydraulic in-feed for pipe grooving of grooved coupling systems DN 25–300, 1–12" (page 50).



Stand (Accessory)



Wheel stand (accessory)

Supply format

REMS Magnum. Threading machine for pipe threads (1/16) ½–3", 16–63 mm, bolt threads (6) 20–60 mm, ½–2". With maintenance-free gear, safety foot switch with emergency-stop, self-tightening quick-action hammer chuck, rear centering device, automatic lubrication and cooling. With tool sets 1/16–2" and/or 2½–3", each consisting of universal automatic die head for all threads, also long threads; automatic opening, with automatic thread-length-stop for tapered threads, dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand, pipe cutter, inner pipe deburrer, pressing lever. Tool support. Choice of 3 motors. Version L-T with removable large oil basin and chip tray. Version T with integrated, even larger oil basin and chip tray. For workbench, stand or wheel stand with material support. In a box.

Description	Version/Equipment	Art.-No.	
3000 L-T	Universal motor 230 V or 110 V, 50–60 Hz, 1700 W. 23 rpm. **Equipment R 2½–3** **Equipment R ½–3**	 380303 380309	
3010 L-T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 20/10 rpm, also under full load. Extremely quiet running. **Equipment R 2½–3** **Equipment R ½–3**	 380304 380310	
3020 L-T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 20/10 rpm, also under full load. Extremely quiet running. **Equipment R 2½–3** **Equipment R ½–3**	 380305 380311	
3000 T	Universal motor 230 V or 110 V, 50–60 Hz, 1700 W. 23 rpm. **Equipment R 2½–3** **Equipment R ½–3**	 380306 380312	
3010 T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 20/10 rpm, also under full load. Extremely quiet running. **Equipment R 2½–3** **Equipment R ½–3**	 380307 380313	
3020 T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 20/10 rpm, also under full load. Extremely quiet running. **Equipment R 2½–3** **Equipment R ½–3**	 380308 380314	

Other voltages and NPT versions on request.

Accessories

Description	Art.-No.	
Stand	344105	
Wheel stand with material shelf	344100	
Dies see page 40.		
Tool set 1/16–2" complete with universal automatic die head, dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R ½–¾" and R 1–2" right-hand, pipe cutter, inner pipe deburrer, pressing lever.	340100	
Universal automatic die head 1/16–2" and others	341000	
Universal automatic die head 2½–3"	381050	
Universal automatic die head 2½–4"	381000	
REMS cutter wheel St ⅛–4", s 8	341614	
REMS cutter wheel St 1–4", s 12	381622	
Thread-cutting oil see page 49.		
Nipple holder see page 48.		
REMS Herkules material supports, see page 96.		
REMS roll grooving attachment for pipe grooving, see page 50.	347000	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Magnum (up to 4") Threading machine

Robust, compact high performance machine for threading, cutting, deburring, threading of nipples, roll grooving. For installation, metalworking, industry. For job site and workshop.

Pipe threads	(1/16) ½–4", 16–63 mm
Bolt threads	(6) 20–60 mm, ½–2"
Thread types see page 40.	
Pipe grooving with REMS roll grooving attachment	DN 25–300 1–12"

REMS Magnum – the super machine up to 4". Exceptionally round and clean threads up to 4" by using 6 threading dies.

Operating principle
Rotating material - stationary tools.

Design
Robust, compact, job site-proven design. Favorable size and weight, e.g. REMS Magnum 4000 L-T only 81 kg. Large work and chip compartment. Tool support.
2 versions:
– Light version L-T with removable large oil basin and chip tray.
– Version T with integrated, even larger oil basin and chip tray.
For workbench. Stand or wheel stand with material support, as accessory, for easy transport, optimum work height and secure standing.

Drive
Extremely powerful and fast. Completely maintenance-free gear which runs in a sealed oil bath.

Choice of 3 powerful motors:
– Strong universal motor, 1700 W.
Overload protection. Spindle speed 23 rpm.
– Pole-reversible capacitor motor, 2100 W.
Overload protection. 2 spindle speeds 20 and 10 rpm, also under full load. **Extremely quiet running.**
– Pole-reversible 3~ induction motor, 2000 W.
Overload protection. 2 spindle speeds 20 and 10 rpm, also under full load. **Extremely quiet running.**

Operator-friendly safety foot switch with emergency-stop, 2-step. Foot switch, can be loaded with the full body weight during operation.

Chuck
Proven quick-action hammer chuck, self-tightening. No slipping of pipes. Large space between chuck and centering device ensures secure clamping of long pipes. Rear centering device for alignment of the material.

Automatic lubrication and cooling
Robust, proven oil pump with high pumping volume. Optimized oil distribution directly onto the threading point through the die head ensures clean threads and long service life of dies, gear and motor.

Universal automatic die head
Only 1 universal automatic die head each for the sizes 1/16–2" and 2½–4" for all threads, including long threads; automatic opening with automatic thread-length-stop for tapered threads. 6 dies 2½–4" ensure a favourable distribution of the cutting force onto the pipe, hence round and clean threads. Fast and easy adjustment of thread size. Simple and fast change of dies through lock-in positioning in die holder.

Dies
The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Pipe cutter
Self centering. Robust body made of forged steel. Ergonomic, wide handle for powerful infeed of spindle. Specially hardened cutter wheel in tough-hard REMS die-steel ensures long service life.

Inner pipe deburrer
Robust, easy-to-handle deburring device for adjustable deburring positioning. Specially hardened and designed deburring blade ensures easy deburring and extremely long service life. Two cutting edges for optimum chip flow, specially for small diameters.

Tool sets
For 2½–4" and ¼–2" one complete tool set each adapted to the work range with universal die head, pipe cutter, inner-pipe-deburring device, pressing lever, dies.



German Quality Product



Choice of 3 powerful motors.



Ташев Галвинг ООД
www.tashev-galving.com

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading
Efficient with automatic internal clamping REMS Nippelfix ½–4"
or with manual internal clamping REMS Nippelspanner ⅜–2" (page 48).

REMS roll grooving attachment
Robust, compact roll grooving attachment with oil hydraulic in-feed for pipe grooving of grooved coupling systems DN 25–300, 1–12" (page 50).



Stand (Accessory)



Wheel stand (accessory)

Supply format

REMS Magnum. Threading machine for pipe threads (1/16) ½–4", 16–63 mm, bolt threads (6) 20–60 mm, ½–2". With maintenance-free gear, safety foot switch with emergency-stop, self-tightening quick-action hammer chuck, rear centering device, automatic lubrication and cooling. With tool sets 1/16–2" and/or 2½–4", each consisting of universal automatic die head for all threads, also long threads; automatic opening, with automatic thread-length-stop for tapered threads, dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand, pipe cutter, inner pipe deburrer, pressing lever. Tool support. Choice of 3 motors. Version L-T with removable large oil basin and chip tray. Version T with integrated, even larger oil basin and chip tray. For workbench, stand or wheel stand with material support. In a carton.

Description	Version/Equipment	Art.-No.	
4000 L-T	Universal motor 230 V or 110 V, 50–60 Hz, 1700 W. 23 rpm.		
	Equipment R ½–2	380447	
	Equipment R 2½–4	380441	
	Equipment R ½–4	380444	
4010 L-T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 20/10 rpm, also under full load. Extremely quiet running.		
	Equipment R ½–2	380448	
	Equipment R 2½–4	380442	
	Equipment R ½–4	380445	
4020 L-T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 20/10 rpm, also under full load. Extremely quiet running.		
	Equipment R 2½–4	380443	
	Equipment R ½–4	380446	
4000 T	Universal motor 230 V or 110 V, 50–60 Hz, 1700 W. 23 rpm.		
	Equipment R 2½–4	380426	
	Equipment R ½–4	380429	
4010 T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 20/10 rpm, also under full load. Extremely quiet running.		
	Equipment R 2½–4	380427	
	Equipment R ½–4	380430	
4020 T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 20/10 rpm, also under full load. Extremely quiet running.		
	Equipment R 2½–4	380428	
	Equipment R ½–4	380431	

Other voltages and NPT versions on request.

Accessories

Description	Art.-No.	
Stand	344105	
Wheel stand with material shelf	344100	
Dies see page 40.		
Tool set 1/16–2" complete with universal automatic die head, dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R ½–¾ and R 1–2 right-hand, pipe cutter, inner pipe deburrer, pressing lever.	340100	
Universal automatic die head 1/16–2" and others	341000	
Universal automatic die head 2½–4"	381000	
REMS cutter wheel St ⅛–4", s 8	341614	
REMS cutter wheel St 1–4", s 12	381622	
Thread-cutting oil see page 49.		
Nipple holder see page 48.		
REMS Herkules material supports, see page 96.		
REMS roll grooving attachment for pipe grooving, see page 50.	347000	





Ташев-Галвинг ООД www.tashev-galving.com

REMS dies (set)

The proven REMS quality dies with precise cutting geometry ensure anexcellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.


Dies for other threads (e.g. BSW) on request. Dies in HSS for machining high strength materials 50% extra charge. [1] Some dies only available in HSS.

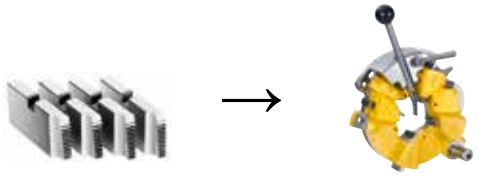

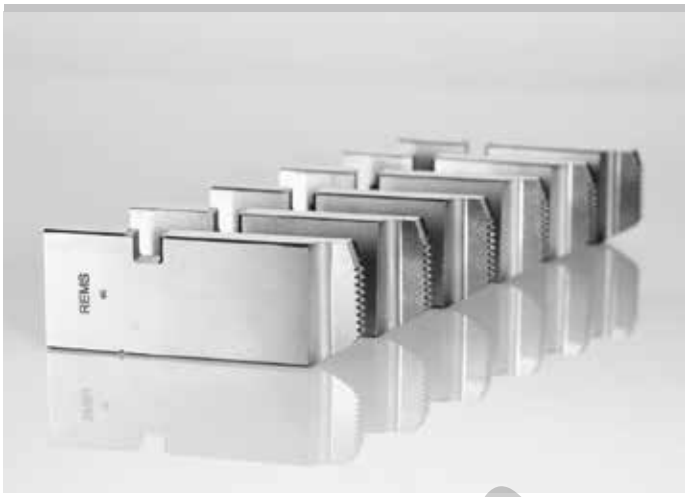

German Quality Product



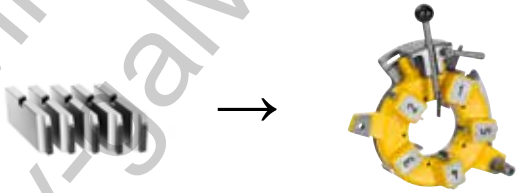


For universal automatic die head 1/16–2"

Thread type	Size	Art.-No.
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 1/16–⅛ HSS[1]	341401
	R ¼–⅜	341402
	R ½–¾	341403
	R 1–2	341404
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G 1/16–⅛	341406
	G ¼–⅜	341407
	G ½–¾	341408
	G 1–2	341409
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT 1/16–⅛ HSS[1]	341411
	NPT ¼–⅜	341412
	NPT ½–¾	341413
	NPT 1–2	341414
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM ⅛	341416
	NPSM ¼–⅜	341417
	NPSM ½–¾	341418
	NPSM 1–2 HSS[1]	341419
Conduit threads Pg DIN 40430	Pg 7	341466
	Pg 9	341467
	Pg 11	341468
	Pg 13,5	341469
	Pg 16	341470
	Pg 21	341471
	Pg 29	341472
	Pg 36	341473
	Pg 42	341474
	Pg 48	341475
Conduit threads M EN 60423	M 16 × 1,5	341493
	M 20 × 1,5	341494
	M 25 × 1,5	341495
	M 32 × 1,5	341496
	M 40 × 1,5	341497
	M 50 × 1,5	341498
	M 63 × 1,5	341499
Metric bolt threads M ISO 261 (DIN 13)	M 6	341426
	M 8	341427
	M 10	341428
	M 12	341429
	M 14	341430
	M 16	341431
	M 18	341432
	M 20	341433
	M 22	341434
	M 24	341435
	M 27	341436
	M 30	341437
	M 33	341438
	M 36	341439
	M 39	341440
	M 42	341441
	M 45	341442
	M 48	341443
	M 52	341444
	M 56 HSS[1]	341445
	M 60 HSS[1]	341446
Bolt threads UNC Unified Inch Screw Thread ASME B1.1	UNC ¼–20	341476
	UNC 5/16–18	341477
	UNC ⅜–16 HSS[1]	341478
	UNC 7/16–14	341479
	UNC ½–13 HSS[1]	341480
	UNC 9/16–12	341481
	UNC ⅝–11 HSS[1]	341482
	UNC ¾–10 HSS[1]	341483
	UNC ⅞–9 HSS[1]	341484
	UNC 1–8 HSS[1]	341485
	UNC 1⅛–7	341486
	UNC 1¼–7 HSS[1]	341487
	UNC 1⅜–6	341488
	UNC 1½–6 HSS[1]	341489
	UNC 1¾–5	341490
	UNC 2–4,5	341491

For universal automatic die head 2½–3"

Thread type	Size	Art.-No.
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 2½–3	381430
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G 2½–3 HSS[1]	381431
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT 2½–3 HSS[1]	381432
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM 2½–3 HSS[1]	381433

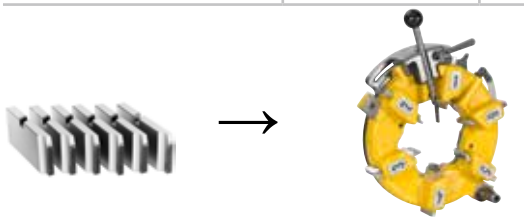

For universal automatic die head 2½–4"

Thread type	Size	Art.-No.
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 2½–4	381401
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G 2½–4 HSS[1]	381405
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT 2½–4 HSS[1]	381410
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM 2½–4 HSS[1]	381415

Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS 4" automatic die head

Threading attachment

Robust, compact threading attachment for efficient threading of tapered pipe threads, nipple-threading.

Pipe threads 2½–4"

REMS 4" automatic die head – excellent threads up to 4" thanks to 5 threading dies and stepless automatically opening die head. No time consuming reverse.







German Quality Product

Operating principle
Stationary material – rotating die head.

Design
Compact unit of die head, clamping chuck and gear. Maintenance-free. Easy to transport.

Technique and operation
- Secure grip, self-tightening chuck, no slipping of pipe.
- Easy start-cutting with pressing lever and rack.
- 5 dies per size ensure favourable distribution of cutting force onto the pipe for round and clean threads. During threading the die head opens tapered in a gradual manner (copying unit), which enables a high cutting speed with low power requirements. Provides perfect threads as well as low impact on dies and machines.
- Automatic die head opening after reaching the standard thread length.
- After threading, immediate re-use possible, no guide thread required, no time-consuming reverse.
- Connection for automatic lubrication and cooling.

Dies
The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Drive
Through REMS Magnum, REMS Tornado, REMS Amigo 2 and threading machines of other makes. Fast, simple assembly. Rugged drive shaft for secure clamping and optimum power transmission.

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading
Efficient nipple threading 2½–4" with the automatic internal clamping REMS Nippelfix (page 48).

Supply format

REMS 4"automatic die head. Threading device for pipe threads 2½–4". Die head with copying unit, automatic opening after reaching the standard thread length, no time-consuming reverse. Self-tightening clamping device. Reduction gear with drive shaft, maintenance-free. Connection for automatic cooling and lubrication. Chip tray. Dies optional for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R 2½, 3, 4, right-hand or for pipe threads, tapered, NPT 2½, 3, 4, right-hand. In a carton.

Description	Equipment	Art.-No.	
REMS 4"automatic die head fits to REMS Magnum, REMS Tornado, and others	R 2½, 3, 4	370010	
REMS 4"automatic die head fits to REMS Magnum, REMS Tornado, and others	NPT 2½, 3, 4	370011	
REMS 4"automatic die head fits to REMS Amigo 2	R 2½, 3, 4	370012	
REMS 4"automatic die head fits to REMS Amigo 2	NPT 2½, 3, 4	370013	



Accessories

Description	Size	Art.-No.	
Dies (set)			
Pipe threads R tapered right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 2½ R 3 R 4	371109 371113 371117	
Pipe threads NPT tapered right-hand Taper Pipe Thread ASME B1. 20.1	NPT 2½ HSS[1)] NPT 3 HSS[1)] NPT 4 HSS[1)]	371134 371138 371142	

Dies in HSS for machining high strength materials 50% extra charge. [1)] Some dies only available in HSS.

REMS Herkules, material supports, see page 96.

Thread-cutting oil see page 49.

Nippelfix 2½–4" see page 48.



Ташев Галвинг ООД
www.tashev-galving.com

REMS Unimat 75

Semi-automatic high-performance machine for efficient cutting of bolt and pipe threads. For industry, metalworking, installation.		
Bolt threads		6 – 72 mm ¼ – 2¾"
Pipe threads		1/16 – 2½", 16 – 63 mm
Tolerance class corresponding to ISO 261 (DIN 13)		"medium" (6 g)
Thread length	≤ Ø 30 mm	unlimited
	≤ Ø 72 mm	≤ 200 mm
Chamfering	Range	7 – 62 mm
	Chamfered Ø	≥ 7 mm
	Maximum chamfer	7 mm
	Chamfer angle	45°
Peeling	Range	7 – 62 mm
	Peeled Ø	≥ 7 mm
Thread types see page 44.		

REMS Unimat 75 – high efficiency. Tangential-chaser-threading-system. Large threading range. Fast working, short resetting time. For single and series production. Low hourly rate for the machine. Simple operation. Relieves expensive turning machines and specialists.

Operating principle
Stationary material – rotating die head.

Design
Compact, rugged design for continous use. Die head with regrindable tangential chasers in self centering holder system. After start-cutting with feed lever and rack mechanism self feeding action of die head (no guide thread). Welded, sturdy machine stand with large oil compartment and removeable chip drawer.

Drive
Indestructible planetary gear with annulus gear for long threads up to Ø 30 mm. Proven and powerful pole-reversible three-phase motor, specially designed for threading, with hollow shaft, 2000/2300 W. Overload protection. Reverse switch for cutting right and left-hand threads. High operating speed, 2 spindle speeds 70 and 35 rpm.

Clamping device
Self-centering universal vice for the complete range with specially toothed and hardened clamping jaws. Choice of manual or hydraulic clamping with operation by foot switch (working pressure 6 bar).

Special clamping jaws
For drawn material, stud bolts, hex screws and pipe nipples, as accessory.

Automatic lubrication and cooling
Robust, proven oil pump with high pumping volume. Ample oil volume ensures longer service life of chasers, gear and motor.

Universal automatic die head
Only **one** universal automatic die head for all threads. Fine adjustment of thread diameter with spindle and scale. Die head closes automatically and opens automatically when the required thread length is reached. After starting the thread via feed lever and rack the chaser-system initiates an automatic feed-forward of the die head. All threads can be cut in a single pass. Copying unit for tapered threads. Instead of changing the dies, additional quick-change die heads ensure shorter resetting time.

Chasers
The proven regrindable REMS tangential chasers with precise cutting geometry ensure an excellent start-cutting performance and clean threads. Tool steel chasers made of special hardened steel for material up to 500 N/mm². HSS chasers for hard-to-machine material above 500 N/mm². The chasers sit in a special holder system. Chasers and holders together form a threading set.

Thread cutting on rebar
Special chaser dies M with additional, ground cut for cutting threads on rebar in a single pass. Driven by REMS Unimat 75 with oil-hydraulic/pneumatic vice, for high clamping pressure.



German Quality Product

Machining examples





ТАШЕВ Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Thread-cutting oil

REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with special clamping jaws 1/16–1¼" or with the automatic internal clamping REMS Nippelfix ½–2½" or with the manual internal clamping REMS Nippelspanner ⅜–2" (page 48).



Supply format

REMS Unimat 75 Basic. Semi-automatic threading machine for bolt threads 6–72 mm, ¼–2¾", pipe threads 1/16–2½", 16–63 mm. Machine on stand. Pole-reversible 3~ induction motor with hollow shaft, 400 V, 50 Hz, 2000/2300 W, right and left-hand rotation. Die head speed 70 and 35 rpm. Self-centering universal chuck for the complete clamping range, choice of manual or oil-hydraulic/pneumatic operation. Automatic lubrication and cooling. 1 universal automatic die head for all threads, opens and closes automatically. Without threading sets, without closing lever. Electric locking system of safety cover. Adjustment gauge. Wrench. In transport case.

Description	Version	Art.-No.	
REMS Unimat 75 Basic mS	manual clamping device	750003	
REMS Unimat 75 Basic pS	oil-hydraulic/pneumatic vice clamping device	750004	

Other voltages on request.

Accessories


Description	Art.-No.	
Chasers and holders (threading sets) and chasers see page 44.		
Universal automatic die head, without threading sets, without closing lever	751000	
Closing lever for closing and opening the chasers **R** for taper pipe threads, right-hand **R-L** for taper pipe threads, left-hand **G** for cylindrical pipe threads, right-hand **G-L** for cylindrical pipe threads, left-hand **M** for all bolt threads, right-hand **M-L** for all bolt threads, left-hand	 751040 751050 751060 751070 751080 751090	
Chamfering/peeling die head 45°, Ø 7 – 62 mm, with chamfering/peeling chasers 45°, Ø 7 – 62 mm, HSS, with holder	751100	
Chamfering/peeling die head 45°, Ø 7–62 mm, without threading sets	751102	
Chamfering/peeling chasers 45°, Ø 7–46 mm, HSS, with holder	751096	
Chamfering/peeling chasers 45°, Ø 40–62 mm, HSS, with holder	751098	
Chamfering/peeling chasers 45°, Ø 7–62 mm, pack of 4, with holder	751097	
Special clamping jaws, pair, for drawn material, stud bolts and hex screws. Workpiece length protrude from vice without thread, minimum 15 mm, Ø 6–42 mm	753240	
Thread-cutting oil see page 49.		
Nipple holder see page 48.		
REMS Herkules material supports, see page 96.		



Ташев Галвинг ООД
www.tashev-galving.com



German Quality Product



German Quality Product

Chasers and holders (threading set)

The proven regrindable REMS tangential chasers with precise cutting geometry ensure an excellent start-cutting performance and clean threads. Tool steel chasers made of special hardened steel for material up to 500 N/mm². HSS chasers for hard-to-machine material above 500 N/mm². The chasers sit in a special holder system. Chasers and holders together form a threading set.

Thread type	Size	Art.-No.
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 1/16–⅛	759250
	R ¼–⅜	759251
	R ½–¾	759252
	R 1–2	759253
	R 2½	759254
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G 1/16–⅛	759255
	G ¼–⅜	759256
	G ½–¾ HSS[1)]	759257
	G 1–2 HSS[1)]	759258
	G 2½ HSS[1)]	759259
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1. 20.1	NPT 1/16–⅛	759360
	NPT ¼–⅜	759361
	NPT ½–¾ HSS[1)]	759362
	NPT 1–2 HSS[1)]	759363
	NPT 2½ HSS[1)]	759364
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1. 20.1	NPSM 1/16–⅛	759365
	NPSM ¼–⅜	759366
	NPSM ½–¾ HSS[1)]	759367
	NPSM 1–2 HSS[1)]	759368
	NPSM 2½	759369
Conduit threads Pg DIN 40430	Pg 7	759260
	Pg 9–16	759261
	Pg 21–48	759262
Conduit threads M EN 60423	M 16–20×1,5	759263
	M 25–32×1,5	759264
	M 40–50×1,5	759265
	M 63×1,5	759330
Threads M for rebar ISO 261 (DIN 13)	M 14–16 HSS	759274
	M 18–22 HSS	759275
	M 24–27 HSS	759276
	M 30–33 HSS	759277
	M 36–39 HSS	759278
	M 42–45 HSS	759279
Metric bolt threads M ISO 261 (DIN 13)	M 6	759270
	M 8	759271
	M 10	759272
	M 12	759273
	M 14–16	759274
	M 18–22	759275
	M 24–27	759276
	M 30–33	759277
	M 36–39	759278
	M 42–45	759279
	M 48–52	759280
	M 56–60	759281
	M 64–72	759282
Bolt threads UNC Unified Inch Screw Thread ASME B1.1	UNC ¼–20	759370
	UNC 5/16–18	759371
	UNC ⅜–16	759372
	UNC 7/16–14	759373
	UNC ½–13	759374
	UNC 9/16–12	759375
	UNC ⅝–11	759376
	UNC ¾–10	759377
	UNC ⅞–9	759378
	UNC 1–8 HSS[1)]	759379
	UNC 1⅛–1¼–7	759380
	UNC 1⅜–1½–6	759381
	UNC 1¾–5	759382
	UNC 2–2¼–4,5	759383
	UNC 2½–2¾–4	759384

Die sets for other threads (e.g. bicycle screw thread, fine thread, BSW) and die sets with chaser dies made of high-speed steel (HSS) for processing high-strength materials on request. 50 % surcharge on chaser dies for HSS.
[1)] Some chasers only available in HSS. Threading sets for left-hand threads 50 % extra charge on chasers.

Chasers (set)

The proven regrindable REMS tangential chasers with precise cutting geometry ensure an excellent start-cutting performance and clean threads. Tool steel chasers made of special hardened steel for material up to 500 N/mm². HSS chasers for hard-to-machine material above 500 N/mm².

Thread type	Size	Art.-No.
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 1/16–⅛	751501
	R ¼–⅜	751502
	R ½–¾	751503
	R 1–2½	751504
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G 1/16–⅛	751505
	G ¼–⅜	751506
	G ½–¾ HSS[1)]	751507
	G 1–2½ HSS[1)]	751508
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1. 20.1	NPT 1/16–⅛	751544
	NPT ¼–⅜	751545
	NPT ½–¾ HSS[1)]	751546
	NPT 1–2 HSS[1)]	751547
	NPT 2½ HSS[1)]	751548
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1. 20.1	NPSM 1/16–⅛	751549
	NPSM ¼–⅜	751550
	NPSM ½–¾ HSS[1)]	751551
	NPSM 1–2	751552
	NPSM 2½	751553
Conduit threads Pg DIN 40430	Pg 7	751509
	Pg 9–16	751510
	Pg 21–48	751511
Conduit threads M EN 60423	M 16–63×1,5 (M 10)	751518
Threads M for rebar ISO 261 (DIN 13)	M 14–16 HSS	751520
	M 18–22 HSS	751521
	M 24–27 HSS	751522
	M 30–33 HSS	751523
	M 36–39 HSS	751524
	M 42–45 HSS	751525
Metric bolt threads M ISO 261 (DIN 13)	M 6	751516
	M 8	751517
	M 10 (M 16–63×1,5)	751518
	M 12	751519
	M 14–16	751520
	M 18–22	751521
	M 24–27	751522
	M 30–33	751523
	M 36–39	751524
	M 42–45	751525
	M 48–52	751526
	M 56–60	751527
	M 64–72	751528
Bolt threads UNC Unified Inch Screw Thread ASME B1.1	UNC ¼–20	751557
	UNC 5/16–18	751558
	UNC ⅜–16	751559
	UNC 7/16–14	751560
	UNC ½–13	751561
	UNC 9/16–12	751562
	UNC ⅝–11	751563
	UNC ¾–10	751564
	UNC ⅞–9	751565
	UNC 1–8 HSS[1)]	751566
	UNC 1⅛–1¼–7	751567
	UNC 1⅜–1½–6	751568
	UNC 1¾–5	751569
	UNC 2–2¼–4,5	751570
	UNC 2½–2¾–4	751571

Chaser dies for other threads (e.g. bicycle screw thread, fine thread, BSW) and chaser dies made of high-speed steel (HSS) for processing high-strength materials on request. 50 % surcharge for HSS. [1)] Some chasers only available in HSS. Chasers for left-hand threads 50 % extra charge.

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Thread tables

Taper Pipe Threads

Whitworth Pipe Thread
ISO 7-1, EN 10226 (DIN 2999, BSPT)
External thread taper 1:16
Flank angle 55°

Nominal Size **R BSPT**	Outside Ø of thread mm	T.P.I.
1/16	7.723	28
⅛	9.728	28
¼	13.157	19
⅜	16.662	19
½	20.955	14
¾	26.441	14
1	33.249	11
1¼	41.910	11
1½	47.803	11
2	59.614	11
2½	75.184	11
3	87.884	11
4	113.030	11

Standard Taper Pipe Thread
NPT, ASME B 1.20.1
External thread taper 1:16
Flank angle 60°

Nominal Size **NPT**	Outside Ø of thread mm	T.P.I.
1/16	7.938	27
⅛	10.287	27
¼	13.716	18
⅜	17.145	18
½	21.336	14
¾	26.670	14
1	33.401	11.5
1¼	42.164	11.5
1½	48.260	11.5
2	60.325	11.5
2½	73.025	8
3	88.900	8
3½	101.600	8
4	114.300	8

Parallel PipeThreads

Whitworth Pipe Thread
ISO 228-1 (DIN 259, BSPP)
External thread parallel
Flank angle 55°

Nominal Size **G BSPP**	Outside Ø of thread mm	T.P.I.
1/16	7.723	28
⅛	9.728	28
¼	13.157	19
⅜	16.662	19
½	20.955	14
¾	26.441	14
1	33.249	11
1¼	41.910	11
1½	47.803	11
2	59.614	11
2½	75.184	11
3	87.884	11
3½	100.330	11
4	113.030	11

Straight Pipe Thread for Fixtures
NPSM, ASME B 1.20.1
External thread parallel
Flank angle 60°

Nominal Size **NPSM**	Outside Ø of thread mm	T.P.I.
⅛	10.083	27
¼	13.360	18
⅜	16.815	18
½	20.904	14
¾	26.264	14
1	32.842	11.5
1¼	41.605	11.5
1½	47.676	11.5
2	59.715	11.5
2½	72.161	8
3	88.062	8
3½	100.787	8
4	113.436	8

Metric Bolt Thread

Metric ISO Thread
ISO 261 (DIN 13)
External thread
Flank angle 60°

Nominal Size **M**	Outside Ø of thread mm	Pitch mm
6	5.974	1
8	7.972	1.25
10	9.968	1.5
12	11.966	1.75
14	13.962	2
16	15.962	2
18	17.958	2.5
20	19.958	2.5
22	21.958	2.5
24	23.952	3
27	26.952	3
30	29.947	3.5
33	32.947	3.5
36	35.940	4
39	38.940	4
42	41.937	4.5
45	44.937	4.5
48	47.929	5
52	51.929	5
56	55.925	5.5
60	59.925	5.5
64	63.920	6
68	67.920	6
72	71.920	6

American and British Bolt Threads

Unified Inch Screw Thread
UNC, ASME B 1.1
External thread
Flank angle 60°

Nominal Size **UNC**	Outside Ø of thread mm	T.P.I.
¼	6.322	20
5/16	7.907	18
⅜	9.491	16
7/16	11.076	14
½	12.661	13
9/16	14.246	12
⅝	15.834	11
¾	19.004	10
⅞	22.176	9
1	25.349	8
1⅛	28.519	7
1¼	31.694	7
1⅜	34.864	6
1½	38.039	6
1¾	44.381	5
2	50.726	4.5
2¼	57.076	4.5
2½	63.421	4
2¾	69.768	4

British Standard Parallel Screw Thread of Whitworth Form B.S.W.
BS 84 (obsolete): External thread
Flank angle 55°

Nominal Size **BSW**	Outside Ø of thread mm	T.P.I.
¼	6.350	20
5/16	7.937	18
⅜	9.525	16
7/16	11.112	14
½	12.700	12
⅝	15.875	11
¾	19.050	10
⅞	22.225	9
1	25.400	8
1⅛	28.575	7
1¼	31.750	7
1½	38.100	6
1¾	44.450	5
2	50.800	4.5
2¼	57.150	4
2½	63.500	4
2¾	69.850	3.5

Threads for Electric Conduit

Conduit Thread
DIN 40 430
External thread parallel
Flank angle 80°

Nominal Size **Pg**	Outside Ø of thread mm	T.P.I.
7	12.5	20
9	15.2	18
11	18.6	18
13.5	20.4	18
16	22.5	18
21	28.3	16
29	37	16
36	47	16
42	54	16
48	59.3	16

Conduit Thread
EN 60423
External thread parallel
Flank angle 60°

Nominal Size **M**	Outside Ø of thread mm	T.P.I.
6	15.968	1.5
20	19.968	1.5
25	24.968	1.5
32	31.968	1.5
40	39.968	1.5
50	49.968	1.5
63	62.968	1.5

Outside diameter of thread is always the maximum diameter, for taper pipe threads this is measured at the scale line.

Ташев-Галвинг ООД
www.tashev-galving.com

Semi-automatic high-performance machine
for efficient cutting of pipe threads.
For industry, metalworking, installation.

Pipe threads	¼–4"
Thread length	≤ 120 mm

REMS Unimat 77 – pipe threads up to 4".
Tangential-chaser-threading-system.
Fast working, short resetting time.
For single and series production.

Operating principle
Stationary material – rotating die head.

Design
Compact, rugged design for continous use. Die head with regrindable tangential chasers in self centering holder system. After start-cutting with feed lever and rack mechanism self feeding action of die head (no guide thread). Welded, sturdy machine stand with large oil compartment and removeable chip drawer.

Drive
Robust worm gear and 2-stage spur gear. Proven and powerful pole-reversible three-phase motor, specially designed for threading, 2000/2300 W. Overload protection. Reverse switch for cutting right and left-hand threads. 4 spindle speeds 50, 25, 16, 8 rpm.

Clamping device
Self-centering universal vice for the complete range with specially toothed and hardened clamping jaws (¼–¾", 1–4"). Choice of manual or hydraulic clamping with operation by foot switch (working pressure 6 bar).

Automatic lubrication and cooling
Robust, proven oil pump with high pumping volume. Ample oil volume ensures longer life of chasers, gear and motor.

Universal automatic die head
Only **one** universal automatic die head for all threads. Fine adjustment of thread diameter with spindle and scale. Die head closes automatically and opens automatically when the required thread length is reached. After starting the thread via feed lever and rack the chaser-system initiates an automatic feed-forward of the die head. All threads can be cut in a single pass. Copying unit for tapered threads. Instead of changing the dies, additional quick-change die heads ensure shorter resetting time.

Chasers
The proven regrindable REMS tangential chasers with precise cutting geometry ensure an excellent start-cutting performance and clean threads. Tool steel chasers made of special hardened steel for material up to 500 N/mm². HSS chasers for hard-to-machine material above 500 N/mm². The chasers sit in a special holder system. Chasers and holders together form a threading set.

Thread-cutting oil
REMS Sanitol and REMS Spezial (page 49). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading
Efficient with the automatic internal clamping REMS Nippelfix ½–4" or with the manual internal clamping REMS Nippelspanner ⅜–2" (page 48).



German Quality Product

Machining examples





Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Unimat 77

Threading machine



Supply format

REMS Unimat 77 Basic. Semi-automatic threading machine for pipe threads ¼–4". Machine on stand. Pole-reversible 3~ induction motor, 400 V, 50 Hz, 2000/2300 W, right and left-hand rotation. Die head speed 50, 25, 16, 8 rpm. Universal vice with clamping jaws 1 – 4", choice of manual or hydraulic/pneumatic operation. Automatic lubrication. 1 universal automatic die head for all threads, opens and closes automatically. Without threading sets, without closing lever. Electrical locking system of safety cover. Adjustment gauge. Wrench. In transport case.

Description	Version	Art.-No.	
REMS Unimat 77 Basic mS	manual clamping device	770003	
REMS Unimat 77 Basic pS	Oil-hydraulic/pneumatic vice clamping device	770004	

Other voltages on request.

Accessories

Chasers and holders (threading set)

Thread type	Size	Art.-No.	
Pipe threads R tapered, right-hand ISO 7-1 (EN 10226, DIN 2999, BSPT)	R ¼–⅜ R ½–¾ R 1–2 R 2½–4	771110 771120 771130 771140	
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G ¼–⅜ G ½–¾ HSS[1)] G 1–2 HSS[1)] G 2½–4 HSS[1)]	771160 771170 771180 771190	
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT ¼–⅜ NPT ½–¾ HSS[1)] NPT 1–2 HSS[1)] NPT 2½–4 HSS[1)]	771210 771220 771230 771240	
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM ¼–⅜ NPSM ½–¾ HSS[1)] NPSM 1–2 NPSM 2½–4	771260 771270 771280 771290	



Chasers (set)

Thread type	Size	Art.-No.	
Pipe threads R tapered, right-hand ISO 7-1 (EN 10226, DIN 2999, BSPT)	R ¼–⅜ R ½–¾ R 1–4	751502 751503 771136	
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G ¼–⅜ G ½–¾ HSS[1)] G 1–4 HSS[1)]	751506 751507 771186	
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT ¼–⅜ NPT ½–¾ HSS[1)] NPT 1–2 HSS[1)] NPT 2½–4 HSS[1)]	751545 751546 751547 771246	
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM ¼–⅜ NPSM ½–¾ HSS[1)] NPSM 1–2 NPSM 2½–4	751550 751551 751552 771296	



Die sets and chaser dies for other threads and die sets and chaser dies made of high-speed steel (HSS) for processing high-strength materials on request. 50% surcharge on chaser dies for HSS. [1)] Some threading sets and chasers only available in HSS. Threading sets and chasers for left-hand threads 50 % extra charge.

Description	Art.-No.	
Universal automatic die head, without threading sets, without closing lever	771000	
Closing lever for closing and opening the chasers **R** for taper pipe threads, right-hand **R-L** for taper pipe threads, left-hand **G** for cylindrical pipe threads, right-hand **G-L** for cylindrical pipe threads, left-hand	 751040 751050 751060 751070	
Clamping jaws ¼–¾" (pack of 2)	773060	
Thread-cutting oil see page 49.		
Nipple holder see page 48.		
REMS Herkules material supports, see page 96.		



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Nippelspanner

Accessories for threading machines
and hand die stocks of all types and makes

Manual pipe nipple chuck for internal clamping
of short pipe pieces. For universal use.

Nipples and double nipples
in standard and special lengths ⅜–2"



German Quality Product



REMS Nippelspanner – efficient nipple-threading. Any length. Anywhere.

To be used universally for threading machines and for hand die stocks of all types and makes. For opening and non-opening die heads. Ideal accessory for REMS REMS Amigo E, REMS Amigo, REMS Amigo 2 and REMS eva and other makes.

Ideal tool for using up short pipe pieces. Saves time and money.

Chucking and centering of pipe pieces by expanding of specially hardened spring steel segments.

Internal clamping, so no thread required for clamping.

Supply format

REMS Nippelspanner. Manual pipe nipple chuck for internal clamping of short pipe pieces.

Description	Size	Art.-No.	
REMS Nippelspanner	⅜" ½" ¾" 1" 1¼" 1½" 2"	110000 110100 110200 110300 110400 110500 110600	

Supply format

REMS Nippelspanner Set. Manual pipe nipple chuck for internal clamping of short pieces of pipe. In sturdy steel case.

Description	Art.-No.	
Set ½-¾-1-1¼"	110620	
Set ½-¾-1-1¼-1½-2"	110621	

REMS Nippelfix

Accessories for threading machines
with opening die head

Automatic pipe nipple chuck for internal clamping
of short pipe pieces.

Nipples and double nipples
in standard and special lengths ½–4"



German Quality Product





REMS Nippelfix – efficient nipple-threading up to 4". Any length. Anywhere. Automatic internal clamping. Super fast and simple.

For threading machines with opening die head: Pipe turning machines, machines with rotating die head, threading devices.

Ideal tool for using up short pipe pieces. Saves time and money.

Automatic quick-chuck and centering of pipe piece. No tools.

Automatic release after completion of nipple. Production of nipples possible without taking the Nipplefix out of the clamping device.

Internal clamping, so no thread required for clamping.

Specially hardened and ground clamping jaws for fast and safe clamping.

Supply format

REMS Nippelfix. Automatic pipe nipple chuck for internal clamping of short pipe pieces.

Description	Size	Art.-No.	
REMS Nippelfix	½" ¾" 1" 1¼" 1½" 2" 2½" 3" 4"	111000 111100 111200 111300 111400 111500 111700 111800 111900	

Supply format

REMS Nippelfix Set. Automatic pipe nipple chuck for internal clamping of short pieces of pipe. In sturdy steel case.

Description	Art.-No.	
Set ½-¾-1-1¼"	111620	
Set ½-¾-1-1¼-1½-2"	111621	

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Spezial

Thread-cutting oil

High-alloyed mineral oil based thread-cutting oil.
For all materials: steel, stainless steel, non-ferrous metal, plastic.

For drinking water supplies, comply with local regulations! In AUT, CHE, DEU, DNK not permitted for drinking water supplies.

REMS Spezial – high-alloyed mineral based thread-cutting oil, can be washed out with water. High lubricating and cooling effect.

Specially developed for threading. High lubricating and cooling effect. Essential for clean threads, long service life of dies, tools and machines.

Pleasant to work with. Can be washed out with water, approved by experts.

Also well suited as a cooling lubricant for sawing metals.

REMS Spezial spray without CFC's, so ozone-harmless.

REMS Spezial squirt bottle without propellants. Refillable.



German Quality Product

Supply format

REMS Spezial. High-alloyed mineral based thread-cutting oil.

Description	Packing	Art.-No.
REMS Spezial	5-l-can	140100
	10-l-can	140101
	50-l-barrel	140103
	600 ml spray	140105
	500 ml squirt bottle	140106

REMS Sanitol

Thread-cutting oil

Synthetic, mineral oil free thread-cutting oil.
Specially for drinking water supplies.
Also for universal use. For all materials.

REMS Sanitol – mineral oil free. Completely water soluable. High lubricating and cooling effect.

Completely water soluable. Complies with the DVGW, ÖVGW, SVGW regulations.

Viscosity at –10°C: 219 mPa s (cP). Pumpable to –28°C.

Simple to work with. Red in colour for flushing control. Perfect corrosion protector.

Developed especially for drinking water pipes but also excellently suitable for universal thread cutting. High lubricating and cooling effect. Essential for clean threads, long service life of dies, tools and machines.

Also well suited as a cooling lubricant for sawing metals.

REMS Sanitol spray without CFC's, so ozone-harmless.

REMS Sanitol squirt bottle without propellants. Refillable.



German Quality Product

Supply format

REMS Sanitol. Synthetic, mineral oil free thread-cutting oil specially for drinking water supplies and for universal use.

Description	Packing	Art.-No.
REMS Sanitol	5-l-can	140110
	50-l-barrel	140113
	600 ml spray	140115
	500 ml squirt bottle	140116

DW-0201 AS2032 W1.303 7808-649

Ташев-Галвинг ООД
www.tashev-galving.com

REMS roll grooving attachment

Robust, compact roll grooving attachment with oil hydraulic forward feed for grooving pipes of pipe coupling systems. For installation, sprinkler lines, commercial heating, industry and mining.
For job site and workshop.

Steel pipes	DN 25–300 1–12" s ≤ 7 mm
Stainless steel pipes, copper, aluminium, PVC pipes	



German Quality Product



REMS roll grooving attachment – compact – universal. Oil hydraulic pressure cylinder for powerful in-feed of pressure roller.

Design
Compact, job site-proven. Robust metal housing for tough use. Handy, easy to transport, only 26 kg. Oil hydraulic pressure cylinder for powerful in-feed of pressure roller. Pressure build-up with hydraulic hand pump. Individually adjustable groove-depth-stop with fine adjustment, for automatic limitation of groove depth. Built-in ring gauge for automatic groove-depth-stop.

Grooving rollers
The proven REMS grooving rollers with perfectly size-adjusted pressure rollers and counterpressure rollers with well gripping axial knurls guarantee a secure rotation of the pipe and precise grooving. Grooving rollers machined from hardened special steel ensure extremely long service life. 3 pairs of groove rollers (pressure roller, counter-pressure roller) for the whole working range DN 25–300, 1–12", easy change. Grooving rollers Cu (pressure roller, counterpressure roller) for copper pipe 54–159 mm. Groove rollers INOX (pressure roller made of stainless steel, counter-pressure roller made of toughened, specially hardened steel, nickel-plated) for stainless steel pipes 2–6" and 8–12". Grooving rollers for aluminium, PVC pipes on request.

Drive
Only one roll grooving device for REMS Amigo, REMS Amigo 2, REMS Amigo 2 Compact, REMS Tornado and REMS Magnum. Fast, simple assembly. 3-face drive shaft of roll grooving attachment for secure clamping and optimum power transmission. Roll grooving attachments for threading machines of other makes, adjusted to support arm distance, diameter of support arm and spindle axis of the corresponding drive machine, on request.

Supply format

REMS roll grooving attachment. Roll grooving attachment for grooving pipes of pipe coupling systems DN 25–300, 1–12". Roll grooving attachment, hydraulic hand pump, built-in ring gauge for automatic groove-depth-stop, 1 pair of groove rollers (pressure roller, counter-pressure roller) 2–6", Allen key. For REMS Amigo, REMS Amigo 2, REMS Amigo 2 Compact, REMS Tornado and REMS Magnum or for other thread cutting machine makes. In a carton.

Description	fit onto	Art.-No.	
REMS roll grooving attachment	REMS Amigo/Amigo 2 Compact[1] REMS Amigo 2[1] REMS Tornado[2] REMS Magnum[2]	347000	
Roll grooving attachment R 300	Ridgid 300	347001	
Roll grooving attachment R 535	Ridgid 535	347002	
Roll grooving attachment N80A	Rex/Rothenberger/ Super-Ego N80A	347003	
Roll grooving attachment Delta 4	Rex Delta 4"	347004	

[1] Conversion kit Amigo/Amigo 2/Amigo 2 Compact (Art. No. 347007) required. Can be used for roll grooving devices manufactured from 2014 onwards.
[2] Can only be used for roll grooving up to DN 200, 8" on T versions.
Roll grooving attachments for other makes on request.



Accessories

Description	Art.-No.	
Grooving rollers 1–1½" (pair)	347030	
Grooving rollers INOX 1–1½" (pair)	347053	
Grooving rollers 2–6" (pair)	347035	
Grooving rollers INOX 2–6" (pair)	347046	
Grooving rollers 8–12" (set)	347040	
Grooving rollers INOX 8–12" (pair)	347047	
Grooving rollers Cu 54–159 (pair) for Cu pipes	347034	
Conversion kit Amigo/Amigo 2/Amigo 2 Compact	347007	
REMS Herkules 3B, material support, see page 96.		



Ташев Галвинг ООД
www.tashev-galving.com

REMS Collum RG

Roll grooving machine

Powerful roll grooving machine for fast, economical grooving of pipes for pipe coupling systems.
For installation, sprinkler lines, commercial heating, industry and mining. For job site and workshop.

Steel pipes	DN 25 – 300 1 – 12" s ≤ 7 mm
Stainless steel pipes, copper, aluminium, PVC pipes	

REMS Collum RG – electrical roll grooving up to 12". Fast and economical feed of the pressure roller with oil-hydraulic pressure cylinder.

Design

Robust, compact construction suitable for building sites. Favourable dimensions, favourable weight, roll grooving device with drive machine only 31 kg. For work bench. Stand for optimum working height and sturdy stand as an accessory.

Drive

Fast and powerful, e.g. roll grooving of 6" steel pipe with REMS Collum RG in just 52 s. Sturdy, compact gear, maintenance-free. Robust, powerful 1200 W universal motor (REMS Collum RG and REMS Collum RG 2 Compact) or 1700 W universal motor (REMS Collum RG 2) for intensive use at large dimensions. Safety switch. Safety foot switch for ergonomic working as an accessory.

Roll grooving attachment

Compact, job site-proven. Robust metal housing for tough use. Handy, easy to transport, only 26 kg. Oil hydraulic pressure cylinder for powerful in-feed of pressure roller. Pressure build-up with hydraulic hand pump. Built-in ring gauge for automatic groove-depth-stop.

Grooving rollers

The proven REMS grooving rollers with perfectly size-adjusted pressure rollers and counterpressure rollers with well gripping axial knurls guarantee a secure rotation of the pipe and precise grooving. Grooving rollers machined from hardened special steel ensure extremely long service life. 3 pairs of groove rollers (pressure roller, counter-pressure roller) for the whole working range DN 25 – 300, 1 – 12", easy change. Grooving rollers Cu (pressure roller, counterpressure roller) for copper pipe 54 – 159 mm. Groove rollers INOX (pressure roller made of stainless steel, counter-pressure roller made of toughened, specially hardened steel, nickel-plated) for stainless steel pipes 2 – 6" and 8 – 12". Grooving rollers for aluminium, PVC pipes on request.



German Quality Product



Tested by electrosuisse



Stand (Accessory)

Herkules 3B (Accessory)

Supply format

REMS Collum RG. Roll grooving attachment for grooving pipes of pipe coupling systems DN 25 – 300, 1 – 12". Roll grooving attachment, hydraulic hand pump, built-in ring gauge for automatic groove-depth-stop, 1 pair of groove rollers (pressure roller, counter-pressure roller) 2 – 6", Allen key. Choice of 3 drive units, with maintenance-free gear, powerful universal motor, safety switch.
For workbench or stand. In a carton.

Description	Version	Art.-No.	
Collum RG	Universal motor 230 V, 50 – 60 Hz, 1200 W, overload protection. 29 min^{-1}	347006	
Collum RG 2	Universal motor 230 V, 50 – 60 Hz, 1700 W. 28 min^{-1}	347008	
Collum RG 2 Compact	Universal motor 230 V, 50 – 60 Hz, 1200 W, overload protection. 26 min^{-1}	347009	

Other voltages on request.

Accessories

Description	Art.-No.	
Stand	849315	
Safety foot switch	347010	

REMS Herkules 3B, material support, see page 96.

Grooving rollers and other accessories, see page 50.



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Magnum RG

Roll grooving machine

Robust, compact high performance machine with roll grooving attachment for pipe grooving of pipe coupling systems. For installation, sprinkler lines, commercial heating lines, industry and mining.
For job site and workshop.

Steel pipes	DN 25–300 1–12" s ≤ 7 mm
Stainless steel pipes, copper, aluminium, PVC pipes	
Pipe threads 1/16–2", 16–63 mm, bolt threads 6–60 mm, ¼–2", with conversion kit.	

REMS Magnum RG – the compact up to 12". Immensely powerful and extremely fast. Feed of the pressure roller with oil-hydraulic pressure cylinder.

Design
Robust, compact, job site-proven design. Favorable size and weight, e.g. REMS Magnum 2000 RG-T only 68 kg. Tool support. Stand or wheel stand with material support, as accessory, for optimum work height and secure standing.

Drive
Immensely powerful and fast, e.g. roll grooving of 6" steel pipe with REMS Magnum 2010 RG-T in just 40 s. Completely maintenance-free gear which runs in a sealed oil bath. Choice of 3 powerful motors (see REMS Magnum page 34). Operator-friendly safety foot switch with emergency-stop, 2-step, can be loaded with the full body weight during operation.

Roll grooving attachment
Compact, job site-proven. Robust metal housing for tough use. Handy, easy to transport, only 26 kg. Oil hydraulic pressure cylinder for powerful in-feed of pressure roller. Pressure build-up with hydraulic hand pump. Built-in ring gauge for automatic groove-depth-stop.

Grooving rollers
The proven REMS grooving rollers with perfectly size-adjusted pressure rollers and counterpressure rollers with well gripping axial knurls guarantee a secure rotation of the pipe and precise grooving. Grooving rollers machined from hardened special steel ensure extremely long service life. 3 pairs of groove rollers (pressure roller, counter-pressure roller) for the whole working range DN 25–300, 1–12", easy change. Grooving rollers Cu (pressure roller, counterpressure roller) for copper pipe 54–159 mm. Groove rollers INOX (pressure roller made of stainless steel, counter-pressure roller made of toughened, specially hardened steel, nickel-plated) for stainless steel pipes 2–6" and 8–12". Grooving rollers for aluminium, PVC pipes on request.

Conversion kit for threading
Tool set ¼–2" complete with universal automatic die head, dies for pipe threads, tapered, ISO 7-1 (DIN 2999, BSPT) R ⅛–¾ and R 1–2" right-hand, pipe cutter, inner pipe deburrer, pressing lever, pump for automatic oiling, oil basin, chip tray.



German Quality Product



Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Magnum RG

Roll grooving machine



Stand
(Accessory)



Wheel stand (Accessory)

Herkules 3B
(Accessory)

Supply format

REMS Magnum RG. Roll grooving machine for pipe grooving of pipe coupling systems DN 25–300, 1–12". With maintenance-free gear, safety foot switch with emergency-stop, self-tightening quick-action hammer chuck, rear centering device, automatic lubrication and cooling, tool support. Choice of 3 motors. Roll grooving attachment, hydraulic hand pump, built-in ring gauge with automatic groove-depth-stop, 1 set of grooving rollers (pressure roller, counterpressure roller) 2–6", hexagon key. For workbench, stand or wheel stand with material support. In a carton.

Description	Version	Art.-No.	
2000 RG-T	Universal motor 230 V or 110 V, 50–60 Hz, 1700 W. 53 rpm.	340230	
2010 RG-T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 52/26 rpm, also under full load. Extremely quiet running.	340231	
2020 RG-T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 52/26 rpm, also under full load. Extremely quiet running.	340232	

Other voltages on request.

Accessories

Description	Art.-No.	
Stand	344105	
Wheel stand with material support	344100	
REMS Herkules 3B, material support, see page 96.		
Grooving rollers and other accessories, see page 50.		
Conversion kit Magnum RG-T to L-T for threading.	340110	



Ташев-Галвинг ООД
www.tashev-galving.com



Ташев-Галвинг ООД
www.tashev-galving.com

Sawing

	Universal electric reciprocating saws	58
	Electric reciprocating pipe saws	60
	Pneumatic reciprocating pipe saw	62
	Cordless universal reciprocating saw	63
	Saw blades for reciprocating saws	64
	Circular pipe sawing machine	66
	Universal circular metal sawing machine	67


Ташев-Галвинг ООД
www.tashev-galving.com

REMS reciprocating saws

Legend



Aggressive orbital action by vertical hacking motion of saw blade provides forceful, fast forward feed, excellent chip flow and long service life of saw blades.
Fixed orbital action, running in needle bearings, ensures long-lasting and forceful sawing also during extreme load conditions, e.g. sawing of steel pipe. Adjustable mechanisms with a great variety of parts and a reduced system stability do not withstand the high in-feed pressure and the heavy-duty requirements of forceful cutting of steel pipes, particularly when a guide support with leverage is being used.

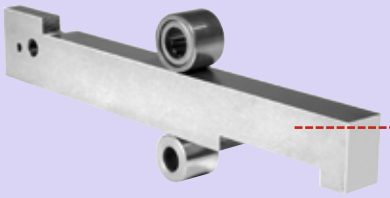


Sturdy, square lift rod in special solid steel, mounted precisely in needle bearings towards the force direction and along the complete stroke length, for distortion-free, precise cutting also during tough use and by applying multiple sawing force, e.g. using a guide support with leverage. For extremely long service life.



Super stable, water and dust resistant, maintenance-free oscillating gear enables a simultaneous generation of saw and orbital stroke of lift rod and saw blade. Allround needle bearing mounted crank drive **(ANC)** reduces friction, heat generation, wear. Thus long service life also at extreme sawing.

Special high sliding silicone gasket protects gear against water and dust.

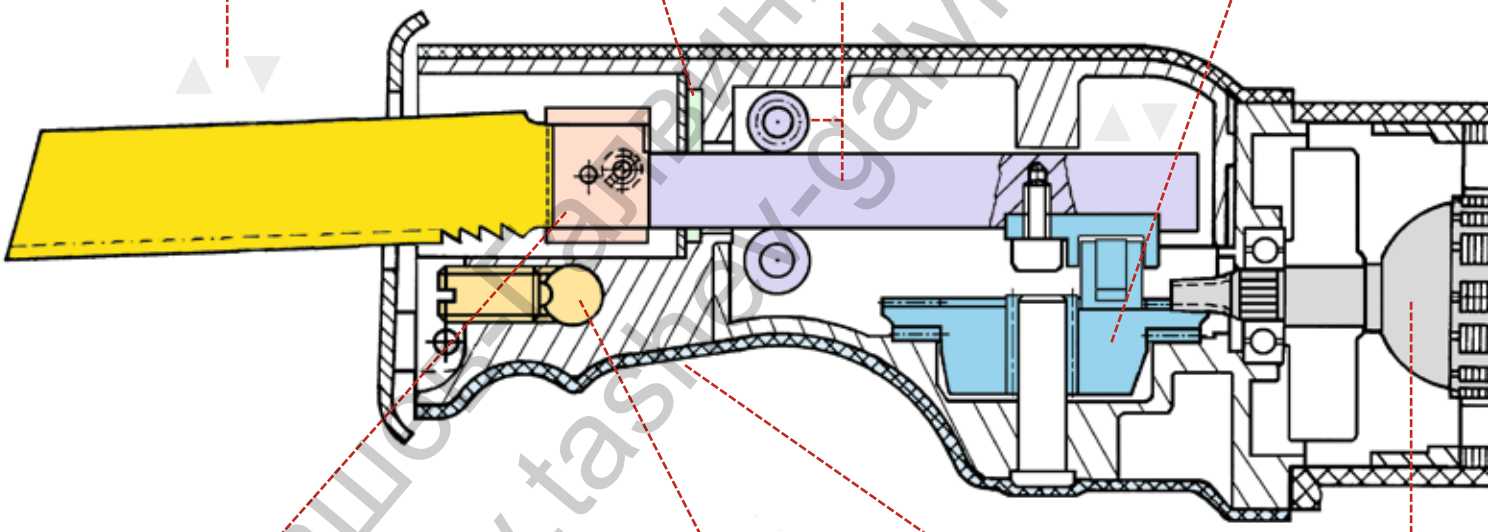



Universal saw blade clamp for mounting all saw blades – with universal or double tang – without changing or turning the saw blade thrust piece.



Unique guide support for 400 % additional sawing force for fast, effortless sawing. Also for effortless demolition work.

V/bar

Drive motors
230 V, 110 V, 48 V,
18 V, 6 bar

Ergonomically shaped front housing grip with slip resistant protection cover, for forceful feed forward while sawing free-hand.

Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS reciprocating saws Legend

VE

Vario-Electronic
Electronic stepless speed control of drive unit for sensitive start-sawing and for stroke selection during sawing according to the material. The stroke speed is controlled continuously by variable pressure on the touch switch from 0 to 2,800 rpm (REMS Puma VE), 0 to 2,400 rpm (REMS Cat ANC VE, REMS Tiger ANC VE) or 0 to 1,800 rpm (REMS Akku-Cat ANC VE) (accelerator switch).

n ideal

Ideal speed
Deliberately fixed speed. Therefore optimum cutting speed for maximum protection of motor and gear and maximum service life of saw blades.
The ideal cutting speed of 2,400 rpm has been determined by extensive sawing tests with steel pipe which lead to optimum performance in combination with the aggressive, fixed orbital action, guide support and REMS special saw blade.



Power-transferring guide support
For assembly and dismantling. Unique guide support with 5-fold leverage enables effortless, fast and right angle sawing anywhere at site, without vice. Ideal handling, easy and rapid to operate, positioned with one hand only for chucking and sawing. No loose swinging chain and cumbersome handling as with chain vice. No danger of jamming by limitation of swing angle. 400 % additional sawing force for effortless, super fast sawing during assembly and dismantling, e.g. 2" steel pipe in only 8 s. Straight machine handle for optimum forward feed.

SR/
INOX

Speed-Regulation
Stepless electronic speed control of drive unit for selecting the speed according to the material. Ideal for sawing stainless steel pipe, cast pipe and for sawing boilers, tanks, bath tubs etc. The speed is continuously adjustable between 700 and 2,200 rpm on the dial. The electronic speed control which is being used keeps the selected speed constant, also under load, including speed generator, control electronics, residual current limitation for sensitive start-sawing, motor temperature control of field wires with PTC resistance (Positive Temperature Coefficient) and stall protection of gear and motor.

kg

Weight
High sawing efficiency at low weight by innovative, proven technology and perfect tuning of all components.
For effortless, fatique-free sawing and easy handling.

W

Power
All power data stated to be understood as the rated power input. The drive motors of REMS reciprocating saws have a very high efficiency of approx. 65% thanks to an outstanding technology and quality. Therefore the user has a high power output available which is useful particularly for sawing difficult-to-cut materials, e.g. steel pipe. High power output can only be used fully by levered sawing, e.g. with the REMS guide support.

V/bar

Drive Motors
Depending on model universal motors of voltages of 230 V, 110 V, 48 V, battery motors 18 V or pneumatic motors for 6 bar operating pressures are used. All drive motors are extremely powerful, fulfill highest quality demands and come with large power reserves, for long service life.



Saw blade holder with quick-change system
Practical saw blade holder with quick-change system for fast saw blade changing without tools. For holding single tang saw blades.



Continuously adjustable support shoe
Swivel support shoe for safe guiding of the saw on the material to be sawn. Support shoe continuously adjustable in longitudinal direction by 40 mm for better utilisation of partially blunted saw blades and for setting the plunge-in depth of the saw blade in the material.



Anti-vibration system
Special drive technology with mass compensation and vibration damping handles. For low vibration, effortless sawing.



Saw blade can be inserted turned 180°.
Saw blade can be inserted with the teeth facing down or turned 180° facing up for cuts in confined spaces with difficult access.

Ташев-Галвинг ООД
www.tashev-galving.com

REMS Puma VE

Universal electric reciprocating saw

Powerful power tool for universal free-hand sawing. Only 3.8 kg. Ideal for assembly, disassembly, repair.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick



REMS Puma VE – the powerful universal saw with anti-vibration system. Quick saw blade change without tools. Adjustable support shoe.

Universal use

Can be used anywhere, free hand, over head, in tight corners, flush with the wall. Extremely versatile and powerful. For all sawing work on the building site and for rescue and emergency operations. Also for plunge-cut sawing.

Design

Powerful, suitable for building sites. Handy, easy grip shape. Only 3.8 kg. Ergonomically designed front housing grip with non-slip, heat insulating protective jacket with soft grip, for powerful sawing thrust. Practical D-shaped handle with vibration damping soft grip. Drive rod runs in an enclosed drive housing for safe work. Large saw blade stroke, 30 mm, for better cut clearance. Fast stroke speed up to 2,800 rpm for fast sawing thrust and effective sawing. Robust crank drive, maintenance-free. High sliding special seal protects the gear against water and dust. Powerful, high capacity universal motor with large power reserve, 1,300 W, safety switch. 4 m long connecting lead. Safety switch.

Anti-vibration system

Special drive technology with mass compensation and vibration damping handles. For low vibration, effortless sawing.

Vario-Electronic

Continuous electronic stroke speed control for gentle start of sawing and selection of a stroke speed suitable for the material. The stroke speed can be continuously controlled by variable pressure on the safety switch from 0 to 2,800 rpm (accelerator switch).

Saw blade holder with quick-change system

Practical saw blade holder with quick-change system for fast saw blade changing without tools. For holding single tang saw blades. Saw blade can be inserted with the teeth facing down or turned 180° facing up for cuts in confined spaces with difficult access.


REMS saw blades

Full range of REMS saw blades for free-hand sawing of different materials (page 65).

Continuously adjustable support shoe

Swivel support shoe for safe guiding of the saw on the material to be sawn. Support shoe continuously adjustable in longitudinal direction by 40 mm for better utilisation of partially blunted saw blades and for setting the plunge-in depth of the saw blade in the material. For economical working.









Supply format

REMS Puma VE Set. Electric universal reciprocating saw with Vario-Electronic (VE) for free-hand sawing, with anti-vibration system. Drive machine with D-shaped handle with soft grip, maintenance-free, water and dust-proof crank drive, powerful 230 V, 50–60 Hz, 1,300 W universal motor, safety switch, connecting cable 4 m. Continuous electronic stroke speed control (accelerator switch) 0 to 2,800 rpm. 30 mm stroke. Saw blade holder with quick-change system Adjustable support shoe. 1 REMS saw blade 210-1.8/2.5. In sturdy steel case.

	Art.-No.	
	560023	

Other voltages on request.





Accessories

Description	Art.-No.	
REMS Puma VE drive unit	560003	
REMS saw blades see page 65.		
Steel case	566051	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Cat ANC VE

Universal electric reciprocating saw

Powerful, robust, handy power tool for universal free-hand sawing. Only 3.0 kg. Ideal for assembly, dismantling, repair.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

Especially also for steel pipes

**REMS Cat ANC VE – saws anything, anywhere.
Extremely versatile and powerful.
Robust and handy.**

Universal use
Ready for use anywhere, free-hand, overhead, in confined areas, flush to wall. Extremely versatile and efficient. Especially also for sawing metal pipes, sawing up boilers, tanks, bath tubs. For rescue and emergency operations. Also for plunge-cut sawing.

Design
Robust, job site-proven. Slender, handy design. Super light, only 3.0 kg. Ergonomically shaped front housing grip with slip resistant, heat insulating protection cover with soft grip, for forceful feed forward. Proven D-shaped handle. Swivel support shoe for safe guiding of the saw on the material to be sawn. High sliding silicone gasket protects gear against water and dust. Powerful universal motor with ample reserve capacity, 1050 W. Safety tip switch.

Sturdy, square lift rod
In special solid steel, mounted precisely in needle bearings towards the force direction and along the complete stroke length, for distortion-free, precise cutting also during tough use. For extremely long service life. Drive rod runs in an enclosed housing for safe work.

Oscillating drive with ANC
Super stable, water and dust resistant, maintenance-free oscillating drive for simultaneous generation of sawing stroke and orbital action of lift rod and saw blade. Allround needle bearing mounted crank drive (ANC) reduces friction, heat generation, wear. For long service life of drive also at extreme sawing.


Aggressive orbital action
Agressive orbital action by vertical hacking motion of saw blade provides forceful, fast forward feed, excellent chip flow and long service life of saw blades. Fixed orbital action, running in needle bearings, ensures long-lasting and forceful sawing also during extreme load conditions, e.g. sawing of steel pipe.

Vario-Electronic
Electronic stepless speed control of drive unit for sensitive start sawing and for speed selection during sawing. The speed is controlled by pressing the tip switch steplessly from 0 to 2,400 rpm (acceleration switch).

Universal saw blade clamp
All saw blades – with universal or double tang – can be clamped without changing or turning the saw blade thrust piece.

REMS universal saw blade
Only 1 REMS universal saw blade (page 64) for all sawing work instead of many different saw blades. Double tang for free-hand sawing and sawing with guide holder.

REMS saw blades
Full range of REMS saw blades for free-hand sawing of different materials (page 65).

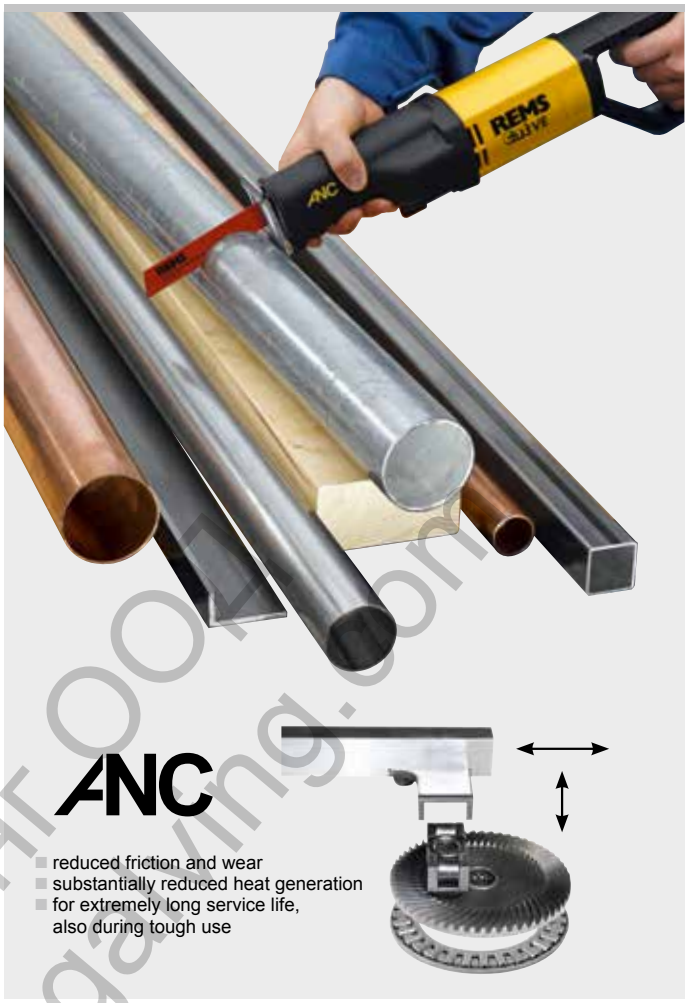





German Quality Product

Tested by electrosuisse

Supply format

REMS Cat ANC VE Set. Electric universal reciprocating saw with Vario-Electronic (VE) for free-hand sawing. Drive unit with D-shaped handle, maintenance-free, water and dust resistant oscillating drive with allround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful universal motor 230 V or 110 V, 50–60 Hz, 1050 W, safety tip switch. Electronic stepless speed control (acceleration switch) 0 to 2,400 rpm. Universal saw blade clamp. Hexagon key. 1 REMS universal saw blade 150-1.8/2.5. In sturdy steel case.

	Art.-No.	
	560040	

Other voltages on request.





Accessories

Description	Art.-No.	
REMS Cat ANC VE drive unit	560004	
REMS saw blades see page 64–65.		
Steel case	566005	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Tiger ANC/VE/SR

Electric reciprocating pipe saws

Powerful, robust, handy power tool with force-transmitting guide holder for effortless, fast, right-angled sawing everywhere on site, without a vice. Also for universal free-hand sawing. Only 3.0 kg. Ideal for assembly, dismantling, repair.

Ideal for steel pipes and others.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

For materials that are difficult to cut, e.g. stainless steel pipes, hard cast iron, use the REMS Tiger ANC SR with electronic stroke speed control.

REMS Tiger – the saw for the pipe fitter.
Saws effortless, fast, right angle.
Robust and handy.

Power-transferring guide support

400 % additional sawing force for effortless, super fast sawing, e.g. 2" steel pipe in only 8 s. For assembly and dismantling. Unique guide support with 5-fold leverage enables effortless, fast and right angle sawing anywhere at site, without vice. Ideal handling, easy and rapid to operate, positioned with one hand only for chucking and sawing. No loose swinging chain and cumbersome handling as with chain vice. No danger of jamming by limitation of swing angle. For optimum in-feed with guide support a straight machine handle is advantageous.

Right angle sawing

Right angle cut thanks to REMS guide support and REMS special saw blade. Essential for subsequent operations in pipe installation.

REMS special saw blade

REMS special saw blade (page 64), extra thick, rigid and unbendable, double tang, absolutely essential for right-angled sawing and fast disassembly of steel pipes with force-transmitting guide holder.

REMS universal saw blade

Only 1 REMS universal saw blade (page 64) for all sawing work instead of many different saw blades. Double tang for free-hand sawing and sawing with guide holder.

REMS saw blades

Full range of REMS saw blades for free-hand sawing of different materials (page 65).

Universal saw blade clamp

All saw blades – with universal or double tang – can be clamped without changing or turning the saw blade thrust piece.

Design

Robust, job site-proven. Slender, handy design. Super light, only 3.0 kg. Can be used anywhere. Ergonomically shaped front housing grip with slip resistant protection cover for forceful feed forward during free-hand sawing. Choice of practical D-shaped handle, advantegeous during free-hand sawing, or straight machine handle, advantegeous during sawing with guide support. Swivel support shoe for safe guiding of the saw on the material to be sawn. High sliding silicone gasket protects gear against water and dust. Powerful universal motor with ample reserve capacity, 1050 W respectively 1400 W (REMS Tiger ANC SR). Safety tip switch. Choice of drive unit with fixed, ideal speed, electronic speed control (Vario-Electronic) or electronic speed regulation. Overload protection (REMS Tiger ANC) protects motor, gear and saw blade. The electronic speed control which is being used (REMS Tiger ANC SR) keeps the selected speed constant, also under load, including speed generator, control electronics, residual current limitation for sensitive start-sawing, motor temperature control of field wires with PTC resistance (Positive Temperature Coefficient) and stall protection of gear and motor.

Sturdy, square lift rod

In special solid steel, mounted precisely in needle bearings towards the force direction and along the complete stroke length, for distortion-free, precise cutting also during tough use. For extremely long service life. Drive rod runs in an enclosed housing for safe work.

Oscillating drive with ANC

Super stable, water and dust resistant, maintenance-free oscillating drive for simultaneous generation of sawing stroke and orbital action of lift rod and saw blade. Allround needle bearing mounted crank drive (ANC) reduces friction, heat generation, wear. For long service life of drive also at extreme sawing.

Aggressive orbital action

Aggressive orbital action by vertical hacking motion of saw blade provides forceful, fast forward feed, excellent chip flow and long service life of saw blades. Fixed orbital action, running in needle bearings, ensures long-lasting and forceful sawing also during extreme load conditions, e.g. sawing of steel pipe. Adjustable mechanisms with a great variety of parts and a reduced system stability do not withstand the high feed forward pressure and the heavy-duty requirements of forceful cutting of steel pipes, particularly when a guide support with leverage is being used.




ANC

- reduced friction and wear
- substantially reduced heat generation
- for extremely long service life, also during tough use

German Quality Product

Tested by electrosuisse

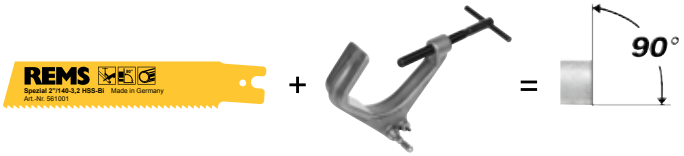





Ташев Галвинг ООД
www.tashev-galving.com

REMS Tiger ANC/VE/SR

Electric reciprocating pipe saws

Ideal speed (REMS Tiger ANC)
Deliberately fixed speed. Therefore optimum cutting speed for maximum protection of motor and gear and maximum service life of saw blades. The ideal cutting speed of 2,400 rpm has been determined by extensive sawing tests with steel pipe which lead to optimum performance in combination with the aggressive, fixed orbital action, guide support and REMS special saw blade.

Vario-Electronic (REMS Tiger ANC VE)
Electronic stepless speed control of drive unit for sensitive start-sawing and for speed selection during sawing according to the material. Also for plunge-cut sawing. The stroke speed can be continuously controlled by variable pressure on the safety switch from 0 to 2,400 rpm (accelerator switch).

Speed Regulation (REMS Tiger ANC SR)
Stepless electronic speed control of drive unit for selecting the stroke according to the material. Ideal for sawing stainless steel pipe, cast pipe and for sawing boilers, tanks, bath tubs etc. Also for plunge-cut sawing. The number of strokes is steplessly adjustable on the dial from 700 to 2,200 rpm.





German Quality Product



Supply format

REMS Tiger ANC Set. Electric reciprocating pipe saw for effortless, fast, right angle sawing with guide support and for free-hand sawing. Drive unit with straight machine handle, maintenance-free, water and dust resistant oscillating drive with allround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful universal motor 230 V or 110 V, 50–60 Hz, 1050 W, safety tip switch. Fixed stroke 2,400 rpm. Overload protection. Universal saw blade clamp. Hexagon key. Guide support 2". 2 pcs. REMS special saw blades 2"/140-3,2. In sturdy steel case.

	Art.-No.	
	560020	

Other voltages, also 48 V on request.



Supply format

REMS Tiger ANC VE Set. Electric reciprocating pipe saw with Vario-Electronic for effortless, fast, right angle sawing with guide support and for free-hand sawing. Drive unit with D-shape handle, maintenance-free, water and dust resistant oscillating drive with allround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful universal motor 230 V or 110 V, 50–60 Hz, 1050 W, safety tip switch. Electronic stepless speed control (acceleration switch) 0 to 2,400 rpm. Universal saw blade clamp. Hexagon key. Guide support 2". 2 pcs. REMS special saw blades 2"/140-3,2. In sturdy steel case.

	Art.-No.	
	560027	

Other voltages on request.



Supply format

REMS Tiger ANC SR Set. Electric reciprocating pipe saw with speed regulation (SR) for effortless, fast, right angle sawing with guide support and for free-hand sawing. Drive unit with straight machine handle, maintenance-free, water and dust resistant oscillating drive with allround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful universal motor 230 V or 110 V, 50–60 Hz, 1400 W, safety tip switch. Stepless electronic speed control 700 to 2,200 rpm with sensitive start-sawing, speed generator, temperature control and stall protection. Universal saw blade clamp. Hexagon key. Guide support 2". 2 pcs. REMS special saw blades 2"/140-3,2. In sturdy steel case.

	Art.-No.	
	560026	

Other voltages on request.



Accessories

Description	Art.-No.	
REMS Tiger ANC drive unit	560000	
REMS Tiger ANC VE drive unit	560008	
REMS Tiger ANC SR drive unit	560001	
REMS saw blades see page 64–65.		
Guide support 2", for pipes Ø ⅛–2"	563000	
Guide support 4", for pipes Ø 2½–4"	563100	
Guide support 6", for pipes Ø 5–6"	563200	
Dual purpose holder for sawing and threading, with REMS Tiger ANC and REMS Amigo E, Amigo, Amigo 2	543100	
Protective cap for guide support 2", 4" and 6", for clamping of thin-walled material	563008	
Steel case	566051	



Ташев Галвинг ООД
www.tashev-galving.com

REMS Tiger ANC pneumatic

Pneumatic reciprocating pipe saw

Powerful, robust, handy compressed air tool with force-transmitting guide holder for effortless, fast, right-angled sawing everywhere on site, without a vice. Also for universal free-hand sawing. Ideal for use in dangerous, e.g. in wet environment. For assembly, dismantling, repair.

Ideal for steel pipes and others.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

For materials that are difficult to cut, e.g. stainless steel pipes, hard cast iron, use the REMS Tiger ANC SR with electronic stroke speed control.




**REMS Tiger pneumatic –
for sawing in dangerous environment.**

Saws effortless, fast, right-angle. Unique guide support for 400 % additional sawing force. Sturdy, square lift rod. Oscillating drive with ANC.

Aggressive orbital action for fast feed forward sawing and long service life of saw blades. Universal saw blade clamp.





German Quality Product

Design

Robust, job site-proven. Slender, handy design. Super light, only 3.8 kg. Can be used anywhere. Ergonomically shaped front housing grip with slip resistant, heat insulating protection cover with soft grip, for forceful feed forward during free-hand sawing. Swivel support shoe for safe guiding of the saw on the material to be sawn. High sliding silicone gasket protects gear against water and dust. Powerful pneumatic motor with ample reserve capacity, 1000 W. Stroke speed control (accelerator switch) 0 to 1,700 rpm. Operating pressure 6 bar, air consumption ≤ 1.6 m³/min. Safety switch with lock.

Additional description see REMS Tiger ANC, page 60 – 61.







Supply format

REMS Tiger ANC pneumatic Set. Pneumatic reciprocating pipe saw for effortless, fast, right angle sawing with guide support and for free-hand sawing. Drive unit with straight machine handle, maintenance-free, water and dust resistant oscillating drive with allround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful pneumatic 1000 W, operating pressure 6 bar, safety switch with lock. Stroke speed control (accelerator switch) 0 to 1,700 rpm. Air inlet hose, air outlet hose. Universal saw blade clamp. Hexagon key. Guide support 2". 2 pcs. REMS special saw blades 2"/140-3,2. In sturdy steel case.

	Art.-No.	
	560022	

Accessories

Description	Art.-No.	
REMS saw blades see page 64 – 65.		
REMS Tiger ANC pneumatic drive unit	560002	
Guide support 2", for pipes Ø ⅛ – 2"	563000	
Guide support 4", for pipes Ø 2½ – 4"	563100	
Guide support 6", for pipes Ø 5 – 6"	563200	
Dual purpose holder for sawing and threading, with REMS Tiger ANC and REMS Amigo E, Amigo, Amigo 2	543100	
Protective cap for guide support 2", 4" and 6", for clamping of thin-walled material	563008	
Steel case	566051	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Akku-Cat ANC VE

Cordless universal reciprocating saw

Powerful, robust, handy power tool for universal free-hand sawing. Only 3.1 kg. Ideal for assembly, dismantling, repair.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

Especially also for steel pipes

REMS Akku-Cat ANC VE Li-Ion – saws anything, anywhere. Extremely versatile and powerful. Robust and handy.

Universal use

Ready for use anywhere, free-hand, overhead, in confined areas, flush to wall. Mains independent. Extremely versatile and efficient, particularly for metal. Saws metal pipes, boilers, tanks, bath tubs, window frames, etc., for rescue and disaster service operations. Also for plunge-cut sawing.

Design

Robust, job site-proven. Slender, handy design. Super light, drive unit with battery only 3.1 kg. Ergonomically shaped front housing grip with slip resistant, heat insulating protection cover with soft grip, for forceful feed forward. Proven D-shaped handle. Swivel support shoe for safe guiding of the saw on the material to be sawn. High sliding silicone gasket protects gear against water and dust. Powerful 18 V battery motor with ample reserve capacity, 500 W output. Safety tip switch. Electronic charging status check with low discharge protection.

Sturdy, square lift rod

In special solid steel, mounted precisely in needle bearings towards the force direction and along the complete stroke length, for distortion-free, precise cutting also during tough use. For extremely long service life.

Oscillating drive with ANC

Super stable, water and dust resistant, maintenance-free oscillating drive for simultaneous generation of sawing stroke and orbital action of lift rod and saw blade. Allround needle bearing mounted crank drive (ANC) reduces friction, heat generation, wear. For long service life of drive also at extreme sawing.

Vario-Electronic

Electronic stepless speed control of drive unit for sensitive start sawing and for speed selection during sawing. The speed is controlled by pressing the tip switch steplessly from 0 to 1,800 rpm (acceleration switch).

Aggressive orbital action

Aggressive orbital action by vertical hacking motion of saw blade provides forceful, fast forward feed, excellent chip flow and long service life of saw blades. Fixed orbital action, running in needle bearings, ensures long-lasting and forceful sawing also during extreme load conditions, e.g. sawing of steel pipe.

Li-Ion PLUS technology

Highly resistant Li-Ion 18 V battery with 3.2 Ah capacity, for long service life. Powerful and light. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger for short charging times.

Universal saw blade clamp

All saw blades – with universal or double tang – can be clamped without changing or turning the saw blade thrust piece.

REMS saw blades

See page 64 – 65.



German Quality Product





3.5 kg | 500 W | 18 V | VE | ANC

Supply format

REMS Akku-Cat ANC VE Li-Ion. Battery driven universal reciprocating saw with Vario-Electronic (VE) for free-hand sawing. Drive unit with D-shaped handle, maintenance-free, water and dust resistant oscillating drive with allround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful 18 V battery motor, safety tip switch. Electronic stepless speed control (acceleration switch) 0 to 1,800 rpm. Battery Li-Ion 18 V, 3.2 Ah, rapid charger Li-Ion/Ni-Cd 230 V or 110 V, 50–60 Hz, 50 W. Universal saw blade clamp. Hexagon key. 1 pcs REMS universal saw blade 150-1,8/2,5. In sturdy case.

	Art.-No.	
	560051	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS saw blades see page 64 – 65.		
REMS Akku-Cat ANC VE drive unit, without battery	560009	
Battery Li-Ion 18 V, 3.2 Ah	565225	
Rapid charger Li-Ion/Ni-Cd 230 V, 50 – 60 Hz, 65 W	571560	
Case with inlay	566025	



Ташев Галвинг ООД
www.tashev-galving.com

REMS special saw blades

For REMS Tiger ANC/VE/SR,
REMS Tiger ANC pneumatic and other makes


Special saw blades for right angle sawing
and for fast dismantling of steel pipes
with power transmitting guide support.

Steel pipes













REMS special saw blades – for right-angled sawing with force-transmitting guide holder, for 400% more sawing power.

Specially developed for REMS Tiger ANC.

Absolutely essential for right angle sawing and for fast dismantling with power transmitting guide support. This produces multiple thrust pressure by a five-fold force-transmitting leverage, for 400% more sawing power. Normal saw blades with single tang do not withstand the high feed pressure during sawing with guide support, they break at the mounting point.

For this reason, extra thick REMS special saw blade, resistant to bending and distortion.

Double tang mounting with exceptionally wide clamping face ensures accurate seating and high stability.

Coarse, corrugated tooth pattern for rapid sawing. Long service life.

German Quality Product

REMS special saw blades ➔ REMS Tiger, etc.	Ø inches/ Length mm	Tooth pitch mm	Material*	Teeth	Colour			Art.-No.	
REMS special saw blade 2"/140-2,5 steel pipes ≤ 2"	2"/140	2,5	HSS-Bi		yellow	5		561007	
REMS special saw blade 2"/140-3,2 steel pipes ≤ 2"	2"/140	3,2	HSS-Bi		yellow	5		561001	
REMS special saw blade 4"/200-3,2 steel pipes ≤ 4"	4"/200	3,2	HSS-Bi		yellow	5		561002	
REMS special saw blade 6"/260-3,2 steel pipes ≤ 6"	6"/260	3,2	HSS-Bi		yellow	5		561008	

For hard-to-machine materials, e.g. stainless steel pipes, hard cast iron pipes, use the finer toothed REMS universal saw blade instead of the REMS special saw blade in combination with REMS Tiger ANC SR with electronic speed regulation (page 61).

REMS universal saw blades

For REMS Cat ANC VE, REMS Tiger ANC/VE/SR,
REMS Akku-Cat ANC VE and other makes

Universal saw blade for free-hand sawing and
for sawing with power transmitting guide support.
Instead of many different saw blades.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

Highly flexible, also ideal for sawing flush with the wall.













REMS universal saw blades – for all sawing jobs.

Only 1 universal saw blade instead of many different saw blades for all sawing jobs.

Resilient material, highly flexible, also for flush-to-wall sawing.

Double tang mounting with exceptionally wide clamping face for accurate seating and high stability. Also for sawing with power transmitting guide support. Single tang saw blades are unable to cope with the high thrust pressure when sawing with a guide holder, they break at the clamping point.

Alternating tooth pitch (combi-teeth) for fast, smooth cut, very highly hardened in the teeth area. Straight-set teeth.

Thus outstanding cutting performance and prolonged service life.

German Quality Product

REMS universal saw blades ➔ REMS Tiger, REMS Cat, etc.	Length mm	Tooth pitch mm	Material*	Teeth	Colour			Art.-No.	
REMS universal saw blade 100-1,8/2,5 for all sawing work	100	Combo 1,8/2,5	HSS-Bi flexible		red	5		561006	
REMS universal saw blade 150-1,8/2,5 for all sawing work	150	Combo 1,8/2,5	HSS-Bi flexible		red	5		561005	
REMS universal saw blade 200-1,8/2,5 for all sawing work	200	Combo 1,8/2,5	HSS-Bi flexible		red	5		561003	
REMS universal saw blade 300-1,8/2,5 for all sawing work	300	Combo 1,8/2,5	HSS-Bi flexible		red	5		561004	

Also for nail-embedded wood, pallets. For hard-to-machine materials, e.g. stainless steel pipes, hard cast iron pipes, lower speed required, e.g. by using REMS Tiger ANC SR with electronic speed regulation (page 61).

Ташев-Галвинг ООД
www.tashev-galving.com

* HSS-Bi: bimetal high speed steel WS: tool steel HM: carbide

Ташев Галвинг ООД
www.tashev-galving.com

REMS saw blades

For REMS Puma VE, REMS Cat ANC VE, REMS Tiger ANC/VE/SR, REMS Akku-Cat ANC VE and other makes

Saw blades for free-hand sawing for different materials.

Alternating tooth pitch (combi-teeth) for fast, smooth cut, also when sawing mixed materials (wood/metal).

Flexible saw blades, also for sawing flush with wall.

- Corrugated teeth for smooth cut with low tooth pitch.
- Straight-set teeth for aggressive cut with coarse tooth pitch.
- Straight teeth for saw blades with very wide carbide teeth.
- Carbide-granulate for materials that are difficult to cut.

German Quality Product


REMS saw blades for metal ➔ REMS Puma, REMS Cat, REMS Tiger, etc.	Length mm	Tooth pitch mm	Material*	Teeth	Colour		Art.-No.
REMS saw blade 150-1 sheet metal, metal, also stainless steel, ≥ 1.2 mm	150	1	HSS-Bi flexible		red	5	561105
REMS saw blade 200-1 sheet metal, metal, also stainless steel, ≥ 1.2 mm	200	1	HSS-Bi flexible		red	5	561106
REMS saw blade 90-1,4, curved blade metal, also stainless steel, ≥ 1.5 mm	90	1,4	HSS-Bi		red	5	561107
REMS saw blade 150-1,4 metal, also stainless steel, ≥ 1.5 mm	150	1,4	HSS-Bi flexible		red	5	561104
REMS saw blade 200-1,4 metal, also stainless steel, ≥ 1.5 mm	200	1,4	HSS-Bi flexible		red	5	561108
REMS saw blade 100-1,8 metal, also stainless steel, ≥ 2 mm	100	1,8	HSS-Bi flexible		red	5	561101
REMS saw blade 150-1,8 metal, also stainless steel, ≥ 2 mm	150	1,8	HSS-Bi flexible		red	5	561103
REMS saw blade 200-1,8 metal, also stainless steel, ≥ 2 mm	200	1,8	HSS-Bi flexible		red	5	561102
REMS saw blade 200-2,5 metal, also stainless steel, ≥ 3 mm	200	2,5	HSS-Bi flexible		red	5	561109
REMS saw blade 280-2,5 metal, also stainless steel, ≥ 3 mm	280	2,5	HSS-Bi flexible		red	5	561112

German Quality Product

REMS saw blades for wood and metal ➔ REMS Puma, REMS Cat, REMS Tiger, etc.	Length mm	Tooth pitch mm	Material*	Teeth	Colour		Art.-No.
REMS saw blade 210-1,8/2,5 round tip, no sticking pallets, wood, wood with nails, metal ≥ 2.5 mm	210	Combo 1,8/2,5	HSS-Bi flexible		black	5	561113
REMS saw blade 150-2,5 wood, wood with nails, pallets, metal ≥ 3 mm	150	2,5	HSS-Bi flexible		black	5	561110
REMS saw blade 225-2,5, extra thick, for disassembly wood, wood with nails, metal ≥ 3 mm	225	2,5	HSS-Bi		black	3	561114
REMS saw blade 300-2,5, extra thick, for disassembly wood, wood with nails, metal ≥ 3 mm	300	2,5	HSS-Bi		black	3	561116
REMS saw blade 300-4,2 wood	300	4,2	WS		black	5	561111
REMS saw blade 225-3,2/5,0 wood, wood with nails	225	Combo 3,2/5,0	HSS-Bi flexible		black	5	561117
REMS saw blade 290-5,0/6,35 green wood	290	Combo 5,0/6,35	WS		black	5	561118
REMS saw blade 150-6,35 wood	150	6,35	WS		black	5	561119


REMS saw blades for different purposes ➔ REMS Puma, REMS Cat, REMS Tiger, etc.	Length mm	Tooth pitch mm	Material*	Teeth	Colour		Art.-No.
REMS saw blade 150-4,2 breeze blocks, plasterboard	150	4,2	WS		white	5	561115
REMS saw blade 225-8,5 breeze blocks, hard wood	225	8,5	HM		white	1	561120
REMS saw blade 300-8,5 breeze blocks, hard wood	300	8,5	HM		white	1	561121
REMS saw blade 400-8,5 breeze blocks, hard wood	400	8,5	HM		white	1	561122
REMS saw blade 235-12 breeze blocks, pumice, brick	235	12	HM		white	1	561123
REMS saw blade 300-12 breeze blocks, pumice, brick	300	12	HM		white	1	561124
REMS saw blade 300-12, extra high blade breeze blocks, pumice, brick	300	12	HM		white	1	561125
REMS saw blade 200 cast iron etc.	200		HM-G		white	2	561126











* HSS-Bi: bimetal high speed steel WS: tool steel HM: carbide HM-G: carbide-granulate

Ташев Галвинг ООД
www.tashev-galving.com

REMS Turbo Cu-INOX

Circular pipe sawing machine

Compact, portable circular pipe sawing machine for burr-reduced, right angle and rapid sawing. Ideal for stainless steel and copper tubes of pressfitting systems. For job site and workshop.

Stainless steel tubes, copper tubes and other materials	Ø ≤ 76 mm
REMS saw blade	Ø 225 mm







REMS Turbo Cu-INOX – burr-reduced, right angle, rapid. Burr-reduced sawing through double clamping vice. Powerful, e.g. Ø 22 mm in only 4 s. Easy to transport.

Ideal for pressfitting systems

In accordance with requirements:
Dry sawing, so no damage to O-rings from lubricants.
Burr-reduced through double clamping vice.
Optimum cutting speed prevents degradation of pipe material through overheating.

Design

Compact, robust, job site-proven. Small in size, handy, portable, only 17 kg. Easy sawing through favourable leverage effect. Fast saw blade change. Precise sawing. Mark on the saw blade protection cover showing the saw blade cutting line. Connection for driving outer/inner pipe deburrer REMS REG 10–54 E. For workbench and stand.

Universal double clamping vice

Robust, easy-running universal double clamping vice for burr-reduced sawing. Both pipe ends remain securely clamped during sawing. Easy, secure clamping also of thin-walled pipes through inclined jaw. Only one strong clamping spindle for both clamping sides ensures even, effortless and secure clamping of the material.

Drive

Robust gear, precisely mounted in roller and needle bearings, maintenance-free. Proven universal motor, 500 W. Powerful, e.g. stainless steel pipe Ø 22 mm in only 4 s. Ideal speed 60 rpm for optimum cutting speed and smooth sawing.

REMS saw blades

Top German quality. REMS circular saw blade HSS 225 × 2 × 32, 220 teeth, for metal, adjusted to the efficiency of REMS Turbo Cu-INOX for sawing stainless steel tubes. Specially fine-toothed, hardened and ground. For easy and exact sawing. Prolonged durability. REMS circular saw blade HSS-E (cobalt alloyed) 225 × 2 × 32, 220 teeth, for metal, for even better durability. Specially fine-toothed, hardened and ground.

Outer/inner pipe deburrer

Outer/inner pipe deburrer REMS REG 10–54 E for pipes Ø 10–54 mm, Ø ½–2⅛", for electric drive with the REMS Turbo Cu-INOX pipe circular sawing machine and others, see page 89.

German Quality Product



Supply format

REMS Turbo Cu-INOX Basic. Circular pipe saw with universal double clamping vice for burr-reduced, right angle, rapid sawing. Ideal for stainless steel and copper tubes of pressfitting systems. For REMS saw blade Ø 225 mm. With maintenance-free gear, proven universal motor 230 V or 110 V, 50–60 Hz, 500 W. Safety tip switch, saw blade protection cover. Speed 60 rpm. Ring spanner. Hexagon key. Without saw blade. For workbench and stand. In a carton.

	Art.-No.	
	849006	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS circular saw blade HSS for metal, specially for stainless steel pipes, fine-toothing, 225 × 2 × 32, 220 teeth.	849703	
REMS circular saw blade HSS-E (cobalt alloyed) circular saw blade HSS-E (cobalt alloyed) toothing, 225 × 2 × 32, 220 teeth. Very long service life.	849706	
REMS REG 10–54 E outer/inner pipe deburrer, see page 89		
Stand	849315	
REMS Jumbo, folding workbenches, see page 95.		
REMS Herkules, material supports, see page 96.		



Ташев Галвинг ООД
www.tashev-galving.com

REMS Turbo K

Universal circular metal sawing machine
with automatic cooling lubricant unit

Compact, mobile, universal circular metal sawing machine for installation, metal working and industry. For job site and workshop.

	○	□	▭	⌐	●	■	▬
90°	78	55	70 × 50	50 × 50	40	40	50 × 30
45°	60	55	60 × 40	50 × 50	40	40	50 × 30

REMS saw blade Ø 225 mm

REMS Turbo K – the most powerful in its class. Progressive drive, e.g. 2" steel pipe in only 5 s. Easy to transport.

Design
Compact, robust, job site-proven. Small in size, handy, portable, complete only 22 kg. Automatic cooling lubricant unit. Easy sawing through favourable leverage effect. Fast saw blade change. Precise sawing. For workbench and stand.

Universal vice
Robust, easy-running universal vice with strong clamping spindle and large clamping lever for effortless, secure clamping of the material. Standard with clamp insert for thin-walled pipes. Quick setting of bevel angle thanks to clearly laid out scale and clamping lever. Simple, sturdy length stop.

Drive
Robust, maintenance-free gear, precisely mounted in roller and needle bearings. Proven universal motor, 1200 W. Extremely strong and powerful, e.g. 2" steel pipe in only 5 s. Ideal speed 115 rpm for fast and smooth sawing.

REMS saw blades
Top German quality. REMS universal circular saw blade HSS 225 × 2 × 32 for metal, 120 teeth, adjusted to the efficiency of REMS Turbo K. Specially toothed, hardened and ground. For easy and exact sawing. REMS universal circular saw blade HSS 225 × 2 × 32, 220 teeth, adjusted for sawing stainless steel. Specially fine-toothed, hardened and ground. For an even better durability, REMS universal circular saw blade HSS-E (cobalt alloyed) 225 × 2 × 32, 220 teeth. Specially fine-toothed, hardened and ground.

Kühlschmierstoffe
REMS Sanitol and REMS Spezial (page 49). High lubricating and cooling effect. Essential for clean cuts, long service life of saw blades and machine.







German Quality Product



Supply format


REMS Turbo K Basic. Universal circular metal sawing machine with automatic cooling lubricant unit. For straight cuts and bevel cuts up to 45°. For REMS saw blade Ø 225 mm. Maintenance-free gear. Proven, powerful universal motor 230 V or 110 V, 50–60 Hz, 1200 W. Safety tip switch, saw blade protection cover, length stop. Clamp insert for thin-walled pipes. Speed 115 rpm. Ring spanner. Hexagon key. 1 filling of cooling lubricant REMS Spezial. Without saw blade. For workbench and stand. In a carton.

	Art.-No.	
	849007	


Other voltages on request.

Accessories

Description	Art.-No.	
REMS universal circular saw blade HSS for metal, 225 × 2 × 32, 120 teeth	849700	
REMS circular saw blade HSS for metal, fine-toothing, 225 × 2 × 32, 220 teeth	849703	
REMS circular saw blade HSS-E (cobalt alloyed) for metal, fine-toothing, 225 × 2 × 32, 220 teeth. Very long service life.	849706	
Electronic speed regulator for hard-to-machine materials, e.g. stainless steel pipes, hard cast iron pipes. Fixed, optimum speed.	565051	
Cooling lubricants see page 49.		
Stand	849315	
REMS Jumbo, folding workbenches, see page 95.		
REMS Herkules, material supports, see page 96.		





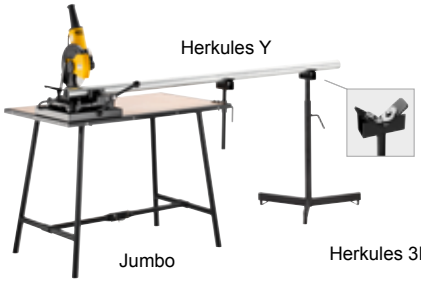

Herkules Y

Jumbo

Herkules 3B

Ташев-Галвинг ООД
www.tashev-galving.com



Ташев-Галвинг ООД
www.tashev-galving.com

Cutting
Chamfering
Deburring

	Pipe and tubing cutters	70
	Cutter wheels	74
	Electric pipe cutter/ Battery-powered pipe cutter	77
	Pipe cutting machines	78
	Cordless pipe shears	83
	Pipe shears	83
	Pipe cutting and pipe chamfering tools	85
	Pipe deburrers	87

Ташев-Галвинг ООД
www.tashev-galving.com

REMS RAS St

Pipe cutters

Robust quality tools for cutting pipes.
Meets high demands and long service life.

Steel pipes Ø ⅛–4", Ø 10–115 mm

REMS cutter wheels for other makes see page 74.



German Quality Products



REMS RAS St – quality pipe cutters.

Solid body in forged steel.

Robust spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the pipe and a long service life.

Ergonomic, wide handle provides a powerful in-feed of spindle.

Broad, precise cutter wheel bearing on a hardened, non rotating wheel shaft guarantees a right angle cut.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Only 1 cutter wheel for pipes Ø ⅛–4" (10–115 mm), wall thickness s ≤ 8 mm, suitable for both pipe cutters. Cutter wheel for pipes Ø 1–4" to wall thickness s ≤ 12.5 mm available as accessory.

Supply format

REMS RAS St. Pipe cutter for steel pipes. With cutter wheel. In a carton.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	
St ⅛–2"	⅛–2" 10–60	8	113000	
St 1¼–4"	1¼–4" 30–115	8	113100	

Accessories

Description	s ≤ mm	Art.-No.	
REMS cutter wheel St 1/8–4", s 8 for REMS RAS St ⅛–2" and St 1¼–4"	8	341614	
REMS cutter wheel St 1–4", s 12 for REMS RAS St 1¼–4"	12.5	381622	



REMS RAS Cu-INOX

Tubing cutters

Robust quality tools for cutting tubes.
Particularly suited for cutting stainless steel tubes.

Copper tubes, thin-walled
stainless steel tubes, thin-walled
steel, aluminium, brass tubes Ø 3–120 mm
Ø ⅛–4"

REMS cutter wheels for other makes see page 74.



REMS RAS Cu-INOX – for places with difficult access.

Small, handy, specially for use in restricted spaces.

Robust design and hardened back pressure rollers provide exact alignment to the tube and a long service life.

Large operating knob in metal for easy in-feed and cutting.

Broad, precise cutter wheel bearing on a hardened, non rotating wheel shaft guarantees a right angle cut.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Supply format

REMS RAS Cu-INOX. Tubing cutter for copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	
Cu-INOX 3–16	3–16 ⅛–⅝"	4	113200	
Cu-INOX 3–28 Mini	3–28 ⅛–1⅛"	4	113240	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS RAS Cu-INOX

REMS RAS Cu-INOX – the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast, easy cutting wheel change by cutting wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 3–35 S with needle bearing cutting wheel and needle bearing counter-pressure rollers for very easy cutting.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred.

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.







Supply format

REMS RAS Cu-INOX. Pipe cutting machine for copper pipes, thin-walled stainless steel pipes, thin-walled steel-aluminium pipes, brass pipes, with integrated pipe deburring device. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	
Cu-INOX 3–35	3–35 ⅛–1⅜"	4	113350	
Cu-INOX 3–35 S, on needle bearings	3–35 ⅛–1⅜"	4	113351	
Cu-INOX 3–42	3–42 ⅛–1¾"	4	113330	



REMS RAS Cu-INOX – quality pipe cutter.

Robust, solid design for heavy-duty application.

Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 8–64 S with needle bearing cutting wheel and needle bearing counter-pressure rollers for very easy cutting. Quick adjustment of the engagement spindle in both directions.

Only 1 cutter wheel for the complete working capacity Ø 3–120 mm.

International Design Award







Supply format

REMS RAS Cu-INOX. Tubing cutter for copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes. With cutter wheel. In blister pack/in box.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	
Cu-INOX 3–28	3–28 ⅛–1⅛"	4	113300	
Cu-INOX 6–42	6–42 ¼–1⅝"	4	113380	
Cu-INOX 6–64	6–64 ¼–2½"	4	113400	
Cu-INOX 8–64 S, on needle bearings, with quick adjustment	8–64 ⅜–2½"	4	113401	
Cu-INOX 64–120	64–120 2½–4"	4	113500	

German Quality Products

Accessories

Description	Wall thickness s ≤ mm	Art.-No.	
REMS cutter wheel Cu-INOX 3–120, s 4	4	113210	
REMS cutter wheel Cu-INOX 3–120 S, s 4, on needle bearings	4	113213	
Universal deburring blade, ground		113360	



Ташев Галвинг ООД
www.tashev-galving.com

REMS RAS Cu

Robust quality tools for cutting tubes.

Copper tubes Ø 3–64 mm
Ø ⅛–2½"

REMS cutter wheels for other makes see page 74.







REMS RAS Cu – the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast, easy cutting wheel change by cutting wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred.

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.

Supply format

REMS RAS Cu. Tubing cutter for copper tubes, with integrated pipe deburring device. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	
Cu 3–35	3–35 ⅛–1⅜"	3	113340	
Cu 3–42	3–42 ⅛–1¾"	3	113320	



REMS RAS Cu – quality pipe cutter. With quick adjustment.

Solid, handy, U-shaped design.

Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the pipe, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.


Ratchet for quick adjustment in both directions.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Only 1 cutter wheel for the complete working capacity Ø 3–120 mm.







German Quality Products





Supply format

REMS RAS Cu. Tubing cutter for copper tubes. With cutter wheel. In blister pack/in box.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	
Cu 8–42 with quick adjustment	8–42 ⅜–1⅝"	3	113370	
Cu 8–64 with quick adjustment	8–64 ⅜–2½"	3	113410	

Accessories

Description	Wall thickness s ≤ mm	Art.-No.	
REMS cutter wheel Cu 3–120, s 3	3	113225	
Universal deburring blade, ground		113360	





Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS RAS P

High performance quality tools for cutting pipes.
With quick adjustment.

Plastic pipes,
multi-layer composite tubes — Ø 10–315 mm
Ø ½–12"

REMS cutter wheels for other makes see page 74.

REMS RAS P – quality pipe cutter. With quick adjustment.

Solid, handy, U-shaped design.

Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the pipe, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.

Ratchet for quick adjustment in both directions.


Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Cutter wheels for different wall thicknesses (s).







German Quality Products

International Design Award



Supply format

REMS RAS P. Pipe cutter for plasic pipes and multi-layer composite tubes. With cutter wheel. In blister pack/in box.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.
P 10–40 with quick adjustment	10–40 ½–1⅝"	7	290050
P 10–63 with quick adjustment	10–63 ½–2"	7	290000
P 50–110 with quick adjustment	50–110 2–4"	11	290100
P 110–160 with quick adjustment	110–160 4–6"	16	290200

REMS RAS P – cutting up to Ø 315 mm, s ≤ 19 mm.

Fast and inexpensive cutting of large pipes. Quick adjustment.
Separate pipe centering for right angle cutting.

Solid design, double-T-shaped body.

Cutter wheels for different wall thicknesses (s).



Supply format

REMS RAS P. Pipe cutter for plastic pipes and multi-layer composite tubes. With cutter wheel and spare cutter wheel. In sturdy case.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.
P 180–315 with quick adjustment	180–315 7–12"	16	290300

Accessories

Description	s ≤ mm	Art.-No.
REMS cutter wheel P 10–63, s 7 for REMS RAS P 10–40, 10–63	7	290016
REMS cutter wheel P 50–315, s 11 for REMS RAS P 50–110, 110–160, 180–315	11	290116
REMS cutter wheel P 50–315, s 16 for REMS RAS P 50–110, 110–160, 180–315	16	290216
REMS cutter wheel P 50–315, s 19 for REMS RAS P 50–110, 110–160, 180–315	19	290316



Ташев Галвинг ООД
www.tashev-galving.com


REMS cutter wheels

German Quality Products
For REMS pipe and tubing cutters and other makes*

Steel pipes		
REMS cutter wheel St ⅛–4", s 8		
	Art.-No.	
Wall thickness s ≤ 8 mm	341614	
to fit following pipe cutters	Capacity	Description
REMS	⅛–2" 1¼–4"	RAS St ⅛–2" RAS St 1¼–4"
Alarm	⅛–2" 1¼–4"	10002 10004
Brinko	⅛–2"	629
Dako	⅛–2"	9.220
Format	⅛–2"	F3061900
Mast	⅛–2" 1¼–4"	52/2 52/4
Reed	⅛–2"	03320
Ridgid	⅛–2"	2-A
ROLLER	⅛–2" 1¼–4"	Corso St ⅛–2" Corso St 1¼–4"
Rothenberger	⅛–2"	7.0045
Stahlwille	⅛–2" 1¼–4"	150/2 150/4
SuperEgo	⅛–2"	701
VBW	⅛–2" 1¼–4"	140005 140010
Virax	½–2"	210120 (2101250)
REMS cutter wheel St 1–4", s 12		
	Art.-No.	
Wall thickness s ≤ 12,5 mm	381622	
to fit following pipe cutters	Capacity	Description
REMS	1¼–4"	RAS St 1¼–4"
Alarm	1¼–4"	10004
Mast	1¼–4"	52/4
Reed	1–3"	03325
ROLLER	1¼–4"	Corso St 1¼–4"
Stahlwille	1¼–4"	150/4
VBW	1¼–4"	140010

Plastic pipes, composite tubes		
REMS cutter wheel P 10–63, s 7		
	Art.-No.	
Wall thickness s ≤ 7 mm	290016	
to fit following pipe cutters	Capacity	Description
REMS	10–40 10–63	RAS P 10–40 RAS P 10–63
ROLLER	10–40 10–63	Corso P 10–40 Corso P 10–63
REMS cutter wheel P 50–315, s 11		
Wall thickness s ≤ 11 mm	290116	
REMS cutter wheel P 50–315, s 16		
Wall thickness s ≤ 16 mm	290216	
REMS cutter wheel P 50–315, s 19		
Wall thickness s ≤ 19 mm	290316	
to fit following pipe cutters	Capacity	Description
REMS	50–110 110–160 180–315	RAS P 50–110 RAS P 110–160 RAS P 180–315
Reed	48–114	TC 4 Q (only Art.-No. 290116)
Ridgid	50–110 110–160	154 156
ROLLER	50–110 110–160	Corso P 50–110 Corso P 110–160
Rothenberger	50–125 100–168	7.0032 7.0033
SuperEgo	50–125 100–168	737 738
Virax	12–63	210620 (2106063)

Dimensions to REMS cutter wheels



REMS cutter wheel	Art.-No.	Ø D1 mm	b mm	Ø d mm
St ⅛–4", s 8	341614	31.92	18.94	9.07
St 1–4", s 12	381622	40.92	18.94	9.07
Cu-INOX 3–120, s 4	113210	19.50	4.93	5.02
Cu-INOX 3–120 S, s 4	113213	19,50	4,93	5,02
Cu-INOX b 3, s 4	113220	18.50	3.04	4.82
Cu 3–120, s 3	113225	18.50	4.93	5.02
P 10–63, s 7	290016	25.00	5.94	6.02
P 50–315, s 11	290116	35.00	10.92	8.03
P 50–315, s 16	290216	45.00	10.92	8.03
P 50–315, s 19	290316	51.00	10.92	8.03

Copper tubes, stainless steel tubes		
REMS cutter wheel Cu-INOX 3–120, s 4		
	Art.-No.	
Wall thickness s ≤ 4 mm	113210	
to fit following pipe cutters	Capacity	Description
REMS	3–16 3–28 3–35 3–42 6–42 6–64 64–120 3–35 3–42	RAS Cu-INOX 3–16 RAS Cu-INOX 3–28 RAS Cu-INOX 3–35 RAS Cu-INOX 3–42 RAS Cu-INOX 6–42 RAS Cu-INOX 6–64 RAS Cu-INOX 64–120 RAS Cu 3–35 RAS Cu 3–42
Alarm	3–16 3–35	10030 10025
Brinko	3–35	632
Dako	4–16	231
Mast	3–16 3–35	C 16 C 35
ROLLER	3–16 3–28 3–35 6–42 6–64 64–120 3–35	Corso Cu-INOX 3–16 Corso Cu-INOX 3–28 Corso Cu-INOX 3–35 Corso Cu-INOX 6–42 Corso Cu-INOX 6–64 Corso Cu-INOX 64–120 Corso Cu 3–35
Sturem	3–16 3–35 3–35	141600 123500 133500
VBW	3–16 3–36	143005 141005
REMS cutter wheel Cu-INOX 3–120 S, s 4, on needle bearings		
	Art.-No.	
Wall thickness s ≤ 4 mm	113213	
to fit following pipe cutters	Capacity	Description
REMS	3–35 8–64	RAS Cu-INOX 3–35 S RAS Cu-INOX 8–64 S
ROLLER	3–35 8–64	Corso Cu-INOX 3–35 S Corso Cu-INOX 8–64 S
REMS cutter wheel Cu-INOX b 3, s 4		
	Art.-No.	
Wall thickness s ≤ 4 mm	113220	
to fit following pipe cutters	Capacity	Description
Ridgid	3–16 3–28 6–28 6–60	103 150 101 205
Rothenberger	3–30 6–22	7.0019 7.0002
SuperEgo	3–16 3–30	716 725
VBW	6–28	142005
Virax	4–16 6–28 6–28	210310 (2103016) 210320 (2103100) 210300 (2103228)

Copper tubes		
REMS cutter wheel Cu 3–120, s 3		
	Art.-No.	
Wall thickness s ≤ 3 mm	113225	
to fit following pipe cutters	Capacity	Description
REMS	3–16 3–28 3–35 3–42 6–42 6–64 64–120 3–35 3–42 8–42 8–64	RAS Cu-INOX 3–16 RAS Cu-INOX 3–28 RAS Cu-INOX 3–35 RAS Cu-INOX 3–42 RAS Cu-INOX 6–42 RAS Cu-INOX 6–64 RAS Cu-INOX 64–120 RAS Cu 3–35 RAS Cu 3–42 RAS Cu 8–42 RAS Cu 8–64
Alarm	3–16 3–35	10030 10025
Brinko	3–35	632
Dako	4–16	231
Mast	3–16 3–35	C 16 C 35
ROLLER	3–16 3–28 3–35 6–42 6–64 64–120 3–35 8–42 8–64	Corso Cu-INOX 3–16 Corso Cu-INOX 3–28 Corso Cu-INOX 3–35 Corso Cu-INOX 6–42 Corso Cu-INOX 6–64 Corso Cu-INOX 64–120 Corso Cu 3–35 Corso Cu 8–42 Corso Cu 8–64
Sturem	3–16 3–35 3–35	141600 123500 133500
VBW	3–16 3–36	143005 141005

*Statements on the use of REMS cutter wheels for other makes are without any obligation.

Ташев Галвинг ООД
www.tashev-galving.com



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Nano

Electric pipe and tubing cutter

Powerful, handy electric tool for cutting pipe and tubing. For trade and industry. For the building site and the workshop.	
Stainless steel pipes of pressfitting systems, carbon steel,	Ø 12–28 mm
copper	Ø 10–35 mm
Multilayer composite pipes	Ø 10–40 mm

REMS Nano – cutting up to Ø 40 mm.
Ultra-light. Fast. Right angled. Chip-free.
Without outer burr. Dry.

Ideal for pressfitting systems

Right angled cutting, according to requirements
Chip-free, no chips in piping system
No outer burr, no damage to O-ring by outer burr
Dry cutting, no damage to O-rings from lubricants
Fast, prevents degradation of pipe material through overheating.

Design

Mobile, electric pipe cutting machine for fast, right angled cutting without outer burr. Handy and light, only 1.9 kg. Also for fixing to the workbench or in the vice. Strong, torsion-free aluminium structure for right angled cutting. Easy cutting of the pipes by specially designed cutter wheel. Powered cutter wheel for fast cutting. Energy-saving in-feed due to ergonomically designed pressing lever. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Pipe support

3 sturdy, specially arranged counter-pressure rollers made of hardened precision steel for low-friction turning and safe guidance of the pipes to be cut in the whole working range Ø 10–40 mm and for optimisation of the contact points of the cutting wheel on the pipe to be cut (Patent EP 2 077 175). No setting.

Drive

Robust gear precisely mounted in ball and needle bearings, maintenance-free. Proven DC motor 230 V, 130 W. Powerful. e.g. copper pipe Ø 22 mm in only 3 s. Ideal speed 130 rpm for optimum cutting speed of the pipes. Safety switch.

REMS cutter wheels

Top German quality. Cutter wheels specially designed to the performance capability of the REMS Nano and for numerous pipe materials with variable cutting geometries for fast cutting with no outer burr. Specially hardened, from proven, through-hardened REMS die-steel, ensuring long service life.







German Quality Product

Tested by electrosuisse

Supply format

REMS Nano Basic-Pack. Electric pipe cutting machine for fast, right angled cutting of pipes Ø 10–40 mm, without outer burr. For pipes of the press fitting systems made of stainless steel, carbon steel, Ø 12–28 mm, copper Ø 10–35 mm. Multilayer composite tubes Ø 10–40 mm. With maintenance-free gear, proven DC motor 130 V, 50–60 Hz, 200 W. Speed 130 rpm. Back pressure rollers made of hardened precision steel. Safety switch. Single open ended wrench size 8. Without cutter wheel. In carrying bag.


	Art.-No.	
	844010	



Accessories

Description	Art.-No.	
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	844050	
REMS cutter wheel V for multilayer composite pipes	844051	
Carrying bag	574436	
REMS Jumbo, folding workbenches, see page 95.		
REMS Herkules, material supports, see page 96.		



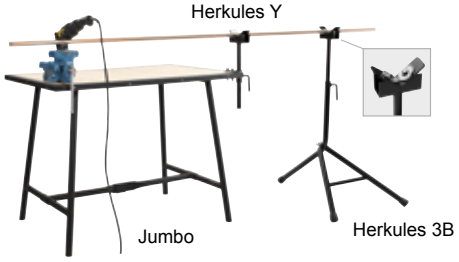

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Akku-Nano

Cordless pipe cutter

Powerful, handy electric tool for cutting pipe and tubing. For trade and industry. For the building site and the workshop.	
Stainless steel pipes of pressfitting systems, carbon steel,	Ø 12–28 mm
copper	Ø 10–35 mm
Multilayer composite pipes	Ø 10–40 mm

REMS Akku-Nano – cutting up to Ø 40 mm.
Ultra-light. Fast. Right angled. Chip-free.
Without outer burr. Dry.

Ideal for pressfitting systems

Right angled cutting, according to requirements
Chip-free, no chips in piping system
No outer burr, no damage to O-ring by outer burr
Dry cutting, no damage to O-rings from lubricants
Fast, prevents degradation of pipe material through overheating.

Design

Mobile, battery-powered pipe cutting machine for fast, right angled cutting without outer burr. Handy and light, only 2.1 kg. Also for fixing to the workbench or in the vice. Strong, torsion-free aluminium structure for right angled cutting. Easy cutting of the pipes by specially designed cutter wheel. Powered cutter wheel for fast cutting. Energy-saving in-feed due to ergonomically designed pressing lever. Cutter wheel protected against touching the back pressure rollers by in-feed limitation. Electronic charging status check with low discharge protection.

Pipe support

3 sturdy, specially arranged counter-pressure rollers made of hardened precision steel for low-friction turning and safe guidance of the pipes to be cut in the whole working range Ø 10–40 mm and for optimisation of the contact points of the cutting wheel on the pipe to be cut (Patent EP 2 077 175). No setting.

Drive

Robust, precision ball and needle bearing gears, maintenance-free. Powerful battery motor 10.8 V, with large power reserve, 270 W output. Super fast, e.g. copper pipe Ø 22 mm in just 3 s. Ideal speed 130 rpm for optimum cutting speed of the pipes. Safety switch.

Li-Ion technology

Battery Li-Ion 10.8 with 1.3 Ah capacity. Powerful and light. High energy density for many cuts. Overheating and overloading protection by temperature monitor (NTC). Rapid charger for short charging times. No memory effect for maximum battery performance.

REMS cutter wheels

Top German quality. Cutter wheels specially designed to the performance capability of the REMS Akku-Nano and for numerous pipe materials with variable cutting geometries for fast cutting with no outer burr. Specially hardened, from proven, through-hardened REMS die-steel, ensuring long service life.

Patent EP 2 077 175







German Quality Product

Tested by electrosuisse

Supply format

REMS Akku-Nano Basic-Pack. Electric pipe cutting machine for fast, right angled cutting of pipes Ø 10–40 mm, without outer burr. For pipes of the press fitting systems made of stainless steel, carbon steel, Ø 12–28 mm, copper Ø 10–35 mm. Multilayer composite tubes Ø 10–40 mm. With maintenance-free gear, powerful battery motor 10,8 V, 270 W. Speed 130 rpm. Safety switch. Battery Li-Ion 10.8 V, 1.3 Ah, rapid charger Li-Ion 230 V, 50–60 Hz, 65 W. Counter pressures rollers made of hardened precision steel. Single open ended wrench size 8. Without cutting wheel. In carrying bag.

	Art.-No.	
	844011	








Accessories

Description	Art.-No.	
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	844050	
REMS cutter wheel V for multilayer composite pipes	844051	
Battery Li-Ion 10.8 V, 1.3 Ah	844510	
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560	
Carrying bag	574436	
REMS Jumbo, folding workbenches, see page 95.		
REMS Herkules, material supports, see page 96.		



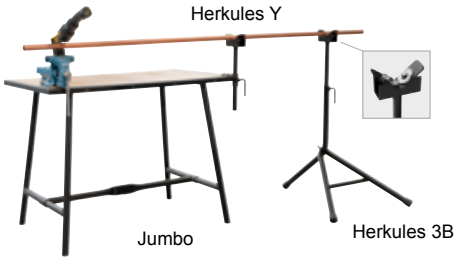

Ташев Галвинг ООД
www.tashev-galving.com

REMS Cento

Pipe cutting machine

Light, portable compact machine. Universal for cutting and deburring pipes. For trade and industry. For the building site and the workshop.

Stainless steel pipes of pressfitting systems, carbon steel, copper	Ø 8–108 mm
Steel pipes EN 10255 (DIN 2440)	DN 10–100 Ø ¼–4", Ø 14–115 mm
Cast iron pipes (SML) EN 877 (DIN 19522)	DN 50–100
Plastic pipes SDR 11 Wall thickness s ≤ 10 mm	Ø 10–110 mm
Multilayer composite pipes	Ø 10–110 mm

REMS Cento – Cutting and deburring up to Ø 115 mm. Super fast. Right angled. Chip-free. No outer burr. Dry cutting.

Universal for many pipe types.

Ideal for pressfitting systems

Right angled cutting, according to requirements
Chip-free, no chips in piping system
No outer burr, no damage to O-ring by outer burr
Dry, no damage to the O-ring by coolants-lubricants.
Fast, prevents degradation of pipe material through overheating.

Design

Compact, mobile pipe cutting machine for fast, right angled, cutting with no outer burr. Handy and light, only 16.8 kg. Stable, distortion-free cast construction for right angled cutting. Easy pipe-cutting through specially designed cutter wheel. Powered cutter wheel and linear advance for fast cutting (Patent EP 1 782 904). Power saving feed-in through easy to grip, proven advance-lever and needle bearing mounted machine screw spindle. Cutter wheel protected – as movement restricted to before any contact with the rollers. Connection for driving outer/inner pipe deburrer REMS REG 10–54 E.

Running rollers

4 strong hardened precision tubular steel running rollers on ball bearings for low-friction turning of the pipes to be cut, trapezoidally arranged, replaceable. No setting work required in the whole working range Ø 22–115 mm. Stainless tubular steel rollers as accessory. Cutting of pipes Ø 8–22 mm by placing two pipe sections Ø 28 × 220 mm on the running rollers.

Drive

Robust gear, precisely mounted in roller and needle bearings, maintenance-free. Proven universal motor, 1200 W. Powerful, e.g. stainless steel pipe Ø 54 mm in just 4 s. Ideal speed 115 rpm for optimum cutting speed of the pipes. Safety foot-switch with emergency stop.

REMS cutter wheels

Top German quality. Cutter wheels specially designed to the performance capability of the REMS Cento and for numerous pipe materials with variable cutting geometries for fast cutting with no outer burr. Specially hardened, from proven, through-hardened REMS die-steel, ensuring long service life.

REMS pipe deburrer

Inner pipe deburrer REMS REG 28–108 for pipes Ø 28–108 mm, Ø ¾–4", for electric drive with the REMS Cento pipe cutting machine, as an accessory. Outer/inner pipe deburrer REMS REG 10–54 E for pipes Ø 10–54 mm, Ø ½ – 2⅛", for electric drive with the REMS Cento pipe cutting machine, see page 89.











German Quality Product

Tested by electrosuisse

Supply format

REMS Cento Basic. Pipe cutting machine for fast, right angled, cutting of pipes with no outer burr Ø 8–108 mm. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 8–108 mm. For steel pipes EN 10255 (DIN 2440) DN 10–100, Ø ¼–4", Ø 14–115 mm, cast pipes (SML) EN 877 (DIN 19522) DN 50–100, plastic tubes SDR 11, wall thickness s ≤ 10 mm, Ø 10–110 mm, composite tubes Ø 10–110 mm. With maintenance-free gear, proven universal motor 230 V or 110 V, 50–60 Hz, 1200 W. Speed 115 rpm. Rollers in hardened precision steel pipe. Safety foot-switch. Ring spanner. Without cutter wheel. For workbench and stand. In a carton.

	Art.-No.	
	845001	

Other voltages on request.



Ташев-Галвинг ООД
www.tashev-galving.com

Description	Art.-No.	
Feed lever for operating the drive unit on the floor (for drive units manufactured from 2014 onwards).	845218	
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	845050	
REMS cutter wheel Cu specially for pipes of copper pressfitting systems	845053	
REMS cutter wheel St for steel pipes, cast iron pipes (SML)	845052	
REMS cutter wheel V for plastic and multilayer composite pipes, wall thickness s ≤ 10 mm	845051	
REMS cutting wheel C-SF especially for pipes of the pressfitting systems and push fitting systems made from carbon steel, simultaneously produces a chamfer.	845055	
Hardened, precision tubular steel rollers (pack of 4)	845118	
Stainless tubular steel INOX rollers (pack of 4)	845110	
REMS REG 10 – 54 E, outer/inner pipe deburrer, see page 89		
REMS REG 28 – 108, inner pipe deburrer for pipes Ø 28 – 108 mm, Ø ¾ – 4", for electric drive with the REMS Cento pipe cutting machine (with REMS cutting wheel Art. No. 845050 or 845053).	113840	
Stand	849315	
REMS Jumbo, folding workbenches, see page 95.		
REMS Herkules, material supports, see page 96.		



Ташев-Галвинг ООД
www.tashev-galving.com

REMS DueCento

Pipe cutting machine

Robust, mobile compact machine. Universal for cutting pipes. For trade and industry. For the building site and the workshop.	
Stainless steel pipes of pressfitting systems, carbon steel, copper	Ø 54–225 mm
Steel pipes EN 10255 (DIN 2440)	DN 10–150 Ø 2–6"
Cast iron pipes (SML) EN 877 (DIN 19522)	DN 50–200
Plastic pipes SDR 11 Wall thickness s ≤ 21 mm	Ø 40–225 mm
Multilayer composite pipes	Ø 40–110 mm

REMS DueCento – Cutting up to Ø 225 mm. Right angled. Chip-free. Ready for welding. Fast. No outer burr. Dry cutting.

Universal for many pipe types.

Right angled cutting, according to requirements
Chip-free, no chips in the pipe system, no dust
Weldable, for muff and butt welds
Fast, without impairment of the pipe material by overheating
Without outside burr, easy insertion into connecting muffs
Dry cutting, without impairment by coolant lubricants

Design

Compact, mobile pipe cutting machine for fast, right angled, cutting with no outer burr. Handy and easily transportable, only 37 kg. Stable, distortion-free cast construction for right angled cutting. Easy pipe-cutting through specially designed cutter wheel. Powered cutter wheel and linear advance for fast cutting (Patent DP 10 2005 053 179). Power saving feed-in through easy to grip, proven advance-lever and needle bearing mounted machine screw spindle. Cutter wheel protected – as movement restricted to before any contact with the rollers. Practical chassis with two rubber tyred wheels for easy transport.

Running rollers

4 strong hardened precision tubular steel running rollers on ball bearings for low-friction turning of the pipes to be cut, trapezoidally arranged, replaceable. No setting work in the working range Ø 100–225 mm, Ø 4–6". Roller insert for cutting pipes Ø 40–100 mm, Ø 1½–3½", as an accessory.

Drive

Robust gear, precisely mounted in roller and needle bearings, maintenance-free. Proven universal motor, 1200 W. Powerful, e.g. plastic tube PE Ø 225 mm in just 15 s. Ideal speed 115 rpm for optimum cutting speed of the pipes. Safety foot-switch with emergency stop.

REMS cutter wheels

Top German quality. Cutter wheels specially designed to the performance capability of the REMS DueCento and for numerous pipe materials with variable cutting geometries for fast cutting with no outer burr. Specially hardened, from proven, through-hardened REMS die-steel, ensuring long service life.

Pipe supports

Pipe supports, height adjustable, for pipes Ø 40–100 mm, Ø 1½–3½" and Ø 100–225 mm, Ø 4–6". Easy moving of the material in all directions when turning, pulling and pushing by four stainless steel balls mounted in a rust-protected housing. Safe guiding of long pipes by use of several pipe supports.











German Quality Product

Tested by electrosuisse

Supply format

REMS DueCento Basic. Pipe cutting machine for fast, right angled cutting of pipes Ø 40–225 mm, without outside burr. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 54–225 mm. For steel pipes EN 10255 (DIN 2440) DN 50–150, Ø 2–6", cast pipes (SML) EN 877 (DIN 19522) DN 50–200, plastic tubes SDR 11, wall thickness s ≤ 21 mm, Ø 40–225 mm, composite tubes Ø 40–110 mm. With maintenance-free gears, proven universal motor 110 / 230 V, 50–60 Hz, 1,200 W. Speed 115 rpm. Hardened, precision tubular steel rollers. Safety foot switch. Ring spanner. Without cutter wheel. Two height adjustable pipe rests Ø 100–225 mm, Ø 4–6". In a carton.

	Art.-No.	
	845004	

Other voltages on request.



Ташев Галвинг ООД
www.tashev-galving.com

Description	Art.-No.	
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	845050	
REMS cutter wheel Cu specially for pipes of copper pressfitting systems	845053	
REMS cutter wheel St for steel pipes, cast iron pipes (SML)	845052	
REMS cutting wheel C-SF especially for pipes of the pressfitting systems and push fitting systems made from carbon steel, simultaneously produces a chamfer.	845055	
REMS cutter wheel V, s 10 for plastic and multilayer composite pipes, wall thickness s ≤ 10 mm	845051	
REMS cutter wheel P, s 21 for plastic and multilayer composite tubes, wall thickness s ≤ 21 mm	845057	
Pipe support Ø 100–225 mm, height adjustable, for pipes Ø 100–225 mm, Ø 4–6"	845220	
Pipe support Ø 40–100 mm, height adjustable, for pipes Ø 40–100 mm, Ø **1½–3½**"	845230	
Roller insert for cutting pipes Ø 40–100 mm, Ø 1½–3½"	845060	




Ташев-Галвинг ООД
www.tashev-galving.com

REMS Akku-ROS P 40

Cordless pipe shears

Powerful, handy electric tool for fast, easy cutting of pipe and tubing. Also for thin-walled pipes. Only 1.2 kg.
For one-hand operation. Ideal for assembly, disassembly, repair.

Plastic pipes, multilayer composite pipes	Ø ≤ 40 mm
s ≤ 6,7 mm	Ø ≤ 1⅝"

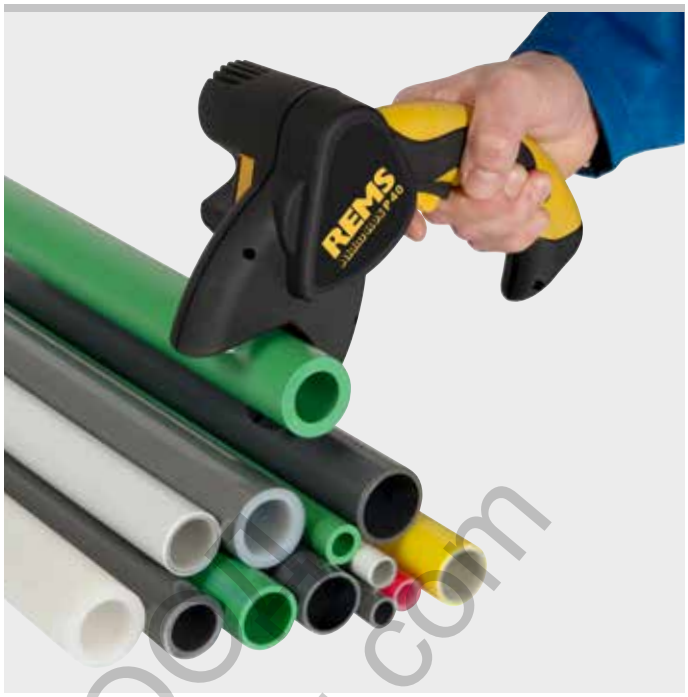

REMS Akku-ROS P 40 – fast, easy cutting of pipes. Powerful, e.g. multilayer composite pipes Ø 20 mm in just 4 s.

Universal use
Specially hardened, wedge-shaped blade for universal cutting of plastic and multilayer composite pipes. Also ideal for cutting thick-walled PP and PVC pipes.

Design
Ultra light, ultra small, ultra handy. Drive machine with NiMH battery only 1.2 kg. Can therefore be used everywhere, free hand, over head, also in very confined spaces. Optimum weight distribution for one-hand operation. Sturdy housing made of glass fibre-reinforced polyamide with steel inlay, with ergonomically shaped handle. Right-angled, burr-free cut by exact pipe rest and blade guided on both sides. Automatic switch off after cutting process. Rapid return for fast resetting of the blade saves time and trouble. For effective working.

Wedge-shaped blade
Changeable, specially hardened wedge-shaped blade, also ideal for cutting thick-walled PP and PVC pipes. Chip-free cutting – no chips left in the pipe.

Drive
Powerful battery motor 9,6 V, 70 W output. Powerful, e.g. multilayer composite pipe Ø 22 mm in just 4 s. Robust, maintenance-free gear. Safety switch. On/Off switch.

Battery
Integrated NiMH battery 9.6 V with 1.0 Ah capacity, for many cuts. Powerful and light. High energy density. Up to 200 cuts per battery charge. Charger NiMH 100–240 V, 50–60 Hz, 6 W, for short charging times. Pulse charging technique reduces memory effect for maximum battery performance.

Ташев-Галвинг ООД
www.tashev-galving.com

Supply format

REMS Akku-ROS P 40 Set. Cordless pipe shears for fast, easy cutting of plastic and composite pipes Ø ≤ 40 mm, Ø ≤ 1⅝", s ≤ 6,7 mm. Electric drive with powerful battery motor 9.6 V, 70 W, maintenance-free gear, safety switch, on/off switch. NiMH battery 9.6 V, 1.0 Ah, charger NiMH 100–240 V, 50–60 Hz, 6 W. With wedge-shaped blade. In box.

	Art.-No.	
	291310	



Accessories

Description	Art.-No.	
Blade for REMS Akku-ROS P 40	291301	



Ташев Галвинг ООД
www.tashev-galving.com

Robust quality tool for clean, fast cutting of pipes.
Stable magnesium version. For one-hand operation.

Plastic pipes, multilayer composite pipes	Ø ≤ 26 mm Ø ≤ 1"



REMS ROS P 26 – fast cutting in one cut

Stable magnesium version, extremely light.

For one-hand operation. Fast cutting in one cut.

Specially hardened and specially ground blade, exchangeable, PTFE-coated. German quality product.

Right-angled, burr-free cut by pipe rest on both sides and blade guided on both sides.

Chipless cutting – no chips remaining in pipe.

Ташев-Галвинг ООД
www.tashev-galving.com



Supply format

REMS ROS P. Pipe shears for plastic and multilayer composite tubes. With blade. In blister pack.

Description	Pipes Ø ≤ mm/inch	Art.-No.	
P 26	26 1"	291240	

Accessories

Description	Art.-No.	
Blade for REMS ROS P 26	291241	



Ташев Галвинг ООД
www.tashev-galving.com

Handy quality tools for clean, fast pipe cuts.
For thin-walled pipes also. Sturdy aluminium design.
For single-hand operation.

Plastic pipes, multi-layer composite tubes Ø ≤ 63 mm
Ø ≤ 2"



REMS ROS P 35
REMS ROS P 35 A
REMS ROS P 42
REMS ROS P 42 PS
REMS ROS P 63 P

Sturdy aluminium design.


Replaceable, specially hardened blade.

For single-hand operation. Effortless working through power transmitting ratchet feed.

Quick reverse saves time and effort. REMS ROS P 35 A with automatic quick reverse after completion of cutting.

Right angle, burr-free cut through exact pipe support and guided blade on both sides.

Chipless cutting – no chips remaining in pipe.

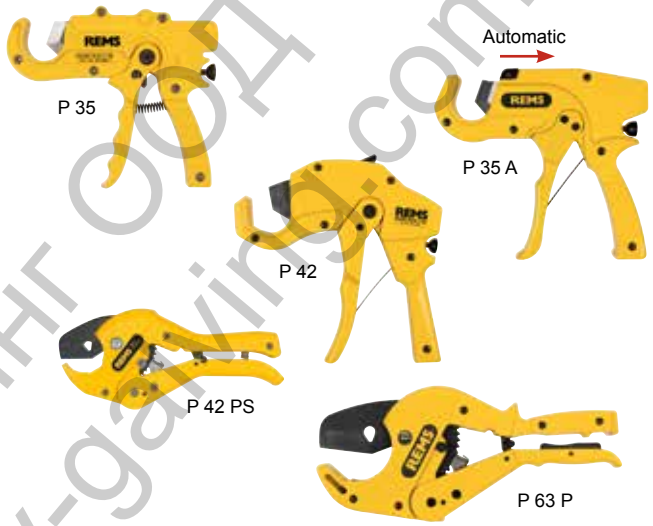

Supply format

REMS ROS P. Pipe shear for plastic pipes and multi-layer composite tubes. With blade. In blister pack/in box.

Description	Pipes Ø ≤ mm/inch	Art.-No.	
P 35 with quick reverse	35 1⅜"	291200	
P 35 A with automatic quick reverse	35 1⅜"	291220	
P 42 with quick reverse	42 1⅝"	291250	
P 42 PS with quick reverse	42 1⅝"	291000	
P 63 P with quick reverse	63 2"	291270	

Robust quality tools for clean, fast pipe cuts.

Plastic pipes Ø ≤ 75 mm
Ø ≤ 2½"



REMS ROS P 75

Robust steel design for tough use and long service life, ideal also for thick-wall plastic pipe.

Replaceable, specially hardened blade.

Fast, easy operation through guided ratchet on both sides and fine-toothed ratchet gear, specially hardened.

Right angle, burr-free cut through two-point pipe support and guided blade on both sides.

Chipless cutting – no chips remaining in pipe.

Supply format


REMS ROS P. Pipe shear for plastic pipes. With blade. In a carton.

Description	Pipes Ø ≤ mm/inch	Art.-No.	
P 75	75 2½"	291100	



Accessories

Description	Art.-No.	
Blade for REMS ROS P 35	291201	
Blade for REMS ROS P 35 A	291221	
Blade for REMS ROS P 42	291251	
Blade for REMS ROS P 42 PS	291021	
Blade for REMS ROS P 63	291281	
Blade for REMS ROS P 63 P	291271	
Blade for REMS ROS P 75	291111	



Ташев Галвинг ООД
www.tashev-galving.com

REMS Cut 110 P

Pipe cutting and pipe chamfering tool

Robust quality tool for right-angle, plain cutting and chamfering (15°) in one operation. Can be used anywhere, free-hand, on parallel vice or work bench.

Plastic pipes in
ABS, PB, PE, PE-HD, PE-X,
PP, PVC, PVDF Ø 40 – 110 mm





REMS Cut 110 P – cutting and chamfering at the same time.

Robust metal design for tough use.

Cutting and chamfering in one operation. While turning the tool shaft, also cutting only possible.

Fast and easy to use, ergonomic clamping grip.

Spring loaded clamp inserts in plastic for concentric clamping of different pipe sizes. Easy to change without tools.

Steplessly adjustable clamping pressure accomodates pipe tolerances.

Cutting and chamfering tool in hard metal with optimum cutter geometry ensures precise cutting and chamfering. Long service life.

Holder for workbench for effortless operation.

Tool set Cu-INOX and clamp inserts for cutting welded rain gutter pipes in copper, titanium zinc, stainless steel, as accessory.



Supply format


REMS Cut 110 P Set. Pipe cutting and pipe chamfering tool for plastic pipes in ABS, PB, PE, PE-HD, PE-X, PP, PVC, PVDF, Ø 40 – 110 mm.Quick clamping device Ø 110 mm with 2 each of clamping inserts Ø 50 and 75 mm. Tool set P with cutting and chamfering blade P, s 11. In sturdy case.

Description	Art.-No.	
Set 50-75-110	290400	

Accessories

Description	Pipes Ø mm	Art.-No.	
Clamping inserts (pack of 2)	40	290420	
	50	290421	
	52	290422	
	56	290444	
	58	290423	
	60	290445	
	63	290427	
	75	290424	
	76	290446	
	78	290425	
	80	290447	
	87	290448	
	90	290426	
	100	290449	
Tool set P with cutting and chamfering blade P, s 11		290432	
Cutting and chamfering blade P, s 11		290430	
Cutting and chamfering blade P, s 15.5		290431	
Tool set Cu-INOX with cutter wheel Cu-INOX 3–120, s 4		290433	
REMS cutter wheel Cu-INOX 3–120, s 4		113210	
Holder for work bench		290440	
Case		290437	



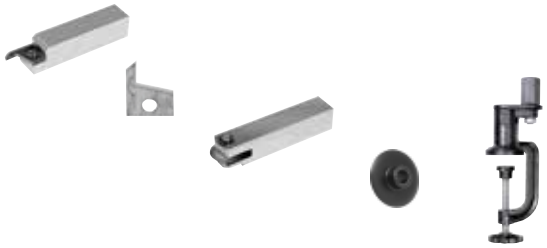

Ташев-Галвинг ООД
www.tashev-galving.com

REMS Cut 110 Cu-INOX

Pipe cutting tool

Robust quality tool for right-angle cutting of welded pipe. Can be used anywhere, free-hand, on parallel vice or work bench.	
Welded rain gutter pipes in copper, titanium zinc, stainless steel	Ø 60–110 mm
Welded drain pipes/downpipes in stainless steel	Ø 50–110 mm



EMS Cut 110 Cu-INOX – easy cutting of rain gutter pipes.

Robust metal design for tough use.

Fast and easy to use, ergonomic clamping grip.

Spring loaded clamp inserts in plastic for concentric clamping of different pipe sizes. Easy to change without tools.

Steplessly adjustable clamping pressure accomodates pipe tolerances.

Cutting and chamfering tool in hard metal with optimum cutter geometry ensures precise cutting and chamfering. Long service life.

Holder for workbench for effortless operation.

Tool set P and clamp inserts for right-angle, plain cutting and chamfering (15°) of plastic pipe, as accessory, see page 85.



Supply format

REMS Cut 110 Cu-INOX Set. Pipe cutter for welded rain gutter pipes in copper, titanium zinc, stainless steel, Ø 60–110 mm, welded drain pipes/downpipes in stainless steel Ø 50–110 mm. Quick action clamp Ø 110 mm with clamp inserts. Tool set Cu-INOX with cutter wheel Cu-INOX 3–120, s 4. In sturdy case.

Description	Art.-No.	
Set 50-75-110	290412	
Set 60-80-100-110	290410	
Set 76-87-100-110	290411	

Accessories

Description	Art.-No.	
Clamp inserts, see page 85.		
Tool set Cu-INOX with cutter wheel Cu-INOX 3–120, s 4	290433	
REMS cutter wheel Cu-INOX 3–120, s 4	113210	
Holder for work bench	290440	



REMS RAG

Pipe chamfering tools

Handy quality tools for simple and fast external chamfering (15°) of pipes.	
Plastic pipes	Ø 16–250 mm, Ø ¾–10"
Wall thickness	≤ PN 16



German Quality Product

Patent DE 44 09 983
Patent US 5,641,253

REMS RAG – chamfering at 15°.

Chamfering at 15° on commonly used plastic pipes.

Also suited for deburring plastic pipes. Ensures easy joining of sleeves to be welded.

Easily adjusted for pipe diameter and wall thickness.

Very easy and fast chamfering thanks to efficient blade geometry.

Patent DE 44 09 983, patent US 5,641,253. Easy-to-slide V-block with two different bevel angles for good guidance of small pipe sizes. In high-grade, glass-fibre reinforced polyamide.

Replaceable blades.





Supply format

REMS RAG. Pipe chamfering tool for plastic pipes. With blades. In a carton.

Description	Pipes Ø ≤ mm/inch	Art.-No.	
P 16–110	16–110 / ¾–4"	292110	
P 32–250	32–250 / 1¼–10"	292210	

Accessories

Description	Art.-No.	
Chamfering blades (pack of 2) for REMS RAG P 16–250	292011	

Ташев-Галвинг ООД
www.tashev-galving.com


Ташев Галвинг ООД
www.tashev-galving.com

REMS REG Universal

Universal deburrer

Universal quality tool for deburring tubes and edges of different materials.

Copper, steel, brass, aluminium, plastic.











REMS REG Universal – the all-purpose deburrer.

Robust metal design for tough use.

Easy handling and good grip thanks to ergonomically designed hexagon handle.

Rotating universal deburrer blade in handle accommodates to the work piece edge to be deburred.

Specially hardened and specially ground universal deburrer blade guarantees easy deburring and long service life.

Fast, simple blade replacement by pulling back the front sliding sleeve.

Supply format

REMS REG Universal. Universal deburrer. For copper, steel, brass, aluminium, plastic. On cardboard.

	Art.-No.	
	113910	

Accessories

Description	Art.-No.	
Universal deburring blade, ground	113360	

REMS REG St ¼–2"

Inner pipe deburrer

Robust quality tool for inner pipe deburring. For electric operation.

Steel pipes and other pipes Ø ¼–2"



German Quality Product

REMS REG St ¼–2": effortless electric deburring.

Inner pipe deburrer with octagonal attachment head for operating by means of electric die stocks with octagonal seat, e.g. REMS Amigo E, REMS Amigo, REMS Amigo 2, REMS Amigo 2 Compact.

Specially hardened and designed deburring blade ensures easy deburring and extremely long life. Double edges for optimum chip flow, specially for small sizes.



Supply format

REMS REG St ¼–2". Inner pipe deburrer for electric operation. For steel pipes and other pipes, Ø ¼–2". In a carton.

	Art.-No.	
	731700	

REMS REG 3–35

Outer-inner tube deburrer

Sturdy manual tool for outer-inner tube deburring.

Copper, brass, aluminium, steel, plastic tubes Ø 3–35 mm Ø ⅛–1⅜"



German Quality Product

REMS REG 3–35 – the sharp edge.

Fast, effortless deburring through 3 specially hardened and ground deburring blades.

Robust housing in shock-proof, resistant plastic.

Supply format

REMS REG 3–35. Outer-inner tube deburrer. For copper, brass, aluminium, steel, plastic tubes, Ø 3–35 mm, Ø ⅛–1⅜". In blister pack.

	Art.-No.	
	113900	

Ташев-Галвинг ООД
www.tashev-galving.com

REMS REG 8–35

Outer-inner pipe deburrer

Robust quality tool for removing outer and inner burr from pipes.

Stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes — Ø 8–35 mm, Ø ⅜–1⅜"



REMS REG 8–35 – the multiple edge up to Ø 35 mm.

Easy, effortless deburring through multiple blades which are specially hardened and ground.

Robust metal design for tough use.



Supply format

REMS REG 8–35. Outer-inner pipe and tube deburrer. For stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes, Ø 8–35 mm, Ø ⅜–1⅜". In blister pack.

	Art.-No.	
	113825	

REMS REG 10–42

Outer-inner pipe deburrer

Robust, solid all-metal tool for outer-inner pipe and tube deburring. For manual or electric operation.

Stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes — Ø 10–42 mm, Ø ½–1⅝"



German Quality Product

REMS REG 10–42 – by hand or electric. Specially for stainless steel pipes.

Ideal for pipes of all types. Specially for stainless steel tubes of pressfitting systems.

Easy and fast deburring through an appropriate, solid all-metal tool, equipped with 4 specially hardened and ground deburring blades

Driver for electrical drive by REMS Helix cordless drill/screwdriver (see page 93) and other power drills/screwdrivers (speed ≤ 300 rpm), as an accessory.



Supply format

REMS REG 10–42. Outer-inner pipe and tube deburrer for manual or electric operation. For stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes, Ø 10–42 mm, Ø ½–1⅝". Without adapter for electric drive. In blister pack.

	Art.-No.	
	113810	



Accessories

Description	Art.-No.	
Adapter for REMS REG 10–42	113815	
REMS Helix, cordless drill/screwdriver, see page 93		



Ташев-Галвинг ООД
www.tashev-galving.com


Ташев Галвинг ООД
www.tashev-galving.com

REMS REG 10–54

Outer-inner pipe deburrer

Robust quality tool for removing outer and inner burr from pipes.

Stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes — Ø 10–54 mm, Ø ½–2⅛"

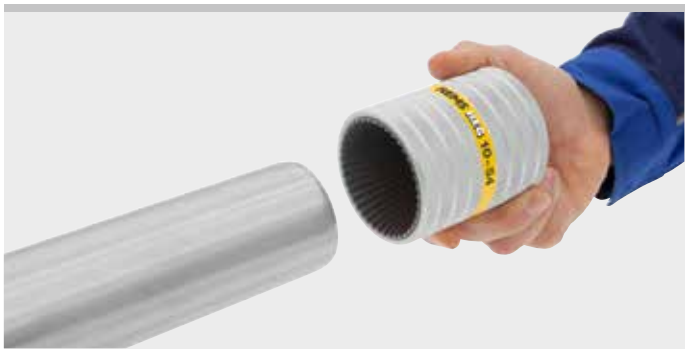

REMS REG 10–54 – the multiple edge up to Ø 54 mm.

Easy, effortless deburring through multiple blades which are specially hardened and ground.

Robust metal design for tough use.



Supply format

REMS REG 10–54. Outer-inner pipe and tube deburrer. For stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes, Ø 10–54 mm, Ø ½–2⅛". In blister pack.

	Art.-No.	
	113830	

REMS REG 10–54 E

Outer-inner pipe deburrer

Robust quality tool for removing outer and inner burr from pipes. For manual operation or electric drive.

Stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes — Ø 10–54 mm, Ø ½–2⅛"



REMS REG 10–54 E – by hand or electrically. Especially for stainless steel pipes.

Easy, effortless deburring through multiple blades which are specially hardened and ground.

Also for electrical drive by REMS Helix cordless drill/screwdriver (see page 93) and other power drills/screwdrivers with ¼" bit holders (speed ≤ 300 rpm), by the REMS Cento pipe cutting machine (see page 78) and by the REMS Turbo Cu-INOX pipe circular sawing machine (see page 66).

Protected by German utility model registration 20 2007 019 016.6. Patent EP pending.

Robust metal design for tough use.







Supply format


REMS REG 10–54 E. Outer-inner pipe and tube deburrer for manual or electric operation. For stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes, Ø 10–54 mm, Ø ½–2⅛". In blister pack.

	Art.-No.	
	113835	

Accessories

Description
REMS Helix, cordless drill/screwdriver, see page 93
REMS Cento, pipe cutting machine, see page 78
REMS Turbo Cu-INOX, pipe circular sawing machine, see page 66

Ташев-Галвинг ООД
www.tashev-galving.com

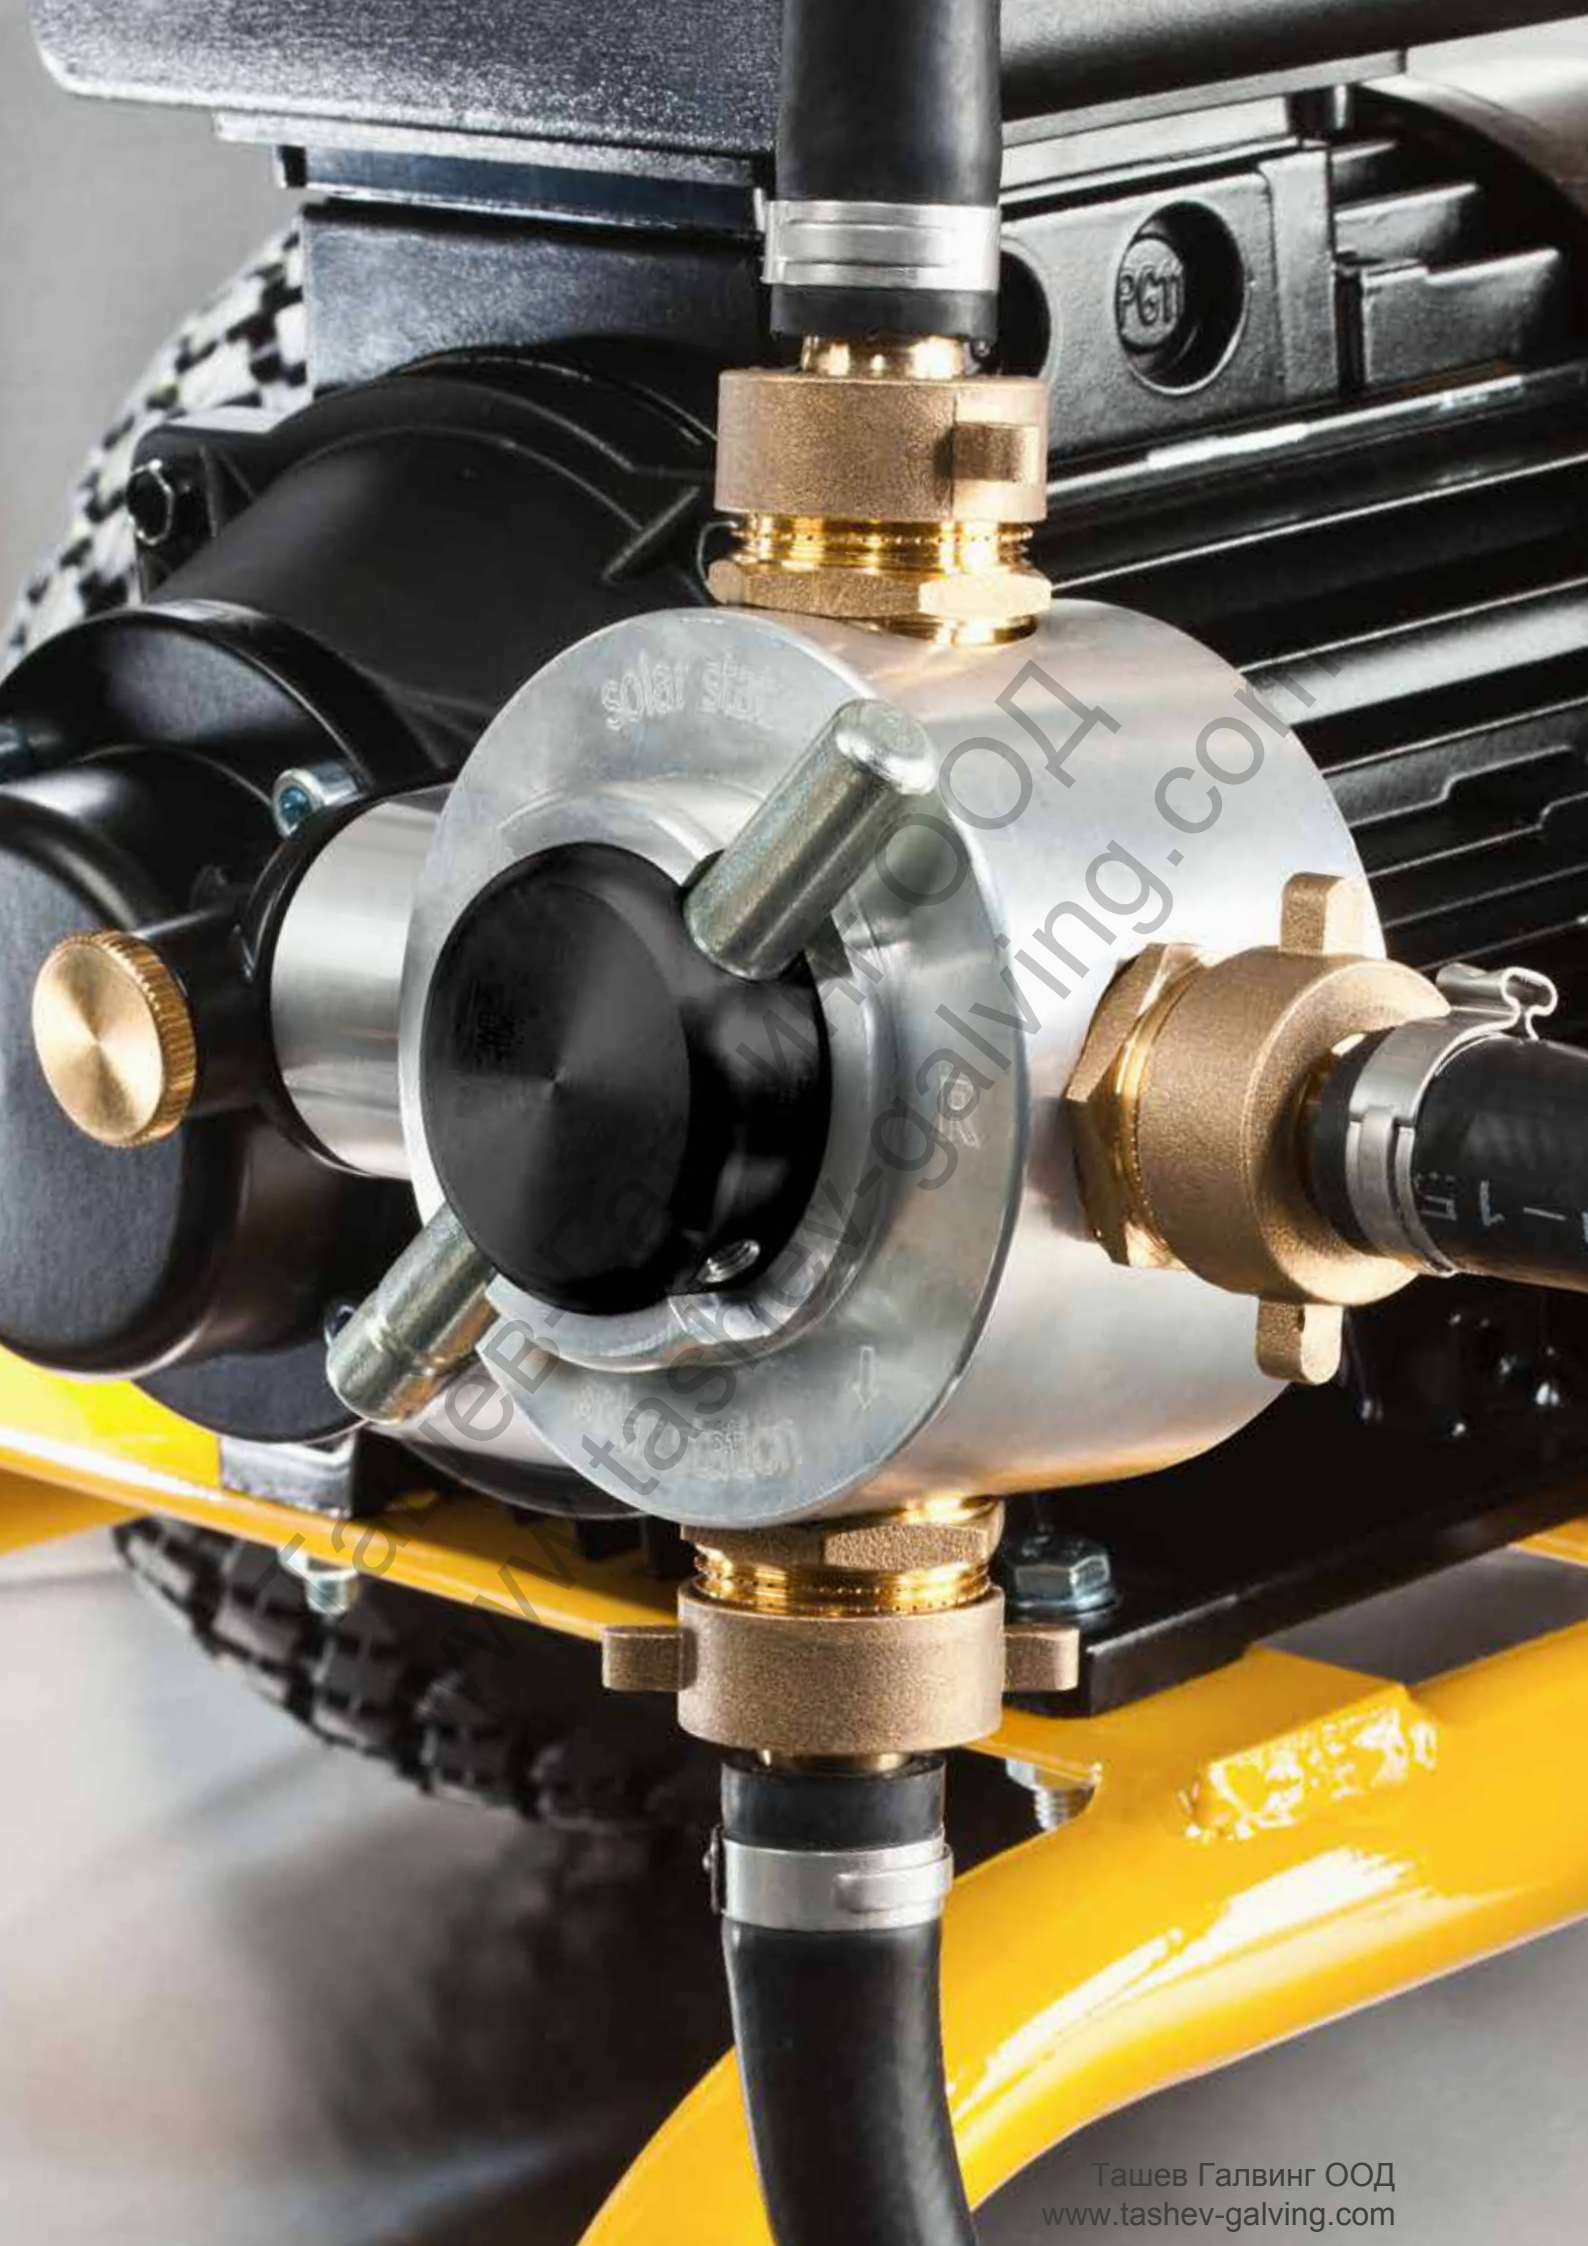

Ташев Галвинг ООД
www.tashev-galving.com

Assembling
Testing
Filling
Flushing

	Water pump pliers	86
	Cordless power drill/screwdriver	93
	Pipe workstation Chain pipe vices	94
	Folding workbenches	95
	Material supports	96
	Battery LED Lamp	97
	Machine cleaner	97
	Hand pressure testing pump	90
	Electric pressure testing pump	91
	Electronic flushing and pressure testing unit with compressor	100
	Electric filling and flushing unit	92

Ташев-Галвинг ООД
www.tashev-galving.com

REMS Catch S

Swedish pattern wrench 'S'

Rugged quality tools for tough use and long service life.
All-steel, drop forged.

Swedish model according to DIN 5234 - Form C.

Pipes Ø ≤ 3"
Nuts, bolts, flat material



REMS Catch S – for professional use.

Swedish model with S-shaped jaws for secure 3-point grip.
Self-locking thus secure gripping and holding even on smooth pipes.

Rugged design in chrome-vanadium steel, all steel, drop forged, tempered, powder-coated. Hardened, highly wear resistant toothing.

Ergonomically shaped handle, slip-proof. Stop prevents jamming.
Adjusting nut cannot be lost. Reinforced sleeve.

Supply format

REMS Catch S. Swedish pattern wrench 'S'. DIN 5234 – Form C.
In plastic bag.

Description Pipes Ø ≤ inch	Width mm	Art.-No.	
S ½"	36	116000	
S 1"	47	116005	
S 1½"	60	116010	
S 2"	78	116015	
S 3"	112	116020	



REMS Catch W

Water pump pliers

Rugged quality tools for tough use and long service life.
All-steel, drop forged.

According to ISO 8976 with box joint.

Pipes Ø ≤ 1½"
Square, hexagonal joints, flat material



REMS Catch W – for professional use.

Gripping pliers with reinforced, ground, box joint. 7 grip positions.
Self-locking thus secure gripping and holding, even on smooth pipes.

Rugged design in chrome-vanadium steel, all-steel, drop forged, tempered, powder-coated. Hardened, highly wear resistant toothing.

Ergonomically shaped handle, slip-proof. Stop prevents jamming.

Supply format

REMS Catch W. Water pump pliers, 7 grip positions. ISO 8976.
In plastic bag.

Description	Pipes Ø ≤ inch	Art.-No.	
W 175	1"	116050	
W 240	1¼"	116055	
W 300	1½"	116060	



Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Helix VE

Cordless power drill/screwdriver

Powerful,handy power tool for drilling, driving in/ loosening screws and deburring pipes. For cordless and mains operation. For assembly, disassembly, repair.	
Drilling in steel, stone	Ø ≤ 10 mm
Drilling in wood	Ø ≤ 28 mm
Drilling with tile drills, e.g. in ceramic, fine clay, granite, marble	Ø ≤ 14 mm
Driving in/loosening of screws	Ø ≤ 7 mm







REMS Helix VE – drilling, screw driving and deburring.

Design

Ultra light, ultra small, ultra handy. Drive machine with battery pack weighs only 1.3 kg. Can therefore be used everywhere, free hand, over head, also in very confined spaces. Optimum weight distribution for one-hand operation. Ergonomically designed housing. Drive machine with keyless quick chuck, clamping range 0.8 – 10 mm, right and left hand rotation. 2 continuously adjustable speed ranges from 0 to 300 rpm and 0 to 1,250 rpm, 25 torque stages plus drilling stage, high torque of 31 Nm in the low speed range for powerful screw driving. Integrated LED work light for illuminating the work place. Belt clip. For cordless and mains operation. 1 bit with double blade slot/cross-head, 50 mm long. Bit set as accessory.

Drive

Powerful electro-mechanical drive with powerful battery motor 14.4 V, 300 W output, robust, 2-step, precision, ball bearing-mounted planetary gear, maintenance-free. Safety switch.

Vario-Electronic

Continuous electronic speed control for gentle start drilling, driving in/loosening of screws and selection of the speed suitable for the material when drilling and driving in/loosening screws. The speed can be continuously controlled by variable pressure on the safety switch from 0 to 300 or 0 to 1,250 rpm (accelerator switch).

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 1.6 or 3.2 Ah capacity for long service life. Powerful and light. Li-Ion 14.4 V, 3.2 Ah battery for driving in more than 1,000 screws 4 x 40 mm in wood. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V voltage supply for mains operation instead of Li-Ion 14.4 V battery, as accessory.

LED



Supply format

REMS Helix VE Li-Ion Set. Cordless power drill/screwdriver with Vario-Electronics (VE) for drilling in steel, stone, Ø ≤ 10 mm, wood Ø ≤ 28 mm and other materials and for driving in/loosening screws Ø ≤ 7 mm. Drive machine with keyless quick chuck, clamping range 0.8 – 10 mm, right and left hand rotation. Electromechanical drive with powerful battery motor 14.4 V, 300 W, 2-step robust planetary gear. 2 continuously adjustable speed ranges from 0 to 300 rpm and 0 to 1,250 rpm, 25 torque stages plus drilling stage, high torque of 31 Nm in the low speed range. Safety switch. Integrated LED work light. Belt clip. Li-Ion 14.4 V, 1,6 Ah battery, Li-Ion/Ni-Cd 230 V, 50 – 60 Hz, 65 W rapid charger. 1 bit with double blade slot/cross-head, 50 mm long. In carrying bag.

	Art.-No.	
	190010	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS REG 10 – 42. Outer/inner pipe deburrer for pipes Ø 10 – 42 mm, Ø ½ – 1⅝", see page 88		
REMS REG 10 – 54 E. Outer/inner pipe deburrer for pipes Ø 10 – 54 mm, Ø ½ – 2⅛", see page 89		
REMS tile drilling, Ø 5 – 14 mm, see page 232		
REMS Helix VE Li-Ion drive unit, without battery	190000	
Battery Li-Ion 14.4 V, 1.6 Ah	571545	
Battery Li-Ion 14.4 V, 3.2 Ah	571555	
Rapid charger Li-Ion/Ni-Cd 230 V, 50 – 60 Hz, 65 W	571560	
Voltage supply Li-Ion 230 V for mains operation instead of battery Li-Ion 14.4 V	571565	
Carrying bag	190053	
Bit set, comprising quick-change bit holder, magnetic, with automatic bit lock, 12 bits (4 Torx, 3 cross-head PH, 3 cross-head PZ, 2 slotted), in practical magazine with elastic band for fixing to wrist or to the power tool.	190051	
REMS cordless LED lamp see page 97	175200	



Ташев Галвинг ООД
www.tashev-galving.com

REMS Aquila 3B

Portable pipe workstation with chain pipe vice

Sturdy, easy to carry pipe workstation with integrated chain pipe vice on folding tripod stand. With practical shelf plate. For trade and industry. For the building site and the workshop.

Clamping range	Ø 10–165 mm Ø ⅛–6"











REMS Aquila 3B – portable pipe workstation. Safe clamping of pipes up to 6". Everywhere on site.

Sturdy, torsion-free die-cast structure of the work plate with integrated chain pipe vice, pipe rest, tool holders, 3 benders for bending pipes Ø 10–26 mm, Ø ⅜–¾", clamping head.

Specially toothed double clamping jaws, easily changeable, prism-shaped, for safe clamping of the pipes in the whole working range. Specially hardened, for long life.

Clamping chain with strong chain links, easy clamping by quick closure and trapezoidal threaded spindle.

Well accessible working range in front of the chain pipe vice for free swing of even long tools.

Especially suitable for pipe installation, e.g. for cutting, thread cutting, bending, assembly.

Adjustable clamping head for clamping the pipe workstation between the ceiling and the floor, for especially secure standing.

Proven tripod stand for secure standing, folding, for easy erection and transport.

Practical shelf plate for tools and work material.

REMS Herkules height adjustable material supports (see page 96).

Supply format

REMS Aquila 3B. Pipe workstation with chain pipe vice for clamping pipes Ø 10–165 mm, Ø ⅛–6". Work plate with integrated chain pipe vice with double clamping jaws, pipe rest, tool holders, 3 benders for bending pipes Ø 10–26 mm, Ø ⅜–¾", clamping head. Folding tripod stand with shelf plate. In a carton.

	Art.-No.	
	120270	

REMS Aquila WB

Chain pipe vice for workbench

High quality, robust chain pipe vice for fixing to a workbench. Excellent quality for long life. For trade and industry. For the building site and the workshop.

Pipes	Ø 10–165 mm Ø ⅛–6"





German Quality Product



REMS Aquila WB – safe clamping of pipes up to 6".

Sturdy, torsion-free die-cast structure of the base plate with integrated chain pipe vice, pipe rest, bender.

Specially toothed double clamping jaws, easily changeable, prism-shaped, for safe clamping of the pipes in the whole working range. Specially hardened, for long life.

Clamping chain with strong chain links, easy clamping by quick closure and trapezoidal threaded spindle.

Well accessible working range in front of the chain pipe vice for free swing of even long tools.

Especially suitable for pipe installation, e.g. for cutting, thread cutting, bending, assembly.

For fixing to the workbench.

REMS Herkules height adjustable material supports (see page 96).

Supply format

REMS Aquila WB. High quality chain pipe vice for clamping pipes Ø 10–165 mm, Ø ⅛–6". Base plate with integrated chain pipe vice with double clamping jaws, pipe rest, bending device. For work bench. In a carton.

	Art.-No.	
	120250	

Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Jumbo

Sturdy, easy to carry folding workbenches for universal use. Worktop in accordance with DIN 68 705. For trade and industry. For the building site and the workshop.

REMS Jumbo E – handy and light.

Work top	Birch-Multiplex, 800 × 600 mm
Height	800 mm
Weight	23 kg
Load capacity	≤ 300 kg

REMS Jumbo – the indestructible folding workbench. Handy and light. German quality product.

Work top	Beech-Multiplex, 1100 × 700 mm
Height	800 mm
Weight	28 kg
Load capacity	≤ 300 kg

REMS Jumbo – assembled and disassembled at lightning speed. With toggle catch. Worktops in accordance with DIN 68 705. Highly resistant up to 300 kg.

Handy and light. REMS Jumbo E only 23 kg, REMS Jumbo only 28 kg.

Worktop made of special Birch-Multiplex plywood (REMS Jumbo E) or Beech-Multiplex plywood (REMS Jumbo), in accordance with DIN 68 705 weather-proof glued, impregnated, vice-proof and tear-proof, flat and torsion-free.

Impact and splinter resistant thanks to steel edge protection. Screws and nuts galvanised,

Especially safe standing by strong tubular steel frame with toggle catch, assembled and disassembled at lightning speed. Easy to carry.

Highly resistant, max. load capacity 300 kg.



German Quality Product





Supply format

REMS Jumbo. Folding workbench with toggle catch. Worktop in accordance with DIN 68 705. In a carton.

Description	Work top	Size mm	Art.-No.
REMS Jumbo E	Birch-Multiplex	800 × 600	120240
REMS Jumbo	Beech-Multiplex	1100 × 700	120200

Ташев-Галвинг ООД
www.tashev-galving.com

REMS Herkules

Vertically adjustable material support with roller guidance for rotating and stationary pipe and solid material.
For trade and industry. For the building site and the workshop.

Pipes	Ø (⅛) 1–6", Ø (6) 25–150 mm
Solid material	Ø (6) 25–150 mm





German Quality Product



REMS Herkules – the sturdy support.

Easy moving of the material in all directions when turning, pulling and pushing by two stainless steel balls mounted in a rust-protected housing in the range Ø 1–6", Ø 25–150 mm.

Especially suitable for pipe installation, e.g. for cutting, thread cutting, roll grooving, welding, soldering.

Robust, job site-proven design. Dismantles for transport and stocking.

Optionally on safe standing tripod or with clamping device for workbench.

Supply format

REMS Herkules. Vertically adjustable material support for pipes Ø (⅛) 1–6", Ø (6) 25–150 mm, solid material Ø (6) 25–150 mm. Optionally on tripod or with clamping device for workbench. In a carton.

Description	Version	Art.-No.	
REMS Herkules 3B	Tripod with protection caps	120120	
REMS Herkules Y	Clamping fixture for work bench	120130	







Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS battery LED Lamp

Hand and standing lamp

Practical, ultra light hand and standing lamp for lighting up the work place. For battery and mains operation.



**REMS cordless LED lamp – lights everywhere.
For cordless and mains operation.
145° continuously tiltable.**

Ultra light hand and standing lamp.

LED technology with high brilliance

Ergonomically designed handle with soft grip

Battery compartment integrated into the handle Li-Ion 14.4 V batteries or Li-Ion 230 V power supply for mains operation in place of Li-Ion 14.4 V battery as an accessory.

Electronic charging status check with low discharge protection.

Practical, foldout hanging device

Lamp head continuously tiltable by 145° for better illumination.

Rapid charger for short charging times, as an accessory.
No memory effect for maximum battery performance.



Supply format

REMS cordless LED. Lamp Hand and standing lamp for Li-Ion 14.4 V batteries or Li-Ion 230 V voltage supply. Without battery, without rapid charger, without voltage supply. In blister pack.

	Art.-No.	
	175200	

Accessories



Description	Art.-No.
Battery Li-Ion 14.4 V, 1.6 Ah	571545
Battery Li-Ion 14.4 V, 3.2 Ah	571555
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560
Voltage supply Li-Ion 230 V for mains operation instead of battery Li-Ion 14.4 V	571565

REMS CleanM

Machine cleaner

Highly effective machine cleaner for fast, reliable removal of oily and greasy soiling of all kinds.
For cleaning and degreasing machines, tools etc.
For trade and industry.





German Quality Product

REMS CleanM – you can't get cleaner than that. Very high cleaning effect.

Especially for fast, reliable removal of oily and greasy soiling of all kinds. Easily biodegradable according to OECD 302 B. Free from substances classified as harmful to the environment.

Universal cleaner for trade and industry. For cleaning and degreasing machines and tools.

Can also be used for removing lime scale.

REMS CleanM spray bottle without propellant.



Supply format

REMS CleanM. Highly effective machine cleaner for fast and reliable removal of oily and greasy soiling. For cleaning and degreasing machines, tools etc.

	Packing	Art.-No.	
	500 ml spray bottle	140119	

Ташев Галвинг ООД
www.tashev-galving.com

REMS Push

Hand pressure testing pump

Proven, reliable testing pump for pressure and tightness tests of piping systems and receptacles.	
Testing and pressure range	p ≤ 6 MPa/60 bar/870 psi
Water, oil, glycol	
pH-value of liquids	7 – 12
Temperature of liquids	≤ 60°C
Viscosity of liquids	≤ 1.5 mPa s



REMS Push – reliable pressure hold.

Universal use

For plumbing, heating, solar system and sprinkler installations, for compressed air, steam and cooling systems, oil installations, for boiler and pressure vessel building.

Design

Robust, job-site proven metal design for tough use. REMS Push with corrosion-resistant, powder-coated 12 ltr steel tank. Distortion resistant lever with ergonomic handle, doubles as carrying handle when locked. Wear resistant pressure piston in brass, Ø 30 mm. High-pressure hose with ½"-connection. Fine scale pressure gauge (accessory), p ≤ 1.6 MPa/16 bar/232 psi, for reading a pressure change of 0.01 MPa/0.1 bar/1.45 psi for tightness testing according to DIN 1988, as accessory.

Stainless steel tank

REMS Push INOX with 12 ltr stainless steel tank. For extremely long life.

Functioning

Pressure and tightness test with water or oil. Double valve system for reliable pressure built-up, with rust-proof steel balls. High pumping capacity with long stroke, fine pressure adjustment at short pushes. High pressure hose with fabric ply prevents measurement errors.

Supply format

REMS Push. Hand pressure testing pump with pressure gauge, p ≤ 6 MPa/ 60 bar/870 psi, for pressure and tightness testing of piping systems and receptacles up to 6 MPa/60 bar/870 psi, Corrosion-resistant, powder-coated 12 ltr steel tank. 1.5 m high-pressure hose with ½"-connection. In a carton.

	Art.-No.	
	115000	



Supply format

REMS Push INOX. Hand pressure testing pump with pressure gauge, p ≤ 6 MPa/60 bar/870 psi, for pressure and tightness testing of piping systems and receptacles up to 6 MPa/60 bar/870 psi. 12 ltr stainless steel tank. 1.5 m high-pressure hose with ½"-connection. In a carton.

	Art.-No.	
	115001	



Accessories

Description	Pressure p ≤ MPa/bar/psi	Art.-No.	
Connecting piece with pressure gauge and shut off valve	6/60/870	115110	
Fine scale pressure gauge	1,6/16/232	115045	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS E-Push 2

Electric pressure testing pump

Powerful, electric pressure testing pump for pressure and tightness tests of piping systems and receptacles.	
Testing and pressure range	p ≤ 6 MPa/60 bar/870 psi
Pumping capacity	6.5 l/min
Water, hydrous solutions, emulsions	
pH-value of liquids	7 – 10
Temperature of liquids	≤ 60°C
Viscosity of liquids	≤ 1.5 mPa s



REMS E-Push 2 – electric charging and testing. Up to 60 bar. With adjustable pressure limiting. 1300 W. Self sucking.

Universal use

In sanitary, heating, solar and sprinkler installation, for compressed air, steam and cooling systems, oil installations, in boiler and pressurised vessel construction.

Design

Robust, compact, light. Weighs only 12 kg. Easy to carry. Wear reduced high power piston pump. Pressure gauge, damped by filling with glycerine, p ≤ 6 MPa/ 60 bar/870 psi. High-pressure hose with fabric ply prevents measurement errors. Suction hose with suction filter. Non-return valve in the suction hose prevents the suction hose from running empty in standstill times; therefore shorter suction times. Suction hose and high pressure hose with ½"-connection. Connecting piece with pressure gauge, p ≤ 6 MPa/60 bar/870 psi, and shut off valve for pressure and tightness testing also after removal of the high pressure pump, e.g. theft protection or for use at several testing points, as accessory. Fine scale pressure gauge, p ≤ 1.6 MPa/
16 bar/232 psi, for reading a pressure change of 0.01 MPa/0,1 bar/1.45 psi for tightness testing according to DIN 1988, as accessory.

High power piston pump

Self-sucking high power piston pump running in a sealed oil bath with wear reduced pressure piston in stainless steel. Proven, powerful capacitor motor, 1300 W, very powerful and fast. High pumping capacity of 6.5 l/min. Pressure and tightness testing up to 6 MPa/60 bar/870 psi.

Adjustable pressure limiting

Pressure limiting in 6 stages, 1 – 6 MPa/10 – 60 bar/145 – 870 psi, adjustable to the necessary pressure in the pipe system/tank.





Supply format

REMS E-Push 2. Electric pressure testing pump with pressure gauge, p ≤ 6 MPa/60 bar/ 870 psi, for pressure and leak testing of pipe systems and tanks up to 6 MPa/60 bar/870 psi, with adjustable pressure limiting. Pump unit with capacitor motor 230 V, 50 Hz, 1300 W. Non-return valve. 1.5 m high-pressure hose with ½"-connection. In a carton.

	Art.-No.	
	115500	

Accessories

Description	Pressure p ≤ MPa/bar/psi	Art.-No.	
Connecting piece with pressure gauge and shut off valve	6/60/870	115110	
Fine scale pressure gauge	1,6/16/232	115045	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Multi-Push

Electronic flushing and pressure testing unit with compressor

Powerful, compact, electronic flushing and pressure testing unit with oil-free compressor. For flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, for pressure and leak testing of pipe systems and vessels with compressed air or water, as a pneumatic pump for controlled filling of all types of vessels with compressed air and for operation of pneumatic tools.

Flushing	
Water pressure pipe network	p ≤ 1 MPa/10 bar/145 psi
Pipe diameter installation	≤ DN 50, 2"
Water temperature	5 – 35°C
Water flow	≤ 5 m^3/h
Various additives for disinfection, cleaning, preservation, see page 102.	
Pressure test with compressed air	p ≤ 0,4 MPa/4 bar/58 psi
Pressure test with water	p ≤ 1,8 MPa/18 bar/261 psi
Pneumatic pump for controlled filling of all types of vessels with compressed air	p ≤ 0,8 MPa/8 bar/116 psi
Operation of pneumatic tools	
Operating pressure	p ≤ 0,8 MPa/8 bar/116 psi
Suction rate	≤ 230 Nl/min







REMS Multi-Push – only one device with more than 10 programs for flushing and pressure testing with compressed air or water of drinking water and heating installation, etc. Very simple menu-guided operation in 26 languages. Permanent process monitoring. Logging. USB interface.

Universal use

Only **one** device for flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, for pressure and leak testing of pipe systems and vessels with compressed air or water, e.g. drinking water installations, radiators or area heating systems, as a pneumatic pump for controlled filling of all types of vessels with compressed air, e.g. for pumping up expansion vessels or tyres and for operating pneumatic tools.

Design

Powerful, compact, electronic flushing and pressure testing unit with oil-free compressor. Handy, easily portable, REMS Multi-Push SL only 37 kg, REMS Multi-Push SLW only 39 kg. Measuring and control devices for automatically running the flushing and test programs and for documenting the results. Safety devices for avoiding contamination of the pipe network by flow-back. Overpressure valves for pressure limiting. 5 µm condensation and particle filters. Large tubular steel frame as a compressed air tank. Two practical handles for easy carrying. Space-saving, folding handle grip for easy movement. Mobile tubular steel frame with two rubber-tyred wheels for easy transport and 2 rubber feet for firm standing. Connecting cable with integrated personal protection switch (PRCD).Captive seals for inputs and outputs of the REMS Multi-Push to avoid contamination during transport and storage.

REMS Multi-Push SLW additionally with hydro-pneumatic water pump for generating the necessary water pressure for hydrostatic pressure testing of pipe systems and vessels with water.

Compressor

Proven, powerful, oil-free piston compressor with crank drive, maintenance-free, with capacitor motor 230 V, 1,500 W. Pressure gauge for displaying the air pressure in the compressed air tank. Emergency stop button .

Hoses

Transparent 1" suction/pressure hose with fabric inlay, 1.5 m long, with 1" hose screw fittings for flushing, disinfection, cleaning, preservation and pressure testing with water. Pneumatic hose 8 mm, 1.5 m long, with DN 5 quick couplings, for pressure testing with compressed air, High-pressure hose ½", with fabric inlay, 1.5 m long, with ½" hose screw fitting, for pressure testing with water. Captive seals for inputs and outputs of the hoses to avoid contamination during transport and storage. Connecting hose for blowing out remaining water from the REMS Multi-Push and hoses at the end of the work, as an accessory.

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Multi-Push

Electronic flushing and pressure testing unit with compressor



Input and control unit

Easy to operate. Menu-guided input and menu-guided control of more than 10 flushing and test programs in 26 languages with edit option for the user to adapt the factory-set test criteria (test sequences, pressures and times) or defaults to the respective national safety provisions, rules and regulations valid for the application site. Format selection for date and time and selection of the different units. Input and control unit with 3" display with modern LCD technology, 76 mm screen diagonal, 128 × 64 pixels. Permanent process monitoring during the program sequences. USB port for USB stick or printer. The respective latest version software for the input and control unit is available via USB stick as a download under www.rems.de → Downloads → Software.

Flushing

Flushing of drinking water installations with water or with a water/air mixture with intermittent compressed air in accordance with EN 806-4:2010 and information leaflet T 84-2004 "Flushing, Disinfection and Commissioning of Drinking Water Installations" of the German Central Association for Sanitary, Heating and Air Conditioning and for flushing of radiators and area heating systems. Also for flushing pipe systems with a water/air mixture with constant compressed air.

Disinfection, cleaning, preservation

Disinfection of drinking water installations in accordance with EN 806-4:2010 and information leaflet T 84-2004 "Flushing, Disinfection and Commissioning of Drinking Water Installations" of the German Central Association for Sanitary, Heating and Air Conditioning and other pipe systems. Cleaning and preservation of radiators and area heating systems. Various additives for disinfection, cleaning and preservation (see page 102) for different applications. Unit for feeding in additives, as an accessory*.

Pressure and leak testing with compressed air

Leak testing of drinking water installations with compressed air in accordance with information leaflet T 82-2011 "Leak Testing of Drinking Water Installations" of the German Central Association for Sanitary, Heating and Air Conditioning and pressure and leak testing of other pipe systems and vessels.

Load testing of drinking water installations with compressed air in accordance with information leaflet T 82-2011 "Leak Testing of Drinking Water Installations" of the German Central Association for Sanitary, Heating and Air Conditioning and pressure and leak testing of other pipe systems and vessels.

Pressure and leak testing with water

REMS Multi-Push SLW with hydro-pneumatic water pump for hydrostatic pressure testing of drinking water installations with water in accordance with EN 806-4:2010, test method A, B or C or test method B, modified in accordance with information leaflet T 82-2011 "Leak Testing of Drinking Water Installations" of the German Central Association for Sanitary, Heating and Air Conditioning and for pressure and leak testing of other pipe systems and vessels.

Pneumatic pump

Pneumatic pump for controlled filling of all types of vessels with compressed air ≤ 0.8 MPa/8 bar/116 psi, with automatic switch-off on reaching the preset air pressure, e.g. for pumping up expansion vessels or tyres.

Operation of pneumatic tools

Connection for pneumatic tools up to an air requirement ≤ 230 Nl/min, adjustable, for adaptation to the pneumatic tool being used. Pressure gauge for controlling the air pressure supplied by the compressed air tank. Pneumatic hose with quick coupling NW 7.2, as an accessory.

Logging

Results of the flushing and test programs are saved with date, time and log number in the selected language and can be transferred to USB stick or printer for documentation. Additions to saved data, e.g. customer name, project number, tester, are possible on external devices (e.g. PC, laptop, tablet-PC, Smartphone).

*available from Spring 2014.

Ташев Галвинг ООД
www.tashev-galving.com

REMS Multi-Push

Electronic flushing and pressure testing unit with compressor

Supply format

REMS Multi-Push SL Set. Electronic flushing and pressure testing unit with oil-free compressor. For flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, for pressure and leak testing of pipe systems and vessels with compressed air, as a pneumatic pump for controlled filling of all types of vessels with compressed air p ≤ 0.8 MPa/8 bar/116 psi, and for operation of pneumatic tools ≤ 230 Nl/min Input and control unit Piston compressor with crank drive, capacitor motor 230 V, 50 Hz, 1500 W. Person circuit breaker (PRCD). 2 off 1" suction/pressure hoses, 1,5 m long, with 1" hose screw fittings, 1 pneumatic hose 8 mm, 1.5 m long, with DN 5 quick couplings, for pressure testing with compressed air. Seals for inputs and outputs. Mobile tubular steel frame. Without feeder unit for additives. In a carton

	Art.-No.	
	115610	

Other voltages on request.



Supply format

REMS Multi-Push SLW Set. Electronic flushing and pressure testing unit with oil-free compressor. For flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, for pressure and leak testing of pipe systems and vessels with compressed air or water, as a pneumatic pump for controlled filling of all types of vessels with compressed air p ≤ 0.8 MPa/8 bar/116 psi, and for operation of pneumatic tools ≤ 230 Nl/min Input and control unit Piston compressor with crank drive, capacitor motor 230 V, 50 Hz, 1500 W. Hydro-pneumatic water pump. Personal protection switch (PRCD). 2 off 1" suction/pressure hoses, 1,5 m long, with 1" hose screw fittings, 1 pneumatic hose 8 mm, 1.5 m long, with DN 5 quick couplings, for pressure testing with compressed air. 1 high-pressure hose ½", 1.5 m long, with ½" hose screw fittings, for pressure testing with water. Seals for inputs and outputs. Mobile tubular steel frame. Without feeder unit for additives. In a carton

	Art.-No.	
	115611	

Other voltages on request.



Accessories

Description	Art.-No.	
Fine filter with fine filter cartridge 50 µm, washable, with large dirt collection vessel	115323	
Fine filter cartridge 50 µm, for fine filter with fine filter cartridge 50 µm	043052	
Connecting hose compressor/water connections, for blowing out water remains from the REMS Multi-Push and the suction/pressure hoses at the end of work	115618	
Pressure gauge, p ≤ 6 MPa/60 bar/870 psi, for pressure and leak testing of pipe systems and vessels up to 6 MPa/60 bar/870 psi.	115140	
Fine scaled pressure gauge, p ≤ 1.6 MPa/16 bar/ 232 psi, for pressure and leak testing of pipe systems and vessels up to 1.6 MPa/16 bar/232 psi.	115045	
Fine scaled pressure gauge, p ≤ 250 hPa/250 mbar/ 3,6 psi, for pressure and leak testing of pipe systems and vessels up to 250 hPa/250 mbar/3.6 psi.	047069	
Compressed air hose NW 7.2 for connecting compressed air tools, with NW 7.2 quick coupling	115621	
Additives feeder unit*, for feeding additives for disinfection, cleaning, preservation	115602	

Additives for disinfection, cleaning and preservation on request.



Ташев Галвинг ООД
www.tashev-galving.com

*available from Spring 2014.

Ташев Галвинг ООД
www.tashev-galving.com



Ташев Галвинг ООД
www.tashev-galving.com

REMS Solar-Push

Electric filling and flushing unit

Powerful electric filling and flushing unit for fast, easy filling, flushing and venting of closed systems. Ideal for solar power systems, ground heat systems and underfloor/wall heating.

Tank volume	30 litres
REMS Solar-Push K 60 with centrifugal pump	
Transport capacity at 40 m pumping head	16 l/min
Transport volume	≤ 36 l/min
Transport pressure	≤ 0.55 MPa/5.5 bar/80 psi
Temperature of the transported media (constant load)	≤ 60°C
pH value of the transported media	7–8
REMS Solar-Push I 80 with impeller pump	
Transport capacity at 40 m pumping head	18 l/min
Transport volume	≤ 27 l/min
Transport pressure	≤ 0.65 MPa/6.5 bar/94 psi
Temperature of the transported media (constant load)	≤ 80°C
pH value of the transported media	7–8

Media transported: heat transfer liquids, antifreeze, water, aqueous solutions, emulsions



REMS Solar-Push – filling, flushing and venting in one action. Self priming. High transport capacity.

System advantage

Filling, flushing and venting in one action. Ideal for solar power systems, ground heat systems and underfloor/wall heating. Also for filling tanks.

Design

Powerful, electric filling and flushing unit on stable, mobile tubular steel frame for secure standing. 2 large, air-filled tyres for easy transport in rugged building site conditions. Practical hose holder. Low weight, only 19 kg. Sturdy plastic tank to hold 30 litres, made of UV-stabilised PE, with filling level indicator, removable, for easy cleaning, with large opening for easy filling. Practical screw cap for fast opening and closing. Return connection ¾" with immersion pipe avoids foaming of the transport medium when it enters the plastic tank. Stop tap for easy cleaning and easy changing of the plastic tank when using different transport media. Two practical handles for easy carrying of the plastic tank. High temperature-resistant connecting hose between plastic tank and pump. Fine filter in the suction line with large viewing window for easy recognition of residue air in the circuit as well as emitted contamination, e.g. chips, solder and welding residue.

REMS Solar-Push K 60

Self-suction centrifugal pump, suitable for different transport media, e.g. heat transfer liquids, antifreeze, water, aqueous solutions, emulsions. With proven, powerful condenser motor with quiet running, 860 W, on/off switch. High transport volume 36 l/min for fast filling, efficient flushing and venting of closed systems and for filling tanks. Pressure relief valve for simple pressure relief in the pressure hose at the end of operation, as an accessory. For continuous load ≤ 60°C. 2 pieces flexible, transparent PVC fabric hoses ½" T60, for pressure and return lines, each 3 m long, with ¾" screw connections, temperature-resistant ≤ 60°C.

REMS Solar-Push I 80

Dry self-suction impeller pump with special impeller, suitable for different transport media, e.g. heat transfer liquids, antifreeze, water, aqueous solutions, emulsions. With proven, powerful condenser motor with quiet running, 1000 W, on/off switch. High transport volume 27 l/min for fast filling, efficient flushing and venting of closed systems and for filling tanks. Pressure relief valve for simple pressure relief in the pressure hose at the end of operation. For continuous load ≤ 80°C. 2 pieces flexible, EPDM fabric hoses ½" T100 (synthetic rubber), for pressure and return lines, each 3 m long, with ¾" screw connections, high temperature-resistant ≤ 100°C.

Extensive accessories

Shut-off valve for closing the pressure or return line, e.g. during transport. Fine filter with fine filter bag 70 µm, consisting of a screw cap with return line connection for return line with ¾" union, adapter and fine filter bag 70 µm, or fine filter with fine filter cartridge 50 µm, washable, with large dirt collection vessel, for return line with ¾" connection for flushing underfloor heating/wall radiators and clearing sludge. Flow direction changeover valve complete with EPDM fabric hose ½" T100, for flushing underfloor heating/wall radiators and effective clearance of sludge by pressure surges when flow direction changes. Changeover valve for alternative suction of the transport medium from another tank, e.g. for larger volumes.


K 60


I 80









Ташев Галвинг ООД
www.tashev-galving.com



Supply format

REMS Solar-Push K 60. Electric filling and flushing unit for fast, easy filling, flushing and venting of closed systems. Transport volume ≤ 36 l/min, tank volume 30 l. With centrifugal pump, temperature-resistant for continuous load ≤ 60°C. Transport pressure ≤ 0,55 MPa/5,5 bar/80 psi. Condenser motor 230 V, 50 Hz, 860 W. 2 pieces flexible, transparent PVC fabric hoses ½" T60, each 3 m long, temperature-resistant ≤ 60°C. In box.

	Art.-No.	
	115312	

Other voltages on request.



Supply format

REMS Solar-Push I 80. Electric filling and flushing unit for fast, easy filling, flushing and venting of closed systems. Transport volume ≤ 27 l/min, tank volume 30 l. With impeller pump, temperature-resistant for continuous load ≤ 80°C. Transport pressure ≤ 0,65 MPa/6,5 bar/94 psi. Transport capacity at 40 m transport height 10 l/min. Condenser motor 230 V, 50 Hz, 1000 W. Pressure relief valve. 2 pieces flexible, EPDM fabric hoses ½" T100, each 3 m long, high temperature-resistant ≤ 100°C. In box.

	Art.-No.	
	115311	

Other voltages on request.

Accessories

Description	Art.-No.	
PVC fabric hose ½" T60 for pressure or return line, 3 m long, with ¾" screw connections, temperature-resistant ≤ 60°C.	115314	
EPDM fabric hose ½" T100 for pressure or return line, 3 m long, with ¾" screw connections, high temperature-resistant ≤ 100°C.	115315	
EPDM fabric hose ½" T165 for pressure or return line, 3 m long, with ¾" screw connections, high temperature-resistant ≤ 165°C.	115319	
¾" shut-off valve for closing the pressure or return line, e.g. during transport.	115324	
30 l plastic tank made of UV-stabilised PE.	115375	
Pressure relief valve for Solar-Push K 60.	115217	
Fine filter with fine filter bag 70 µm, consisting of a screw cap with return line connection for return line with ¾" union, adapter, 1 file filter bag 70 µm, for flushing underfloor heating/wall radiators and clearing sludge	115220	
Fine filter bag 70 µm (pack of 10), fine file filter with fine filter bag 70 µm	115221	
Fine filter with fine filter cartridge 50 µm, washable, with large dirt collection vessel, for return line with ¾" union, for flushing underfloor heating/wall radiators and clearing sludge	115323	
Fine filter cartridge 50 µm, for fine filter with fine filter cartridge 50 µm	043052	
Flow direction changeover valve complete with EPDM fabric hose ½" T100, for flushing underfloor heating/wall radiators and effective clearance of sludge by pressure surges when flow direction changes	115326	
Changeover valve for alternative suction of the transport medium from another tank, e.g. for larger volumes.	115325	



Ташев-Галвинг ООД www.tashev-galving.com



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Bending

Ташев-Галвинг ООД
www.tashev-galving.com

	**Hydraulic pipe bender**	**108**
	**Single-hand tube bender**	**110**
	**Electric pipe and tube bender**	**111**
	**Cordless tube bender**	**114**
	**Hand tube bender**	**116**

REMS Python

Hydraulic pipe bender

Robust, hydraulic pipe bender for dimensionally accurate bending of pipes up to 90°. For trade and industry. For the building site and the workshop.	
Steel pipes EN 10255 (DIN 2440)	Ø ⅜–2"
Multilayer composite tubes	Ø 32–75 mm

REMS Python – extremely easy bending up to Ø 2", 75 mm. Ideal for steel pipes EN 10255 and for multilayer composite tubes of the pressfitting systems.

Universal use

For locksmith work, sanitary and heating installation and machine and plant engineering. Excellently suitable for steel pipes EN 10255 (DIN 2440) and for multilayer composite tubes of the pressfitting systems.

System advantage

Only **one** bender drive for the whole working range up to Ø 2", Ø 75 mm. Thus simple, inexpensive stocking. No confusion possible.

Cost advantage

Pipe bender is amortised after just a few bends by saving on fittings. No costs for fittings, storage, procurement. Saving of welds, press connections and working time. Increased safety due to fewer pipe connections.

Design

Robust, compact pipe bender with closed, maintenance-free hydraulic system. 2 back former supports for high rigidity and precision during bending. Upper back former support tiltable for easy insertion and removal of the pipe, with marked plug positions for the back formers according to the pipe size to be bent, with angle scale 0 to 90°. Can be used anywhere, any time. No setting. Easy, effortless, quick working, e.g. 90° bend Ø 63 mm only 60 s. Tripod as accessory.

Bending formers and back formers

Bending formers St for steel pipes, form and pressure stable, made of highly resistant spheroidal iron. Bending formers V for multilayer composite tubes, form and pressure stable, made of torsion-free shell-cast aluminium. See page 109. Marking on every bending former for dimensionally accurate bending. Angle gauge with angle scale 0 to 180° for dimensionally accurate bending, as an accessory. Optimum matching of bending formers and back formers guarantees material-compatible bending without cracks and creases. High strength back formers for low friction support of the thrust pressure. Fast changing of the bending formers and back formers by simple plug system.

Drive

Hydraulic drive unit with hydraulic cylinder made of high quality, rolled hydraulic tube. Overload protection of the hydraulic thrust in the foremost piston position for safe working. Ergonomically designed thrust lever for strength saving pressure build-up with manual hydraulic pump. No danger of crushing due to end limiting of the thrust lever, for high work safety.



German Quality Product



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com



Supply format

REMS Python Set. Hydraulic pipe bender for dimensionally accurate bending of pipes up to 90°. Steel pipes EN 10255 Ø ⅜–2", multilayer composite tubes Ø 32–75 mm. Bender drive with back former supports and back formers, bending formers St and V. In sturdy carrying case.

Description	Art.-No.
Set St ⅜-½-¾-1-1¼"	590020
Set St ½-¾-1-1¼-1½-2"	590021
Set V 40-50-63 mm	590022

Accessories



Description	Art.-No.
Bender drive with back former supports and back formers	590000
Slide piece Ø 75 mm (pack of 2)	590111
Tripod	590150
Carrying case with practical handles	590160
Angle gauge for dimensionally accurate bending	590153

Bending former for pipes Ø mm/inch	Bending radius[1] mm	Bending radius[2] mm	suitable for St 10255	suitable for V				Art.-No.
St ⅜"	50		•					590051
St ½"	65		•					590052
St ¾"	85		•					590053
St 1"	100		•					590054
St 1¼"	150		•					590055
St 1½"	170		•					590056
St 2"	220		•					590057
V 32 mm	112	128		•				590061
V 40 mm	140	160		•				590058
V 50 mm	175	200		•				590059
V 63 mm	220	252		•				590060
V 75 mm	260	298		•[3]				590062

St 10255: Steel pipes (threaded pipes) EN 10255 (DIN 2440)
V: multilayer composite pipes of the pressfitting systems


[1] Bending radius mm on the inside of the bend (EN 10255)
[2] Bending radius mm at the neutral axis of the bend (DVGW VP 632)
[3] 2 slide pieces Ø 75 mm (Art. No. 590111) required

Ташев-Галвинг ООД
www.tashev-galving.com

REMS Swing

Single-hand tube bender

Practical single-hand tool for exact tube bending up to 90°. Ideal for on-site work. For trade and industry. For the building site and the workshop.	
Soft copper pipes, also thin-walled	Ø 10–22 mm Ø ⅜–⅞" s ≤ 1 mm
Coated soft copper tubes	Ø 10–18 mm Ø ⅜–⅝" s ≤ 1 mm
Coated carbon steel pipes of pressfitting systems	Ø 12–18 mm
Soft precision steel tubes	Ø 10–18 mm s ≤ 1 mm
Multi-layer composite tubes	Ø 14–32 mm

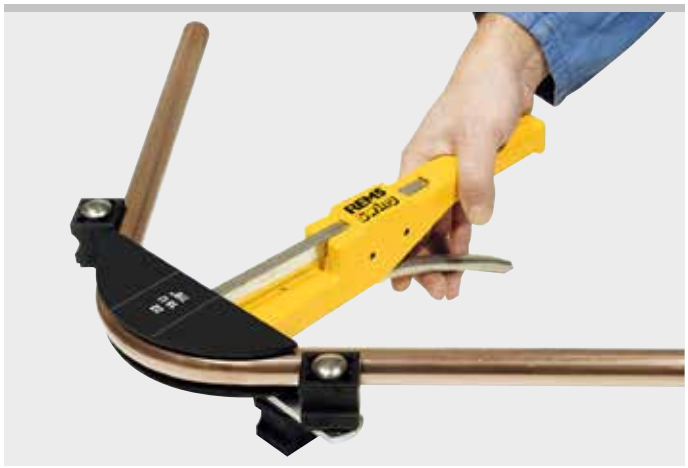

German Quality Product





REMS Swing – bending tubes where they are installed. Universally usable for many pipe types. Fast operation through quick-acting in-feed forward and release. Proven, reliable ratchet feed. Ideal also for coated tubes.

Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Also for copper thin-walled heating tubes according to EN 1057 and for tubes of pressfitting systems.

Cost advantage

Bender recovered after a few bends through savings on fittings. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design

Compact, job site-proven. Handy and light, only 1.3 kg. Can be used anywhere, free-hand, in confined areas. Simple, fast operation, e.g. bends Ø 22 mm in only 9 s. Quick-acting in-feed and release saves time and effort. Marked bending formers for exact bending. Crossover, swan-neck, reverse bends possible. Easy and rapid changing of bending formers.

Bending formers and sliding pieces

In high-strength, high-slide, glass-fibre reinforced polyamide. Application of bending formers, see table right.

Drive

Only 1 sturdy bender drive with with proven, reliable ratchet feed for the complete work range up to Ø 32 mm. 1 universal crossbar, reversive according to the required tube size, with bending formers up to Ø 26 mm, ⅞". 1 crossbar with sliding pieces for Ø 32 mm. Device for reverse bends up to Ø 22 mm, ⅞".

Accessories

Description	Art.-No.	
Bender drive	153100	
Universal back former carrier with back formers for Ø 10 – 26 mm, ⅜ – ⅞" pipes	153125	
Back former carrier 32 with back formers for Ø 32 mm pipes	153115	
Device for reverse bends on installed pipes	153140	
Steel case with inlay	153265	
Case with inlay	153270	

Bending former for tubes Ø mm/inch	Bending radius[1] mm	suitable for Cu	Cu-U	St-U	St	V	Art.-No.	
10, ⅜	30	•			•		153155	
12, 10 U, ½	36	•	•		•		153160	
14, 12 U	50	•		•	•	•	153170	
15, 12 U, ⅝	55	•	•		•		153175	
16, 14 U	55	•	•		•	•	153180	
17, 15 U	60			•		•	153185	
18, 14 U, 15 U, 16 U, ¾	72	•	•		•	•	153190	
20, 18 U	79	•	•	•		•	153195	
22, 18 U, ⅞	86	•	•				153200	
25, 26	88					•	153205	
32	128					•	153210	

[1] Bending radius mm at the neutral axis of the bend (DVGW GW 392).

Cu: soft copper tubes, also thin-wall
St-U: coated carbon steel pipes of the pressfitting systems EN 10305-3 (DIN 2394)
St: soft precision steel pipes EN 10305-1, EN 10305-2, EN 10305-3 (DIN 2391–2394)
U: coated
V: multi-layer composite tubes of pressfitting systems

Supply format

REMS Swing Set. Single-hand tube bender Ø 10–32 mm, Ø ⅜–⅞", up to 90°. Soft copper tubes Ø 10–22 mm, Ø ⅜–⅞", s ≤ 1mm, coated soft copper tubes Ø 10–18 mm, Ø ⅜–⅝", s ≤ 1mm, coated carbon steel pipes of pressfitting systems Ø 12–18 mm, soft precision steel tubes Ø 10–18 mm, s ≤ 1mm, composite tubes Ø 14–32 mm. Up to Ø 26 mm with bender drive, bending formers, universal crossbar with sliding pieces, in sturdy steel case/plastic case. Up to Ø 32 mm with bender drive, bending formers, 2 universal crossbars with sliding pieces, in sturdy plastic case.

Description mm	inch	Art.-No.	
Set 12-15-18-22	½-⅝-¾-⅞"	153025	
Set 10-12-15-18-22	⅜-½-⅝-¾-⅞"	153021	
Set 12-14-16-18-22	½-¾-⅞"	153020	
Set 14-16-20-25/26		153026	
Set 14-16-18-20-25/26		153022	
Set 16-20-25/26-32		153029	
Set Allround 22 10-12-14-15-16-17-18-20-22	⅜-½-⅝-¾-⅞"	153027	
Set 16-18-20-25/26-32		153023	
Set Allround 32 10-12-14-15-16-17-18-20-22-25/26-32	⅜-½-⅝-¾-⅞"	153028	





Ташев Галвинг ООД
www.tashev-galving.com

REMS Curvo 50

Electric pipe and tube bender

Universal, compact electric tool for cold bending of pipes and tubes up to 90°. Can be used anywhere, without vice. For trade and industry. For the building site and the workshop.	
Steel pipes EN 10255 (DIN 2440)	Ø ¼–1¼"
Hard, half-hard, soft copper tubes	Ø 10–42 mm
Thin-wall copper tubes	Ø 10–35 mm
Pipes of press fitting systems made of stainless steel	Ø 12–42 mm
Carbon steel, also coated	Ø 12–35 (28) mm
Multi-layer composite tubes	Ø 14–50 mm
Further materials, see REMS Curvo	







German Quality Product

REMS Curvo 50 – wrinkle free bending of large pipes.

Universal use

For metalwork and in sanitary, heating, air conditioning, refrigeration and hydraulic applications. Specially suited for steel pipe EN 10255 (DIN 2440), pipe for press-fitting systems, for hard and half hard copper pipe and for thin-walled copper heating pipe according to EN 1057.

System advantage

Bending formers and back formers of REMS Curvo, REMS Akku-Curvo and REMS Sinus (page 117) also fit in the REMS Curvo 50 drive machine with adaptor block 10–40, support 10–40. Therefore simple, inexpensive stocking. No confusion possible.

Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design

Compact, handy electric tool with integral absorption of torque during bending. Can be used anywhere, anytime. No setting. Simple, effortless, fast working, e.g. 90° bends of steel pipe Ø 1¼" in only 37 s. Fast and creep speed operation for precise bending. Swan-neck, U-bends possible.

Bending formers and back formers

Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers. Bending formers and back formers for different sizes, materials and bending radii. Bending formers and back formers REMS Curvo 50 (Ø 35 R 100, Ø 42 R 140, Ø 50 R 135, Ø 1" R 100, Ø 1¼" R 140): Form and pressure resistant bending formers in ductile iron and back formers in high-strength, high-slide glass-fibre reinforced polyamide.

Drive

Robust, maintenance-free gear. Final point safety in both directions through safety slipping clutch. Proven, powerful universal motor, 1000 W. Right and left-hand rotation. Stepless electronic safety switch for rapid and creep speed operation.

Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and uniform bending. High-pressure-proof, acid-free. CFC-free, so ozone-harmless.

Supply format

REMS Curvo 50 Basic-Pack. Electric pipe and tube bender Ø 10–50 mm, up to 90°. Steel pipes EN 10255 Ø ¼–1¼", hard, half-hard and soft copper tubes, Ø 10–42 mm, thin-wall copper tubes Ø 10–35 mm, pipes of the press fitting systems made of stainless steel Ø 12–42 mm, carbon steel Ø 12–35 mm, carbon steel coated Ø 12–28 mm, multi-layer composite tubes Ø 14–50 mm and others. Drive unit with maintenance-free gear and safety slipping clutch, universal motor 230 V or 110 V, 50–60 Hz, 1000 W, stepless electronic safety switch, right and left-hand rotation. Adaptor block 35–50, Support 35–50, insert bolt. In sturdy carrying case.

	Art.-No.	
	580110	

Other voltages on request.



Accessories

Description	Art.-No.	
Bending formers and back formers see page 117.		
REMS Curvo 50 drive unit	580100	
Adaptor block 35–50, Support 35–50, for bending formers and back formers Ø 35 R 100, Ø 42 R 140, Ø 50 R 135, Ø 1" R 100, Ø 1¼" R 140 (see page 117).	582110	
Adaptor block 10–40, Support 10–40, for bending formers and back formers REMS Curvo, REMS Akku-Curvo, REMS Sinus (see page 117).	582120	
Insert bolt	582036	
REMS bending spray, 400 ml	140120	
Carrying case with practical handles	590160	
Steel case with insert for each bending former and back former R 100 and R 135/R 140, 90°	586012	



Ташев Галвинг ООД
www.tashev-galving.com

REMS Curvo

Electric pipe and tube bender

Universal, compact electric tool for cold bending of pipes and tubes up to 180°. Can be used anywhere, without vice. For trade and industry. For the building site and the workshop.	
Hard, half-hard, soft copper tubes also thin-wall	Ø 10–35 mm Ø ⅜–1⅜"
Coated soft copper tubes, also thin-wall	Ø 10–18 mm
Pipes of press fitting systems made of stainless steel	Ø 12–28 mm
Carbon steel (coated)	Ø 12–28 mm
Soft precision steel tubes	Ø 10–28 mm
Steel pipes EN 10255 (DIN 2440)	Ø ¼–¾"
Electric conduit EN 50086	Ø 16–32 mm
Multi-layer composite tubes	Ø 14–40 mm



German Quality Product

Tested by electrosuisse

REMS Curvo – wrinkle-free bending. Universal for many pipe types. Instant use without setting. Fast and creep speed operation for precise bending. Rapid change of bending and back formers.

Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Specially suited for tubes of pressfitting systems, for hard and half-hard copper tubes and for thin-walled copper heating tubes according to EN 1057.

System advantage

Only one type of bending and back formers for REMS Curvo and REMS Sinus. Therefore simple, inexpensive stocking. No confusion possible.

Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design

Compact, handy electric tool with integral absorbtion of torque during bending. Super light, drive unit only 8 kg. Can be used anywhere, anytime. No setting. Simple, effortless, fast working, e.g. 90° bends, Ø 22 mm in only 6 s. Fast and creep speed operation for precise bending. Crossover, swan-neck, U-bends possible. Height adjustable machine support as accessory.

Bending formers and back formers

Form and pressure resistant, in high-strength, high-slide, glass-fibre reinforced polyamide. Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale 0 to 180° provided on each bending former and mark on the back former ensure precise bending Rapid change of bending formers and back formers. Bending formers and back formers for different sizes, materials and bending radii, see page 117.

Drive

Robust, maintenance-free gear. Final point safety in both directions through safety slipping clutch. Proven, powerful universal motor, 1000 W. Right and left-hand rotation. Stepless electronic safety switch for rapid and creep speed operation.

Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and uniform bending. High-pressure-proof, acid-free. CFC-free, so ozone-harmless.



Ташев Галвинг ООД
www.tashev-galving.com



Basic-Pack

Supply format

REMS Curvo Set. Electric pipe and tube bender Ø 10–40 mm, Ø ¼–1⅝", up to 180°. Hard, half-hard and soft copper tubes, also thin-wall Ø 10–35 mm, Ø ⅜–1⅜", coated soft copper tubes, also thin-wall Ø 10–18 mm, pipes of the press fitting systems made of stainless steel Ø 12–28 mm, carbon steel, also coated Ø 12–28 mm, soft precision steel tubes Ø 10–28 mm, steel pipes EN 10255 Ø ¼–¾", electric conduit EN 50086 Ø 16–32 mm, multi-layer composite tubes Ø 14–40 mm and others. Drive unit with maintenance-free gear and safety slipping clutch, universal motor 230 V or 110 V, 50–60 Hz, 1000 W, stepless electronic safety switch, right and left-hand rotation, insert bolt. Bending formers and back formers. In sturdy steel case.

Description	Art.-No.	
Set 15-18-22	580026	
Set 15-18-22-28[1)]	580027	
Set 15-18-22-28[2)]	580035	
Set 12-15-18-22	580020	
Set 12-15-18-22-28[1)]	580033	
Set 15-22-28[1)]	580022	
Set 17-20-24	580023	
Set 12-14-16-18-22	580021	
Set 12-14-16-18-22-28[1)]	580031	
Set 14-16-18-22-28[1)]	580028	
Set ⅜-½-⅝-¾-⅞"	580024	
Set 16-20-26-32	580025	
Set 16-20-25-32	580034	
Set 20-25-32	580029	
Set 32-40	580030	
Basic-Pack (without bending and back formers)	580010	

REMS Curvo Set delivered with the smaller radius bending and back former (except Art.-No. 580029 and 580030), see page 117.

[1)] Bending former and back former 28, ¾, R102, Art.-No. 581070, see page 117.

[2)] Bending former and back former 28, ¾, R114, Art.-No. 581310, see page 117.



Accessories

Description	Art.-No.	
Bending formers and back formers see page 117.		
REMS Curvo drive unit	580000	
Insert bolt	582036	
REMS bending spray, 400 ml	140120	
Steel case with insert	586000	
Machine support 3B, height adjustable,on tripod	586100	
Machine support WB, height adjustable, for mounting on work bench	586150	





3B



WB

Ташев Галвинг ООД
www.tashev-galving.com

REMS Akku-Curvo

Cordless tube bender

Universal, compact electric tool for cold bending of pipes up to 180°. Can be used anywhere, without vice. For trade and industry. For the building site and the workshop.	
Hard, half-hard, soft copper tubes also thin-wall	Ø 10–28 mm Ø ⅜–1⅛"
Coated soft copper tubes, also thin-wall	Ø 10–18 mm
Pipes of press fitting systems made of stainless steel Carbon steel, also coated	 Ø 12–28 mm Ø 12–28 mm
Soft precision steel tubes	Ø 10–28 mm
Steel pipes EN 10255 (DIN 2440)	Ø ¼–½"
Electric conduit EN 50086	Ø 16–25 mm
Multi-layer composite tubes	Ø 14–32 mm



German Quality Product

REMS Akku-Curvo Li-Ion – wrinkle-free bending of pipes. Universal for many pipe types. Ready to use immediately without setting. Fast and creep speed with immediate stop for precise bending. Quick change of bending and back formers.

Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Mains independent. Specially suited for tubes of pressfitting systems, for hard and half-hard copper tubes and for thin-walled copper heating tubes according to EN 1057.

System advantage

Only one type of bending and back formers for REMS Akku-Curvo, REMS Curvo and REMS Sinus. Therefore simple, inexpensive stocking. No confusion possible.

Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design

Compact, handy electric tool with integral absorbtion of torque during bending. Super light, drive machine with battery pack weights only 8.6 kg. Electronic charging status check with low discharge protection. Proven D-shaped handle. Can be used anywhere, anytime. No setting. Simple, effortless, fast working, e.g. 90° bend Ø 22 mm only 7 s. Fast and creep speed with immediate stop for precise bending. Crossover, swan-neck, U-bends possible. Height adjustable machine support as accessory.

Bending formers and back formers

Form and pressure resistant, in high-strength, high-slide, glass-fibre reinforced polyamide. Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale 0 to 180° provided on each bending former and mark on the back former ensure precise bending Rapid change of bending formers and back formers. Bending formers and back formers for different sizes, materials and bending radii, see page 117.

Drive


Robust, maintenance-free gear. Final point safety in both directions through safety slipping clutch. Powerful battery motor 18 V, with large power reserve, 500 W output. Right and left-hand rotation. Stepless electronic safety switch for fast and creep speed, with immediate stop.

Li-Ion PLUS technology

Highly resistant Li-Ion 18 V battery with 3.2 Ah capacity, for long service life. Powerful and light. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger for short charging times.

Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and uniform bending. High-pressure-proof, acid-free. CFC-free, so ozone-harmless.

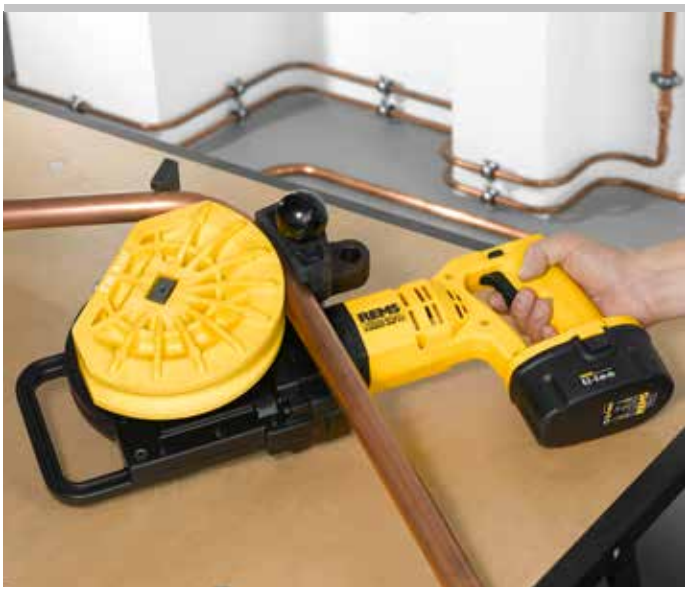

Ташев Галвинг ООД
www.tashev-galving.com

REMS Akku-Curvo

Cordless tube bender





Basic-Pack

Supply format

REMS Akku-Curvo Li-Ion Set. Cordless tube bender Ø 10–32 mm, Ø ¼–1⅛", to 180°. Hard, semi-hard, soft copper pipes, also thin-walled, Ø 10–28 mm, Ø ⅜–1⅛", soft jacketed copper pipes, also thin-walled, Ø 10–18 mm, pipes of the pressfitting systems made of stainless steel Ø 12–28 mm, carbon steel, also coated Ø 12–28 mm, soft precision steel pipes Ø 10–28 mm, steel pipes EN 10255 Ø ¼–½", electrical installation pipes EN 50086 Ø 16–25 mm, multi-layer composite tubes Ø 14–32 mm, among other things drive machine with D-shaped handle, maintenance-free gear with safely slipping clutch, powerful battery motor 18 V, stepless, electronic safety switch with immediate stop, right and left-hand rotation Battery Li-Ion 18 V, 3.2 Ah, rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 50 W. Insert bolt. Bending and back formers. In sturdy steel case.

Description	Art.-No.	
Set 15-18-22	580076	
Set 15-18-22-28[1)]	580077	
Set 15-18-22-28[2)]	580073	
Set 12-15-18-22	580070	
Set 12-15-18-22-28[1)]	580083	
Set 15-22-28[1)]	580072	
Set 12-14-16-18-22	580071	
Set 12-14-16-18-22-28[1)]	580081	
Set 14-16-18-22-28[1)]	580078	
Set ⅜-½-⅝-¾-⅞"	580074	
Set 16-20-26-32	580075	
Set 16-20-25-32	580084	
Set 20-25-32	580079	
Basic-Pack (without bending and back formers)	580012	

REMS Akku-Curvo Set delivered with the smaller radius bending and back former (except Art.-No. 580079), see page 117.

[1)] Bending former and back former 28, ¾, R102, Art.-No. 581070, see page 117.

[2)] Bending former and back former 28, ¾, R114, Art.-No. 581310, see page 117.





Accessories

Description	Art.-No.	
Bending formers and back formers see page 117.		
REMS Akku-Curvo Li-Ion drive unit, without battery	580002	
Battery Li-Ion 18 V, 3.2 Ah	565225	
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560	
Insert bolt	582036	
REMS bending spray, 400 ml	140120	
Steel case with inlay	586015	
Machine support 3B, height adjustable,on tripod	586100	
Machine support WB, height adjustable, for mounting on work bench	586150	





3B




WB

Ташев-Галвинг ООД
www.tashev-galving.com

REMS Sinus

Hand tube bender

Universal, robust hand tool for cold bending up to 180°. Can be used anywhere. For trade and industry. For the building site and the workshop.	
Hard, half-hard, soft copper tubes, also thin-wall	Ø 10 – 22 mm Ø ⅜ – ⅞"
Coated soft copper tubes, also thin-wall	Ø 10 – 18 mm
Pipes of press fitting systems made of stainless steel, carbon steel (coated) Carbon steel	Ø 12 – 18 mm Ø 12 – 22 mm
Soft precision steel tubes	Ø 10 – 20 mm
Electric conduit EN 50086	Ø 16 – 20 mm
Multi-layer composite tubes	Ø 14 – 32 mm

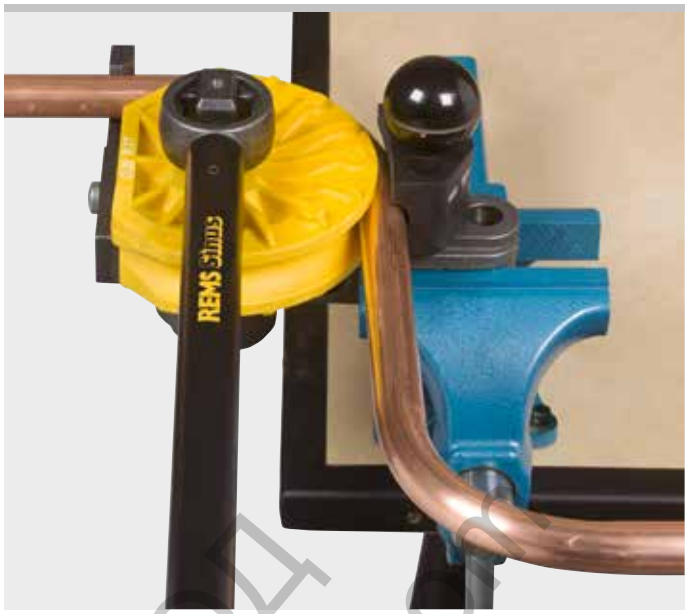



REMS Sinus – wrinkle-free bending. Universal for many tubes. Easy bending through long lever arms. Selectable lever positioning ensures optimum bending position and power transmission. Only one type of bending and back formers for REMS Sinus and REMS Curvo.

Universal use
For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Specially suited for tubes of pressfitting systems, for hard and half-hard copper tubes and for thin-walled copper heating tubes according to EN 1057.

System advantage
Only one type of bending and back formers for REMS Sinus and REMS Curvo. Therefore simple, inexpensive stocking. No confusion possible.

Cost advantage
Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design
Compact, handy unit of bender drive and bending tools. Can be used anywhere, in parallel vice or free hand as double-hand-bender. Easy bending through long lever arms. Selectable lever positioning ensures optimum bending position and power transmission. Robust design, bender drive in hardened steel for high stress conditions. Simple and rapid changing of bending and back formers. Crossover, swan-neck and U-bends possible.

Bending formers and back formers
For different pipe sizes, materials and bending radii, see page 117.

Bending lubricant
REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and for uniform bending. High-pressure-proof, acid-free. CFC-free, so ozone-harmless.

German Quality Product

Supply format

REMS Sinus Set. Hand tube bender Ø 10 – 32 mm, Ø ⅜ – ⅞", up to 180°. Hard, half-hard, soft copper tubes, also thin-wall Ø 10 – 22 mm, Ø ⅜ – ⅞", coated soft copper tubes, also thin-wall Ø 10 – 18 mm, pipes of the press fitting systems made of stainless steel, carbon steel (coated) Ø 12 – 18 mm, soft precision steel tubes Ø 10 – 22 mm, soft precision steel tubes, Ø 10 – 20 mm, electric conduit EN 50086, Ø 16 – 20 mm, multi-layer composite tubes Ø 14 – 32 mm and others. Bender drive, insert bolt. Bending formers and back formers. REMS bending spray. In sturdy steel case.

Description	Art.-No.	
Set 15-18-22	154001	
Set 14-16-18	154002	
Set 12-15-18-22	154003	
Set 10-12-14-16-18-22	154004	
Basic-Pack (without bending and back formers and bending spray)	154010	

REMS Sinus Set is delivered with bending formers and back formers of the smaller radius, see page 117.



Accessories

Description	Art.-No.	
Bending and back formers see page 117.		
Insert bolt	582036	
REMS Curvo drive unit	580000	
REMS Sinus bender drive	154000	
REMS bending spray, 400 ml	140120	
Steel case with inlay	154160	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Bending formers and back formers

Bending formers and back formers, 180°, form and pressure resistant, in high-strength, high-slide, glass-fibre reinforced polyamide 90° (Ø 35 R 100, Ø 42 R 140, Ø 50 R 135, Ø 1" R 100, Ø 1¼" R 140). Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers.





Bending former and back former for pipes Ø mm/inch O.D.	R mm	X mm	Cu				Cu-U				St 10217				St 10305-U				St 10305				St 10255				St 50086				V				Art.-No.
			REMS Sinus	REMS Curvo	REMS Akku-Curvo	REMS Curvo 50	REMS Sinus	REMS Curvo	REMS Akku-Curvo	REMS Curvo 50	REMS Sinus	REMS Curvo	REMS Akku-Curvo	REMS Curvo 50	REMS Sinus	REMS Curvo	REMS Akku-Curvo	REMS Curvo 50	REMS Sinus	REMS Curvo	REMS Akku-Curvo	REMS Curvo 50	REMS Sinus	REMS Curvo	REMS Akku-Curvo	REMS Curvo 50	REMS Sinus	REMS Curvo	REMS Akku-Curvo	REMS Curvo 50	REMS Sinus	REMS Curvo	REMS Akku-Curvo	REMS Curvo 50	
10	40	45	●	●	●	●[2]													●	●	●	●[2]													581400
12	45	49	●	●	●	●[2]					●	●	●	●[2]					●	●	●	●[2]													581410
14, 10 U, ¼ (DN 6)	50	53	●	●	●	●[2]	●	●	●	●[2]									●	●	●	●[2]		●	●	●[2]					●	●	●	●[2]	581420
15, 12 U	55	56	●	●	●	●[2]					●	●	●	●[2]	●	●	●	●[2]	●	●	●	●[2]													581430
16, 12 U	60	62	●	●	●	●[2]	●	●	●	●[2]									●	●	●	●[2]					●	●	●	●[2]	●	●	●	●[2]	581440
17, 15 U	56	60													●	●	●	●[2]													●	●	●	●[2]	581110
18, 14 U, 15 U, ⅜ (DN 10)	70	75	●	●	●	●[2]	●	●	●	●[2]	●	●	●	●[2]					●	●	●	●[2]		●	●	●[2]					●	●	●	●[2]	581450
20, 16 U, 18 U	75	80	●	●	●	●[2]	●	●	●	●[2]					●	●	●	●[2]									●	●	●	●[2]	●	●	●	●[2]	581080
22, 18 U, ½ (DN 15)	77	81	●	●	●	●[2]	●	●	●	●[2]		●	●	●[2]					●	●	●	●[2]		●	●	●[2]									581460
22, 18 U, ½ (DN 15)	88	91	●	●	●	●[2]	●	●	●	●[2]		●	●	●[2]					●	●	●	●[2]													581470
24, 22 U	75	85		●	●	●[2]										●	●	●[2]																	581130
25	98	103		●	●	●[2]														●	●	●[2]						●	●	●[2]	●	●	●	●[2]	581180
26	98	108																		●	●	●[2]									●	●	●	●[2]	581270
28, ¾ (DN 20)	102[1]	108		●	●	●[2]						●	●	●[2]										●		●[2]									581070
28, ¾ (DN 20)	102	110										●	●	●[2]						●	●	●[2]		●		●[2]									581260
28, ¾ (DN 20)	114	120		●	●	●[2]						●	●	●[2]						●	●	●[2]		●		●[2]									581310
30, 28 U	98[1]	105		●		●[2]										●	●	●[2]																	581150
32	98	110																													●	●	●	●[2]	581280
32	114	121		●		●[2]																						●		●		●	●	●[2]	581320
35	100	105				●[3]								●[3]								●[3]													581500
35	140	150		●		●[2]																													581350
40	140	148																														●		●[2]	581330
42	140	155				●[3]								●[3]								●[3]													581510
50	135	143																																●[3]	581540
⅜" (9,5 mm)	43	48	●	●	●	●[2]																													581200
½" (12,7 mm)	52	60	●	●	●	●[2]																													581210
⅝" (15,9 mm)	63	70	●	●	●	●[2]																													581220
¾" (19,1 mm)	75	82	●	●	●	●[2]																													581230
⅞" (22,2 mm)	98	107	●	●	●	●[2]																													581240
1" (33,7 mm)	100	105																				●[3]													581520
1" (25,4 mm)	101	112		●	●	●[2]																													581370
1⅛" (28,6 mm)	102	110		●	●	●[2]						●	●	●[2]						●	●	●[2]		●		●[2]									581260
1⅛" (28,6 mm)	115	117		●	●	●[2]																													581380
1¼" (31,8 mm)	114	123		●		●[2]																													581320
1¼" (31,8 mm)	133	145		●		●[2]																													581390
1¼" (42,4 mm)	140	150																				●[3]													581530
1⅜" (34,9 mm)	140	150		●		●[2]																													581350

R mm	Bending radius mm at the neutral axis of the bend (DVGW GW 392)
X mm	Correction dimension mm
[1]	According to DVGW work sheet GW 392 minimum bending radius of 114 mm required for copper tubes Ø 28 mm. Wall thickness ≥ 0,9 mm
[2]	Adaptor block 10–40, support 10–40 (Art.-No. 582120) necessary.
[3]	Adaptor block 35–50, support 35–50 (Art.-No. 582110) necessary.
Cu:	hard, half-hard, soft copper tubes, also thin-wall, EN 1057
St 10217:	stainless steel pipes of the pressfitting systems EN 10217-7 (DIN 2463)
St 10305-U:	coated carbon steel pipes of the pressfitting systems EN 10305-3 (DIN 2394)
St 10305:	soft precision steel pipes EN 10305-1, EN 10305-2, EN 10305-3 (DIN 2391–2394), carbon steel pipes EN 10305-3 (DIN 2394)
St 10255:	Steel pipes (threaded pipes) EN 10255 (DIN 2440)
St 50086:	Electrical installation pipes DIN EN 50086
U:	coated
V:	multi-layer composite tubes of pressfitting systems

Bending to size
If a bend is required at a certain point on the pipe, a length correction must be made to suit the pipe size. For a 90° bend, the correction dimension X given in Fig. 1 must be taken into account. The set dimension L must be reduced by the amount X here. If, e.g., the dimension L for pipe size 22 is 400 mm and a bend with a bending radius of 77 mm is to be made, the dimension line should be marked on the pipe at 319 mm. This line is then – as shown in Fig. 1 – to be aligned with the 0-mark on the bending former.

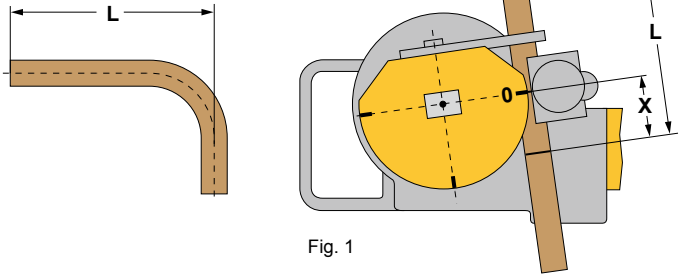


Fig. 1


Ташев Галвинг ООД
www.tashev-galving.com



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Radial Press Jointing

	Cordless radial press Mini	121
	Pressing tongs Mini	122
	Cropping tongs Mini	135
	Manual radial press	136
	Electric radial press	137
	Electro-hydraulic radial presses	138
	Cordless radial presses	140
	Pressing tongs / pressing rings	142
BTGA suissetec VDKF	Hold-Harmless and Indemnification Agreement	160
	Cropping tongs	161
	Cable shears	161

Ташев-Галвинг ООД
www.tashev-galving.com



2.6 million!

REMS will have produced more than 2.6 million pressing tongs by the end of 2013. This success confirms the leading role of REMS in press-jointing technology.

Ташев Галвинг ООД
www.tashev-galving.com

REMS Mini-Press ACC

Cordless radial press with automatic circuit control

Universal, super handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints	Ø 10–40 mm Ø ⅜–1¼

Complete range of REMS pressing tongs Mini for all common pressfitting systems, see page 122–134.

REMS Mini-Press ACC Li-Ion – universal up to Ø 40 mm. Super light, super small, super handy. With automatic circuit control. Secure crimping in seconds. Automatic locking of the pressing tongs.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs Mini for all common pressfitting systems (page 122–134). High-compression pressing tongs in forged and specially hardened steel. Pressing contours of REMS pressing tongs are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing.

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection **(Patent EP 1 952 948).**

Design

Super light, super small, super handy. Drive unit with battery only 2.4 kg. Drive unit with pressing tongs under 34 cm. Works anywhere, free-hand, overhead, also in particularly tight areas. Optimum weight distribution for single-hand operation. Ergonomically designed housing. Integrated LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs by automatic locking. For battery and corded operation. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Powerful electro-hydraulic drive with powerful battery motor 14,4 V, 420 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 1.6 or 3.2 Ah capacity for long service life. Powerful and light. Li-Ion 14.4 V, 3.2 Ah battery for approx. 330 pressings Viega Profipress DN 15 per battery charge. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V voltage supply for mains operation instead of Li-Ion battery 14.4 V, as accessory.



Patent EP 1 952 948

with automatic circuit control and charging status check





German Quality Product

Tested by electrosuisse

LED



Supply format

REMS Mini-Press ACC Li-Ion Basic-Pack. Cordless radial press with automatic circuit control for producing pipe pressing joints Ø 10–40 mm, Ø ⅜–1¼". For operating with REMS pressing tongs Mini. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14,4 V, 420 W, obust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, Safety tip switch. Integrated LED work light. Battery Li-Ion 14,4 V, 1,6 Ah, rapid charger Li-Ion/Ni-Cd 230 V or 110 V, 50–60 Hz, 65 W. In sturdy steel case.

	Art.-No.	
	578012	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS pressing tongs Mini see page 122–134.		
REMS cropping tongs Mini for threaded rods see page 135.		
REMS Mini-Press ACC Li-Ion drive unit, without battery	578001	
Battery Li-Ion 14.4 V, 1.6 Ah	571545	
Battery Li-Ion 14.4 V, 3.2 Ah	571555	
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560	
Voltage supply Li-Ion 230 V for mains operation instead of battery Li-Ion 14.4 V.	571565	
Steel case with inlay	578290	
REMS cordless LED lamp see page 97	175200	



Ташев Галвинг ООД
www.tashev-galving.com

for all common pressfitting systems

German Quality Product

Patent EP 1 952 948



REMS pressing tongs Mini/ REMS pressing rings

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection **(Patent EP 1 952 948)**.

High-compression pressing tongs/pressing rings in forged and specially hardened steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Hence far closer tolerances compared to as cast pressing contour.

Drive through REMS Mini-Press ACC drive unit. Read and follow the installation and assembly instructions of the system provider/ manufacturer.

Select pressing tongs Mini/ pressing rings yourself!

Search for the required pressfitting system in the opposite table and select the correct pressing tongs size/pressing rings size. Please note that pressfitting systems for gas installation may only be pressed with the REMS pressing tongs Mini/pressing rings which are highlighted in yellow in the table.

Traceability according to EN 1775:2007

REMS pressing tongs Mini with pressing contour M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.



Example REMS pressing tongs Mini V: "V" imprint on pressed fitting for traceability according to EN 1775:2007

Hold-Harmless and Indemnification Agreement

See page 160.

Confirmation of suitability

See page 159.

ZVSHK


BTGA

suissetec

VDKF

Pressing contours

ACz
B
F
G
H
HA
HE
K
KI
M
MT
RFz
RN
SA
TH
U
UP
US
V
VAU
VIC
VP
VRX
VX
VUS

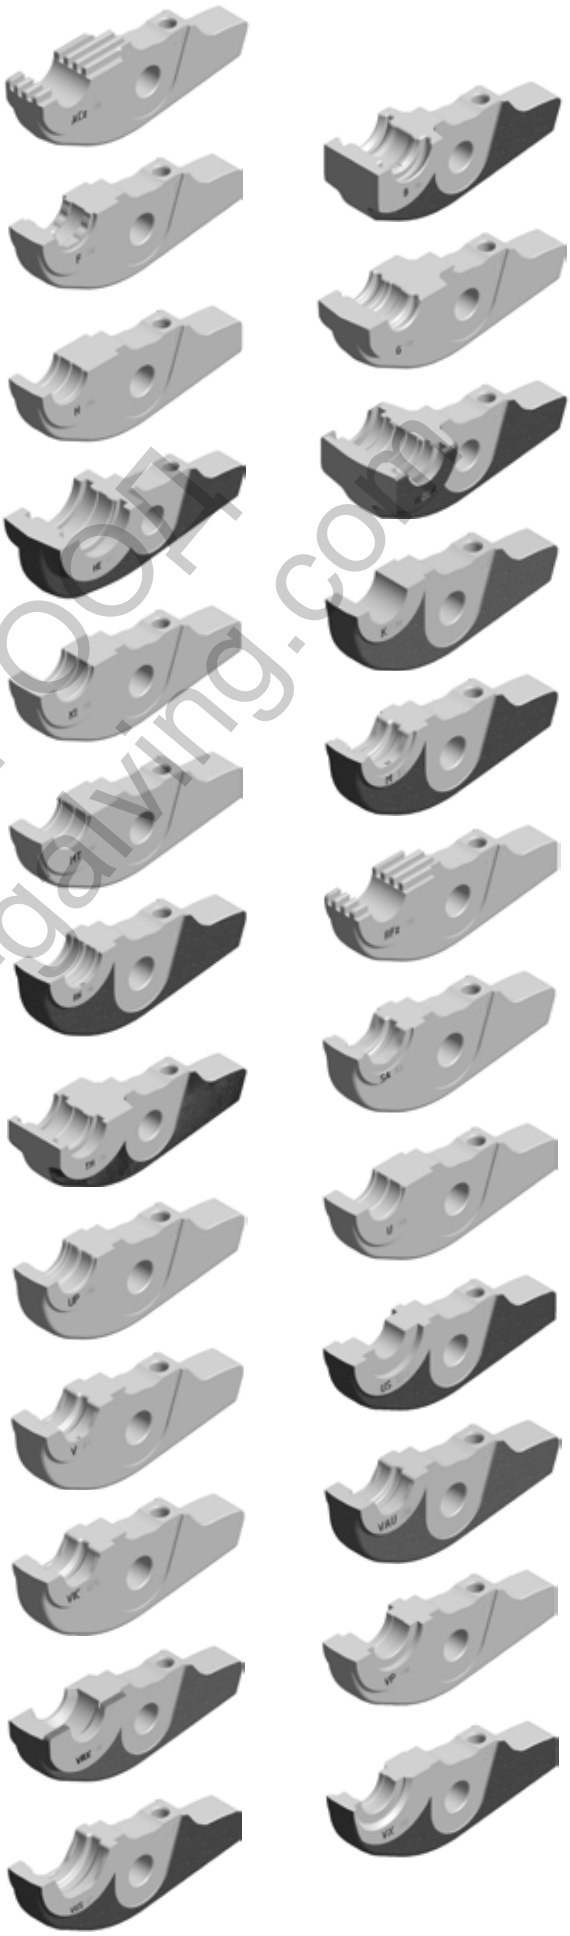

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
AC-FIX PRESS (Global Piping Systems)	H 12	578396
	H 16	578400
	H 20	578406
	H 25	578408
	H 32	578412
	RFz 12	578490
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	VX 16	578552
	VX 20	578554
AC-FIX PRESS-MULTI (Global Piping Systems)	H 16	578400
	H 18	578404
	H 20	578406
	H 25	578408
	H 32	578412
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
ACOME MT	ACz 12	578608
	ACz 16	578610
	ACz 20	578612
	ACz 25	578614
AHLSELL A-press elförzinkad	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
AHLSELL A-press koppar	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
AHLSELL A-press rostfritt	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
AIRBEL PRESSCLIM	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
AIRBEL SERTINOX	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
ALB Sistema Multicapa	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 18	578376
	U 20	578378
	C 26	578392
	U 32	578382
APE Raccordi a pressare	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 40	578386

System	Pressing contour	Art.-No.
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US ⅜"	578534
	US ½"	578536
	US ¾"	578538
	US 1"	578540
Bampi BALPEX (serie MP)	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
Bampi BALPEX Gas	TH 16	578352
	TH 20	578358
	TH 26	578362
BEGETUBE/ IVAR	B 14	578466
	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476
BRASELI Pressfitting PE-X	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
BRASELI Pressfitting Multicapa	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Brass Form Press Form Pex	H 16	578400
	H 18	578404
	H 20	578406
	TH 16	578352
	TH 18	578356
	TH 20	578358
	U 16	578374
	U 18	578376
	U 20	578378
Brass Form Press Form Pex-Al-Pex	H 16	578400
	H 18	578404
	H 20	578406
	TH 16	578352
	TH 18	578356
	TH 20	578358
	U 16	578374
	U 18	578376
	U 20	578378
Brass & Fittings Pressman Multicapa	RFz 16	578492
	RFz 18	578638
	ACz 20	578612
	RFz 25	578496
	RFz 32	578498
Brass & Fittings Retipress	RFz 16	578492
	RFz 18	578638
	ACz 20	578612
	RFz 25	578496
	RFz 32	578498
BRASSTECH MULTItermoSAN Brasspress	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 18	578376
	U 20	578378
Business Key MT-PRESS (inox)	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
Cello Products <B>Press	VUS ½"	578566
	VUS ¾"	578568
	VUS 1"	578570
	VUS 1¼"	578606

System	Pressing contour	Art.-No.
CIMBERIO SpA Cim 220	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
CIMBERIO SpA Cim 1220.1	VUS ½"	578566
	VUS ¾"	578568
	VUS 1"	578570
	VUS 1¼"	578606
CIMBERIO SpA Cim 220G	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
CIMBERIO SpA Cim 1220M	SA 15	578514
	SA 22	578520
	SA 28	578522
	M 15	578312
	M 22	578316
	M 28	578318
	M 35	578390
CIMBERIO SpA CIM 1220V	SA 15	578514
	SA 22	578520
	SA 28	578522
	V 15	578328
	V 22	578334
	V 28	578336
	V 35	578604
Climatek Clima Therm	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
ClouSet Press	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
Comap Sudopress Cu Visu-Control	V 12	578324
	V 14	578326
	V 15	578328
	V 16	578330
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
Comap Sudopress Cu Visu-Control Gas	V 12	578324
	V 14	578326
	V 15	578328
	V 16	578330
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
Comap Sudopress Cu Visu-Control Solar	V 12	578324
	V 14	578326
	V 15	578328
	V 16	578330
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.
Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For taking suitable pressing inserts.

[3] An adapter tong is required for driving pressing rings (PR), see page 134.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website:
www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
Comap	RFz 12	578490
PEXPress	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
Comap	TH 14	578348
SKINPress	TH 16	578352
Visu-Control	TH 18	578356
	TH 20	578358
	TH 26	578362
	THL 32	578368
	TH 40	578624
Comap	TH 16	578352
SKINPress	TH 18	578356
Visu-Control Gas	TH 20	578358
	TH 26	578362
	THL 32	578368
COMISA	TH 14	578348
Press System	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	B 14	578466
	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476
COMISA	TH 16	578352
Press System Gas	TH 20	578358
	TH 26	578362
	TH 32	578364
CONEL	F 16	578456
CONNECT	F 20	578460
MULTI	F 26	578462
	F 32	578464
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
(NW 26)	U 25	578380
	U 32	578382
	VP 16	578482
	VP 20	578484
	VP 32	578488
Danfoss	U 16	578374
SpeedUp	U 20	578378
FH Composite AL		
Danfoss	U 16	578374
Basic	U 20	578378
FH Composite AL		
DIWAflex systems	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
DUOFIL	U 16	578374
MKSYSTEM	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
DW Verbundrohr	U 16	578374
multitubo systems	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
EBRILLE	U 16	578374
Isomonflex	U 18	578376
	U 20	578378
	U 25	578380
	H 26	578410
	TH 26	578362
	U 32	578382

System	Pressing contour	Art.-No.
EBRILLE	U 14	578372
Monflex	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	H 26	578410
	TH 26	578362
	U 32	578382
	U 40	578386
egeda Comisa	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
egeda Baronio	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Elkhart	VUS ½"	578566
APOLLOXPRESS	VUS ¾"	578568
Fittings Copper	VUS 1"	578570
and Low-Lead	VUS 1¼"	578606
Brass		
EMMETI	B 16	578468
GERPEX-	B 20	578472
FIVPRESS	B 26	578474
	B 32	578476
	F 16	578456
	F 20	578460
	H 16	578400
	H 20	578406
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 20	578378
EMPUR	TH 14	578348
	TH 15	578350
	TH 16	578352
	TH 17	578354
	TH 20	578358
	TH 25	578360
EURACCORDI	M 15	578312
SYCPRESS	M 18	578314
STAINLESS	M 22	578316
STEEL PRESS	M 28	578318
FITTINGS	M 35	578390
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
EURACCORDI	M 15	578312
SYCPRESS	M 18	578314
CARBON STEEL	M 22	578316
PRESS FITTINGS	M 28	578318
	M 35	578390
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
EUROTUBI	M 12	578310
Europa C-STAHL	M 15	578312
PRESSFITTING	M 18	578314
SISTEM[1]	M 22	578316
	M 28	578318
EUROTUBI	M 15	578312
Europa INOX	M 18	578314
PRESSFITTING	M 22	578316
SISTEM[1]	M 28	578318

System	Pressing contour	Art.-No.
FAR Rubinetterie	TH 14	578348
PRESSFAR	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
F.B.Q. BARONIO	V 12	578324
BQ press	V 14	578326
	V 15	578328
	V 16	578330
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
F.B.Q. BARONIO	V 15	578328
BQ press	V 18	578332
carbon steel	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
F.B.Q. BARONIO	V 15	578328
BQ press gas	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
FELSINEA TECH	TH 14	578348
Felsineapress	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
Fercofloor	RFz 16	578492
DUO Press	RFz 20	578494
FERCO PEX	RFz 25	578496
	RFz 32	578498
Fercofloor	RFz 16	578492
DUO Press	RFz 20	578494
MULTIFER	RFz 25	578496
	RFz 32	578498
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
FILTUBE	M 15	578312
Instalpress	M 18	578314
Carbon Steel	M 22	578316
	M 28	578318
	M 35	578390
FILTUBE	M 15	578312
Instalpress	M 18	578314
Copper	M 22	578316
	M 28	578318
	M 35	578390
FILTUBE	M 15	578312
Instalpress	M 18	578314
Inox	M 22	578316
	M 28	578318
	M 35	578390
Fittings Estándar	RFz 16	578492
ECO-PRESS	RFz 20	578494
	RFz 25	578496
	RFz 32	578498

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
Fittings Estándar MULTICAPA	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
Fittings Estándar PE-X	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
FOHS HEIZTECHNIK FOHSPRESS	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
FORNARA ForPress	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 32	578382
FRABO FRABOPRESS RAME (Cu)	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
FRABO FRABOPRESS RAME (Cu)	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
FRABO FRABOPRESS INOX 316	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
FRABO FRABOPRESS C-STEEL	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
FRABO FRABOPRESS C-STEEL GAS	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
FRABO FRABOPRESS MULTI-BRASS (MB)	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
FRABO FRABOPRESS MULTI-PLUS (MP)	H 16	578400
	H 20	578406
	U 16	578374
	U 20	578378
FRABO SOLARPRESS	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336

System	Pressing contour	Art.-No.
Fränkische alpex-duo	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 18	578458
	F 20	578460
	F 26	578462
	F 32	578464
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
Fränkische alpex F50 PROFI	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
(NW 26)	U 25	578380
	U 32	578382
	VP 16	578482
	VP 20	578484
	VP 32	578488
Fränkische alpex-gas	F 20	578460
	F 26	578462
	F 32	578464
Fränkische alpex L	F 40	578478
gabotherm H+S	TH 10	578342
	TH 12	578346
	TH 14	578348
	TH 15	578350
	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
GAROS	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
Geberit Mapress C-STAHL	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
Geberit Mapress EDELSTAHL	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530

System	Pressing contour	Art.-No.
Geberit Mapress EDELSTAHL Gas	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
Geberit Mapress KUPFER	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
Geberit Mapress KUPFER Gas	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
Geberit Mepla	G 16	578444
	G 20	578446
	G 26	578448
	G 32	578450
	G 40	578452
General Fittings Serie 5G00 Trident	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	U 32	578382
General Fittings Serie 5S00	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	H 16	578400
	H 18	578404
	H 20	578406
	H 25	578408
	H 26	578410
	H 32	578412
	U 16	578374
	U 18	578376
	U 20	578378
	U 32	578382
	U 40	578386
	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476
Giacomini Raccordi RM Giacomini	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	THL 32	578368
	U 16	578374
	U 20	578378
	U 32	578382
	U 40	578386

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.
Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For taking suitable pressing inserts.

[3] An adapter tong is required for driving pressing rings (PR), see page 134.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website:
www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
Giacomini	V 15	578328
Valvole Giacomini	V 18	578332
serie R850V	V 22	578334
	V 28	578336
	V 35	578604
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
Ginde Press	U 16	578374
Fitting for Ginde	U 20	578378
Multi-layer Pipe	U 25	578380
System	U 32	578382
Global Plastic	TH 16	578352
Rothapress	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 32	578364
	TH 40	578624
GLOBAL	U 16	578374
TRADE	U 20	578378
aqualpress	U 25	578380
system	U 32	578382
Golan Pipe	U 16	578374
Systems	U 20	578378
(Scandinavia)	U 25	578380
Alu-Pres	U 32	578382
GS	TH 14	578348
Wärmesysteme	TH 16	578352
System TH	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
GS	V 15	578328
Wärmesysteme	V 18	578332
System V	V 22	578334
	V 28	578336
	V 35	578604
GSP Group	TH 16	578352
USMetrix	TH 20	578358
HAGOS	TH 16	578352
HakaGerodur	TH 10	578342
HakaGerodur-	TH 11,6	578344
System	TH 12	578346
	TH 14	578348
	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 25	578360
HakaGerodur	TH 16	578352
HAKASAN	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
Harden 2000	TH 14	578348
Poly-Pex 2000	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 26	578362
	THL 32	578368
	TH 40	578624
Harden 2000	TH 16	578352
Poly-Pex Gas	TH 20	578358
	TH 26	578362
	THL 32	578368
Harden 2000	TH 14	578348
Plastic-Press	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
HASTINIK	M 15	578312
Hastinik/Hitpress	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390

System	Pressing contour	Art.-No.
heima-press	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
HELIROMA	U 16	578374
klimapress	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
HELIROMA	RFz 16	578492
romapress	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
Henco	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
Henco Gas	TH 16	578352
	TH 20	578358
	TH 26	578362
herotec	TH 14	578348
Tempuss-press	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
herotec	H 16	578400
Tempuss-press	H 20	578406
Plus	H 25	578408
	H 32	578412
	MT 20	578560
	MT 25	578562
	MT 32	578564
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Herz pipefix	TH 10	578342
	TH 14	578348
	TH 15	578350
	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
HITEC Sistema	TH 14	578348
Multistrato	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
Hydro-Air	US ⅜"	578534
Systems	US ½"	578536
Hydro-Plumb	US ¾"	578538
Plus PEX	US 1"	578540
Hydro-Air	U 16 (½")	578374
Systems	U 20 (⅝")	578378
Hydro-Flex	U 25 (¾")	578380
PEX-AL-PEX	U 32 (1")	578382
IBP >B< Flex	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386

System	Pressing contour	Art.-No.
IBP >B< Press	V 12	578324
	V 14	578326
	V 15	578328
	V 16	578330
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
IBP >B< Press	V 12	578324
Carbon	V 14	578326
	V 15	578328
	V 16	578330
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
IBP >B< Press	V 15	578328
Gas	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
IBP >B< Press	V 15	578328
Inox	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
IBP >B< Press	V 15	578328
Solar	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Idrosanitaria	TH 16	578352
Bonomi	TH 20	578358
Homegas	TH 26	578362
Idrosanitaria	TH 16	578352
Bonomi	TH 18	578356
Idropress	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
IDROSISTEMI	TH 16	578352
Ta-Press	TH 20	578358
	TH 26	578362
	TH 32	578364
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	U 32	578382
	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
IPA IPANA-Press	TH 10	578342
	TH 11,6	578344
	TH 12	578346
	TH 14	578348
	TH 15	578350
	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 22	578588
	TH 25	578360
	TH 26	578362
	TH 28	578590
	TH 32	578364
	TH 40	578624
IPALPEX (Industrie du Plastique et Accessoires)	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	THL 32	578368
	TH 40	578624
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	K16/P18	578592
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	K16/P18	578592
	K/20	578594
	K/25	578596
	K32	578598
	K1/40	578600
IPLEX PIPELINES AUSTRALIA Iplex K2	K16/P18	578592
	K/20	578594
	K/25	578596
ISOTUBI NUMEPRESS	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
IVAR ALPEX-GAS	B 20	578472
	B 26	578474
	B 32	578476
IVAR Ivar-Press	B 14	578466
	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476
IVAR MULTI PRESS GAS	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
IVAR Multi Press MP	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	F 16	578456
	F 18	578458
	F 20	578460
	F 26	578462
	F 32	578464
	H 16	578400
	H 18	578404
	H 20	578406
	H 25	578408
	H 26	578410
	H 32	578412
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	C 26	578392
	U 32	578382
	U 40	578386
	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476

System	Pressing contour	Art.-No.
IVAR Plastic Multi Press PMP	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	H 16	578400
	H 20	578406
	H 25	578408
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	U 25	578380
	C 26	578392
	U 32	578382
	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
Jäger aquapress H	H 14	578398
	H 16	578400
	H 17	578402
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 40	578386
Jäger Niropress Typ M	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
Jaraflex-Presssystem	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
KAN KAN-therm	U 16	578374
	U 20	578378
	U 25	578380
	C 26	578392
	U 32	578382
	U 40	578386
KAN KAN-therm LBP	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 14	578372
	U 16	578374
	U 20	578378
	U 25	578380
	C 26	578392
	U 32	578382
	U 40	578386
KAN KAN-therm Inox	M 15	578312
	M 18[1)]	578314
	M 22	578316
	M 28[1)]	578318
KAN KAN-therm Steel	M 15	578312
	M 18[1)]	578314
	M 22	578316
	M 28[1)]	578318
KE KELIT KELIT KELOX	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386

System	Pressing contour	Art.-No.
KE KELIT steelFIX C-Stahl	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
KE KELIT steelFIX Edelstahl	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
KEMBLA KemPress (AUS)	VAU 15 (OD 12,7 mm)	578630
	VAU 20 (OD 19,1 mm)	578632
	VAU 25 (OD 25,4 mm)	578634
	VAU 32 (OD 31,8 mm)	578636
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm)	578630
	VAU 20 (OD 19,1 mm)	578632
	VAU 25 (OD 25,4 mm)	578634
	VAU 32 (OD 31,8 mm)	578636
KISAN Kisan KD	KI 16	578524
	KI 20	578526
	KI 25	578528
	TH 16	578352
	TH 20	578358
	TH 25	578360
KISAN Kisan WL	KI 16	578524
	KI 20	578526
	KI 25	578528
	KI 32	578530
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
KISAN Kisan WM	KI 16	578524
	KI 20	578526
	KI 25	578528
	KI 32	578530
KISAN Kisan WR	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
KISAN Kistal C	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B)[3)]	574522
	M 18 45° (PR-2B)[3)]	574524
	M 22 45° (PR-2B)[3)]	574526
	M 28 45° (PR-2B)[3)]	574528
	M 35 45° (PR-2B)[3)]	574530
KISAN Kistal Inox	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B)[3)]	574522
	M 18 45° (PR-2B)[3)]	574524
	M 22 45° (PR-2B)[3)]	574526
	M 28 45° (PR-2B)[3)]	574528
	M 35 45° (PR-2B)[3)]	574530
KME Q-tec	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
Largo-Presssystem	TH 12	578346
	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
LECHAR ALCOBRAPEX	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
LECHAR COBRAPEX	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
LEGEND-PRESS press fitting system	VUS ½"	578566
	VUS ¾"	578568
	VUS 1"	578570
	VUS 1¼"	578606

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.
Observe the national regulations.

[1)] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2)] For taking suitable pressing inserts.

[3)] An adapter tong is required for driving pressing rings (PR), see page 134.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
LK Systems	V 12	578324
LK >B<Press	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
LK Systems	V 12	578324
LK >B<Press	V 15	578328
Elförzinkat	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
LK Systems	V 15	578328
LK >B<Press	V 18	578332
Gas	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
LK Systems	TH 16	578352
LK Universal	TH 20	578358
	TH 25	578360
	TH 32	578364
	TH 40	578624
LVI-DAHL	U 16	578374
Altech-Alupex	U 20	578378
	U 25	578380
	U 32	578382
Mair Heiztechnik	M 12	578310
Gomafix Cu/E[1]	M 15	578312
	M 18	578314
	M 22	578316
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
Mair Heiztechnik	H 11,5	578394
Gomafix M	H 14	578398
	H 16	578400
	H 20	578406
Mair Heiztechnik	H 11,5	578394
M-Press	H 14	578398
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
Ma.s.ter System	TH 14	578348
PRESSMASTER	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386

System	Pressing contour	Art.-No.
MAXITUB	RFz 12	578490
MAXIPRESS	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
MAXITUB	TH 14	578348
METALPEX	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
MEGARO	H 11,5	578394
HAKAPRESS	H 14	578398
	H 16	578400
	H 17	578402
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
MEGARO	B 16	578468
MEGAPRESS	B 20	578472
	B 26	578474
	B 32	578476
	F 40	578478
MEGARO	TH 16	578352
MEGAPRESS MP	TH 20	578358
	TH 26	578362
	TH 32	578364
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	F 40	578478
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	U 32	578382
	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
MEGARO	TH 16	578352
MEGAPRESS	TH 20	578358
MPL	TH 26	578362
	TH 32	578364
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	F 40	578478
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	U 32	578382
	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
METALGRUP	RFz 16	578492
PexGrup	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
METALGRUP	U 16	578374
MultiGrup	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
MULTITHERM	TH 16	578352
PRESSSYSTEM	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624

System	Pressing contour	Art.-No.
Multicapas	U 16	578374
Industrial	U 18	578376
multitubo systems	MT 20	578560
MC	MT 25	578562
	MT 32	578564
	U 40	578386
Multicapas	U 16	578374
Industrial	MT 20	578560
multitubo systems	MT 25	578562
MM	MT 32	578564
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	H 16	578400
	H 20	578406
	H 25	578408
	H 26	578410
	H 32	578412
NEUTHERM	H 16	578400
MEKUPRESS-HT	H 20	578406
	H 26	578410
	H 32	578412
NIBCO (POL)	H 16	578400
NEXT-Heat	H 20	578406
	H 25	578408
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
NIBCO (USA)	VUS ½"	578566
Press System	VUS ¾"	578568
Copper	VUS 1"	578570
	VUS 1¼"	578606
Nicoll Fluxo	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
Nicoll Fluxo Gas	TH 16	578352
	TH 20	578358
	TH 26	578362
NIROTEC	M 15	578312
PRESSFITTING	M 18	578314
	M 22	578316
	M 28	578318
N.T.M.	TH 14	578348
WINNY-AL	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
NUPIGECO	U 14	578372
Multinupi	U 16	578374
	U 18	578376
	U 20	578378
	C 26	578392
	U 32	578382
	U 40	578386

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
Nussbaum	V 12	578324
Cupress	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
Nussbaum	VP 16	578482
Optiflex Press	VP 20	578484
	VP 25	578486
	VP 32	578488
Nussbaum	V 15	578328
Optipress	V 18	578332
Aquaplus	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Nussbaum	V 15	578328
Optipress Gaz	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Nussbaum	V 15	578328
Optipress-Therm	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
O.M.T.	H 16	578400
Heizungssystem	H 20	578406
	H 26	578410
	H 32	578412
Oteraccordi	M 12	578310
Oter Tecno[1]	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
Oteraccordi	M 12	578310
Oter Tecno	M 15	578312
carbonio[1]	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
Oventrop Cofit P	H 16 A	578420
	H 20 A	578426
	H 26 A	578430
	H 32 A	578432
PB TUB	RFz 12	578490
SERTIPRESS	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
Pegler Yorkshire	M 15	578312
XPress Carbon	M 18[1]	578314
	M 22	578316
	M 28[1]	578318
	M 35	578390

System	Pressing contour	Art.-No.
Pegler Yorkshire	M 12	578310
XPress Copper	M 15	578312
	M 18[1]	578314
	M 22	578316
	M 28[1]	578318
	M 35	578390
Pegler Yorkshire	M 15	578312
XPress Copper	M 18[1]	578314
Gas	M 22	578316
	M 28[1]	578318
	M 35	578390
Pegler Yorkshire	TH 14	578348
Henco Multilayer	TH 16	578352
Solutions	TH 18	578356
	TH 20	578358
	TH 26	578362
Pegler Yorkshire	M 15	578312
XPress Solar	M 18[1]	578314
	M 22	578316
	M 28[1]	578318
	M 35	578390
Pegler Yorkshire	M 15	578312
XPress	M 18[1]	578314
Stainless	M 22	578316
	M 28[1]	578318
	M 35	578390
PERFEXIM	U 16	578374
"PERFEKT	U 20	578378
SYSTEM"	U 25	578380
	U 32	578382
PERFILTUBO	U 16	578374
PERFILALUPEX	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
PERFILTUBO	M 15	578312
PERFILPRESS	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
PEXTUBE	RFz 16	578492
PexTube	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
PIPELIFE	M 15	578312
C-PRESS	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
PIPELIFE-	TH 16	578352
RADOPRESS	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
PLASTICA ALFA	H 16	578400
Multypex	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382
PLASTICA ALFA	H 16	578400
Multypex	H 20	578406
Air	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382
PLASTICA ALFA	H 16	578400
Multypexalfa Gas	H 20	578406
	H 26	578410
PLASTICA ALFA	H 16	578400
Multypexalfa Gas	H 20	578406
protek	H 26	578410

System	Pressing contour	Art.-No.
PLASTICA ALFA	H 16	578400
Multypex	H 20	578406
Plus	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382
PLASTICA ALFA	H 16	578400
Multypex	H 20	578406
Thermo	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382
PLASTICA ALFA	H 16	578400
Multypex	H 20	578406
Thermo Plus	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382
PLÁSTICOS	RFz 16	578492
FERRO	RFz 20	578494
FERROPLAST	RFz 25	578496
Pressfitting PE-X	RFz 32	578498
PLOMYPLAS	RFz 16	578492
plomyPRESS	RFz 20	578494
plomyAIR	RFz 25	578496
	RFz 32	578498
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
PLOMYPLAS	TH 16	578352
plomyPRESS	TH 20	578358
plomyGAS	TH 25	578360
	TH 32	578364
PLOMYPLAS	RFz 16	578492
plomyPRESS	RFz 20	578494
plomyLAYER	RFz 25	578496
	RFz 32	578498
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
PLOMYPLAS	RFz 16	578492
plomyPRESS	RFz 20	578494
plomyLAYER PEX	RFz 25	578496
	RFz 32	578498
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
PLOMYPLAS	RFz 16	578492
plomyPRESS	RFz 20	578494
plomyPERT EVAL	RFz 25	578496
	RFz 32	578498
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.
Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For taking suitable pressing inserts.

[3] An adapter tong is required for driving pressing rings (PR), see page 134.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website:
www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
PLOMYPLAS	RFz 16	578492
plomyPRESS	RFz 20	578494
plomyPEX	RFz 25	578496
	RFz 32	578498
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
PLOMYPLAS	RFz 16	578492
plomyPRESS	RFz 20	578494
plomyPEX EVAL	RFz 25	578496
	RFz 32	578498
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
PLUMBING PLUS	VAU 15 (OD 12,7 mm)	578630
PRESS PLUS	VAU 20 (OD 19,1 mm)	578632
(AUS)	VAU 25 (OD 25,4 mm)	578634
	VAU 32 (OD 31,8 mm)	578636
POLYPIPE	F 16	578456
POLYPRESS	F 20	578460
	F 26	578462
	F 32	578464
	F 40	578478
POLYPIPE	TH 10	578342
POLYSURE	TH 15	578350
	TH 22	578588
	TH 28	578590
POLYSAN	TH 14	578348
Handelsges.	TH 16	578352
m.b.H. & Co KG	TH 17	578354
(Krems/Öster-	TH 18	578356
reich) POLYSAN-	TH 20	578358
Press-System	TH 26	578362
	TH 32	578364
	TH 40	578624
POLYSAN	M 15	578312
Handelsges.	M 18	578314
m.b.H. & Co KG	M 22	578316
(Krems/Öster-	M 28	578318
reich) POLYSAN-	M 35	578390
EUROTUBI C-		
Stahl-Press-		
System		
POLYSAN	M 15	578312
Handelsges.	M 18	578314
m.b.H. & Co KG	M 22	578316
(Krems/Öste-	M 28	578318
reich) POLYSAN-	M 35	578390
EUROTUBI Edel-		
stahl-Press-		
System		
POLYSAN	M 15	578312
Handelsges.	M 18	578314
m.b.H. & Co KG	M 22	578316
(Krems/Öster-	M 28	578318
reich) POLYSAN-	M 35	578390
EUROTUBI		
Edelstahl-Press-		
System Gas		
POLYSAN	U 16	578374
(España)	U 18	578376
Rainbow	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Prandelli	H 14	578398
Multyrama Pf	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
Prandelli	H 16	578400
Multyrama Pfm	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 18	578376
	U 20	578378

System	Pressing contour	Art.-No.
PRASKI	TH 10	578342
BAVARIA-press	TH 14	578348
	TH 16	578352
	TH 17	578354
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
Raccorderie	M 15	578312
Metalliche	M 18	578314
inoxPRES[1)]	M 22	578316
	M 28	578318
Raccorderie	M 15	578312
Metalliche	M 18	578314
steelPRES[1)]	M 22	578316
	M 28	578318
RBM Tita-gas	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
RBM Tita-fix	B 14	578466
	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	F 16	578456
	F 18	578458
	F 20	578460
	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
remo	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
RIFENG U	U 14	578372
PRESS FITTING	U 16	578374
(F5)	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
RIFENG TH	TH 16	578352
PRESS FITTING	TH 20	578358
(F9)	TH 25	578360
	TH 26	578362
	TH 32	578364
RIQUIER	RFz 12	578490
A SERTIR	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
Rofix Climatrix	H 16	578400
Rhinopex	H 20	578406
	U 16	578374
	U 20	578378
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
Roth	RN 14	578434
	RN 17	578436
	RN 20	578438
	RN 25/26	578440
	RN 32	578442
Roth Nordic	RN 16	578454
Alu-LaserPlus/	RN 20	578438
PressCheck	RN 25/26	578440
(DNK-NOR-SWE-FIN)	RN 32	578442
Rubinetterie	M 15	578312
Bresciane	M 18	578314
Bonomi	M 22	578316
TURBO INOX	M 28	578318
	M 35	578390
Rubinetterie	M 15	578312
Bresciane	M 18	578314
Bonomi	M 22	578316
TURBO STEEL	M 28	578318
	M 35	578390

System	Pressing contour	Art.-No.
Rubinetterie	TH 14	578348
Bresciane	TH 16	578352
Bonomi	TH 18	578356
TURBO PRESS	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
Rubinetterie	TH 16	578352
Bresciane	TH 20	578358
Bonomi	TH 26	578362
TURBO PRESS	TH 32	578364
GAS		
SA.MI plastic	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
SA.MI plastic	TH 16	578352
Multistrato Gas	TH 20	578358
	TH 26	578362
	TH 32	578364
SANHA	TH 14	578348
3fit-Press	TH 16	578352
Serie 25000	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 14	578372
	U 16	578374
	U 20	578378
SANHA-Press	SA 12	578510
Chrom	SA 15	578514
Serie 16000	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15[1)]	578312
	M 18[1)]	578314
	M 22[1)]	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B)[3)]	574520
	M 15 45° (PR-2B)[3)]	574522
	M 18 45° (PR-2B)[3)]	574524
	M 22 45° (PR-2B)[3)]	574526
	M 28 45° (PR-2B)[3)]	574528
	M 35 45° (PR-2B)[3)]	574530
	V 12	578324
	V 15[1)]	578328
	V 18[1)]	578332
	V 22[1)]	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3)]	574502
	V 15 45° (PR-2B)[3)]	574504
	V 18 45° (PR-2B)[3)]	574506
	V 22 45° (PR-2B)[3)]	574508
	V 28 45° (PR-2B)[3)]	574510
	V 35 45° (PR-2B)[3)]	574512
SANHA-NiroSan-	SA 15	578514
Presssystem	SA 18	578518
Serie 9000	SA 22	578520
	SA 28	578522
	M 15[1)]	578312
	M 18[1)]	578314
	M 22[1)]	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B)[3)]	574522
	M 18 45° (PR-2B)[3)]	574524
	M 22 45° (PR-2B)[3)]	574526
	M 28 45° (PR-2B)[3)]	574528
	M 35 45° (PR-2B)[3)]	574530
	V 15[1)]	578328
	V 18[1)]	578332
	V 22[1)]	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3)]	574504
	V 18 45° (PR-2B)[3)]	574506
	V 22 45° (PR-2B)[3)]	574508
	V 28 45° (PR-2B)[3)]	574510
	V 35 45° (PR-2B)[3)]	574512

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
SANHA-NiroSan-Presssystem Serie 19000 (silicone free)	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15 [1]	578312
	M 18 [1]	578314
	M 22 [1]	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) [3]	574522
	M 18 45° (PR-2B) [3]	574524
	M 22 45° (PR-2B) [3]	574526
	M 28 45° (PR-2B) [3]	574528
	M 35 45° (PR-2B) [3]	574530
	V 15 [1]	578328
	V 18 [1]	578332
	V 22 [1]	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) [3]	574504
	V 18 45° (PR-2B) [3]	574506
	V 22 45° (PR-2B) [3]	574508
	V 28 45° (PR-2B) [3]	574510
	V 35 45° (PR-2B) [3]	574512
SANHA-NiroSan-Presssystem Gas Serie 17000	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15 [1]	578312
	M 18 [1]	578314
	M 22 [1]	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) [3]	574522
	M 18 45° (PR-2B) [3]	574524
	M 22 45° (PR-2B) [3]	574526
	M 28 45° (PR-2B) [3]	574528
	M 35 45° (PR-2B) [3]	574530
	V 15 [1]	578328
	V 18 [1]	578332
	V 22 [1]	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) [3]	574504
	V 18 45° (PR-2B) [3]	574506
	V 22 45° (PR-2B) [3]	574508
	V 28 45° (PR-2B) [3]	574510
	V 35 45° (PR-2B) [3]	574512
SANHA-Pressfittings Serie 6000/ Serie 8000	SA 12	578510
	SA 14	578512
	SA 15	578514
	SA 16	578516
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 [1]	578312
	M 18 [1]	578314
	M 22 [1]	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) [3]	574520
	M 15 45° (PR-2B) [3]	574522
	M 18 45° (PR-2B) [3]	574524
	M 22 45° (PR-2B) [3]	574526
	M 28 45° (PR-2B) [3]	574528
	M 35 45° (PR-2B) [3]	574530
	V 12	578324
	V 14	578326
	VG 14	578338
	V 15 [1]	578328
	V 16	578330
	VG 16	578340
	V 18 [1]	578332
	V 22 [1]	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) [3]	574502
	V 15 45° (PR-2B) [3]	574504
	V 18 45° (PR-2B) [3]	574506
	V 22 45° (PR-2B) [3]	574508
	V 28 45° (PR-2B) [3]	574510
	V 35 45° (PR-2B) [3]	574512

System	Pressing contour	Art.-No.
SANHA-Pressfittings Gas Serie 10000/ Serie 11000	SA 12	578510
	SA 14	578512
	SA 15	578514
	SA 16	578516
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 [1]	578312
	M 18 [1]	578314
	M 22 [1]	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) [3]	574520
	M 15 45° (PR-2B) [3]	574522
	M 18 45° (PR-2B) [3]	574524
	M 22 45° (PR-2B) [3]	574526
	M 28 45° (PR-2B) [3]	574528
	M 35 45° (PR-2B) [3]	574530
	V 12	578324
	V 14	578326
	VG 16	578340
	V 15 [1]	578328
	V 16	578330
	VG 16	578340
	V 18 [1]	578332
	V 22 [1]	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) [3]	574502
	V 15 45° (PR-2B) [3]	574504
	V 18 45° (PR-2B) [3]	574506
	V 22 45° (PR-2B) [3]	574508
	V 28 45° (PR-2B) [3]	574510
	V 35 45° (PR-2B) [3]	574512
SANHA-Pressfittings Solar Serie 12000/ Serie 13000	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 [1]	578312
	M 18 [1]	578314
	M 22 [1]	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) [3]	574520
	M 15 45° (PR-2B) [3]	574522
	M 18 45° (PR-2B) [3]	574524
	M 22 45° (PR-2B) [3]	574526
	M 28 45° (PR-2B) [3]	574528
	M 35 45° (PR-2B) [3]	574530
	V 12	578324
	V 15 [1]	578328
	V 18 [1]	578332
	V 22 [1]	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) [3]	574502
	V 15 45° (PR-2B) [3]	574504
	V 18 45° (PR-2B) [3]	574506
	V 22 45° (PR-2B) [3]	574508
	V 28 45° (PR-2B) [3]	574510
	V 35 45° (PR-2B) [3]	574512
SANHA-Pressfittings Air Serie 14000/ Serie 15000	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 [1]	578312
	M 18 [1]	578314
	M 22 [1]	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) [3]	574520
	M 15 45° (PR-2B) [3]	574522
	M 18 45° (PR-2B) [3]	574524
	M 22 45° (PR-2B) [3]	574526
	M 28 45° (PR-2B) [3]	574528
	M 35 45° (PR-2B) [3]	574530
	V 12	578324
	V 15 [1]	578328
	V 18 [1]	578332
	V 22 [1]	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) [3]	574502
	V 15 45° (PR-2B) [3]	574504
	V 18 45° (PR-2B) [3]	574506
	V 22 45° (PR-2B) [3]	574508
	V 28 45° (PR-2B) [3]	574510
	V 35 45° (PR-2B) [3]	574512

System	Pressing contour	Art.-No.
SANHA-Pressfittings Industrie Serie 18000	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 [1]	578312
	M 18 [1]	578314
	M 22 [1]	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) [3]	574520
	M 15 45° (PR-2B) [3]	574522
	M 18 45° (PR-2B) [3]	574524
	M 22 45° (PR-2B) [3]	574526
	M 28 45° (PR-2B) [3]	574528
	M 35 45° (PR-2B) [3]	574530
	V 12	578324
	V 15 [1]	578328
	V 18 [1]	578332
	V 22 [1]	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) [3]	574502
	V 15 45° (PR-2B) [3]	574504
	V 18 45° (PR-2B) [3]	574506
	V 22 45° (PR-2B) [3]	574508
	V 28 45° (PR-2B) [3]	574510
	V 35 45° (PR-2B) [3]	574512
SANHA PURAPRESS Serie 80000	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12 [1]	578310
	M 15 [1]	578312
	M 18 [1]	578314
	M 22 [1]	578316
	M 28 [1]	578318
	M 12 45° (PR-2B) [3]	574520
	M 15 45° (PR-2B) [3]	574522
	M 18 45° (PR-2B) [3]	574524
	M 22 45° (PR-2B) [3]	574526
	M 28 45° (PR-2B) [3]	574528
	V 12	578324
	V 15 [1]	578328
	V 18 [1]	578332
	V 22 [1]	578334
	V 28	578336
	V 12 45° (PR-2B) [3]	574502
	V 15 45° (PR-2B) [3]	574504
	V 18 45° (PR-2B) [3]	574506
	V 22 45° (PR-2B) [3]	574508
	V 28 45° (PR-2B) [3]	574510
SANHA-Therm Serie 24000	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 [1]	578312
	M 18 [1]	578314
	M 22 [1]	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) [3]	574520
	M 15 45° (PR-2B) [3]	574522
	M 18 45° (PR-2B) [3]	574524
	M 22 45° (PR-2B) [3]	574526
	M 28 45° (PR-2B) [3]	574528
	M 35 45° (PR-2B) [3]	574530
	V 12	578324
	V 15 [1]	578328
	V 18 [1]	578332
	V 22 [1]	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) [3]	574502
	V 15 45° (PR-2B) [3]	574504
	V 18 45° (PR-2B) [3]	574506
	V 22 45° (PR-2B) [3]	574508
	V 28 45° (PR-2B) [3]	574510
	V 35 45° (PR-2B) [3]	574512

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.
Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For taking suitable pressing inserts.

[3] An adapter tong is required for driving pressing rings (PR), see page 134.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
SATEC SK VITerm	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 40	578386
Schlösser EUROPRESS-SYSTEM	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
SCHÜTZ EHT rOpress	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
Schwer Fittings AQUApress	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
Seppelfricke HENCO PRESS	TH 16	578352
	TH 20	578358
	TH 26	578362
Seppelfricke Sudopress Edelstahl Visu-Control	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
Seppelfricke Sudopress Kupfer Visu-Control	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
Seppelfricke Sudopress Kupfer Visu-Control Gas	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
Seppelfricke Sudopress Kupfer Visu-Control Solar	V 15	578328
	V 18	578332
	V 22	578334
Seppelfricke Sudopress SKIN Visu-control	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	THL 32	578368
	TH 40	578624
Seppelfricke XPress C-Stahl	M 12	578310
	M 15	578312
	M 18[1]	578314
	M 22	578316
	M 28[1]	578318
	M 35	578390
Seppelfricke XPress Edelstahl	M 15	578312
	M 18[1]	578314
	M 22	578316
	M 28[1]	578318
	M 35	578390
Seppelfricke XPress Kupfer	M 12	578310
	M 15	578312
	M 18[1]	578314
	M 22	578316
	M 28[1]	578318
	M 35	578390
Seppelfricke XPress Kupfer gas	M 15	578312
	M 18[1]	578314
	M 22	578316
	M 28[1]	578318
SESTA SESTA GAS	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
SESTA sistema multistrato	H 16	578400
	H 20	578406
	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 20	578378
SIKO TYPRO	H 26	578410
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362

System	Pressing contour	Art.-No.
SIKO TYROTHERM	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
SLOVARM PEX-THERM	U 16	578374
	U 20	578378
	H 26	578410
	U 32	578382
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
Standard Hidráulica MultiStandard	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
STELBI POLIKRAFT	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
Systerm WELCO-Gas	H 16 A	578420
	H 20 A	578426
	H 26 A	578430
	H 32 A	578432
Systerm WELCO-Flex	H 14 A	578418
	H 16 A	578420
	H 17 A	578422
	H 20 A	578426
	H 26 A	578430
	H 32 A	578432
Systerm WELCO-Teck	H 16 A	578420
	H 20 A	578426
	H 26 A	578430
TERMICALINE Termipex	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
	H 16	578400
	H 20	578406
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
TermoConcept TC-PRESS	Basic E01[2]	578618
THERMOLUTZ acular/rapid	H 14	578398
	H 16	578400
	H 17	578402
TE-SA TE-SA press serie 800	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
THISA Thisa multiplus	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
THISA Thisa Pex	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
TIEMME COBRAPRESS	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	THL 32	578368
	TH 40	578624
TIEMME Serie 1700 PE-X a pressare	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
TIEMME TIEMME Gas	TH 16	578352
	TH 20	578358
	TH 26	578362
	THL 32	578368

System	Pressing contour	Art.-No.
TKM Systemtechnik	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
TRA MULTITRAPRESS	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
TRA TRAPRESS	H 12	578396
	H 16	578400
	H 20	578406
	H 25	578408
	H 32	578412
	RFz 12	578490
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
Tréfimétaux Qtec	TH 14	578348
	TH 16	578352
	TH 20	578358
TWEETOP	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
UNICAL AG MAX MULTIPEX	U 16	578374
	U 20	578378
	H 26	578410
	U 32	578382
UNIDELTA DeltAll	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	U 32	578382
	U 40	578386
Uponor Unipipe	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Uponor MLC	UP 14	578576
	UP 16	578578
	UP 18	578580
	UP 20	578582
	UP 25	578584
	UP 32	578586
Uponor MLC-D	UP 16	578578
	UP 20	578582
	UP 25	578584
	U 32	578382
	U 40	578386
Uponor MLC-G	UP 20	578582
	UP 25	578584
	UP 32	578586
Valsir PEXAL	H 14	578398
	H 16	578400
	H 20	578406
	H 26	578410
	H 32 V	578602
Valsir PEXAL Gas	H 14	578398
	H 16	578400
	H 20	578406
	H 26	578410
Van Marcke Log. Tu-Bi-Pex	TH 16	578352
	TH 17	578354
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
Van Marcke Log. Tu-Bi-Press	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530

Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
Variotherm	TH 11,6	578344
System TH	TH 16	578352
Viega Pexfit Fosta	VX 16	578552
	VX 20	578554
	VX 25	578556
Viega Pexfit	VX 16	578552
Fosta G	VX 20	578554
	VX 25	578556
Viega Pexfit Plus	VX 12	578550
	VX 16	578552
	VX 20	578554
Viega Pexfit	VX 16	578552
Pro Fosta	VX 20	578554
	VX 25	578556
Viega Pexfit	VX 16	578552
Pro Plus	VX 20	578554
Viega Prestabo	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Viega Profipress	V 12	578324
	VG 14	578338
	V 15	578328
	VG 16	578340
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Viega	V 12	578324
Profipress G	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Viega	V 12	578324
Profipress S	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Viega	V 12	578324
Profipress Therm	V 15	578328
	V 18	578332
	V 22	578334
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
Viega ProPress	VUS ½" (OD 15,88 mm)	578566
System USA	VUS ¾" (OD 22,22 mm)	578568
	VUS 1" (OD 28,58 mm)	578570
	VUS 1¼" (OD 34,93 mm)	578606
Viega Propress	VAU 15 (OD 12,7 mm)	578630
WATER System	VAU 20 (OD 19,1 mm)	578632
AUS	VAU 25 (OD 25,4 mm)	578634
	VAU 32 (OD 31,8 mm)	578636

System	Pressing contour	Art.-No.
Viega PropressG	VAU 15 (OD 12,7 mm)	578630
GAS System	VAU 20 (OD 19,1 mm)	578632
AUS	VAU 25 (OD 25,4 mm)	578634
	VAU 32 (OD 31,8 mm)	578636
Viega	VP 16	578482
Sanfix Fosta	VP 20	578484
	VP 25	578486
	VP 32	578488
Viega	VP 16	578482
Sanfix Plus	VP 20	578484
Viega Sanpress	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Viega	V 15	578328
Sanpress Inox	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Viega	V 15	578328
Sanpress Inox G	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Viessmann	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
VSH MultiPress	U 14	578372
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
VSH	M 12	578310
XPress Carbon	M 15	578312
	M 18[1]	578314
	M 22	578316
	M 28[1]	578318
	M 35	578390
VSH	M 15	578312
XPress Copper	M 18[1]	578314
	M 22	578316
	M 28[1]	578318
	M 35	578390
VSH	M 15	578312
XPress Copper	M 18[1]	578314
GAS	M 22	578316
	M 28[1]	578318
VSH	M 15	578312
XPress Copper	M 18[1]	578314
Solar	M 22	578316
	M 28[1]	578318
	M 35	578390
VSH	M 15	578312
XPress Stainless	M 18[1]	578314
	M 22	578316
	M 28[1]	578318
	M 35	578390
Walter Meier	U 16	578374
Metalplast	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386

System	Pressing contour	Art.-No.
Watts MTR	TH 16	578352
Art press	TH 20	578358
	TH 26	578362
	TH 32	578364
WATTS	US ⅜"	578534
RADIANT	US ½"	578536
Watts WaterPEX	US ¾"	578538
	US 1"	578540
WATTS	US ⅜"	578534
RADIANT	US ½"	578536
Watts	US ¾"	578538
RadiantPEX	US 1"	578540
WATTS	U 16 (½")	578374
RADIANT	U 20 (⅝")	578378
Watts	U 25 (¾")	578380
RadiantPEX-AL	U 32 (1")	578382
Wavin	U 14	578372
Tigris K1	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Wavin	U 14	578372
Tigris M1	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
WeeConPress	M 12	578310
Alu	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
WeeConPress	M 12	578310
C-Stahl	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
WeeConPress	M 12	578310
Inox	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.
Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For taking suitable pressing inserts.

[3] An adapter tong is required for driving pressing rings (PR), see page 134.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website:
www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
WeeConPress	M 12	578310
Kupfer	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B)[3)]	574520
	M 15 45° (PR-2B)[3)]	574522
	M 18 45° (PR-2B)[3)]	574524
	M 22 45° (PR-2B)[3)]	574526
	M 28 45° (PR-2B)[3)]	574528
	M 35 45° (PR-2B)[3)]	574530
WeeConFlex	TH 16	578352
MVR	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
WEFA PLASTIC	H 16	578400
WEFATHERM-	H 20	578406
PRESS	H 26	578410
	H 32	578412
WEM	H 16	578400
	U 16	578374
WIELAND	TH 14	578348
cuprotherm	TH 16	578352
CTX	TH 18	578356
	TH 20	578358
	TH 26	578362
Winkler	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
WKS-Press	TH 14	578348
	TH 16	578352
	TH 17	578354
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624

System	Pressing contour	Art.-No.
XtraConnect	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
(NW 26)	U 25	578380
	U 32	578382
	VP 16	578482
	VP 20	578484
	VP 32	578488
Zetaesse	TH 14	578348
Multistrato	TH 16	578352
EUROPEX	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
Zetaesse	TH 14	578348
Multistrato	TH 16	578352
ISOPEX	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378

System	Pressing contour	Art.-No.
Zetaesse Rame	TH 14	578348
HydroSAN	TH 16	578352
	TH 20	578358
	U 14	578372
	U 16	578374
	U 20	578378
Zetaesse Rame	TH 14	578348
ThermoSAN	TH 16	578352
	TH 20	578358
	U 14	578372
	U 16	578374
	U 20	578378
ZEWOTHERM	TH 12	578346
	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
ZURN	US ⅜"	578534
INDUSTRIES	US ½"	578536
ZURN PEX	US ¾"	578538
	US 1"	578540



REMS Mini pressing tongs with 2 swivellable monoblock pressing jaws.



REMS pressing ring 45° (PR-2B) with 2 pressing jaws for pressings at places of difficult access, with Mini Z1 adapter tongs.

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.
Observe the national regulations.

[1)] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2)] For taking suitable pressing inserts.

[3)] An adapter tong is required for driving pressing rings (PR), see page 134.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website:
www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs for additional pressfitting systems on request.

Accessories

Description	Art.-No.	
Adapter tong Mini Z1 for driving REMS pressing rings 45° (PR-2B)	578558	
Steel case with insert for adapter tong Mini Z1 and adapter tong Z1 and 6 REMS pressing rings V 12–35 45° (PR-2B) or M 12–35 45° (PR-2B)	574516	
Steel case with insert for 8 pressing tongs Mini/cropping tongs Mini and compartment for pipe cutter up to 42 mm	578295	







Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS cropping tongs Mini

High performance cropping tongs Mini in forged and specially hardened steel for cutting threaded rods.

Steel, stainless steel up to hardness classification 4.8 (400 N/mm²) M 6 – M 10

REMS cropping tong Mini – cuts in just 2 seconds!

Made of forged and specially hardened steel.

Reversible cropping inserts for double service life.

M cropping inserts with high precision thread contour machined on CNC machining centres for exact guiding of the threaded rod in the cutting process Pliers parts, cropping inserts and specially machined and hardened cutting edges, made to fit exactly, for cutting without burr


Threaded rod can be screwed into a threaded connection of the pipe clip or the nut without rework after cutting

Cutting device in pliers design **(Patent EP 1 459 825, patent US 7,284,330).** Very compact design and low weight of the REMS Mini cropping tongs due to special arrangement of the cropping tongs connection **(Patent EP 1 952 948)**.

Driven by REMS Mini-Press ACC









German Quality Product



Patent EP 1 952 948
Patent EP 1 459 825
Patent US 7,284,330

Supply format

REMS cropping tong Mini. Cropping tong with 1 pair of reversible cropping inserts for steel, stainless steel, M 6 – M 10. In a carton.

Description	for threaded rods	Art.-No.
REMS cropping tong Mini M 6	M 6	578620
REMS cropping tong Mini M 8	M 8	578621
REMS cropping tong Mini M 10	M 10	578622

Accessories

Description	for threaded rods	Art.-No.
Cropping inserts M 6 (pair)	M 6	571891
Cropping inserts M 8 (pair)	M 8	571896
Cropping inserts M 10 (pair)	M 10	571866
Steel case with insert for 8 pressing tongs Mini/cropping tongs Mini and compartment for pipe cutter up to 42 mm		578295





Ташев Галвинг ООД
www.tashev-galving.com

REMS Eco-Press

Manual radial press

Universal, manual radial press for producing pipe pressing joints for all common pressfitting systems.

Pressing joints with plastic and multi-layer composite tubes Ø 10 – 26 mm
Ø ⅜ – 1"

Complete range of REMS pressing tongs for all common pressfitting systems, see page 142 – 158.



REMS Eco-Press – universal up to Ø 26 mm. Secure crimping in seconds.

System advantage

Only **one** type of pressing tongs for all REMS radial presses (except REMS Mini-Press ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection **(Patent EP 1 223 008, Patent US 6,739,172)** and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs for all common pressfitting systems (page 142 – 158). High-compression pressing tongs in forged and specially hardened steel. Pressing contours of REMS pressing tongs are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing.

Design

Compact, handy, light. Drive unit with short tubular arms only 1.6 kg. Works anywhere, free-hand, overhead, in confined areas. Secure seating of pressing tongs through locking pins. Dividable tubular arms for individual adjustment of leverage to accomodate different force demands of different pressfitting systems.

Pressing operation

A perfect joint is achieved when pressing tongs close completely. Final-lock-positioning, the pressing jaws remain in a closed position until opening. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

German Quality Product



Supply format

REMS Eco-Press drive unit. Manual radial press with final-lock-positioning for producing pressing joints of plastic and multi-layer composite tubes Ø 10 – 26 mm, Ø ⅜ – 1". For operating with REMS pressing tongs. With dividable tubular arms. In skin package.

	Art.-No.	
	574000	



Accessories

Description	Art.-No.	
REMS pressing tongs/pressing rings see page 142 – 158.		
REMS cropping tongs for threaded rods see page 161.		
Carrying bag for drive unit and for 3 pressing tongs	574436	
Steel case with insert for drive unit and for 3 pressing tongs	574430	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Power-Press SE

Electric radial press

Universal, handy electric tool for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints	Ø 10–108 mm Ø ⅜–4"

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 142–158.



REMS Power-Press SE – universal up to Ø 108 mm.
Secure crimping in seconds.
Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except REMS Mini-Press ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection **(Patent EP 1 223 008, Patent US 6,739,172)** and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 142–158). High-compression pressing tongs/pressing rings in forged and specially hardened steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective press-fitting system. Thus perfect systemconformity, safe press jointing.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing chains.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. The pressing tongs remain in a closed position until machine is switched and runs into reverse. The perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Powerful electro-mechanical drive with proven universal motor, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle. Overload protection. Safety tip switch.

Tested by electrosuisse

German Quality Product



Supply format

REMS Power-Press SE Basic-Pack. Electric radial press for producing pressing joints Ø 10–108 mm, Ø ⅜–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-mechanical drive with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle, overload protection, safety tip switch. In sturdy steel case.

	Art.-No.	
	572111	

Other voltages on request.



Accessories

Description	Art.-No.	
REMS Power-Press SE Drive Unit	572101	
REMS pressing tongs/pressing rings see page 142–158.		
REMS cropping tongs for threaded rods see page 161.		
REMS cable shear for electric cable see page 161.		
Steel case with insert	570280	





Ташев-Галвинг ООД
www.tashev-galving.com

REMS Power-Press

Electro-hydraulic radial press with switch-off signal

Universal, handy electric tool with switch-off signal for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints	Ø 10 – 108 mm Ø ⅜ – 4"

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 142 – 158.



REMS Power-Press – universal up to Ø 108 mm.
Secure crimping in seconds.
Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except REMS Mini-Press ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection **(Patent EP 1 223 008, Patent US 6,739,172)** and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 142 – 158). High-compression pressing tongs/pressing rings in forged and specially hardened steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective press-fitting system. Thus perfect systemconformity, safe press jointing.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip. Swivelling pressing tongs/adapter tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. Acoustic signal after successful completion of pressing operation. The pressing tongs remain in a closed position until reset button is pushed and releases. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Tested by electrosuisse
German Quality Product



Supply format

REMS Power-Press Basic-Pack. Electro-hydraulic radial press with switch-off signal for producing pressing joints Ø 10 – 108 mm, Ø ⅜ – 4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/press-ing chains. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. In sturdy steel case.

	Art.-No.	
	577011	

Other voltages on request.



Accessories

Description	Art.-No.	
REMS Power-Press Drive Unit	577001	
REMS pressing tongs/pressing rings see page 142 – 158.		
REMS cropping tongs for threaded rods see page 161.		
REMS cable shear for electric cable see page 161.		
Steel case with insert	570280	





Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Power-Press ACC

Electro-hydraulic radial press with automatic retraction

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints	Ø 10 – 108 mm Ø ⅜ – 4"

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 142 – 158.



REMS Power-Press ACC – universal up to Ø 108 mm. With automatic circuit control. Secure crimping in seconds. Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except REMS Mini-Press ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection **(Patent EP 1 223 008, Patent US 6,739,172)** and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 142 – 158). High-compression pressing tongs/pressing rings in forged and specially hardened steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective press-fitting system. Thus perfect systemconformity, safe press jointing.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip. Swivelling pressing tongs/adapter tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Tested by electrosuisse

German Quality Product



Supply format

REMS Power-Press ACC Basic-Pack. Electro-hydraulic radial press with automatic retraction for producing pressing joints Ø 10 – 108 mm, Ø ⅜ – 4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. In sturdy steel case.

	Art.-No.	
	577010	

Other voltages on request.



Accessories

Description	Art.-No.	
REMS Power-Press ACC Drive Unit	577000	
REMS pressing tongs/pressing rings see page 142 – 158.		
REMS cropping tongs for threaded rods see page 161.		
REMS cable shear for electric cable see page 161.		
Steel case with insert	570280	





Ташев-Галвинг ООД
www.tashev-galving.com

REMS Akku-Press

Cordless radial press with switch-off signal

Universal, handy electric tool with switch-off signal for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints Ø 10–108 mm / Ø ⅜–4

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 142–158.



REMS Akku-Press Li-Ion – universal up to Ø 108 mm.
Secure crimping in seconds.
Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except REMS Mini-Press ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection **(Patent EP 1 223 008, Patent US 6,739,172)** and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 142–158). High-compression pressing tongs/pressing rings in forged and specially hardened steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective press-fitting system. Thus perfect systemconformity, safe press jointing.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. Integrated LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings. For battery and corded operation. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. Acoustic signal after successful completion of pressing operation. The pressing tongs remain in a closed position until reset button is pushed and releases. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 3.2 Ah capacity, for long service life. Powerful and light. Li-Ion 14.4 V, 3.2 Ah battery for approx. 270 pressings Viega Profipress DN 15 per battery charge. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V voltage supply for mains operation instead of Li-Ion battery 14.4 V, as accessory.

Tested by electrosuisse

German Quality Product

REMS TECHNOLOGY LI-ION PLUS

International Design Award

LEO





Supply format

REMS Akku-Press Li-Ion Basic-Pack. Cordless radial press with switch-off signal for producing pipe pressing joints Ø 10–108 mm, Ø ⅜–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Integrated LED work light. Battery Li-Ion 14.4 V, 3.2 Ah, rapid charger Li-Ion/Ni-Cd 230 V or 110 V, 50–60 Hz, 65 W. In sturdy steel case.

	Art.-No.	
	571013	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS pressing tongs/pressing rings see page 142–158.		
REMS cropping tongs for threaded rods see page 161.		
REMS cable shear for electric cable see page 161.		
REMS Akku-Press Li-Ion drive unit, without battery	571003	
Battery Li-Ion 14.4 V, 3.2 Ah	571555	
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560	
Voltage supply Li-Ion 230 V	571565	
Steel case with inlay	571290	
REMS cordless LED lamp see page 97	175200	



Ташев Галвинг ООД
www.tashev-galving.com

REMS Akku-Press ACC

Cordless radial press with automatic circuit control

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints Ø 10–108 mm / Ø ⅜–4

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 142–158.



with automatic circuit control and charging status check

REMS Akku-Press ACC Li-Ion – universal up to Ø 108 mm. With automatic circuit control. Secure crimping in seconds. Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except REMS Mini-Press ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection **(Patent EP 1 223 008, Patent US 6,739,172)** and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 142–158). High-compression pressing tongs/pressing rings in forged and specially hardened steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective press-fitting system. Thus perfect systemconformity, safe press jointing.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. Integrated LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings. For battery and corded operation. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 3.2 Ah capacity, for long service life. Powerful and light. Li-Ion 14.4 V, 3.2 Ah battery for approx. 270 pressings Viega Profipress DN 15 per battery charge. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V voltage supply for mains operation instead of Li-Ion battery 14.4 V, as accessory.

Tested by electrosuisse

German Quality Product

REMS TECHNOLOGY LI-ION PLUS

International Design Award





Supply format

REMS Akku-Press ACC Li-Ion Basic-Pack. Cordless radial press with automatic circuit control for producing pipe pressing joints Ø 10–108 mm, Ø ⅜–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Integrated LED work light. Battery Li-Ion 14.4 V, 3.2 Ah, rapid charger Li-Ion/Ni-Cd 230 V or 110 V, 50–60 Hz, 65 W. In sturdy steel case.

	Art.-No.	
	571014	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS pressing tongs/pressing rings see page 142–158.		
REMS cropping tongs for threaded rods see page 161.		
REMS cable shear for electric cable see page 161.		
REMS Akku-Press ACC Li-Ion drive unit, without battery	571004	
Battery Li-Ion 14.4 V, 3.2 Ah	571555	
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560	
Voltage supply Li-Ion 230 V	571565	
Steel case with inlay	571290	
REMS cordless LED lamp see page 97	175200	



Ташев Галвинг ООД
www.tashev-galving.com

for all common pressfitting systems

German Quality Product

Patent EP 1 223 008
Patent US 6,739,172



REMS pressing tongs/REMS pressing rings

High-compression pressing tongs in forged and specially hardened steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Hence far closer tolerances compared to as cast pressing contour.

Drive through all REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes. All pressing tongs marked with * have an optional connection **(Patent EP 1 223 008, Patent US 6,739,172)** for manual drive through the radial press REMS Eco-Press. Read and follow the installation and assembly instructions of the system provider/manufacturer.

Select pressing tongs/pressing rings yourself!

Search for the required pressfitting system in the opposite table and select the correct pressing tongs size/pressing rings size. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table. Intermediate tongs (page 158) are necessary for driving the REMS pressing rings (PR).

Traceability according to EN 1775:2007

REMS pressing tongs/pressing rings with pressing contour M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.



Example REMS pressing tongs M: ”M” imprint on pressed fitting for traceability according to EN 1775:2007

Hold-Harmless and Indemnification Agreement


See page 160.

Confirmation of suitability

See page 159.

Pressing contours

ACz
B
F
G
H
HA
HE
K
KI
M
MT
RFz
RN
SA
TH
U
UP
US
V
VAU
VIC
VP
VRX
VX
VUS

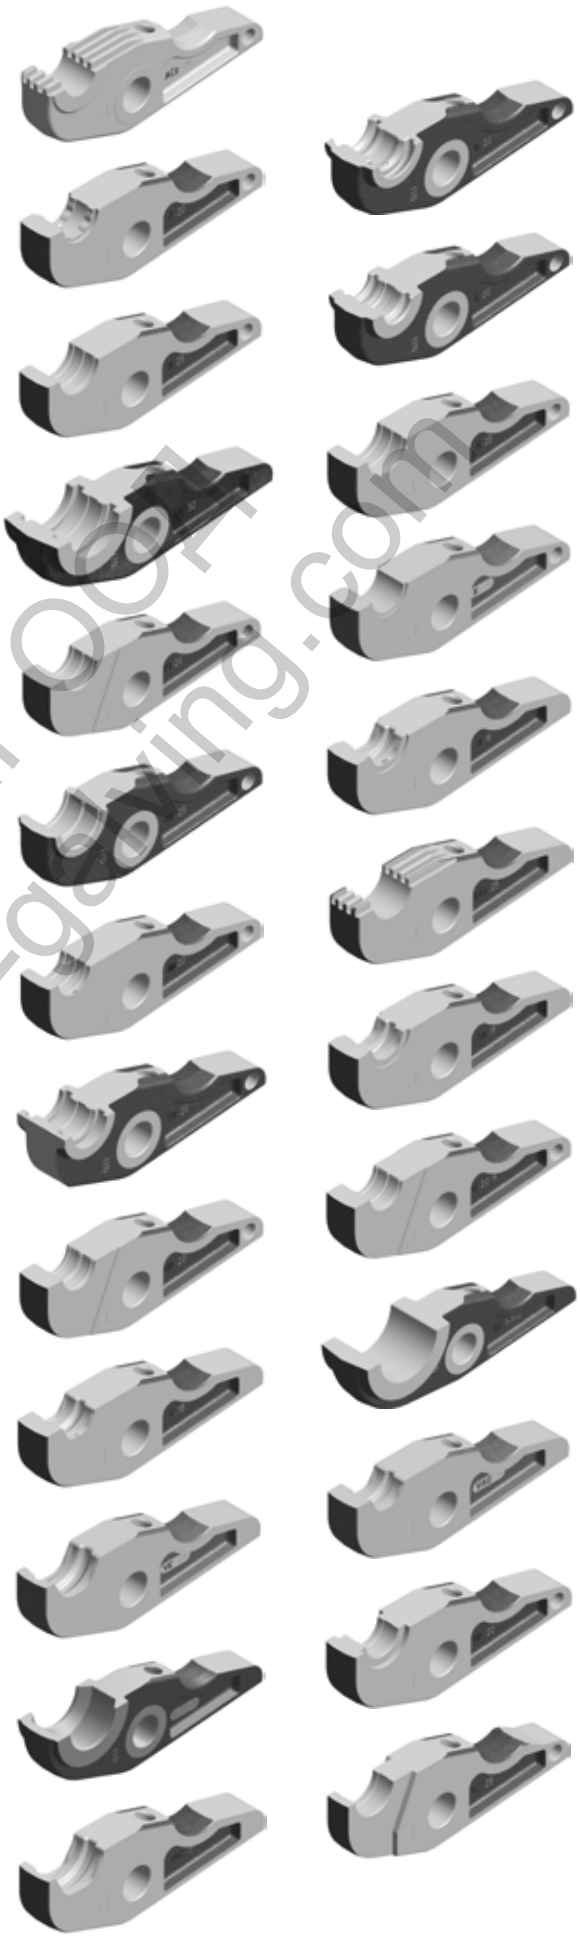

Ташев-Галвинг ООД www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
AC-FIX PRESS (Global Piping Systems)	H 12*	570300
	H 16*	570320
	H 20*	570350
	H 25*	570360
	H 32	570380
	RFz 12*	571320
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	VX 16*	571635
	VX 20*	571640
AC-FIX PRESS-MULTI (Global Piping Systems)	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 25*	570360
	H 32	570380
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
ACOME MT	ACz 12*	572642
	ACz 16*	572644
	ACz 20*	572646
	ACz 25	572648
AHLSELL A-press elförzinkad	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
AHLSELL A-press koppar	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
AHLSELL A-press rostfritt	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
AIRBEL PRESSCLIM	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
AIRBEL SERTINOX	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708

System	Pressing contour	Art.-No.
ALB Sistema Multicapa	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 16*	570765
	U 18*	570770
	U 20*	570775
	C 26*	570750
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
APE Raccordi a pressare	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US ⅜"*	571450
	US ½"*	571455
	US ¾"*	571460
	US 1"*	571465
	US 1 ¼"	571470
	US 1 ½"	571475
	US 2"	571477
Bampi BALPEX (serie MP)	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Bampi BALPEX Gas	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
BEGETUBE/ IVAR	B 14*	570845
	B 16*	570850
	B 18*	570855
	B 20*	570860
	B 26	570870
	B 32	570880
	F 50	570745
	F 63 (S)	572385
	F 75 (PR-3B)[3]	572830
BRASELI Pressfitting PE-X	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
BRASELI Pressfitting Multicapa	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795

System	Pressing contour	Art.-No.
Brass Form Press Form Pex	H 16*	570320
	H 18*	570340
	H 20*	570350
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	U 16*	570765
	U 18*	570770
	U 20*	570775
Brass Form Press Form Pex-Al-Pex	H 16*	570320
	H 18*	570340
	H 20*	570350
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	U 16*	570765
	U 18*	570770
	U 20*	570775
Brass & Fittings Pressman Multicapa	RFz 16*	571325
	ACz 20*	572646
	RFz 25	571335
	RFz 32	571340
Brass & Fittings Retipress	RFz 16*	571325
	ACz 20*	572646
	RFz 25	571335
	RFz 32	571340
BRASSTECH MULTItermoSAN Brasspress	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16*	570765
	U 18*	570770
	U 20*	570775
BROEN BALLOFIX PRES	M 15	570110
	M 18	570120
	M 22	570130
	V 15	570115
	V 18	570125
	V 22	570135
Business Key MT-PRESS (inox)	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Cello Products >B< Press	VUS ½"	571770
	VUS ¾"	571775
	VUS 1"	571780
	VUS 1¼"	571785
	VUS 1½"	571790
	VUS 2"	571795

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

[3] An adapter tong is required for driving pressing rings (PR), see page 158.

[4] Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.

[5] For taking suitable pressing inserts.

[6] Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
CIMBERIO SpA	SA 15	570935
Cim 220	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
CIMBERIO SpA	VUS ½"	571770
Cim 220.1	VUS ¾"	571775
	VUS 1"	571780
	VUS 1¼"	571785
	VUS 1½"	571790
	VUS 2"	571795
CIMBERIO SpA	SA 15	570935
Cim 220G	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
CIMBERIO SpA	SA 15	570935
Cim 1220M	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 15	570110
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
CIMBERIO SpA	SA 15	570935
Cim 1220V	SA 22	570945
	SA 28	570950
	SA 35	570955
	V 15	570115
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
Climatek	TH 14*	570455
Clima Therm	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	H 40 A (4G)	570695
ClouSet Press	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
Comap	V 12	570107
Sudopress Cu	V 14	570112
Visu-Control	V 15	570115
	V 16	570117
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
Comap	V 12	570107
Sudopress	V 14	570112
Cu Visu-Control	V 15	570115
Gas	V 16	570117
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175

System	Pressing contour	Art.-No.
Comap	V 12	570107
Sudopress Cu	V 14	570112
Visu-Control	V 15	570115
Solar	V 16	570117
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
Comap	RFz 12*	571320
PEXPress	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
Comap	TH 16*	570460
SKINPress	TH 18*	570465
Visu-Control Gas	TH 20*	570470
	TH 26*	570475
	THL 32	570487
Comap	TH 14*	570455
SKINPress	TH 16*	570460
Visu-Control	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	THL 32	570487
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
COMISA	TH 14*	570455
Press System	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 14*	570310
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	B 14*	570845
	B 16*	570850
	B 18*	570855
	B 20*	570860
	B 26	570870
	B 32	570880
COMISA	TH 16*	570460
Press System Gas	TH 20*	570470
	TH 26*	570475
	TH 32	570480
CONEL	F 16*	570715
CONNECT	F 20*	570725
MULTI	F 26*	570730
	F 32	570735
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 16*	570765
	U 20*	570775
(NW 26)	U 25*	570780
	U 32	570785
	VP 16*	570910
	VP 20*	570915
	VP 32	570925
Danfoss SpeedUp	U 16*	570765
FH Composite AL	U 20*	570775
Danfoss Basic	U 16*	570765
FH Composite AL	U 20*	570775
DIWAflex systems	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
DUOFIL	U 16*	570765
MKSYSTEM	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785

System	Pressing contour	Art.-No.
DW Verbundrohr	U 16*	570765
multitubo systems	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
	U 75 (PR-3B)[3]	572828
EBRILLE	U 16*	570765
Isomonflex	U 18*	570770
	U 20*	570775
	U 25*	570780
	H 26*	570370
	TH 26*	570475
	U 32	570785
EBRILLE	U 14*	570760
Monflex	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	H 26*	570370
	TH 26*	570475
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
	U 75 (PR-3B)[3]	572828
egeda Comisa	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
egeda Baronio	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Elkhart	VUS ½"	571770
APOLLOXPRESS	VUS ¾"	571775
Fittings Copper	VUS 1"	571780
and Low-Lead	VUS 1¼"	571785
Brass	VUS 1½"	571790
	VUS 2"	571795
Elkhart	VUSF 2½" (PR-3B)[3]	572819
APOLLOXPRESS	VUSF 3" (PR-3B)[3]	572820
LD-C Fittings	VUSF 4" (PR-3B)[3]	572821
Copper		
EMMETI	B 16*	570850
GERPEX-	B 20*	570860
FIVPRESS	B 26	570870
	B 32	570880
	F 16*	570715
	F 20*	570725
	H 16*	570320
	H 20*	570350
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16*	570765
	U 20*	570775
EMPUR	TH 14*	570455
	TH 15*	570457
	TH 16*	570460
	TH 17*	570462
	TH 20*	570470
	TH 25*	570495
EURACCORDI	M 15	570110
SYCPRESS	M 18	570120
STAINLESS	M 22	570130
STEEL PRESS	M 28	570140
FITTINGS	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530

Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes

System	Pressing contour	Art.-No.
EURACCORDI	M 15	570110
SYCPRESS	M 18	570120
CARBON STEEL	M 22	570130
PRESS FITTINGS	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
EUROTUBI	M 12	570100
Europa C-STAHL	M 15	570110
PRESSFITTING	M 18	570120
SISTEM[1]	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
EUROTUBI	M 15	570110
Europa INOX	M 18	570120
PRESSFITTING	M 22	570130
SISTEM[1]	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
FAR Rubinetterie	TH 14*	570455
PRESSFAR	TH 16*	570460
	TH 17*	570462
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 14*	570310
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
F.B.Q. BARONIO	V 12	570107
BQ press	V 14	570112
	V 15	570115
	V 16	570117
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512

System	Pressing contour	Art.-No.
F.B.Q. BARONIO	V 15	570115
BQ press	V 18	570125
carbon steel	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
F.B.Q. BARONIO	V 15	570115
BQ press gas	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
FELSINEA TECH	TH 14*	570455
Felsineapress	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Fercofloor	RFz 16*	571325
DUO Press	RFz 20*	571330
FERCO PEX	RFz 25	571335
	RFz 32	571340
Fercofloor	RFz 16*	571325
DUO Press	RFz 20*	571330
MULTIFER	RFz 25	571335
	RFz 32	571340
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
FILTUBE	FTB 15	571432
Filpress	FTB 18	571434
	FTB 22	571436
	FTB 28	571438
	FTB 35	571440
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
FILTUBE	M 15	570110
Instalpress	M 18	570120
Carbon Steel	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
FILTUBE	M 15	570110
Instalpress	M 18	570120
Copper	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708

System	Pressing contour	Art.-No.
FILTUBE	M 15	570110
Instalpress	M 18	570120
Inox	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Fittings Estándar	RFz 16*	571325
ECO-PRESS	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
Fittings Estándar	RFz 16*	571325
MULTICAPA	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
Fittings Estándar	RFz 16*	571325
PE-X	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
FOHS	TH 16*	570460
HEIZTECHNIK	TH 20*	570470
FOHSPRESS	TH 26*	570475
	TH 32	570480
FORNARA	B 16*	570850
ForPress	B 20*	570860
	B 26	570870
	B 32	570880
	F 16*	570715
	F 20*	570725
	F 26*	570730
	F 32	570735
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 32	570785
FRABO	V 12	570107
FRABOPRESS	V 15	570115
RAME (Cu)	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
FRABO	V 12	570107
FRABOPRESS	V 15	570115
RAME (Cu)	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

[3] An adapter tong is required for driving pressing rings (PR), see page 158.

[4] Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.

[5] For taking suitable pressing inserts.

[6] Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
FRABO	V 12	570107
FRABOPRESS	V 15	570115
INOX 316	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
FRABO	V 15	570115
FRABOPRESS	V 18	570125
C-STEEL	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
FRABO	V 15	570115
FRABOPRESS	V 18	570125
C-STEEL GAS	V 22	570135
	V 28	570145
	V 35	570155
FRABO	TH 16*	570460
FRABOPRESS	TH 20*	570470
MULTI-BRASS	TH 26*	570475
(MB)	TH 32	570480
	U 16*	570765
	U 20*	570775
FRABO	H 16*	570320
FRABOPRESS	H 20*	570350
MULTI-PLUS	U 16*	570765
(MP)	U 20*	570775
FRABO	V 15	570115
SOLARPRESS	V 18	570125
	V 22	570135
	V 28	570145
Fränkische	B 16*	570850
alpex-duo	B 18*	570855
	B 20*	570860
	B 26	570870
	B 32	570880
	F 16*	570715
	F 18*	570720
	F 20*	570725
	F 26*	570730
	F 32	570735
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
Fränkische	F 16*	570715
alpex F50 PROFI	F 20*	570725
	F 26*	570730
	F 32	570735
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 16*	570765
	U 20*	570775
(NW 26)	U 25*	570780
	U 32	570785
	VP 16*	570910
	VP 20*	570915
	VP 32	570925
Fränkische	F 20[2)]	570725
alpex-gas[2)]	F 26[2)]	570730
	F 32[2)]	570735
Fränkische	F 40	570742
alpex L	F 50	570745
	F 63 (S)	572385
	F 75 (PR-3B)[3)]	572830
gabotherm H+S	TH 10*	570467
	TH 12*	570452
	TH 14*	570455
	TH 15*	570457
	TH 16*	570460
	TH 17*	570462
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405

System	Pressing contour	Art.-No.
GAROS	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
Geberit Mapress	M 12	570100
C-STAHL	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
	M 12 45° (PR-2B)[3)]	574520
	M 15 45° (PR-2B)[3)]	574522
	M 18 45° (PR-2B)[3)]	574524
	M 22 45° (PR-2B)[3)]	574526
	M 28 45° (PR-2B)[3)]	574528
	M 35 45° (PR-2B)[3)]	574530
Geberit Mapress	M 12	570100
EDELSTAHL	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
	M 12 45° (PR-2B)[3)]	574520
	M 15 45° (PR-2B)[3)]	574522
	M 18 45° (PR-2B)[3)]	574524
	M 22 45° (PR-2B)[3)]	574526
	M 28 45° (PR-2B)[3)]	574528
	M 35 45° (PR-2B)[3)]	574530
Geberit Mapress	M 15	570110
EDELSTAHL Gas	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
Geberit Mapress	M 12	570100
KUPFER	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
	M 12 45° (PR-2B)[3)]	574520
	M 15 45° (PR-2B)[3)]	574522
	M 18 45° (PR-2B)[3)]	574524
	M 22 45° (PR-2B)[3)]	574526
	M 28 45° (PR-2B)[3)]	574528
	M 35 45° (PR-2B)[3)]	574530
Geberit Mapress	M 15	570110
KUPFER Gas	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
Geberit Mepla	G 16*	570400
	G 20*	570410
	G 26*	570420
	G 32	570430
	G 40	570440
	G 50	570450
	G 63 (S)	572470
General Fittings	TH 16*	570460
Serie 5G00 Trident	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	U 32	570785

System	Pressing contour	Art.-No.
General Fittings	TH 16*	570460
Serie 5S00	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 50 (S)	572400
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 25*	570360
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 32	570785
	U 40	570790
	U 50	570795
	B 16*	570850
	B 18*	570855
	B 20*	570860
	B 26	570870
	B 32	570880
Giacomini	H 16*	570320
Raccordi RM	H 20*	570350
Giacomini	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	THL 32	570487
	U 16*	570765
	U 20*	570775
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
Giacomini	V 15	570115
Valvole Giacomini	V 18	570125
serie R850V	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
Ginde Press	U 16*	570765
Fitting for Ginde	U 20*	570775
Multi-layer Pipe	U 25*	570780
System	U 32	570785
Global Plastic	TH 16*	570460
Rothapress	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
GLOBAL	U 16*	570765
TRADE	U 20*	570775
aqualpress	U 25*	570780
system	U 32	570785
Golan Pipe	U 16*	570765
Systems	U 20*	570775
(Scandinavia)	U 25*	570780
Alu-Pres	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
GS	TH 14*	570455
Wärmesysteme	TH 16*	570460
System TH	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes

System	Pressing contour	Art.-No.
GS	V 15	570115
Wärmesysteme	V 18	570125
System V	V 22	570135
	V 28	570145
	V 35	570155
GSP Group	TH 16*	570460
USMetrix	TH 20*	570470
HAGOS	TH 16*	570460
HakaGerodur	TH 10*	570467
HakaGerodur-	TH 11,6*	570482
System	TH 12*	570452
	TH 14*	570455
	TH 16*	570460
	TH 17*	570462
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
HakaGerodur	TH 16*	570460
HAKASAN	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Harden 2000	TH 14*	570455
Poly-Pex 2000	TH 16*	570460
	TH 17*	570462
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	THL 32	570487
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Harden 2000	TH 16*	570460
Poly-Pex Gas	TH 20*	570470
	TH 26*	570475
	THL 32	570487
Harden 2000	TH 14*	570455
Plastic-Press	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
HASTINIK	M 15	570110
Hastinik/Hitpress	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
heima-press	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
HELIROMA	U 16*	570765
Klimapress	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
	U 75 (PR-3B)[3]	572828
HELIROMA	RFz 16*	571325
romapress	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
Henco	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	HE 32	571900
	HE 40	571902

System	Pressing contour	Art.-No.
Henco Gas	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	HE 32	571900
	HE 40	571902
herotec	TH 14*	570455
Tempuss-press	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
herotec	H 16*	570320
Tempuss-press	H 20*	570350
Plus	H 25*	570360
	H 32	570380
	MT 20*	571744
	MT 25*	571746
	MT 32	571748
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 63 (PR-3B)[3]	572837
	U 75 (PR-3B)[3]	572828
Herz pipefix	TH 10*	570467
	TH 14*	570455
	TH 15*	570457
	TH 16*	570460
	TH 17*	570462
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	TH 75 (PR-3B)[3]	572829
HITEC Sistema	TH 14*	570455
Multistrato	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
Hydro-Air	US ⅜"*	571450
Systems	US ½"*	571455
Hydro-Plumb	US ¾"*	571460
Plus PEX	US 1"*	571465
	US 1¼"	571470
Hydro-Air	U 16* (½")	570765
Systems	U 20* (⅝")	570775
Hydro-Flex	U 25* (¾")	570780
PEX-AL-PEX	U 32 (1")	570785
IBP >B< Flex	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 63 (PR-3B)[3]	572837
	U 75 (PR-3B)[3]	572828

System	Pressing contour	Art.-No.
IBP >B< Press	V 12	570107
	V 14	570112
	V 15	570115
	V 16	570117
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
IBP >B< Press	V 12	570107
Carbon	V 14	570112
	V 15	570115
	V 16	570117
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
IBP >B< Press	V 15	570115
Gas	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
IBP >B< Press	V 15	570115
Inox	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
IBP >B< Press	V 15	570115
Solar	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Idrosanitaria	TH 16*	570460
Bonomi	TH 20*	570470
Homegas	TH 26*	570475

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

[3] An adapter tong is required for driving pressing rings (PR), see page 158.

[4] Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.

[5] For taking suitable pressing inserts.

[6] Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
Idrosanitaria	TH 16*	570460
Bonomi	TH 18*	570465
Idropress	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
IDROSISTEMI	TH 16*	570460
Ta-Press	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	F 16*	570715
	F 20*	570725
	F 26*	570730
	F 32	570735
	F 50	570745
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	U 32	570785
	B 16*	570850
	B 20*	570860
	B 26	570870
	B 32	570880
IPA IPANA-Press	TH 10*	570467
	TH 11,6*	570482
	TH 12*	570452
	TH 14*	570455
	TH 15*	570457
	TH 16*	570460
	TH 17*	570462
	TH 18*	570465
	TH 20*	570470
	TH 22*	570472
	TH 25*	570495
	TH 26*	570475
	TH 28	570477
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	TH 75 (PR-3B)[3]	572829
IPALPEX	TH 14*	570455
(Industrie du	TH 16*	570460
Plastique et	TH 18*	570465
Accessoires)	TH 20*	570470
	TH 26*	570475
	THL 32	570487
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
IPLEX	K16/P18*	572600
PIPELINES	PF 22*	571980
AUSTRALIA		
Iplex Pro-fit		
IPLEX	K16/P18*	572600
PIPELINES	K/20*	572605
AUSTRALIA	K/25*	572610
Iplex K1	K32	572615
(Gas)	K1/40	572620
	K1/50	572625
IPLEX	K16/P18*	572600
PIPELINES	K/20*	572605
AUSTRALIA	K/25*	572610
Iplex K2		
ISOLTUBEX	RFz 16*	571325
ISOLPEX	RFz 20*	571330
	RFlz 25	571337
	RFlz 32	571342
ISOLTUBEX	RFz 16*	571325
Multicapa	RFz 20*	571330
	RFlz 25	571337
	RFlz 32	571342
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
ISOTUBI	M 15	570110
NUMEPRESS	M 18[1]	570120
	M 22	570130
	M 28[1]	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708

System	Pressing contour	Art.-No.
IVAR	B 20*	570860
ALPEX-GAS	B 26	570870
	B 32	570880
IVAR	B 14*	570845
Ivar-Press	B 16*	570850
	B 18*	570855
	B 20*	570860
	B 26	570870
	B 32	570880
	F 50	570745
	F 63 (S)	572385
IVAR	TH 16*	570460
MULTI PRESS	TH 20*	570470
GAS	TH 26*	570475
	TH 32	570480
IVAR	TH 16*	570460
Multi Press MP	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	F 16*	570715
	F 18*	570720
	F 20*	570725
	F 26*	570730
	F 32	570735
	F 50	570745
	F 63 (S)	572385
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 25*	570360
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	C 26*	570750
	U 32	570785
	U 40	570790
	U 50	570795
	B 16*	570850
	B 18*	570855
	B 20*	570860
	B 26	570870
	B 32	570880
IVAR	TH 16*	570460
Plastic Multi Press	TH 20*	570470
PMP	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	F 16*	570715
	F 20*	570725
	F 26*	570730
	F 32	570735
	H 16*	570320
	H 20*	570350
	H 25*	570360
	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	U 25*	570780
	C 26*	570750
	U 32	570785
	B 16*	570850
	B 20*	570860
	B 26	570870
	B 32	570880
Jäger	H 14*	570310
aquapress H	H 16*	570320
	H 17*	570330
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 40	570790
	U 50	570795
	U 63 (S)	572365
Jäger	M 15	570110
Niropress Typ M	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708

System	Pressing contour	Art.-No.
Jaraflex-	TH 14*	570455
Presssystem	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
KAN	U 16*	570765
KAN-therm	U 20*	570775
	U 25*	570780
	C 26*	570750
	U 32	570785
	U 40	570790
	TH 50 (S)	572400
	TH 63 (S)	572405
KAN	U 14*	570760
KAN-therm LBP	U 16*	570765
	U 20*	570775
	U 25*	570780
	C 26*	570750
	U 32	570785
	U 40	570790
	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
KAN	M 15	570110
KAN-therm	M 18[1]	570120
Inox	M 22	570130
	M 28[1]	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
KAN	M 15	570110
KAN-therm	M 18[1]	570120
Steel	M 22	570130
	M 28[1]	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
KE KELIT	U 16*	570765
KELIT KELOX	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 75 (PR-3B)[3]	572828
KE KELIT	M 15	570110
steelFIX	M 18	570120
C-Stahl	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
KE KELIT	M 15	570110
steelFIX	M 18	570120
Edelstahl	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
KEMBLA	VAU 15 (OD 12,7 mm)	572687
KemPress	VAU 20 (OD 19,1 mm)	572689
(AUS)	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
	VAU 50 (OD 50,8 mm)	572697
KEMBLA	VAU 15 (OD 12,7 mm)	572687
KemPress Gas	VAU 20 (OD 19,1 mm)	572689
(AUS)	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
	VAU 50 (OD 50,8 mm)	572697

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes

System	Pressing contour	Art.-No.
KISAN	KI 16*	571360
Kisan KD	KI 20*	571370
	KI 25*	571375
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
KISAN	KI 16*	571360
Kisan WL	KI 20*	571370
	KI 25*	571375
	KI 32	571380
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
KISAN	KI 16*	571360
Kisan WM	KI 20*	571370
	KI 25*	571375
	KI 32	571380
KISAN	U 20*	570775
Kisan WR	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
KISAN	M 15	570110
Kistal C	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
KISAN	M 15	570110
Kistal Inox	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
KME Q-tec	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
Largo-	TH 12*	570452
Presssystem	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
LECHAR	TH 16*	570460
ALCOBRAPEX	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485

System	Pressing contour	Art.-No.
LECHAR	U 16*	570765
COBRAPEX	U 20*	570775
	U 25*	570780
	U 32	570785
LEGEND-PRESS	VUS ½"	571770
press fitting	VUS ¾"	571775
system	VUS 1"	571780
	VUS 1¼"	571785
	VUS 1½"	571790
	VUS 2"	571795
LK Systems	V 12	570107
LK >B<Press	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
LK Systems	V 12	570107
LK >B<Press	V 15	570115
Elförzinkat	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
LK Systems	V 15	570115
LK >B<Press	V 18	570125
Gas	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
LK Systems	TH 16*	570460
LK Universal	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
LVI-DAHL	U 16*	570765
Altech-Alupex	U 20*	570775
	U 25*	570780
	U 32	570785
Mair Heiztechnik	M 12	570100
Gomafix Cu/E	M 15	570110
	M 18[1]	570120
	M 22	570130
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526

System	Pressing contour	Art.-No.
Mair Heiztechnik	H 11,5*	570315
Gomafix M	H 14*	570310
	H 16*	570320
	H 20*	570350
Mair Heiztechnik	H 11,5*	570315
M-Press	H 14*	570310
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 40	570790
Ma.s.ter System	TH 14*	570455
PRESSMASTER	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 14*	570310
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
MAXITUB	RFz 12*	571320
MAXIPRESS	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
MAXITUB	TH 14*	570455
METALPEX	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
MEGARO	H 11,5*	570315
HAKAPRESS	H 14*	570310
	H 16*	570320
	H 17*	570330
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 40	570790
	F 50	570745
	F 63 (S)	572385
MEGARO	B 16*	570850
MEGAPRESS	B 20*	570860
	B 26	570870
	B 32	570880
	F 40	570742
	F 50	570745
	F 63 (S)	572385

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

[1] Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

[3] An adapter tong is required for driving pressing rings (PR), see page 158.

[4] Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.

[5] For taking suitable pressing inserts.

[6] Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
MEGARO	B 16*	570850
MEGAPRESS MP	B 20*	570860
	B 26	570870
	B 32	570880
	F 16*	570715
	F 20*	570725
	F 26*	570730
	F 32	570735
	F 40	570742
	F 50	570745
	F 63 (S)	572385
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 32	570785
MEGARO	B 16*	570850
MEGAPRESS	B 20*	570860
MPL	B 26	570870
	B 32	570880
	F 16*	570715
	F 20*	570725
	F 26*	570730
	F 32	570735
	F 40	570742
	F 50	570745
	F 63 (S)	572385
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 32	570785
METALGRUP	RFz 16*	571325
PexGrup	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
METALGRUP	U 16*	570765
MultiGrup	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
MULTITHERM	TH 16*	570460
PRESSSYSTEM	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	TH 75 (PR-3B)[3]	572829
Multicapas	U 16*	570765
Industrial	U 18*	570770
multitubo systems	MT 20*	571744
MC	MT 25*	571746
	MT 32	571748
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 63 (PR-3B)[3]	572837
	U 75 (PR-3B)[3]	572828
Multicapas	U 16*	570765
Industrial	MT 20*	571744
multitubo systems	MT 25*	571746
MM	MT 32	571748
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
	H 16*	570320
	H 20*	570350
	H 25*	570360
	H 26*	570370
	H 32	570380

System	Pressing contour	Art.-No.
NEUTHERM	H 16*	570320
MEKUPRESS-HT	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 40	570790
NIBCO (POL)	H 16*	570320
NEXT-Heat	H 20*	570350
	H 25*	570360
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
NIBCO (USA)	VUS ½"	571770
Press System	VUS ¾"	571775
Copper	VUS 1"	571780
	VUS 1¼"	571785
	VUS 1½"	571790
	VUS 2"	571795
Nicoll Fluxo	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	TH 75 (PR-3B)[3]	572829
Nicoll Fluxo Gas	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
NIROTEC	M 15	570110
PRESSFITTING	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
N.T.M.	TH 14*	570455
WINNY-AL	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 14*	570310
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
NUPIGECO	U 14*	570760
Multinupi	U 16*	570765
	U 18*	570770
	U 20*	570775
	C 26*	570750
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
Nussbaum	V 12	570107
Cupress	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
Nussbaum	VP 16*	570910
Optiflex Press	VP 20*	570915
	VP 25*	570920
	VP 32	570925

System	Pressing contour	Art.-No.
Nussbaum	V 15	570115
Optipress	V 18	570125
Aquaplus	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VF 64,0 (PR-3B)[3]	572815
	VF 76,1 (PR-3B)[3]	572816
	VF 88,9 (PR-3B)[3]	572817
	VF 108,0 (PR-3B)[3]	572818
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Nussbaum	V 15	570115
Optipress-Gaz	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VF 64,0 (PR-3B)[3]	572815
	VF 76,1 (PR-3B)[3]	572816
	VF 88,9 (PR-3B)[3]	572817
	VF 108,0 (PR-3B)[3]	572818
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
Nussbaum	V 15	570115
Optipress-Therm	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VF 64,0 (PR-3B)[3]	572815
	VF 76,1 (PR-3B)[3]	572816
	VF 88,9 (PR-3B)[3]	572817
	VF 108,0 (PR-3B)[3]	572818
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
O.M.T.	H 16*	570320
Heizungssystem	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
Oteraccordi	M 12	570100
Oter Tecno[1]	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Oteraccordi	M 12	570100
Oter Tecno	M 15	570110
carbonio[1]	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Oventrop Cofit P	H 16 A*	570620
	H 20 A*	570650
	H 26 A*	570670
	H 32 A	570680
	H 40 A	570690
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
PB TUB	RFz 12*	571320
SERTIPRESS	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
Pegler Yorkshire	M 15	570110
XPress Carbon	M 18[1]	570120
	M 22	570130
	M 28[1]	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Pegler Yorkshire	M 12	570100
XPress Copper	M 15	570110
	M 18[1]	570120
	M 22	570130
	M 28[1]	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes

System	Pressing contour	Art.-No.
Pegler Yorkshire	M 15	570110
XPress Copper	M 18[1)]	570120
Gas	M 22	570130
	M 28[1)]	570140
	M 35	570150
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
Pegler Yorkshire	TH 14*	570455
Henco Multilayer	TH 16*	570460
Solutions	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	HE 32	571900
	HE 40	571902
Pegler Yorkshire	M 15	570110
XPress Solar	M 18[1)]	570120
	M 22	570130
	M 28[1)]	570140
	M 35	570150
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
Pegler Yorkshire	M 15	570110
XPress	M 18[1)]	570120
Stainless	M 22	570130
	M 28[1)]	570140
	M 35	570150
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
PERFEXIM	U 16*	570765
"PERFEKT	U 20*	570775
SYSTEM"	U 25*	570780
	U 32	570785
PERFILTUBO	U 16*	570765
PERFILALUPEX	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3)]	572837
	U 63 (S)	572365
	U 75 (PR-3B)[3)]	572828
PERFILTUBO	M 15	570110
PERFILPRESS	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
PEXTUBE	RFz 16*	571325
PexTube	RFz 20*	571330
	RFIz 25	571337
	RFIz 32	571342
PIPELIFE	M 15	570110
C-PRESS	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
PIPELIFE-	TH 16*	570460
RADOPRESS	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405

System	Pressing contour	Art.-No.
PLASTICA ALFA	H 16*	570320
Multypex	H 20*	570350
	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	C 26*	570750
	U 32	570785
PLASTICA ALFA	H 16*	570320
Multypexalfa Gas	H 20*	570350
	H 26*	570370
PLASTICA ALFA	H 16*	570320
Multypexalfa Gas	H 20*	570350
protek	H 26*	570370
PLASTICA ALFA	H 16*	570320
Multypex	H 20*	570350
Air	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	C 26*	570750
	U 32	570785
PLASTICA ALFA	H 16*	570320
Multypex	H 20*	570350
Plus	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	C 26*	570750
	U 32	570785
PLASTICA ALFA	H 16*	570320
Multypex	H 20*	570350
Thermo	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	C 26*	570750
	U 32	570785
PLASTICA ALFA	H 16*	570320
Multypex	H 20*	570350
Thermo Plus	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	C 26*	570750
	U 32	570785
PLÁSTICOS	RFz 16*	571325
FERRO	RFz 20*	571330
FERROPLAST	RFz 25	571335
Pressfitting PE-X	RFz 32	571340
PLOMYPLAS	RFz 16*	571325
plomyPRESS	RFz 20*	571330
plomyAIR	RFz 25	571335
	RFz 32	571340
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
PLOMYPLAS	TH 16*	570460
plomyPRESS	TH 20*	570470
plomyGAS	TH 25*	570495
	TH 32	570480

System	Pressing contour	Art.-No.
PLOMYPLAS	RFz 16*	571325
plomyPRESS	RFz 20*	571330
plomyLAYER	RFz 25	571335
	RFz 32	571340
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
PLOMYPLAS	RFz 16*	571325
plomyPRESS	RFz 20*	571330
plomyLAYER PEX	RFz 25	571335
	RFz 32	571340
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
PLOMYPLAS	RFz 16*	571325
plomyPRESS	RFz 20*	571330
plomyPERT EVAL	RFz 25	571335
	RFz 32	571340
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
PLOMYPLAS	RFz 16*	571325
plomyPRESS	RFz 20*	571330
plomyPEX	RFz 25	571335
	RFz 32	571340
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
PLOMYPLAS	RFz 16*	571325
plomyPRESS	RFz 20*	571330
plomyPEX EVAL	RFz 25	571335
	RFz 32	571340
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
PLUMBING PLUS	VAU 15 (OD 12,7 mm)	572687
PRESS PLUS	VAU 20 (OD 19,1 mm)	572689
(AUS)	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
	VAU 50 (OD 50,8 mm)	572697
	VAUF 65 (PR-3B)[3)] (OD 63,5 mm)	572839
	VAUF 80 (PR-3B)[3)] (OD 76,2 mm)	572840
	VAUF 100 (PR-3B)[3)] (OD 101,6 mm)	572841

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

[1)] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2)] For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

[3)] An adapter tong is required for driving pressing rings (PR), see page 158.

[4)] Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.

[5)] For taking suitable pressing inserts.

[6)] Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
POLYPIPE	F 16*	570715
POLYPRESS	F 20*	570725
	F 26*	570730
	F 32	570735
	F 40	570742
	F 50	570745
	F 63 (S)	572385
	F 75 (PR-3B)[3]	572830
POLYPIPE	TH 10*	570467
POLYSURE	TH 15*	570457
	TH 22*	570472
	TH 28	570477
POLYSAN	TH 14*	570455
Handelsges.	TH 16*	570460
m.b.H. & Co KG	TH 17*	570462
(Krems/Öster-	TH 18*	570465
reich) POLYSAN-	TH 20*	570470
Press-System	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	TH 75 (PR-3B)[3]	572829
POLYSAN	M 15	570110
Handelsges.	M 18	570120
m.b.H. & Co KG	M 22	570130
(Krems/Öster-	M 28	570140
reich) POLYSAN-	M 35	570150
EUROTUBI	M 42 (PR-3S)[3]	572706
C-Stahl-Press-	M 54 (PR-3S)[3]	572708
System		
POLYSAN	M 15	570110
Handelsges.	M 18	570120
m.b.H. & Co KG	M 22	570130
(Krems/Öster-	M 28	570140
reich) POLYSAN-	M 35	570150
EUROTUBI	M 42 (PR-3S)[3]	572706
Edelstahl-	M 54 (PR-3S)[3]	572708
Press-System		
POLYSAN	M 15	570110
Handelsges.	M 18	570120
m.b.H. & Co KG	M 22	570130
(Krems/Öster-	M 28	570140
reich) POLYSAN-	M 35	570150
EUROTUBI	M 42 (PR-3S)[3]	572706
Edelstahl-Press	M 54 (PR-3S)[3]	572708
System Gas		
POLYSAN	U 16*	570765
(España)	U 18*	570770
Rainbow	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
Prandelli	H 14*	570310
Multyrama Pf	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 40	570790
	U 50	570795
Prandelli	H 16*	570320
Multyrama Pfm	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 16*	570765
	U 18*	570770
	U 20*	570775
PRASKI	TH 10*	570467
BAVARIA-press	TH 14*	570455
	TH 16*	570460
	TH 17*	570462
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485

System	Pressing contour	Art.-No.
Raccorderie	M 15	570110
Metalliche	M 18	570120
inoxPRES[1]	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Raccorderie	M 15	570110
Metalliche	M 18	570120
steelPRES[1]	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
RBM Tita-gas	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
RBM Tita-fix	B 14*	570845
	B 16*	570850
	B 18*	570855
	B 20*	570860
	B 26	570870
	F 16*	570715
	F 18*	570720
	F 20*	570725
	H 14*	570310
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
remo	H 14*	570310
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
RIFENG U	U 14*	570760
PRESS FITTING	U 16*	570765
(F5)	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 63 (PR-3B)[3]	572837
	U 75 (PR-3B)[3]	572828
RIFENG TH	TH 16*	570460
PRESS FITTING	TH 20*	570470
(F9)	TH 25*	570495
	TH 26*	570475
	TH 32	570480
RIQUIER	RFz 12*	571320
A SERTIR	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
Rofix Climatrix	H 16*	570320
Rhinopex	H 20*	570350
	U 16*	570765
	U 20*	570775
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
Roth	RN 14*	572672
	RN 17*	572674
	RN 20*	572676
	RN 25/26	572678
	RN 32	572680
	RN 40 (PR-3S)[3]	572714
	RN 50 (PR-3S)[3]	572716
	RN 63 (PR-3B)[3]	572836

System	Pressing contour	Art.-No.
Roth Nordic	RN 16	572670
Alu-LaserPlus/	RN 20	572676
PressCheck[2]	RN 25/26	572678
(DNK-NOR-SWE-FIN)	RN 32	572680
	RN 40 (PR-3S)[3]	572714
	RN 50 (PR-3S)[3]	572716
Rubinetterie	M 15	570110
Bresciane	M 18	570120
Bonomi	M 22	570130
TURBO INOX	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Rubinetterie	M 15	570110
Bresciane	M 18	570120
Bonomi	M 22	570130
TURBO STEEL	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Rubinetterie	TH 14*	570455
Bresciane	TH 16*	570460
Bonomi	TH 18*	570465
TURBO PRESS	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Rubinetterie	TH 16*	570460
Bresciane	TH 20*	570470
Bonomi	TH 26*	570475
TURBO PRESS	TH 32	570480
GAS		
Sa.MI plastic	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Sa.MI plastic	TH 16*	570460
Multistrato Gas	TH 20*	570470
	TH 26*	570475
	TH 32	570480
SANHA	TH 14*	570455
3fit-Press	TH 16*	570460
Serie 25000	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 14*	570760
	U 16*	570765
	U 20*	570775
SANHA-Press	SA 12	570930
Chrom	SA 15	570935
Serie 16000	SA 18	570940
	SA 22	570945
	SA 28	570950
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes

System	Pressing contour	Art.-No.
SANHA-NiroSan-Presssystem Serie 9000	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
SANHA-NiroSan-Presssystem Gas Serie 17000	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512

System	Pressing contour	Art.-No.
SANHA-NiroSan-Presssystem Serie 19000 (silicone free)	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
SANHA-Pressfittings Serie 6000/ Serie 8000	SA 12	570930
	SA 14	570932
	SA 15	570935
	SA 16	570937
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 12	570107
	V 14	570112
	VG 14	570132
	V 15	570115
	V 16	570117
	VG 16	570137
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512

System	Pressing contour	Art.-No.
SANHA-Pressfittings Gas Serie 10000/ Serie 11000	SA 12	570930
	SA 14	570932
	SA 15	570935
	SA 16	570937
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 12	570107
	V 14	570112
	VG 14	570132
	V 15	570115
	V 16	570117
	VG 16	570137
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
SANHA-Pressfittings Solar Serie 12000/ Serie 13000	SA 12	570930
	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

[3] An adapter tong is required for driving pressing rings (PR), see page 158.

[4] Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.

[5] For taking suitable pressing inserts.

[6] Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
SANHA-Pressfittings Air Serie 14000/ Serie 15000	SA 12	570930
	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
SANHA-Pressfittings Industrie Serie 18000	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
SANHA PURAPRESS Serie 80000	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
	M 15[1]	570110
	M 18[1]	570120
	M 22[1]	570130
	M 28[1]	570140
	M 35[1]	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512

System	Pressing contour	Art.-No.
SANHA-Therm Serie 24000	SA 12	570930
	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
SATEC SK VITerm	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 40	570790
	U 50	570795
	U 63 (S)	572365
Schlösser EUROPRESS-SYSTEM	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
SCHÜTZ EHT rOpress	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
Schwer Fittings AQUApress	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
Seppelfricke HENCO PRESS	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	HE 32	571900
	HE 40	571902
Seppelfricke Sudopress Edelstahl Visu-Control	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
Seppelfricke Sudopress Kupfer Visu-Control	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
Seppelfricke Sudopress Kupfer Visu-Control Gas	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
Seppelfricke Sudopress Kupfer Visu-Control Solar	V 15	570115
	V 18	570125
	V 22	570135

System	Pressing contour	Art.-No.
Seppelfricke Sudopress SKIN Visu-control	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	THL 32	570487
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Seppelfricke XPress C-Stahl	M 12	570100
	M 15	570110
	M 18[1]	570120
	M 22	570130
	M 28[1]	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Seppelfricke XPress Edelstahl	M 15	570110
	M 18[1]	570120
	M 22	570130
	M 28[1]	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Seppelfricke XPress Kupfer	M 12	570100
	M 15	570110
	M 18[1]	570120
	M 22	570130
	M 28[1]	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
Seppelfricke XPress Kupfer gas	M 15	570110
	M 18[1]	570120
	M 22	570130
	M 28[1]	570140
	M 35	570150
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
SESTA SESTA GAS	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
SESTA Sistema multistrato	H 16*	570320
	H 20*	570350
	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16*	570765
	U 20*	570775
SIKO TYPRO	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
SIKO TYROTHERM	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
SLOVARM PEX-THERM	U 16*	570765
	U 20*	570775
	H 26*	570370
	U 32	570785
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
Standard Hidráulica MultiStandard	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
STELBI POLIKRAFT	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405

Ташев Галвинг ООД
www.tashev-galving.com

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes

System	Pressing contour	Art.-No.
SURE HISPANIA	RFz 16*	571325
SURE-PRESS	RFz 20*	571330
	RFlz 25	571337
	RFlz 32	571342
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
Systerm	H 16 A*	570620
WELCO-Gas	H 20 A*	570650
	H 26 A*	570670
	H 32 A	570680
Systerm	H 14 A*	570610
WELCO-Flex	H 16 A*	570620
	H 17 A*	570630
	H 20 A*	570650
	H 26 A*	570670
	H 32 A	570680
	H 40 A (4G)	570695
Systerm	H 16 A*	570620
WELCO-Teck	H 20 A*	570650
	H 26 A*	570670
TERMICALINE	B 16*	570850
Termipex	B 20*	570860
	B 26	570870
	B 32	570880
	H 16*	570320
	H 20*	570350
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 16*	570765
	U 20*	570775
TermoConcept	Basic E01[5]	571855
TC-PRESS		
THERMOLUTZ	H 14*	570310
acular/rapid	H 16*	570320
	H 17*	570330
TE-SA	TH 14*	570455
TE-SA press	TH 16*	570460
serie 800	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
THISA	RFz 16*	571325
Thisa multiplus	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
THISA	RFz 16*	571325
Thisa Pex	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
TIEMME	TH 14*	570455
COBRAPRESS	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	THL 32	570487
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405

System	Pressing contour	Art.-No.
TIEMME	RFz 16*	571325
Serie 1700 PE-X	RFz 20*	571330
a pressare	RFz 25	571335
	RFz 32	571340
TIEMME	TH 16*	570460
TIEMME Gas	TH 20*	570470
	TH 26*	570475
	THL 32	570487
TKM	TH 14*	570455
Systemtechnik	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
TRA	U 16*	570765
MULTITRAPRESS	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
	U 75 (PR-3B)[3]	572828
TRA TRAPRESS	H 12*	570300
	H 16*	570320
	H 20*	570350
	H 25*	570360
	H 32	570380
	RFz 12*	571320
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
Tréfimétaux Qtec	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
TWEETOP	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
	U 75 (PR-3B)[3]	572828
UNICAL AG	U 16*	570765
MAX MULTIPEX	U 20*	570775
	H 26*	570370
	U 32	570785
UNIDELTA	TH 16*	570460
DeltAll	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 16*	570765
	U 20*	570775
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365

System	Pressing contour	Art.-No.
Uponor Unipipe	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
	U 75 (PR-3B)[3]	572828
Uponor MLC	UP 14*	572630
	UP 16*	572632
	UP 18*	572634
	UP 20*	572636
	UP 25	572638
	UP 32	572640
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
	U 75 (PR-3B)[3]	572828
Uponor MLC-D	UP 16*	572632
	UP 20*	572636
	UP 25	572638
	UP 32	572640
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3]	572837
	U 63 (S)	572365
	U 75 (PR-3B)[3]	572828
Uponor MLC-G[2]	UP 20[2]	572636
	UP 25	572638
	UP 32	572640
Valsir PEXAL	H 14*	570310
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32 V	570685
Valsir PEXAL Gas	H 14*	570310
	H 16*	570320
	H 20*	570350
	H 26*	570370
Van Marcke Log.	TH 16*	570460
Tu-Bi-Pex	TH 17*	570462
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	TH 75 (PR-3B)[3]	572829
Van Marcke Log.	M 12	570100
Tu-Bi-Press	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
Variotherm	TH 11,6*	570482
System TH	TH 16*	570460
Viega Pexfit Fosta	VX 16*	571635
	VX 20*	571640
	VX 25*	571645
Viega Pexfit	VX 16*	571635
Fosta G	VX 20*	571640
	VX 25*	571645

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

[3] An adapter tong is required for driving pressing rings (PR), see page 158.

[4] Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.

[5] For taking suitable pressing inserts.

[6] Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

System	Pressing contour	Art.-No.
Viega Pexfit Plus	VX 12*	571630
	VX 16*	571635
	VX 20*	571640
Viega Pexfit Pro Fosta	VX 16*	571635
	VX 20*	571640
	VX 25*	571645
Viega Pexfit Pro Plus	VX 16*	571635
	VX 20*	571640
Viega Prestabo	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VF 64,0 (PR-3B)[3) 6)]	572815
	VF 76,1 (PR-3B)[3) 6)]	572816
	VF 88,9 (PR-3B)[3) 6)]	572817
	VF 108,0 (PR-3B)[3) 6)]	572818
	V 12 45° (PR-2B)[3)]	574502
	V 15 45° (PR-2B)[3)]	574504
	V 18 45° (PR-2B)[3)]	574506
	V 22 45° (PR-2B)[3)]	574508
	V 28 45° (PR-2B)[3)]	574510
	V 35 45° (PR-2B)[3)]	574512
Viega Profipress	V 12	570107
	VG 14	570132
	V 15	570115
	VG 16	570137
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VF 64,0 (PR-3B)[3) 6)]	572815
	VF 76,1 (PR-3B)[3) 6)]	572816
	VF 88,9 (PR-3B)[3) 6)]	572817
	VF 108,0 (PR-3B)[3) 6)]	572818
	V 12 45° (PR-2B)[3)]	574502
	V 15 45° (PR-2B)[3)]	574504
	V 18 45° (PR-2B)[3)]	574506
	V 22 45° (PR-2B)[3)]	574508
	V 28 45° (PR-2B)[3)]	574510
	V 35 45° (PR-2B)[3)]	574512
Viega Profipress G	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VF 64,0 (PR-3B)[3) 6)]	572815
	V 12 45° (PR-2B)[3)]	574502
	V 15 45° (PR-2B)[3)]	574504
	V 18 45° (PR-2B)[3)]	574506
	V 22 45° (PR-2B)[3)]	574508
	V 28 45° (PR-2B)[3)]	574510
	V 35 45° (PR-2B)[3)]	574512
Viega Profipress S	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 12 45° (PR-2B)[3)]	574502
	V 15 45° (PR-2B)[3)]	574504
	V 18 45° (PR-2B)[3)]	574506
	V 22 45° (PR-2B)[3)]	574508
	V 28 45° (PR-2B)[3)]	574510
	V 35 45° (PR-2B)[3)]	574512
Viega Profipress Therm	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 12 45° (PR-2B)[3)]	574502
	V 15 45° (PR-2B)[3)]	574504
	V 18 45° (PR-2B)[3)]	574506
	V 22 45° (PR-2B)[3)]	574508

System	Pressing contour	Art.-No.
Viega ProPress System USA	VUS ½"	571770
	VUS ¾"	571775
	VUS 1"	571780
	VUS 1¼"	571785
	VUS 1½"	571790
	VUS 2"	571795
XL-C/XL-S	VUSF 2½" (PR-3B)[3) 6)]	572819
XL-C/XL-S	VUSF 3" (PR-3B)[3) 6)]	572820
XL-C/XL-S	VUSF 4" (PR-3B)[3) 6)]	572821
Viega Propress WATER System AUS	VAU 15 (OD 12,7 mm)	572687
	VAU 20 (OD 19,1 mm)	572689
	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
	VAU 50 (OD 50,8 mm)	572697
Viega PropressG GAS System AUS	VAU 15 (OD 12,7 mm)	572687
	VAU 20 (OD 19,1 mm)	572689
	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
	VAU 50 (OD 50,8 mm)	572697
Viega Raxofix	VRX 16	571750
	VRX 20	571752
	VRX 25	571754
	VRX 32	571756
Viega Sanfix Fosta[2)]	VP 16*	570910
	VP 20*	570915
	VP 25*	570920
	VP 32	570925
Viega Sanfix Plus	VP 16*	570910
	VP 20*	570915
Viega Sanpress	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VR 76,1 (PR-3B)[3) 6)]	572822
	VR 88,9 (PR-3B)[3) 6)]	572823
	VR 108,0 (PR-3B)[3) 6)]	572824
	V 12 45° (PR-2B)[3)]	574502
	V 15 45° (PR-2B)[3)]	574504
	V 18 45° (PR-2B)[3)]	574506
	V 22 45° (PR-2B)[3)]	574508
	V 28 45° (PR-2B)[3)]	574510
	V 35 45° (PR-2B)[3)]	574512
Viega Sanpress Inox	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VF 64,0 (PR-3B)[3) 6)]	572815
	VF 76,1 (PR-3B)[3) 6)]	572816
	VF 88,9 (PR-3B)[3) 6)]	572817
	VF 108,0 (PR-3B)[3) 6)]	572818
	V 15 45° (PR-2B)[3)]	574504
	V 18 45° (PR-2B)[3)]	574506
	V 22 45° (PR-2B)[3)]	574508
	V 28 45° (PR-2B)[3)]	574510
	V 35 45° (PR-2B)[3)]	574512
Viega Sanpress Inox G	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VF 64,0 (PR-3B)[3) 6)]	572815
	VF 76,1 (PR-3B)[3) 6)]	572816
	VF 88,9 (PR-3B)[3) 6)]	572817
	VF 108,0 (PR-3B)[3) 6)]	572818
	V 15 45° (PR-2B)[3)]	574504
	V 18 45° (PR-2B)[3)]	574506
	V 22 45° (PR-2B)[3)]	574508
	V 28 45° (PR-2B)[3)]	574510
	V 35 45° (PR-2B)[3)]	574512

System	Pressing contour	Art.-No.
Viessmann	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
VSH MultiPress	U 14*	570760
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
VSH XPress Carbon	M 12	570100
	M 15	570110
	M 18[1)]	570120
	M 22	570130
	M 28[1)]	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
VSH XPress Copper	M 15	570110
	M 18[1)]	570120
	M 22	570130
	M 28[1)]	570140
	M 35	570150
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
VSH XPress Copper GAS	M 15	570110
	M 18[1)]	570120
	M 22	570130
	M 28[1)]	570140
	M 35	570150
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
VSH XPress Copper Solar	M 15	570110
	M 18[1)]	570120
	M 22	570130
	M 28[1)]	570140
	M 35	570150
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
VSH XPress Stainless	M 15	570110
	M 18[1)]	570120
	M 22	570130
	M 28[1)]	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3)]	572706
	M 54 (PR-3S)[3)]	572708
Walter Meier Metalplast	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B)[3)]	572837
	U 63 (S)	572365
	U 75 (PR-3B)[3)]	572828
Watts MTR Art press	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
WATTS RADIANT Watts WaterPEX	US ⅜"*	571450
	US ½"*	571455
	US ¾"*	571460
	US 1"*	571465
	US 1¼"	571470
	US 1½"	571475
WATTS RADIANT Watts RadiantPEX	US ⅜"*	571450
	US ½"*	571455
	US ¾"*	571460
	US 1"*	571465
	US 1¼"	571470
	US 1½"	571475
WATTS RADIANT Watts RadiantPEX-AL	U 16 (½")	570765
	U 20 (⅝")	570775
	U 25 (¾")	570780
	U 32 (1")	570785
Wavin Tigris K1	U 14*	570760
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
Wavin Tigris M1	U 14*	570760
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes

System	Pressing contour	Art.-No.
WeeConPress Alu	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B)[3]	574502
	V 15 45° (PR-2B)[3]	574504
	V 18 45° (PR-2B)[3]	574506
	V 22 45° (PR-2B)[3]	574508
	V 28 45° (PR-2B)[3]	574510
	V 35 45° (PR-2B)[3]	574512
	SA 12	570930
	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S)[3]	572710
	SA 54 (PR-3S)[3]	572712
WeeConPress C-Stahl	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
WeeConPress Inox	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)[3]	572706
	M 54 (PR-3S)[3]	572708
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530

System	Pressing contour	Art.-No.
WeeConPress Kupfer	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S)3)	572706
	M 54 (PR-3S)3)	572708
	M 12 45° (PR-2B)[3]	574520
	M 15 45° (PR-2B)[3]	574522
	M 18 45° (PR-2B)[3]	574524
	M 22 45° (PR-2B)[3]	574526
	M 28 45° (PR-2B)[3]	574528
	M 35 45° (PR-2B)[3]	574530
WeeConFlex MVR	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
WEFA PLASTIC WEFATHERM-PRESS	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
WEM	H 16*	570320
	U 16*	570765
WIELAND cuprotherm CTX	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
Winkler	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
WKS-Press	TH 14*	570455
	TH 16*	570460
	TH 17*	570462
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
XtraConnect	F 16*	570715
	F 20*	570725
	F 26*	570730
	F 32	570735
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 16*	570765
	U 20*	570775
(NW 26)	U 25*	570780
	U 32	570785
	VP 16*	570910
	VP 20*	570915
	VP 32	570925

System	Pressing contour	Art.-No.
Zetaesse Multistrato EUROPEX	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
Zetaesse Multistrato ISOPEX	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
Zetaesse Rame HydroSAN	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	U 14*	570760
	U 16*	570765
	U 20*	570775
Zetaesse Rame ThermoSAN	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	U 14*	570760
	U 16*	570765
	U 20*	570775
ZEWOTHERM	TH 12*	570452
	TH 16*	570460
	TH 17*	570462
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
ZURN INDUSTRIES ZURN PEX	US ⅜"*	571450
	US ½"*	571455
	US ¾"*	571460
	US 1"*	571465
	US 1 ¼"	571470
	US 1 ½"	571475
	US 2"	571477

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

[1] Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

[3] An adapter tong is required for driving pressing rings (PR), see page 158.

[4] Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.

[5] For taking suitable pressing inserts.

[6] Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

The suitability of REMS pressing tools for pressfitting systems: Date 28.10.2013. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

Ташев-Галвинг ООД
www.tashev-galving.com

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes



REMS pressing tong with two pivoted mono block pressing jaws. Top-selling standard version.



REMS pressing tong (4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions.



REMS pressing tong (S) with one fixed and two pivoted pressing segments, for midsize dimensions.



REMS pressing ring (PR-3S) with 3 swivellable pressing segments mounted on a jointed ring for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments, with adapter tong.



REMS pressing rings (PR-3B) with 3 pressing segments for high quality, large dimension pressings Optimum pressing by radially controlled movement of the pressing segments with adaptor tongs.



REMS pressing ring 45° (PR-2B) with 2 pressing jaws for pressings at places of difficult access, with adapter tongs.


Accessories

Description	Art.-No.	
Adapter tong Z1 for driving REMS pressing rings 45° (PR-2B)	574500	
Adapter tong Z2 for driving REMS pressing rings (PR-3S) 42–54 mm	572795	
Adapter tong Z4 for driving REMS pressing rings (PR-3B) 75 mm	572801	
Adapter tong Z5 For driving REMS pressing rings (PR-3B) VF/VR 64–108 mm and VUSF/VUSR 2½–4"	572802	
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1¼")/cropping tongs and compartment for pipe cutter up to 42 mm	570295	
Steel case with insert for 2 pressing tongs (M 42 (4G), M 54 (4G), V 42, V 54, H 40, H 40 A, VUS 1½", VUS 2")	570290	
Steel case with insert for adapter tongs with pressing rings M 42 (PR-3S) and M 54 (PR-3S) or with pressing rings SA 42 (PR-3S) and M 54 (PR-3S).	572810	
Steel case with inlay for adapter tongs and 4 pressing rings (PR-3B) VF 64.0–108.0 mm/VR 76.1–108.0 mm/ VUSF 2½–4"/VUSR 2½–4"	572809	
Steel case with insert for adapter tong Mini Z1 and adapter tong Z1 and 6 REMS pressing rings V 12–35 45° (PR-2B) or M 12–35 45° (PR-2B)	574516	




Ташев Галвинг ООД
www.tashev-galving.com

Confirmation of suitability

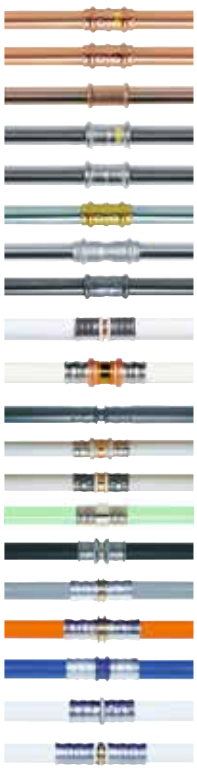



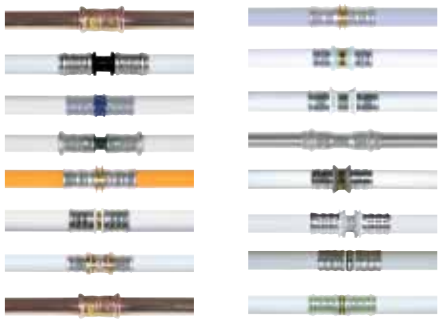

ZVSHK

BTGA

suissetec

VDKF

Hold-Harmless and Indemnification Agreement
See page 160.

The suitability of crimping tools is determined basically by the manufacturer of crimping tools. Moreover the suitability of REMS crimping tools has been confirmed by the system manufacturer/ supplier himself or approved through independent testing institutes.

Confirmation of suitability through the system manufacturer/supplier

More than 90 % of the manufacturers/suppliers of the pressfitting systems listed herein have tested REMS pressing tongs and confirmed the suitability for their pressfitting system.

Confirmation of suitability through independent testing institutes

The suitability of REMS pressing tongs for additional pressfitting systems have been confirmed through independent technical institutes:

TÜV-Certificates

Available for Geberit Mepla, Geberit Mapress C-STAHL, Geberit Mapress EDELSTAHL, Geberit Mapress Kupfer, Nussbaum Cupress, Nussbaum Optipress, Uponor Unipipe, Viega-'profipress', Viega-'profipress G', Viega-'sanfix P', Viega-'sanpress', Viega-'Viegatherm P', Wavin Tigris.
The TÜV-certificates confirm that REMS crimping tools are suitable for producing perfect and system-conformity pressing joints corresponding to these systems.

Suitability test according to DVGW W 534 (portable water)

Pressing joints produced with REMS pressing tools were tested by the state-operated material testing institute in Darmstadt/Germany or the material testing institute of the Land of North-Rhine-Westphalia, Germany according to DVGW work sheet W 534. These material testing institutes are certified by the DVGW for making these tests. A representative cross-section of press joints of pressfitting systems Geberit Mapress Edelstahl, Raccorderie Metalliche inoxPRES, Raccorderie Metalliche steelPRES, Uponor Unipipe and Viega 'profipress' was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.

Eignungsprüfung nach DVGW VP 614/625 or prEN 1254-7 (Gas)

Pressing joints made with REMS pressing tools have been tested by the TÜV or by the Land Material Testing Institute Nordrhein-Westfalen or the DVGW Research Institute Karlsruhe according to DVGW Regulations VP 614/625 or by the BSI (UK) according to prEN 1254-7. A representative cross-section of pressing joints of the pressfitting systems Geberit Mapress Edelstahl Gas, Geberit Mapress Kupfer Gas, Henco Gas, IBP >B<press Gas, Kembla KemPress Gas, Pegler Yorkshire X-Press Copper Gas, Uponor MLC-G, Viega-'profipress G', Viega-'sanpress INOX G', Viega-'propress G GAS' (AUS) was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.





potable water



gas

Ташев Галвинг ООД
www.tashev-galving.com

Hold-Harmless and Indemnification Agreement



Reliable and safe: REMS is the first system-independent machine and tool manufacturer who negotiated a hold-harmless and indemnification agreement for press tools.

A hold-harmless and indemnification agreement exists with the:

Zentralverband Sanitär Heizung Klima (Central Organization for the Sanitary-, Heating- and Climatization Industries),
Rathausallee 6, D-53757 St. Augustin,
referred to in the following as ”ZVSHK”,

Bundesindustrieverband Technische Gebäudeausrüstung e.V.,
Hinter Hoben 149, 53129 Bonn,
referred to in the following as ”BTGA”,

Verband Deutscher Kälte-Klima-Fachbetriebe e. V.
(German Association for Coolant & Air-Conditioning Profession Industries),
Kaiser-Friedrich-Straße 7, D-53113 Bonn,
referred to in the following as ”VDKF”,

Schweizerisch-Liechtensteinischem Gebäudetechnikverband
(Swiss-Liechtenstein Technical Building Association),
Auf der Mauer 11, CH-8023 Zürich,
referred to in the following as ”suissetec”,

The Zentralverband Sanitär Heizung Klima (ZVSHK), the Bundesindustrieverband Technische Gebäudeausrüstung e. V. (BTGA), the Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (VDKF) and the Schweizerisch-Liechtensteinische Gebäudetechnikverband (suissetec) have made liability acceptance agreements in the interests of trade and industry with REMS GmbH & Co KG (REMS) for the radial pressing tools.

- Manual radial press REMS Eco-Press
- Cordless radial press REMS Mini-Press ACC
- Electric radial press REMS Power-Press E
- Electro-hydraulic radial press REMS Power-Press
- Electro-hydraulic radial press REMS Power-Press ACC
- Cordless radial press REMS Akku-Press
- Cordless radial press REMS Akku-Press ACC
- REMS pressing tongs (pressing jaws)
- REMS pressing tongs Mini (pressing jaws).

This makes REMS the first system-independent machine- and tool manufacturer to have concluded a hold-harmless and indemnification agreement for pressing tools. The conclusion of the agreement was effected on the basis of a successful cooperation established on partnership between REMS, the crafts, trades and industry and their organizations.

Eligible for services and performances from this agreement are all independent professional craftsmen, and companies of such, who are enrolled in the register of artisans and craftsmen (referred to in the following as ”SHK-Establishments”), in as far as they have been members of the crafts guild of the sanitary- heating- and climatization enterprises competent for their business location at the time the damage event has arisen, and this crafts guild is associated with a regional guild association, which is a member of the ZVSHK.

Entitled to the services from the agreement with the BTGA are all building technology companies (hereinafter referred to as “TGA companies”) insofar as they were a member of the Bundesindustrieverband Technische Gebäudeausrüstung responsible at the seat of their company at the time of the damage case and therefore an indirect member of the BTGA or direct member of the BTGA.

Eligible for services and performances from this agreement with the VDKF are all coolant systems companies or professional organisations (referred to as Coolant and Air-Conditioning Profession Industries) who, at the time the damage is caused, are members of the VDKF.

Eligible for services and performances from this agreement are all building systems companies (following TGA companies) who, at the time the damaged is caused, are members of suissetec.

In as far as the radial pressing tools mentioned show a defect with regard to construction, manufacture or material, or if the operator’s manuals are faulty, thereby causing damage for the customer of the SHK-establishment, the Coolant and Air-Conditioning Profession Industries, or the TGA-companies, for which the SHK-establishment or the TGA-company is liable, then REMS shall be additionally liable - aside of the statutory prescriptions – for the consequences resulting from leakage, in accordance with the stipulations and provisions of this hold-harmless agreement.

The hold-harmless and indemnification agreement shall be independently valid, regardless of which pressfitting system is pressed with the REMS pressing tools. The current status regarding suitability of the REMS pressing tools for pressfitting systems can be viewed on the Internet: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

Please consult Mr. Walter Hindelang for further information:
walter.hindelang@rems.de.

Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS cropping tongs

Accessories for REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes

High performance cropping tongs in forged and specially hardened steel for cutting threaded rods.

Steel, stainless steel up to hardness classification 4.8 (400 N/mm²) M 6 – M 12

REMS cropping tong – for cutting threaded rods.

Made of forged and specially hardened steel.

Reversible cropping inserts for double service life.


M cropping inserts with high precision thread contour machined on CNC machining centres for exact guiding of the threaded rod in the cutting process Pliers parts, cropping inserts and specially machined and hardened cutting edges, made to fit exactly, for cutting without burr

Threaded rod can be screwed into a threaded connection of the pipe clip or the nut without rework after cutting

Cutting device in pliers design **(Patent EP 1 459 825, patent US 7,284,330).** Drive through all REMS radial presses (except radial presses Mini) and through suitable radial presses of other makes. All cropping tongs marked with * have an optional connection **(Patent EP 1 223 008, patent US 6,739,172)** for manual drive through the radial press REMS Eco-Press.









German Quality Product



Patent EP 1 223 008
Patent US 6,739,172
Patent EP 1 459 825
Patent US 7,284,330

Supply format

REMS cropping tong. Cropping tongs with 1 pair of reversible cropping inserts for steel, stainless steel, M 6 – M 12. In a carton.

Description	for threaded rods	Art.-No.
REMS cropping tong M 6*	M 6	571890
REMS cropping tong M 8*	M 8	571895
REMS cropping tong M 10	M 10	571865
REMS cropping tong M 12	M 12	571870

Accessories

Description	for threaded rods	Art.-No.
Cropping inserts M 6 (pair)	M 6	571891
Cropping inserts M 8 (pair)	M 8	571896
Cropping inserts M 10 (pair)	M 10	571866
Cropping inserts M 12 (pair)	M 12	571871
Steel case with insert for 6 cropping tongs/pressing tongs and compartment for pipe cutter up to 42 mm		570295





REMS cable shear

Accessories for REMS radial presses (except REMS Mini-Press ACC) and suitable radial presses of other makes

High-grade cable shear in forged and specially hardened steel for cutting electric cable.

Electric cable ≤ 300 mm² (Ø 30 mm)

REMS cable shear – Easy cutting of electric cable.

Made of forged and specially hardened steel.

Replaceable cutting blades manufactured on CNC production centres ensure a precision blade geometry and long service life. Large cutting range.

Drive through electric REMS radial presses (except REMS Mini-Press ACC) and through suitable radial presses of other makes.





German Quality Product



Supply format

REMS cable shear. Cable shears with 2 changeable cable cutters for electric cables ≤ 300 mm² (Ø 30 mm). In a carton.


	Art.-No.
	571887

Accessories

Description	Art.-No.
Cable cutters (pack of 2)	571889



Ташев Галвинг ООД
www.tashev-galving.com

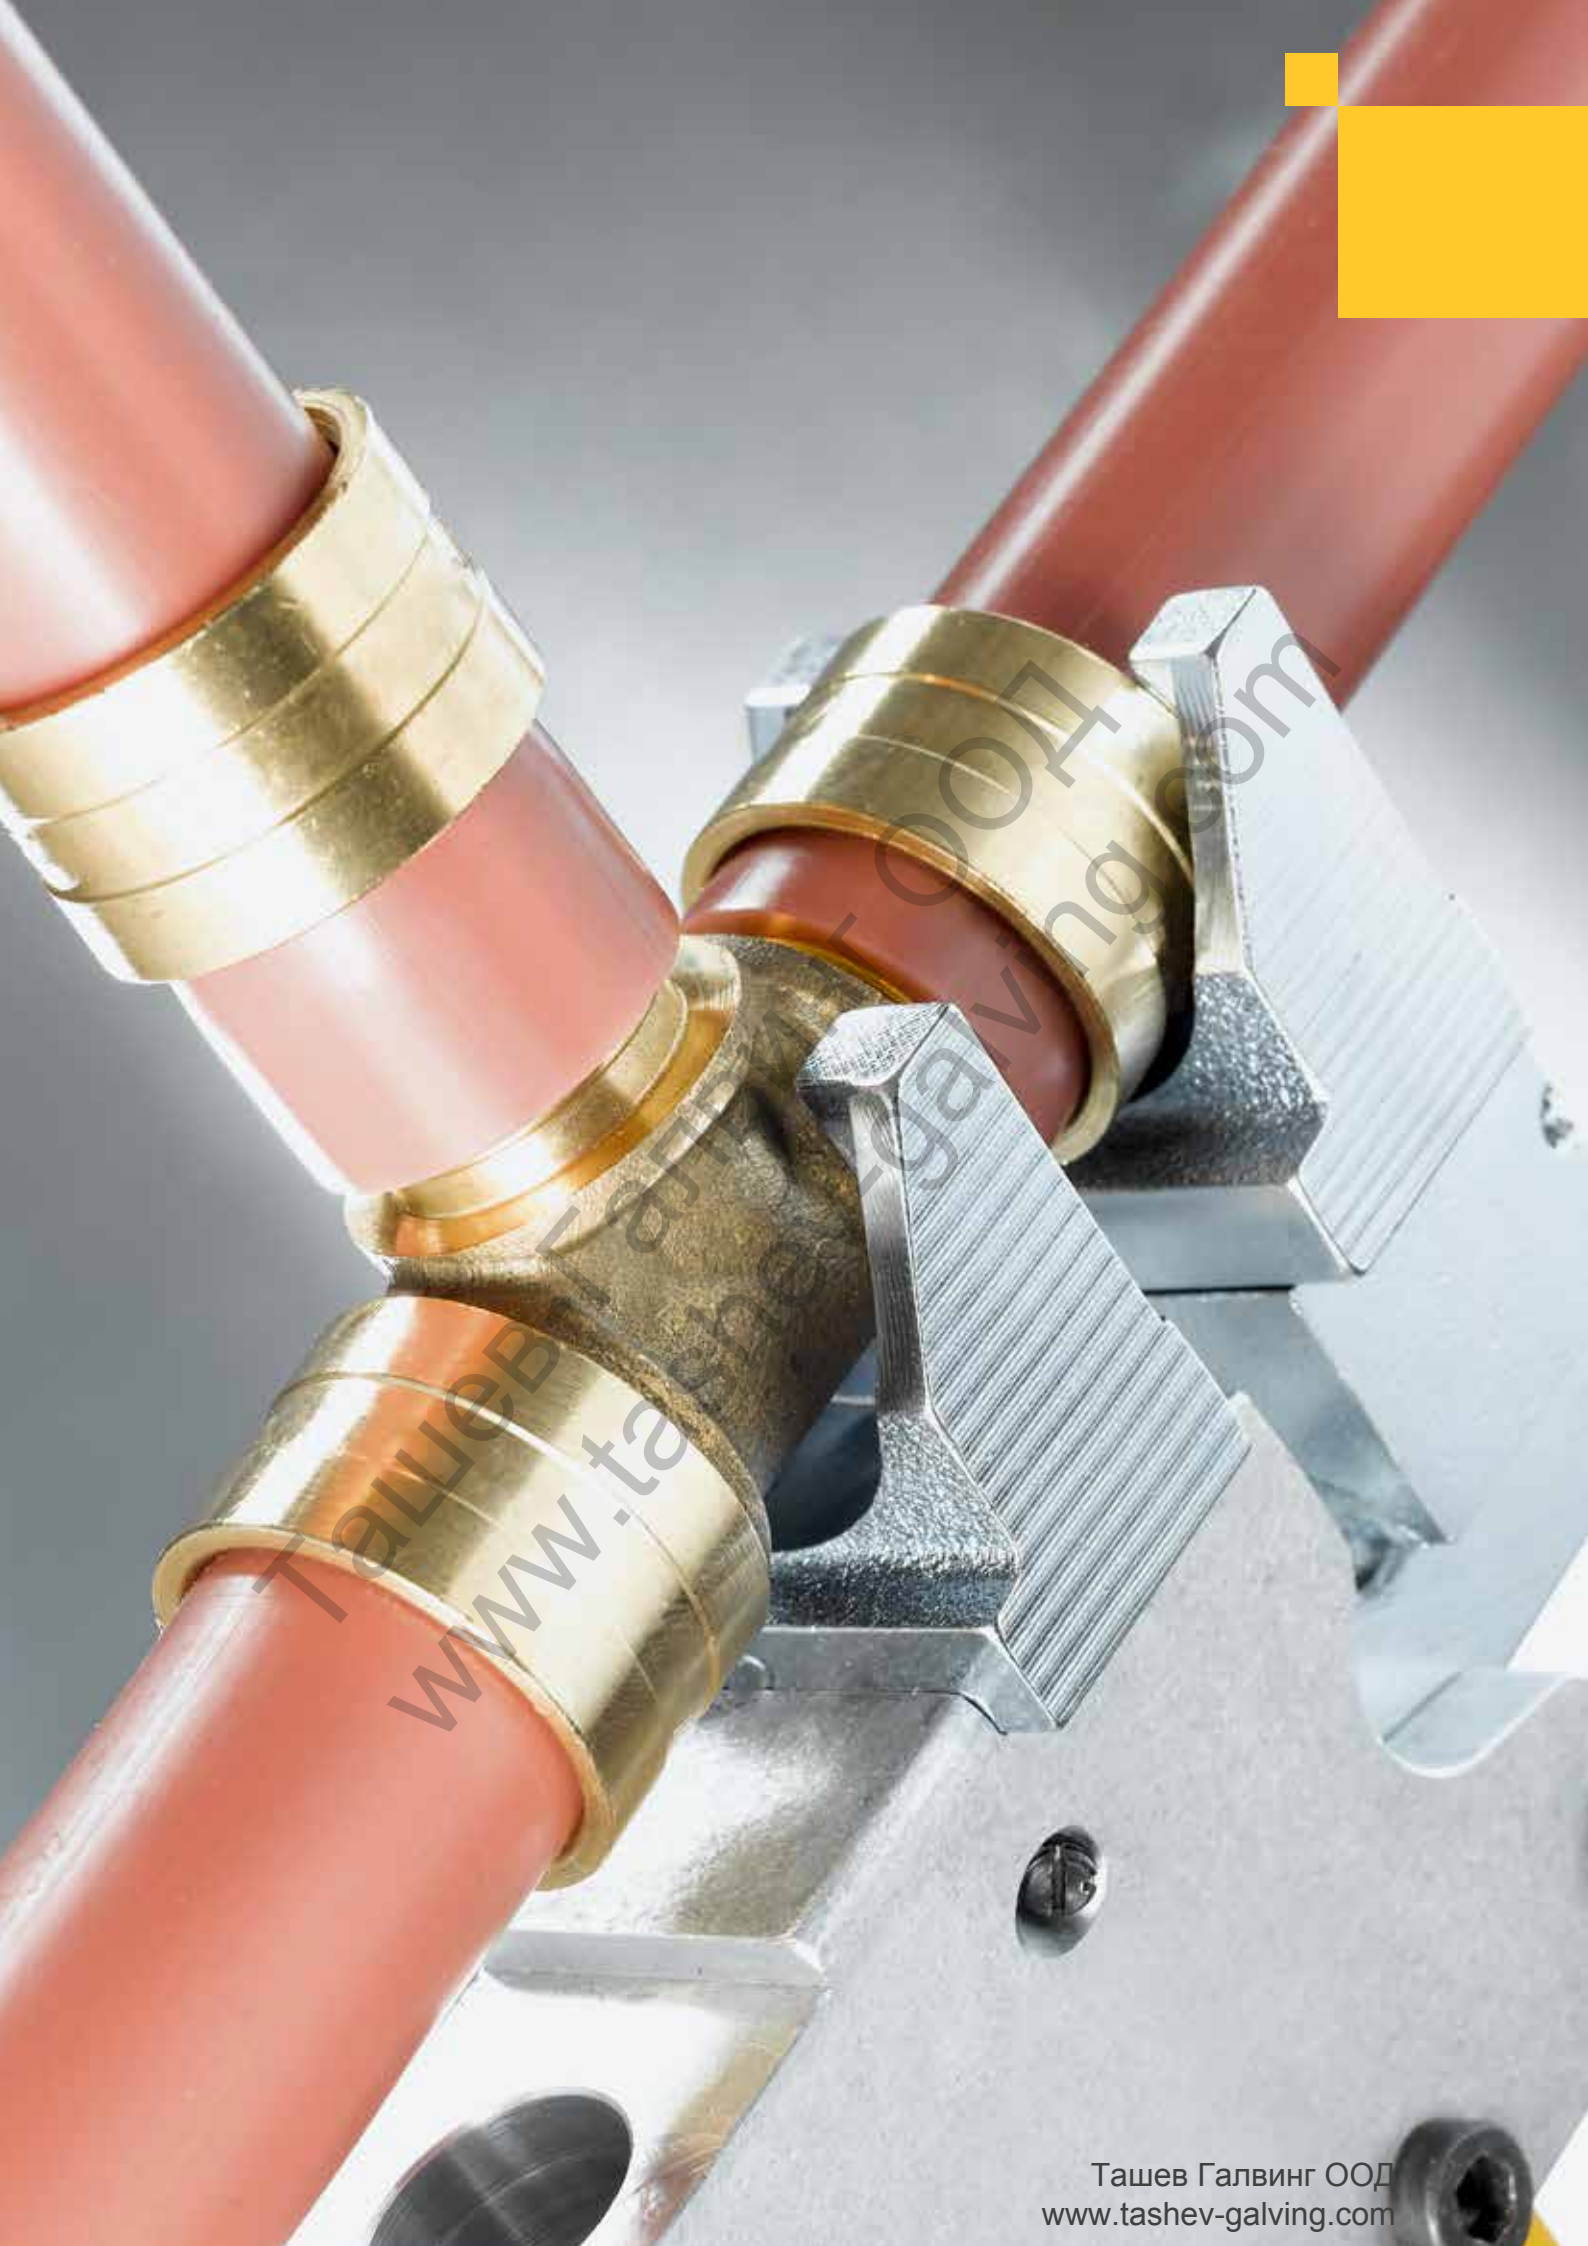

Ташев Галвинг ООД
www.tashev-galving.com

Axial Press Jointing

Ташев-Галвинг ООД
www.tashev-galving.com

	**Cordless axial press 25 / 25 L**	**164**
	**Manual axial press**	**166**
	**Compression heads**	**167**
	**Cordless axial press 40 Compression heads**	**169**

REMS Ax-Press 25 / 25 L ACC

Cordless axial press with automatic return

Compact, handy electric tool for producing compression sleeve joints and for expanding tubes. For battery and corded operation. For trade and industry. For the building site and the workshop.

Axial compression	Ø 12–40 mm

REMS Ax-Press 25 ACC – universal up to Ø 40 mm. Super light, super handy. Fast. With automatic return. Optimum weight distribution for single-hand operation. Swivelling compression device.

System advantage

Only **one** type of compression heads for REMS Ax-Press HK, REMS Ax-Press H, REMS Ax-Press 25 and REMS Ax-Press 25 L. Thus easy, economic stocking.

Compression heads for all common systems

Full range of REMS compression heads for all common compression sleeve systems (page 167–168). Choice of REMS compression heads with spring lock for seating common compression inserts. High-grade compression heads in forged and specially hardened steel. The REMS compression heads are system-specific and meet the demands of compression sleeve systems. Thus perfect system-conformity, safe jointing.

Expander heads for all common systems

Complete assortment of REMS expander heads for all common compression sleeve systems. The REMS compression heads are system-specific and correspond to the respective compression sleeve system. Thus perfect system-conformity, precise expanding.

Design

Compact, handy, light. REMS Ax-Press 25 drive machine with battery weighs only 2.9 kg, only 29 cm long REMS Ax-Press 25 L drive machine with battery weighs only 3.1 kg, only 32 cm long REMS Ax-Press 25 and REMS Ax-Press 25 L with 40 mm stroke respectively REMS Ax-Press 25 with preset compression head position for pressing compression sleeve connectors with a clamping distance ≤ 82 mm in one action REMS Ax-Press 25 L with selectable compression head position for pressing compression sleeve connectors with a clamping distance ≤ 116 mm in one action and for double pressings. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. Integrated LED work light for illuminating the work place. Swivelling compression device for working in confined area. Extension for enlarging the clamping distance on the pressing sleeve connector, also for double pressings, as an accessory. Compression heads quickly interchangeable, without tools. Secure spring lock seating of compression heads. For battery and corded operation. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED.

Drive

Enormous pressing force for fast and perfect jointing. Powerful electro-hydraulic drive with automatic return (ACC), eccentric reciprocating pump with robust planetary gear. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 420 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 1.6 or 3.2 Ah capacity for long service life. Powerful and light. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V voltage supply for mains operation instead of Li-Ion 14.4 V battery, as accessory.

Expanding

Various pipe expanders and complete range of REMS expanding heads for all common pressure sleeve systems



with automatic circuit control and charging status check

e.g.
aquatherm,
Brasstech,
General Fittings,
IVT,
REHAU,
REVEL,
ROTEX,
Seppelfricke,
TECE,
Würth




with automatic circuit control and charging status check

e.g.
AC-FIX,
EUROP´FLUIDES
MAXITUB,
SURE HISPANIA,
THISA

Tested by electrosuisse

German Quality Product



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Ax-Press 25 / 25 L ACC

Cordless axial press with automatic return

Supply format

REMS Ax-Press 25 ACC Basic-Pack. Cordless axial press for producing compression sleeve joints Ø 12 – 40 mm. 40 mm stroke, for pressing compression sleeve connections with a clamping distance ≤ 82 mm. For driving REMS pressing heads. Electro-hydraulic drive with powerful battery motor 14,4 V, 420 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch, swivelling pressing device. Integrated LED work light. Battery Li-Ion 14.4 V, 1.6 Ah, rapid charger Li-Ion/Ni-Cd 230 V or 110 V, 50 – 60 Hz, 50 W. Without compression heads. In sturdy steel case.

	Art.-No.	
	573033	

Other voltages on request.



Supply format

REMS Ax-Press 25 L ACC Basic-Pack. Cordless axial press for producing compression sleeve joints Ø 12 – 40 mm. 40 mm stroke, for pressing compression sleeve connections with a clamping distance ≤ 116 mm. For driving REMS pressing heads. Electro-hydraulic drive with powerful battery motor 14,4 V, 420 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch, swivelling pressing device. Integrated LED work light. Battery Li-Ion 14.4 V, 1.6 Ah, rapid charger Li-Ion/Ni-Cd 230 V or 110 V, 50 – 60 Hz, 50 W. Without compression heads. In sturdy steel case.

	Art.-No.	
	573034	

Other voltages on request.



Combi Set

Space and weight saving Combi Set, consisting of REMS Ax-Press 25 ACC and REMS Akku-Ex-Press P ACC For fast and simple expanding of pipes and pressing of compression sleeve connectors with a clamping distance of ≤ 82 mm For details of the REMS Akku-Ex-Press P ACC. see page 175. Advantage: only 1 steel case for REMS Ax-Press 25 ACC and REMS Akku-Ex-Press P ACC, expanding heads and compression heads Price advantage.

Supply format

REMS Ax-Press 25 ACC / Akku-Ex-Press P ACC Combi Set Basic. Space and weight saving Combi Set, consisting of REMS Ax-Press 25 ACC drive machines for producing compression sleeve connections Ø 12 – 40 mm, with 40 mm stroke, for pressing compression sleeve connectors with a clamping distance of ≤ 82 mm and REMS Akku-Ex-Press P ACC for fast expanding of plastic and composite tubes Ø 12 – 40 mm. 2 Li-ion 14.4 V, 1.6 Ah batteries, Li-ion/Ni-Cd 230 V, 50 – 60 Hz, 65 W rapid charger. Without compression heads. Without expanding heads. In sturdy steel case.

	Art.-No.	
	573035	

Other voltages on request.



Accessories

Description	Art.-No.	
REMS compression heads see page 167 – 168.		
Expander heads P see page 177.		
REMS Ax-Press 25 ACC drive unit, without battery	573003	
REMS Ax-Press 25 L ACC drive unit, without battery	573004	
REMS Akku-Ex-Press P ACC drive unit, without battery	575008	
Battery Li-Ion 14,4 V, 1.6 Ah	571545	
Battery Li-Ion 14.4 V, 3.2 Ah	571555	
Rapid charger Li-Ion/Ni-Cd 230 V, 50 – 60 Hz, 65 W	571560	
Voltage supply Li-Ion 230 V for mains operation instead of battery Li-Ion 14.4 V.	571565	
Steel case with insert	578290	
Steel case with inlay for cordless axial press and cordless pipe expander	573284	
REMS cordless LED lamp see page 97	175200	



Ташев Галвинг ООД
www.tashev-galving.com

Universal manual axial press for producing compression sleeve joints.

Axial compression Ø 12 – 32 mm

REMS Ax-Press HK – universal up to Ø 22 mm
Ultra small, ultra light, ultra handy. Only 1.1 kg

REMS Ax-Press H – universal up to Ø 32 mm.
Handy and light. Only 1.4 kg.

Complete assortment of REMS compression heads, quickly interchangeable.

System advantage

Only **one** type of compression heads for REMS Ax-Press HK, REMS Ax-Press H, REMS Ax-Press 25 and REMS Ax-Press 25 L. Thus easy, economic stocking.

Compression heads

Full range of REMS compression heads for all common compression sleeve systems (page 167 – 168). Choice of REMS compression heads with spring lock for seating common compression inserts. High-grade compression heads in forged and specially hardened steel. The REMS compression heads are system-specific and meet the demands of compression sleeve systems. Thus perfect system-conformity, safe jointing.

Design

Compact, job site proven. Handy and light. REMS Ax-Press HK drive unit only 1.1 kg. REMS Ax-Press H drive unit only 1.4 kg. Works anywhere, free-hand, also in tight spots. 66 mm stroke. Quick-acting forward and release for easy, fast operation. Selectable compression head position **(Patent ES 2 273 563, Patent FR 05 03513, Patent DE pending)** for pressing compression sleeve connectors with a clamping distance of ≤ 161 mm in one action and for double pressings. Quick-change compression heads and pressing inserts without tools. Secure fit of compression heads and pressing inserts by spring catch.

Expanding

Various pipe expanders and complete range of REMS expanding heads for all common compression sleeve systems (page 174 – 177).

Patent ES 2 273 563
Patent FR 05 03513
Patent DE pending



e.g.
AC-FIX,
aquatherm,
Comap,
PB TUB,
RIQUIER,
ROTEX,
SURE HISPANIA,
TECE,
THISA,
VELTA-EUROJAUGE









German Quality Product





Supply format

REMS Ax-Press HK drive unit. Axial press for single-handed operation for producing compression sleeve joints Ø 12 – 22 mm. 66 mm stroke. With quick-acting forward and release. For driving REMS compression heads. In a carton.

	Art.-No.	
	574302	

Supply format

REMS Ax-Press H drive unit. Manual axial press for producing compression sleeve joints Ø 12 – 32 mm. 66 mm stroke. With quick-acting forward and release. For driving REMS compression heads. In a carton.

	Art.-No.	
	574300	


Accessories

Description	Art.-No.	
REMS compression heads see page 167 – 168.		
Carrying bag for REMS Ax-Press HK/H drive unit and compression heads	574437	
Case with inlay for REMS Ax-Press HK drive unit and compression heads	574352	




Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com



REMS compression heads with spring lock for commercially available press inserts

Description	Use
Compression head Basic 20 (pack of 2)	for pipe fittings 20 mm and for standard press inserts outer Ø 20 mm
Compression head Basic 25 (pack of 2)	for pipe fittings 25 mm and for standard press inserts outer Ø 25 mm
Compression head Basic 32 (pack of 2)	for pipe fittings 32 mm and for standard press inserts outer Ø 32 mm

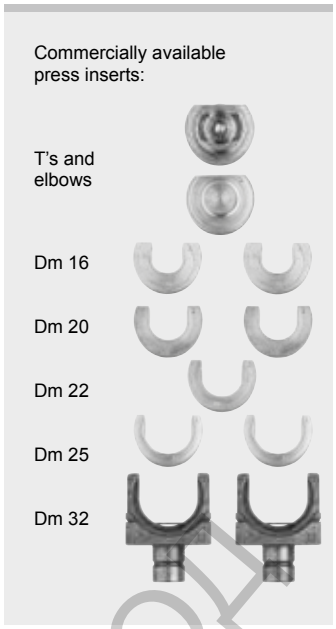







REMS compression head for T-pieces, elbows, splitters, transition pieces

Description	Use
Compression head UNI T/L (piece)	for T-pieces, elbows, splitters, in combination with an additional compression head; for transition pieces, in combination with a support bol









REMS support bolt for transition pieces

Description	for transition pieces inch	Art.-No.	
Support bolt ⅜"	⅜	573647	
Support bolt ½"	½	573648	
Support bolt ¾"	¾	573649	





Ташев Галвинг ООД
www.tashev-galving.com

REMS compression heads

Accessories for REMS Ax-Press HK, REMS Ax-Press H, REMS Ax-Press 25, REMS Ax-Press 25 L

Select compression heads yourself!

Search for the required compression sleeve system in the table below and select the correct compression heads.


High-grade compression heads in forged and specially hardened steel. Quickly interchangeable, without tools. The REMS compression heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, safe jointing. Drive through REMS axial presses.



Compr. heads Uni



Compr. head UNI T/L



Compr. heads Basic for press inserts

Pressure sleeves system	Compression head mm	Number of pressing heads	fits REMS Ax-Press HK[1]	H	25	25 L	Art.-No.
AC-FIX (Global Piping System)	UNI 12	2	•	•		•	573630
	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI 32	2		•		•	573644
	UNI T/L**	1	•	•		•	573646
	Basic 20*	2	•	•		•	573624
	Basic 25*	2	•	•		•	573616
	Basic 32*	2	•	•		•	573628
aquatherm	AT 16	2			•		573120
	AT 20	2			•		573122
	AT 25	2			•		573124
	AT 32	2			•		573126
	AT 40	2			•		573128
BRASELI	UNI 12	2	•	•		•	573630
	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI 32	2		•		•	573644
	UNI T/L**	1	•	•		•	573646
	Basic 20*	2	•	•		•	573624
	Basic 25*	2	•	•		•	573616
	Basic 32*	2	•	•		•	573628
Brass & Fittings	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI 32	2		•		•	573644
	UNI T/L**	1	•	•		•	573646
	Basic 20*	2	•	•		•	573624
	Basic 25*	2	•	•		•	573616
	Basic 32*	2	•	•		•	573628
Brasstech Raptor/ Metalpex/ Raptor 2/ MULTItermoSAN	ME 14	2			•		573100
	ME 16	2			•		573102
	ME 20	2			•		573106
	ME 26	2			•		573108
COMAP PEXY	UNI 12	2	•	•			573630
	UNI 16	2	•	•			573632
	UNI 20	2	•	•			573636
	UNI 25	2		•			573640
	UNI 32	2		•			573644
	UNI T/L**	1	•	•			573646
	Basic 25*	2	•	•			573616
	Basic 32*	2	•	•			573628
EUROP´FLUIDES HYDROFLUIDES	UNI 12	2	•	•		•	573630
	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI 32	2		•		•	573644
	UNI T/L**	1	•	•		•	573646
	Basic 25*	2	•	•		•	573616
	Basic 32*	2	•	•		•	573628
Fittings Estándar	UNI 12	2	•	•		•	573630
	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI 32	2		•		•	573644
	UNI T/L**	1	•	•		•	573646
	Basic 20*	2	•	•		•	573624
	Basic 25*	2	•	•		•	573616
	Basic 32*	2	•	•		•	573628
General Fittings Serie 3400 PEX	RE 16	2			•		573160
	RE 20	2			•		573162
	RE 25	2			•		573172
	RE 32	2			•		573178
	RO 16	2			•		573184
	RO 20	2			•		573186
General Fittings Serie 3400 PEX/AL/PEX	RE 16	2			•		573160
	RE 20	2			•		573162
	RE 25	2			•		573172
	RE 32	2			•		573178
	RO 16	2			•		573184
	RO 20	2			•		573186
General Fittings Serie 3700 PEX	TC 12/14/16	2			•		573360
	TC 18/20	2			•		573364
	TC 25	2			•		573367
	TC 32	2			•		573370
General Fittings Serie 3700 PEX/AL/PEX	TC 12/14/16	2			•		573360
	TC 18/20	2			•		573364
	TC 25	2			•		573367
	TC 32	2			•		573370
General Fittings Serie 5400	ME 14	2			•		573100
	ME 16	2			•		573102
	ME 20	2			•		573106
	ME 26	2			•		573108
IVT PRINETO	IV 16	3			•		573320
	IV 20	3			•		573325
	IV 25	3			•		573330
	IV 32	3			•		573335
ISOLTUBEX	UNI 12	2	•	•		•	573630
	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI 32	2		•		•	573644
	UNI T/L**	1	•	•		•	573646
	Basic 20*	2	•	•		•	573624
	Basic 25*	2	•	•		•	573616
	Basic 32*	2	•	•		•	573628
MAXITUB MAXIFIX	UNI 12	2	•	•		•	573630
	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI 32	2		•		•	573644
	UNI T/L**	1	•	•		•	573646
	Basic 25*	2	•	•		•	573616
	Basic 32*	2		•		•	573628
PB TUB Sertigliss	UNI 12	2	•	•			573630
	UNI 16	2	•	•			573632
	UNI 20	2	•	•			573636
	UNI 25	2		•			573640
	UNI 32	2		•			573644
	UNI T/L**	1	•	•			573646
	Basic 25*	2	•	•			573616
	Basic 32*	2	•	•			573628
PLÁSTICOS FERRO FERROPLAST	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI 32	2		•		•	573644
	UNI T/L**	1	•	•		•	573646
	Basic 20*	2	•	•		•	573624
	Basic 25*	2	•	•		•	573616
	Basic 32*	2	•	•		•	573628
REHAU RAUTHERM (série S 5)	RH 12	2			•		573164
	RH 16	2			•		573166
	RH 20	2			•		573170
	RH 25	2			•		573154
	RH 32	2			•		573156
REHAU RAUTHERM S (REHAU HAS)	RH 17	2			•		573168
	RH 20	2			•		573170
	RH 25	2			•		573154
	RH 32	2			•		573156
REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler	RE 16	2			•		573160
	RE 20	2			•		573162
	RE 25	2			•		573172
	RE 32	2			•		573178
	RE 40	2			•		573176
REHAU (GBR) EVERLOC	RH 16	2			•		573166
	RH 20	2			•		573170
	RH 25	2			•		573154
	RH 32	2			•		573156
REVEL	RV 16	2			•		573400
	RV 20	2			•		573402
	RV 25	2			•		573404
	RV 32	2			•		573406
Riquier à glissement	UNI 12	2	•	•			573630
	UNI 16	2	•	•			573632
	UNI 20	2	•	•			573636
	UNI 25	2		•			573640
	UNI 32	2		•			573644
	UNI T/L**	1	•	•			573646
	Basic 25*	2	•	•			573616
ROTEX	RO 12	2		•	•		573180
	RO 16	2		•	•		573184
	RO 20	2		•	•		573186
	RO 25	2		•	•		573188
	RO 32	2		•	•		573190
Seppelfricke SD Sistemi Italia SYLVER	RH 16	2			•		573166
	RH 20	2			•		573170
	RH 25	2			•		573154
	RH 32	2			•		573156
Seppelfricke SD Sistemi Italia NEROflex	RH 16	2			•		573166
	RH 20	2			•		573170
	RH 25	2			•		573154
	RH 32	2			•		573156
SURE HISPANIA SURE-CAS	UNI 12	2	•	•		•	573630
	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI 32	2		•		•	573644
	UNI T/L**	1	•	•		•	573646
	Basic 20*	2	•	•		•	573624
	Basic 25*	2	•	•		•	573616
	Basic 32*	2	•	•		•	573628
TECE TECEflex	TC 12/14/16	2	•	•	•		573360
	TC 18/20	2	•	•	•		573364
	TC 25	2		•	•		573367
	TC 32	2		•	•		573370
TERSIA-Pex	IV 16	3			•		573320
	IV 20	3			•		573325
	IV 25	3			•		573330
	IV 32	3			•		573335
THISA plus THISA PEX	UNI 12	2	•	•		•	573630
	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI 32	2		•		•	573644
	UNI T/L**	1	•	•		•	573646
	Basic 20*	2	•	•		•	573624
	Basic 25*	2	•	•		•	573616
	Basic 32*	2	•	•		•	573628
Velta Eurojauge	UNI 12	2	•	•		•	573630
	UNI 16	2	•	•		•	573632
	UNI 20	2	•	•		•	573636
	UNI 25	2		•		•	573640
	UNI T/L**	1	•	•		•	573646
	Basic 25*	2	•	•		•	573616
Würth PRINETO	IV 16	3			•		573320
	IV 20	3			•		573325
	IV 25	3			•		573330
	IV 32	3			•		573335

Compression heads for additional compression sleeve systems on request.

[1] For producing compression sleeve connection of Ø 12 – 22 mm.

* **Compression heads with spring lock**

Compression head Basic 20 for pipe fittings 20 mm and for standard press inserts outer Ø 20 mm

Compression head Basic 25 for pipe fittings 25 mm and for standard press inserts outer Ø 25 mm

Compression head Basic 32 for pipe fittings 32 mm and for standard press inserts outer Ø 32 mm

** **Compression head for T-pieces, elbows, splitters, transition pieces**

Compression head UNI T/L for T-pieces, elbows, splitters, in combination with an additional compression head; for transition pieces, in combination with a support bolt, see page 167.

Ташев-Галвинг ООД www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Ax-Press 40

Cordless axial press

Compact, handy electric tool for producing compression sleeve joints with crimping sleeve. For trade and industry. For the building site and the workshop.

Axial compression Ø 12 – 32 mm

REMS Ax-Press 40 Li-Ion – up to Ø 32 mm.

Complete assortment of REMS compression heads for all common compression sleeve systems with crimping sleeve. High-grade compression heads in forged and specially hardened steel. The REMS compression heads are system-specific and correspond to the respective compression sleeve system. Thus perfect system-conformity, safe jointing.

Design

Compact, handy, light. Drive unit with battery only 5.5 kg. Vertically from the drive unit located pressing device for seating the compression heads **(Patent US 6,415,641).** Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. Integrated LED work light for illuminating the work place. Swivelling compression device for working in confined area. Compression heads and expander heads quickly interchangeable, without tools. Secure spring lock seating of compression heads. For battery and corded operation. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED.

Drive

Enormous pressing force for fast and perfect jointing. Powerful electro-hydraulic drive, eccentric reciprocating pump with robust planetary gear. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 3.2 Ah capacity, for long service life. Powerful and light. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V voltage supply for mains operation instead of Li-Ion 14.4 V battery, as accessory.



Patent US 6,415,641

e.g.
Brasstech
CONVAL
General Fittings
Georg Fischer pfci
Logstor

German Quality Product

Tested by electrosuisse

LED



Supply format

REMS Ax-Press 40 Set. Cordless axial press for producing compression sleeve joints with crimping sleeve Ø 12 – 32 mm. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch, swivelling compression device. Integrated LED work light. Battery Li-Ion 14.4 V, 3.2 Ah, rapid charger Li-Ion/Ni-Cd 230 V, 50 – 60 Hz, 65 W. REMS compression heads corresponding to the respective compression sleeve system. In sturdy steel case.

Description	Compression sleeve system	Art.-No.
Set ME 16-20-26	CONVAL, Brasstech Raptor/ Metalpex/Raptor 2/MULTItermo-SAN, Genral Fittings Serie 5400, Georg Fischer pfci ALUPEX-EX-PRESS/Alupex Gas-System	573061
Set LR 20-22-25	Logstor	573064
Basic-Pack	without compression heads	573060



Accessories



REMS compression heads

Compression sleeve system	Compression head	Art.-No.
Brasstech Raptor/ Metalpex/ Raptor 2/ MULTItermoSAN	ME 14 (pack of 2)	573100
	ME 16 (pack of 2)	573102
	ME 20 (pack of 2)	573106
	ME 26 (pack of 2)	573108
CONVAL	ME 14 (pack of 2)	573100
	ME 16 (pack of 2)	573102
	ME 20 (pack of 2)	573106
	ME 26 (pack of 2)	573108
General Fittings Serie 5400	ME 14 (pack of 2)	573100
	ME 16 (pack of 2)	573102
	ME 20 (pack of 2)	573106
	ME 26 (pack of 2)	573108
Georg Fischer pfci ALUPEX-EXPRESS/ Alupex Gas System	ME 14 (pack of 2)	573100
	ME 16 (pack of 2)	573102
	ME 20 (pack of 2)	573106
	ME 26 (pack of 2)	573108

Description	Art.-No.
REMS Ax-Press 40 Li-Ion drive unit, without battery	573006
Battery Li-Ion 14.4 V, 3.2 Ah	571555
Rapid charger Li-Ion/Ni-Cd 230 V, 50 – 60 Hz, 65 W	571560
Voltage supply Li-Ion 230 V for mains operation instead of battery Li-Ion 14.4 V.	571565
Steel case with insert	573282
REMS cordless LED lamp see page 97	175200

REMS compression heads

Compression sleeve system	Compression head	Art.-No.
Logstor	ME 16 (pack of 2)	573102
	LR 20 (pack of 2)	573430
	LR 22 (pack of 2)	573432
	LR 25 (pack of 2)	573434
	LR 28 (pack of 2)	573436
	LR 32 (pack of 2)	573438




Ташев Галвинг ООД
www.tashev-galving.com



Ташев Галвинг ООД
www.tashev-galving.com

Expanding
Extracting

	Hand tube expander Cu	172
	Expander head Cu	172
	Cordless pipe expander Cu	173
	One-hand pipe expander	174
	Hand tube expander P	174
	Cordless pipe expander P	175
	Expander head Cu P	177
	Cordless pipe expander Q&E	178
	Electro-hydraulic pipe expander Q&E	179
	Hand tube extractor	180
	Electric tube extractor Electric tube expander	181

Ташев-Галвинг ООД
www.tashev-galving.com

REMS Ex-Press Cu

Hand tube expander

Proven quality tool for expanding and calibrating pipes for pipe installation without fittings.	
Soft copper tubes s ≤ 1.5 mm	Ø 8–42 mm Ø ⅜–1⅛"
Soft aluminium tubes, soft precision steel tubes s ≤ 1.2 mm	Ø 8–42 mm Ø ⅜–1⅛"
Soft stainless steel tubes s ≤ 1 mm	Ø 8–42 mm Ø ⅜–1⅛"



German Quality Product

REMS Ex-Press Cu – for making sockets yourself. 6-face mandrel for even and concentric expanding. Extra long sockets according to DVGW. Expander heads with calibration neck, fit other makes as well.

Cost advantage

Pipe installation without fittings. No costs for fittings, storage, procurement. Savings in soldering joints, soldering material and working hours. Using up pipe pieces to provide sockets.

Design

Robust quality tool. Torsion-free, power-transmitting expander levers with ergonomically designed handles, for effortless expanding. 6-face mandrel for even and concentric expanding. Extra long sockets, spring-loaded return of mandrel

Expander heads

Quick-change. Extra long expander heads result in extra long sockets for perfect pipe connections according to DVGW. Special neck at expander head specially for calibration of deformed pipe ends.

Supply format

REMS Ex-Press Cu Set. Hand tube expander Ø 8–42 mm, Ø ⅜–1⅛". Soft copper tubes Ø 8–42 mm, Ø ⅜–1⅛", s ≤ 1,5 mm, soft aluminium tubes and soft steel precision tubes Ø 8–42 mm, Ø ⅜–1⅛", s ≤ 1,2 mm, soft stainless steel tubes Ø 8–42 mm, Ø ⅜–1⅛", s ≤ 1 mm. Expander drive. Choice of expander heads for pipes in mm or inch. In sturdy steel case.

Description	Art.-No.
Set 12-15-18-22	150000
Set 12-15-22-28	150005
Set 15-18-22-28	150006
Set 12-15-18-22-28	150007
Set 12-14-16-18-22	150010
Set ⅜-½-⅝-¾-⅞-1⅛"	150017
Set ½-⅝-⅞-1⅛"	150018
Set ⅜-½-⅝-⅞"	150019
Set ⅜-½-⅝-¾-⅞-1"	150020



Accessories

Description	Pipes Ø mm/inch	Art.-No.
Expander head Cu (fit expander drives of REMS Akku-Ex-Press Cu ACC and other makes also)	8	150100
	10	150105
	12	150110
	14	150120
	15	150125
	16	150130
	18	150140
	20	150145
	22	150150
	24	150155
	25	150160
	26	150165
	28	150170
	30	150175
	32	150180
	34	150185
	35	150190
	36	150195
	40	150205
	42	150210
	⅜"	150220
	½"	150225
	⅝"	150230
	¾"	150235
	⅞"	150240
	1"	150245
	1⅛"	150250
Expander drive Cu		150500
Steel case with insert		150600





Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Akku-Ex-Press Cu ACC

Cordless pipe expander with automatic return

Compact, handy electric tool for fast, easy expanding and calibration of pipes for pipe installation without fittings. For battery and corded operation. For trade and industry. For the building site and the workshop.

Soft copper tubes s ≤ 1.5 mm	Ø 8–42 mm Ø ⅜–1¾"
Soft aluminium tubes, soft precision steel tubes s ≤ 1.2 mm	Ø 8–42 mm Ø ⅜–1¾"
Soft stainless steel tubes s ≤ 1 mm	Ø 8–42 mm Ø ⅜–1¾"



German Quality Product

Tested by electrosuisse

REMS Akku-Ex-Press Cu ACC – fast, easy electric expanding up to Ø 42 mm. With automatic return.

Cost advantage

Pipe installation without fittings. No costs for fittings, storage, procurement. Savings in soldering joints, soldering material and working hours. Using up pipe pieces to provide sockets.

Expander heads for all common systems

Quick-change. Extra long expander heads result in extra long sockets for perfect pipe connections according to DVGW. Special neck at expander head specially for calibration of deformed pipe ends.

Execution

Compact, handy, light. Drive unit with battery only 2.3 kg. Drive machine only 30 cm long. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. For battery and corded operation. Integrated LED work light for illuminating the work place. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED. Conical expanding mandrel (conical angle 18°) for even concentric expanding. Extra long sockets, spring-loaded return of mandrel.

Drive

High pressing force for fast, perfect expanding. Powerful electro-hydraulic drive with automatic return (ACC), with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 1.6 or 3.2 Ah capacity for long service life. Powerful and light. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V voltage supply for mains operation instead of Li-Ion 14.4 V battery, as accessory.

Supply format

REMS Akku-Ex-Press Cu ACC Basic-Pack. Cordless pipe expander for fast, easy expanding and calibration of pipes. Soft copper pipes Ø 8–42 mm, Ø ⅜–1¾", s ≤ 1.5 mm, soft aluminium pipes, soft precision steel pipes, Ø 8–42 mm, Ø ⅜–1¾", s ≤ 1.2 mm, soft stainless steel pipes Ø 8–42 mm, Ø ⅜–1¾", s ≤ 1 mm. Electro-hydraulic drive with automatic retraction, with powerful battery motor 14.4 V, 420 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Integrated LED work light. Battery Li-Ion 14.4 V, 1.6 Ah, rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W. Without expander heads. In sturdy steel case.

	Art.-No.	
	575016	

Other voltages on request.



Accessories

Description	Art.-No.	
Expander heads Cu see page 172.		
REMS Akku-Ex-Press Cu ACC drive unit, without battery	575006	
Battery Li-Ion 14.4 V, 1.6 Ah	571545	
Battery Li-Ion 14.4 V, 3.2 Ah	571555	
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560	
Voltage supply Li-Ion 230 V for mains operation instead of battery Li-Ion 14.4 V.	571565	
Steel case with insert	578290	
REMS cordless LED lamp see page 97	175200	



Ташев Галвинг ООД
www.tashev-galving.com

REMS Ex-Press H

One-hand pipe expander

Robust, compact quality tool for expanding tubes.
For one-hand operation.

PEX tubes Serie S 5 according to ISO 4065 Ø 12–40 mm





German Quality Product

REMS Ex-Press H – universal up to Ø 40 mm.

Robust, compact quality tool. Super light, only 0.7 kg.

Stepped mandrels for expanding several tube dimensions, no tool change required.

Torsion-free, leveraged expander tool for effortless expanding.
For one-hand operation.

Supply format

REMS Ex-Press H. One-hand pipe expander for PEX tubes Serie S 5 according to ISO 4065 Ø 12–40 mm. In a carton.

	Art.-No.	
	150550	

REMS Ex-Press P

Hand tube expander

Proven quality tool for expanding tubes.

Plastic tubes, multi-layer composite tubes Ø 12–32 mm



German Quality Product

REMS Ex-Press P – for expanding tubes. Conical mandrel for even and concentric expanding.

Design

Robust quality tool. Torsion-free, power-transmitting expander levers with ergonomically designed handles, for effortless expanding. Conical mandrel (taper angle 18°) for even and concentric expanding. Long mandrel guidance, spring-loaded mandrel release.

Expander heads for all common systems

Complete assortment of REMS expander heads P for all common compression sleeve systems (page 177). Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding.

Supply format

REMS Ex-Press P Set. Hand tube expander for plastic tubes and multi-layer composite tubes Ø 12–32 mm. REMS Ex-Press P. Expander heads P for tubes in mm. In sturdy steel case.

Description	Compr. sleeve system	Art.-No.	
Set AT P 16-20-25	aquatherm SHT PB/PE-Rohre	150021	
Set AT V 16-20-25	aquatherm SHT Mehrschicht-Metall-verbundrohre	150033	
Set IV 16-20-25	IVT PRINETO, Würth PRINETO	150026	
Set RH HAS 17-20-25	REHAU RAUTHERM S (REHAU HAS)	150027	
Set RH HIS 16-20-25	REHAU RAUTITAN flex/gas flex/pink/his, General Fittings Serie 3400 PEX, Seppelfricke SD Sistemi Italia NEROflex/SYLVER	150028	
Set RH MKV 16-20-25	REHAU RAUTITAN stabil/gas stabil, General Fittings Serie 3400 PEX/AL/PEX	150022	
Set RH 16-20-25	REHAU RAUTHERM (série S 5), REHAU (GBR) EVERLOC	150029	
Set RO VA 16-20-25	ROTEX	150023	
Set TC 16-18/20-25	TECE TECEflex, General Fittings Serie 3700	150025	

System-specific and/or national differences of the wall thickness (s) of tubes need to be considered selecting expander heads, see table page 177.

e.g.
aquatherm,
General Fittings,
IVT,
REHAU,
REVEL,
ROTEX,
Seppelfricke,
TECE,
Würth



Accessories

Description	Art.-No.	
Expander heads P see page 177.		
Expander drive REMS Ex-Press P (taper angle 18°)	150510	
Steel case with insert	150600	





Ташев Галвинг ООД
www.tashev-galving.com

REMS Akku-Ex-Press P ACC

Cordless pipe expander with automatic return

Compact, handy power tool with automatic return for fast, easy expansion of pipes. For battery and corded operation. For trade and industry. For the building site and the workshop.

Plastic tubes, multi-layer composite tubes — Ø 12–40 mm

REMS Akku-Ex-Press P ACC – Fast, easy electric expanding up to Ø 40 mm. With automatic return. Conical mandrel for even and concentric expanding.

Expander heads

Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding.

Execution

Compact, handy, light. Drive unit with battery only 2.3 kg. Drive machine only 30 cm long. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. Integrated LED work light for illuminating the work place. For battery and corded operation. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED. Conical expanding mandrel (conical angle 18°) for even centric expanding. Long mandrel guide, spring-loaded mandrel recoil.

Drive

High pressing force for fast, perfect expanding. Powerful electro-hydraulic drive with automatic return (ACC), with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 1.6 or 3.2 Ah capacity for long service life. Powerful and light. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V voltage supply for mains operation instead of Li-Ion 14.4 V battery, as accessory.



German Quality Product

Tested by electrosuisse

LED

Supply format

REMS Akku-Ex-Press P ACC Basic-Pack. Cordless pipe expander for fast expanding of plastic and multilayer composite pipes Ø 12–40 mm. Electro-hydraulic drive with automatic retraction, with powerful battery motor 14.4 V, 420 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Integrated LED work light. Battery Li-Ion 14.4 V, 1.6 Ah, rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W. Without expander heads. In sturdy steel case.

	Art.-No.
	575018

Other voltages on request.

e.g. ROTEX



Accessories

REMS expander heads P

Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding. Drive through expander REMS Ex-Press P (taper angle 18°), REMS Akku-Ex-Press P ACC and through suitable expanders of other makes.

Compression sleeve system	Expander head P Ø × s	Art.-No.
ROTEX	RO VA 12 × 2,0	150814
	RO VA 16 × 2,2	150851
	RO VA 20 × 2,8	150890
	RO VA 25 × 3,5	150918
	RO VA 32 × 4,4	150919



Description	Art.-No.
REMS Akku-Ex-Press P ACC drive unit, without battery	575008
Battery Li-Ion 14.4 V, 1.6 Ah	571545
Battery Li-Ion 14.4 V, 3.2 Ah	571555
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560
Voltage supply Li-Ion 230 V for mains operation instead of battery Li-Ion 14.4 V.	571565
Steel case with insert	578290
REMS cordless LED lamp see page 97	175200



Ташев Галвинг ООД
www.tashev-galving.com

REMS Akku-Ex-Press P

Cordless pipe expander with switch-off signal

Compact, handy power tool with switch-off signal for fast, easy expansion of pipes. For battery and corded operation. For trade and industry. For the building site and the workshop.

Plastic tubes, multi-layer composite tubes — Ø 12–40 mm

REMS Akku-Ex-Press P – Fast, easy electric expanding up to Ø 40 mm. Conical mandrel for even and concentric expanding.

Expander heads for all common systems

Complete assortment of REMS expander heads P for all common compression sleeve systems (page 177). Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding.

Execution

Compact, handy, light. Drive unit with battery only 2.3 kg. Drive machine only 30 cm long. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. Integrated LED work light for illuminating the work place. For battery and corded operation. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED. Conical expanding mandrel (conical angle 18°) for even centric expanding. Long mandrel guide, spring-loaded mandrel recoil.

Drive

High pressing force for fast, perfect expanding. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Acoustic signal after successfully finished expansion. The expanding heads stay open until switching over to return. Read and follow the installation and assembly instructions of the system provider/manufacturer.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 1.6 or 3.2 Ah capacity for long service life. Powerful and light. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V voltage supply for mains operation instead of Li-Ion 14.4 V battery, as accessory.



German Quality Product

Tested by electrosuisse

Supply format

REMS Akku-Ex-Press P Basic-Pack. Cordless pipe expander for fast expanding of plastic and multilayer composite pipes Ø 12–40 mm. Electro-hydraulic drive with switch-off signal, with powerful battery motor 14.4 V, 420 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Integrated LED work light. Battery Li-Ion 14.4 V, 1.6 Ah, rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W. Without expander heads. In sturdy steel case.

	Art.-No.	
	575019	

Other voltages on request.

e.g. aquatherm, General Fittings, IVT, REHAU, REVEL, TECE, Würth



Accessories

Description	Art.-No.	
Expander heads P see page 177.		
REMS Akku-Ex-Press P drive unit, without battery	575009	
Battery Li-Ion 14.4 V, 1.6 Ah	571545	
Battery Li-Ion 14.4 V, 3.2 Ah	571555	
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560	
Voltage supply Li-Ion 230 V for mains operation instead of battery Li-Ion 14.4 V.	571565	
Steel case with insert	578290	
REMS cordless LED lamp see page 97	175200	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS expander heads P

Choose expander heads yourself!

Search for the required compression sleeve system in the table below and select the correct expander heads.

REMS expander heads P

Complete assortment of REMS expander heads P for all common compression sleeve systems. Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding. Drive through expander REMS Ex-Press P (taper angle 18°), REMS Akku-Ex-Press P and through suitable expanders of other makes.

Compression sleeve system	Expander head P Ø × s	Art.-No.
aquatherm SHT PB/PE-RT-Rohre	AT P 14 × 2,0	150828
	AT P 16 × 2,0	150842
	AT P 18 × 2,0	150873
	AT P 20 × 2,0	150882
	AT P 25 × 2,3	150912
aquatherm SHT Mehrschicht-Metallverbundrohre (MVR)	AT V 16 × 2,4	150843
	AT V 20 × 2,4	150883
	AT V 25 × 2,7	150913
	AT V 32 × 3,2	150957
	AT V 40 × 3,5	150958
General Fittings Serie 3400 PEX	RH HIS 16 x 2,2	150849
	RH HIS 20 x 2,8	150888
	RH HIS 25 x 3,5	150916
	RH HIS 32 x 4,4	150945
General Fittings Serie 3400 PEX/AL/PEX	RH MKV 16,2 x 2,6	150858
	RH MKV 20 x 2,9	150897
	RH MKV 25 x 3,7	150926
	RH MKV 32 x 4,7	150952
General Fittings Serie 3700 PEX	TC 16	150855
	TC 18/20	150894
	TC 25	150923
	TC 32	150950
General Fittings Serie 3700 PEX/AL/PEX	TC 16	150855
	TC 18/20	150894
	TC 25	150923
	TC 32	150950
IVT PRINETO	IV 16 × 2,2/2,8	150845
	IV 20 × 2,8/3,4	150885
	IV 25 × 3,5/4,0	150914
	IV 32 × 4,4/4,9	150943
REHAU RAUTHERM (série S 5)	RH 12 x 1,1	150812
	RH 16 x 1,5	150846
	RH 20 x 1,9	150886
	RH 25 x 2,3 (RH HAS 25x2,3)	150915
	RH 32 x 2,9 (RH HAS 32x2,9)	150944
REHAU RAUTHERM S (REHAU HAS)	RH HAS 17 x 2,0	150868
	RH HAS 20 x 2,0	150887
	RH HAS 25 x 2,3	150915
	RH HAS 32 x 2,9	150944
REHAU RAUTITAN flex/ RAUTITAN gas flex/ RAUTITAN pink/ RAUTITAN his	RH HIS 16 x 2,2	150849
	RH HIS 20 x 2,8	150888
	RH HIS 25 x 3,5	150916
	RH HIS 32 x 4,4	150945
	RH HIS 40 x 5,5	150946
REHAU RAUTITAN stabil/ RAUTITAN gas stabil	RH MKV 16,2 x 2,6	150858
	RH MKV 20 x 2,9	150897
	RH MKV 25 x 3,7	150926
	RH MKV 32 x 4,7	150952
	RH MKV 40 x 6,0	150947
REHAU (GBR) EVERLOC	RH 16 x 1,5	150846
	RH 20 x 1,9	150886
	RH 25 x 2,3 (RH HAS 25x2,3)	150915
	RH 32 x 2,9 (RH HAS 32x2,9)	150944
REVEL	RH HIS 16 × 2,2	150849
	RH HIS 20 × 2,8	150888
	RH HIS 25 × 3,5	150916
	RH HIS 32 × 4,4	150945
Seppelfricke SD Sistemi Italia NEROflex/SYLVER	RH HIS 16 × 2,2	150849
	RH HIS 20 × 2,8	150888
	RH HIS 25 × 3,5	150916
	RH HIS 32 × 4,4	150945
TECE TECEflex	TC 12/14	150826
	TC 16	150855
	TC 18/20	150894
	TC 25	150923
	TC 32	150950
Würth PRINETO	IV 16 × 2,2/2,8	150845
	IV 20 × 2,8/3,4	150885
	IV 25 × 3,5/4,0	150914
	IV 32 × 4,4/4,9	150943

System-specific and/or national differences of the wall thickness (s) of tubes need to be considered selecting expander heads. REMS expander heads P for additional compression sleeve systems on request.



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Akku-Ex-Press Q & E ACC

Cordless pipe expander with automatic return

Compact, handy electric tool for fast, easy expanding of tubes/coil of the Uponor Quick & Easy system. For battery and corded operation. For trade and industry. For the building site and the workshop.

Expanding	Ø 16 – 40 mm

REMS Akku-Ex-Press Q & E ACC – Fast, easy electric expanding up to Ø 40 mm. Compact, handy, light. With automatic return. For Uponor Quick & Easy.

Expander heads

Large expanding capacity up to Ø 40 mm. Automatic, gradual expansion until reaching the given end position which is determined by the expander head. Use of original Uponor Quick & Easy expander heads, manual and hydraulic.

Execution

Compact, handy, light. Drive unit with battery only 2.3 kg. Drive machine only 30 cm long. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. Integrated LED work light for illuminating the work place. For battery and corded operation. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED.

Drive

High pressing force for fast, perfect expanding. Powerful electro-hydraulic drive with automatic return (ACC), with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 1.6 or 3.2 Ah capacity for long service life. Powerful and light. Total discharge and overload protection with single cell monitoring. Temperature monitoring during the charging process. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V voltage supply for mains operation instead of Li-Ion 14.4 V battery, as accessory.



German Quality Product

Tested by electrosuisse

LED



Supply format

REMS Akku-Ex-Press Q & E ACC Basic-Pack. Cordless tube expander for expanding tubes/coils of the Uponor Quick & Easy system Ø 16 – 40 mm, Ø ½ – 1½". Electro-hydraulic drive with automatic retraction, with powerful battery motor 14.4 V, 420 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Integrated LED work light. Battery Li-Ion 14.4 V, 1.6 Ah, rapid charger Li-Ion/Ni-Cd 230 V, 50 – 60 Hz, 65 W. Without expander heads. In sturdy steel case.

	Art.-No.	
	575015	

Note assembly instructions of system supplier. Battery tube expander for other systems on request. Other voltages on request.

Accessories

Description	Art.-No.	
REMS Akku-Ex-Press Q&E ACC Li-Ion drive unit, without battery	575005	
Battery Li-Ion 14.4 V, 1.6 Ah	571545	
Battery Li-Ion 14.4 V, 3.2 Ah	571555	
Rapid charger Li-Ion/Ni-Cd 230 V, 50 – 60 Hz, 65 W	571560	
Voltage supply Li-Ion 230 V for mains operation instead of battery Li-Ion 14.4 V.	571565	
Steel case with insert	578290	
REMS cordless LED lamp see page 97	175200	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Power-Ex-Press Q & E ACC

Electro-hydraulic pipe expander with automatic return

Compact, handy electric tool for fast, easy expanding of tubes/coil of the Uponor Quick & Easy system. For trade and industry. For the building site and the workshop.

Expanding	Ø 16 – 63 mm Ø ½ – 2" s ≤ 5,8 mm

REMS Power-Ex-Press Q&E ACC – Fast, easy electric expanding up to Ø 63 mm. With automatic return. For Uponor Quick & Easy.

Expander heads

Large expanding capacity up to Ø 63 mm. Automatic, gradual expansion until reaching the given end position which is determined by the expander head. Use of original Uponor Quick & Easy expander heads, Ø 16 – 63 mm, Ø ½ – 2", Expanding device for holding the original Uponor Quick & Easy 54 – 63 mm, 2" expanding heads. Expanding device for holding the original Uponor Quick & Easy 16 – 40 mm, ½ – 1½", expanding heads as an accessory.

Execution

Compact, robust, job site-proven. Small in size, slender design, drive unit only 5.3 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip.

Drive

High pressing force for fast, perfect expanding. Powerful electro-mechanical drive with automatic return (ACC), with proven universal motor, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle. Safety tip switch.



with automatic circuit control

German Quality Product

Tested by electrosuisse

Supply format

REMS Power-Ex-Press Q&E ACC Basic-Pack. Electro-hydraulic pipe expander for expanding tubes/coils of the Uponor Quick & Easy system Ø 16 – 63 mm, Ø ½ – 2", s ≤ 5,8 mm. Electro-hydraulic drive with automatic retraction, ith proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Expanding device 54 – 63 mm, 2". Without expander heads. In a carton.

	Art.-No.	
	575017	

Note assembly instructions of system supplier. Battery tube expander for other systems on request. Other voltages on request.



Accessories

Description	Art.-No.	
Adapter 16 – 40 mm, ½ – 1½" for fitting the original expanding heads Uponor Quick & Easy 16 – 40 mm, ½ – 2".	575100	
Steel case with insert	570280	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Hurrican H

Hand tube extractor

Economic manual tool for efficiently making T-branches for pipe installations without fittings.

Hard and soft copper tubes	Ø 10–22 mm Ø ⅜–⅞" s ≤ 1.5 mm

REMS Hurrican H – for making T-branches yourself. Inexpensive. Also on tubes already installed.

System advantage
Only **one** type of extractor tools for REMS Hurrican H, REMS Hurrican and REMS Twist/Hurrican. Simple, inexpensive storage. No confusion possible.

Cost advantage
No costs for T-pieces, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety by fewer tube joints.

Design
Compact, handy, light. Can be used anywhere, free-hand, on pipes already installed. Drill head for exact drilling start without centre punching, drilling depth stop according to size of the T-outlet. Limitation of insertion depth to avoid obstruction by using the dimpling pliers. Handy gripping tongs for fixing the tool holder on the pipe, as an accessory.

Drill head drive
Drive with conventional electric drill.

Extractor tools
Special design of extractor tools facilitate even and smooth material deformation without burrs and notches. Therefore no secondary treatment required.

Tool holder drive
With standard ratchet and hexagon socket 11 mm or with spanner. Upgrade to electric pipe neck expander by buying the REMS Twist/Hurrican drive machine.



German Quality Product



Supply format

REMS Hurrican H Set. Hand tube extractor for hard and soft copper tubes Ø 10–22 mm, Ø ⅜–⅞", s ≤ 1.5 mm. Tool holder, drill head, dimpling pliers, lubricant. Extractor tools for tubes in mm or inch. In sturdy case.

Description	Art.-No.
Set 12-15-18-22	151003
Set 12-14-16-18-22	151004
Set ⅜-½-⅝-¾-⅞"	151005

Accessories

Description	Tubes Ø mm/inch	Art.-No.
Extractor tool	10	151105
	12	151110
	14	151120
	15	151125
	16	151130
	18	151140
	20	151145
	22	151150
	⅜"	151155
	½"	151160
	⅝"	151165
	¾"	151170
	⅞"	151175
REMS Twist/Hurrican drive unit with stabiliser		151401
Grip wrench for clamping the tool holder		076117
Tool holder		151200
Drill head		151210
Dimpling pliers		151230
Ratchet ½"		074021
Hexagon socket 11 mm		074041
Lubricant (tin)		151240
Case with inlay		151618



Ташев Галвинг ООД
www.tashev-galving.com

REMS Hurrican

Electric tube extractor

Powerful, compact electric tool for efficient machining of T-branches of hard and soft tubes for tube installations without fittings.

Hard and soft copper tubes	Ø 10 – 22 mm Ø ⅜ – ⅞" s ≤ 1.5 mm



German Quality Product



REMS Hurrican – for making T-branches yourself. Inexpensive. Also on tubes already installed.

System advantage

Only **one** type of extractor tools for REMS Hurrican H, REMS Hurrican and REMS Twist/Hurrican. Simple, inexpensive storage. No confusion possible.

Cost advantage

No costs for T-branches, storage, procurement. Savings in soldering joints, soldering material and working hours. Higher safety by fewer tube joints.

Design

Compact, handy, light. Can be used anywhere, free-hand, on pipes already installed. Drill head provides precise drilling without punching with any standard power drill. Drill depth-stop according to the size of T-branch. Tool holder for holding the extractor tools. Limitation of insertion depth to avoid obstruction by using the dimpling pliers. Handy grip wrench for clamping the tool holder onto the pipe.

Drive

Proven drive unit with hexagon mount. Enormously powerful. Handly, light, only 2 kg. Can be used anywhere, free-hand, also on pipes already installed. Robust, maintenance-free gear with safety slipping clutch. Universal motor, 600 W, high-torque forward and reverse at low speed. Stepless, electronic speed control. The speed between 0 and 550 rpm is controlled by pressing the tip switch steplessly (acceleration switch).

Extractor tools

Special design of extractor tools facilitate even and smooth material deformation without burrs and notches. Therefore no secondary treatment required.

REMS Twist/Hurrican

Space and weight-saving combination set for efficient production of T-branches and for efficient cold-expanding of hard and soft tubes for installations without fittings. Only one drive unit for expanding and extracting tools. Price advantage!
See page 183.

Supply format

REMS Hurrican Set. Electric tube extractor for hard and soft copper tube Ø 10 – 22 mm, Ø ⅜ – ⅞", s ≤ .5 mm. Drive unit with hexagon mount, maintenance-free gear, universal motor 230 V or 110 V, 50 – 60 Hz, 600 W. High torque at low speed, left and right-hand rotation. Safety tip switch. Stepless, electronic speed control (acceleration switch). Drive holder. Tool holder, drill head, dimpling pliers, lubricant. Extractor tools for pipes in mm or inch. In sturdy steel case.

Description	Art.-No.	
Set 12-15-18-22	151000	
Set 12-14-16-18-22	151010	
Set ⅜-½-⅝-¾-⅞"	151002	

Other voltages on request.



Accessories

Description	Tubes Ø mm/inch	Art.-No.	
Extractor tool	10	151105	
	12	151110	
	14	151120	
	15	151125	
	16	151130	
	18	151140	
	20	151145	
	22	151150	
	⅜"	151155	
	½"	151160	
	⅝"	151165	
	¾"	151170	
	⅞"	151175	
REMS Twist/Hurrican drive unit with stabiliser		151401	
Tool holder		151200	
Drill head		151210	
Dimpling pliers		151230	
Lubricant (tin)		151240	
Case with inlay		151618	



Ташев Галвинг ООД
www.tashev-galving.com

REMS Twist

Electric tube expander

Powerful, compact electric tool for efficient cold-expanding of hard and soft tubes for pipe installations without fittings.

Hard and soft copper tubes	Ø 12–22 mm Ø ⅜–⅞" s ≤ 1 mm



German Quality Product

REMS Twist – for making sockets yourself. Cold-expanding of hard copper pipes.

Cost advantage
No costs for annealing hard copper tubes, for deburring and cleaning, for fittings, storage, procurement. Savings in soldering joints, soldering material and working hours. Higher safety by fewer tube joints. Using up tube pieces to make sockets.

Design
Compact, robust, job site-proven. Simple and fast working free-hand, at vice or workbench. No adjustments. Integrated clamping device provides safe support against torque in both directions.

Drive
Proven drive unit with hexagon mount. Enormously powerful. Handly, light, only 2 kg. Can be used anywhere, free-hand, also on pipes already installed. Robust, maintenance-free gear with safety slipping clutch. Universal motor, 600 W, high-torque forward and reverse at low speed. Stepless, electronic speed control. The speed between 0 and 550 rpm is controlled by pressing the tip switch steplessly (acceleration switch).

Expander tools
One quick-changing expander tool of each tube size with rotating mandrel for easy expanding and smooth operation. Without annealing, standard socket in just a few seconds, extra long.

REMS Twist/Hurrican
Space and weight-saving combination set for efficient production of T-branches and for efficient cold-expanding of hard and soft tubes for installations without fittings. Only one drive unit for expanding and extracting tools. Price advantage!
See page 183.

Supply format

REMS Twist Set. Electric tube expander for hard and soft copper tubes Ø 12–22 mm, Ø ⅜–⅞", s ≤ 1 mm. Drive unit with hexagon mount, maintenance-free gear, universal motor 230 V or 110 V, 50–60 Hz, 600 W. High torque at low speed, left and right-hand rotation. Safety tip switch. Stepless, electronic speed control (acceleration switch). Drive holder. Lubricant. Expander tools for mm or inch. In sturdy steel case.

Description	Art.-No.	
Set 12-15-18-22	156000	
Set 12-14-16-18-22	156002	
Set ⅜-½-⅝-¾-⅞"	156004	

Other voltages on request.



Accessories

Description	Tubes Ø mm/inch	Art.-No.	
Expander tool	12	156150	
	14	156200	
	15	156225	
	16	156250	
	18	156300	
	22	156350	
	⅜"	156375	
	½"	156400	
	⅝"	156425	
	¾"	156450	
	⅞"	156475	
REMS Twist/Hurrican drive unit with stabiliser		151401	
Lubricant (tin)		151240	
Steel case with insert		151600	







Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Twist/Hurrican

Electric tube extractor
Electric tube expander

Powerful, compact electric tool for efficient machining of T-branches and for efficient cold-expanding of hard and soft tubes for tube installations without fittings.

Extracting:	
Hard and soft copper tubes	Ø 10–22 mm Ø ⅜–⅞" s ≤ 1.5 mm
Expanding:	
Hard and soft copper tubes	Ø 12–22 mm Ø ⅜–⅞" s ≤ 1 mm

REMS Hurrican for making T-branches yourself. Inexpensive. Also on tubes already installed.

REMS Twist for making sockets yourself. Cold-expanding of hard copper tubes.

Space and weight saving combi set. Only **one** drive unit for expander and extractor tools. Price advantage!

Description see REMS Hurrican and REMS Twist (page 181–182).



German Quality Product



Supply format

REMS Twist/Hurrican Combi Set. Electric tube expander and electric tube extractor for hard and soft copper tubes. Expanding Ø 12–22 mm, Ø ⅜–⅞", s ≤ 1 mm, extracting Ø 10–22 mm, Ø ⅜–⅞", s ≤ 1.5 mm. Drive unit with hexagon mount, maintenance-free gear, universal motor 230 V or 110 V, 50–60 Hz, 600 W. High torque at low speed, left and right-hand rotation. Stepless, electronic safety switch. Drive holder. Tool holder, drill head, dimpling pliers, lubricant. Choice of expander and extractor tools for pipes in mm or inch. In sturdy steel case.

Description	Art.-No.
Set 12-15-18-22	156010
Set 12-14-16-18-22	156012
Set ⅜-½-⅝-¾-⅞"	156014

Other voltages on request.


Accessories

Description	Tubes Ø mm/inch	Art.-No.
Expander tool	12	156150
	14	156200
	15	156225
	16	156250
	18	156300
	22	156350
	⅜"	156375
	½"	156400
	⅝"	156425
	¾"	156450
	⅞"	156475
Extractor tool	10	151105
	12	151110
	14	151120
	15	151125
	16	151130
	18	151140
	20	151145
	22	151150
	⅜"	151155
	½"	151160
	⅝"	151165
	¾"	151170
	⅞"	151175
REMS Twist/Hurrican drive unit with stabiliser		151401
Tool holder		151200
Drill head		151210
Dimpling pliers		151230
Lubricant (tin)		151240
Steel case with insert		151600





Ташев-Галвинг ООД
www.tashev-galving.com

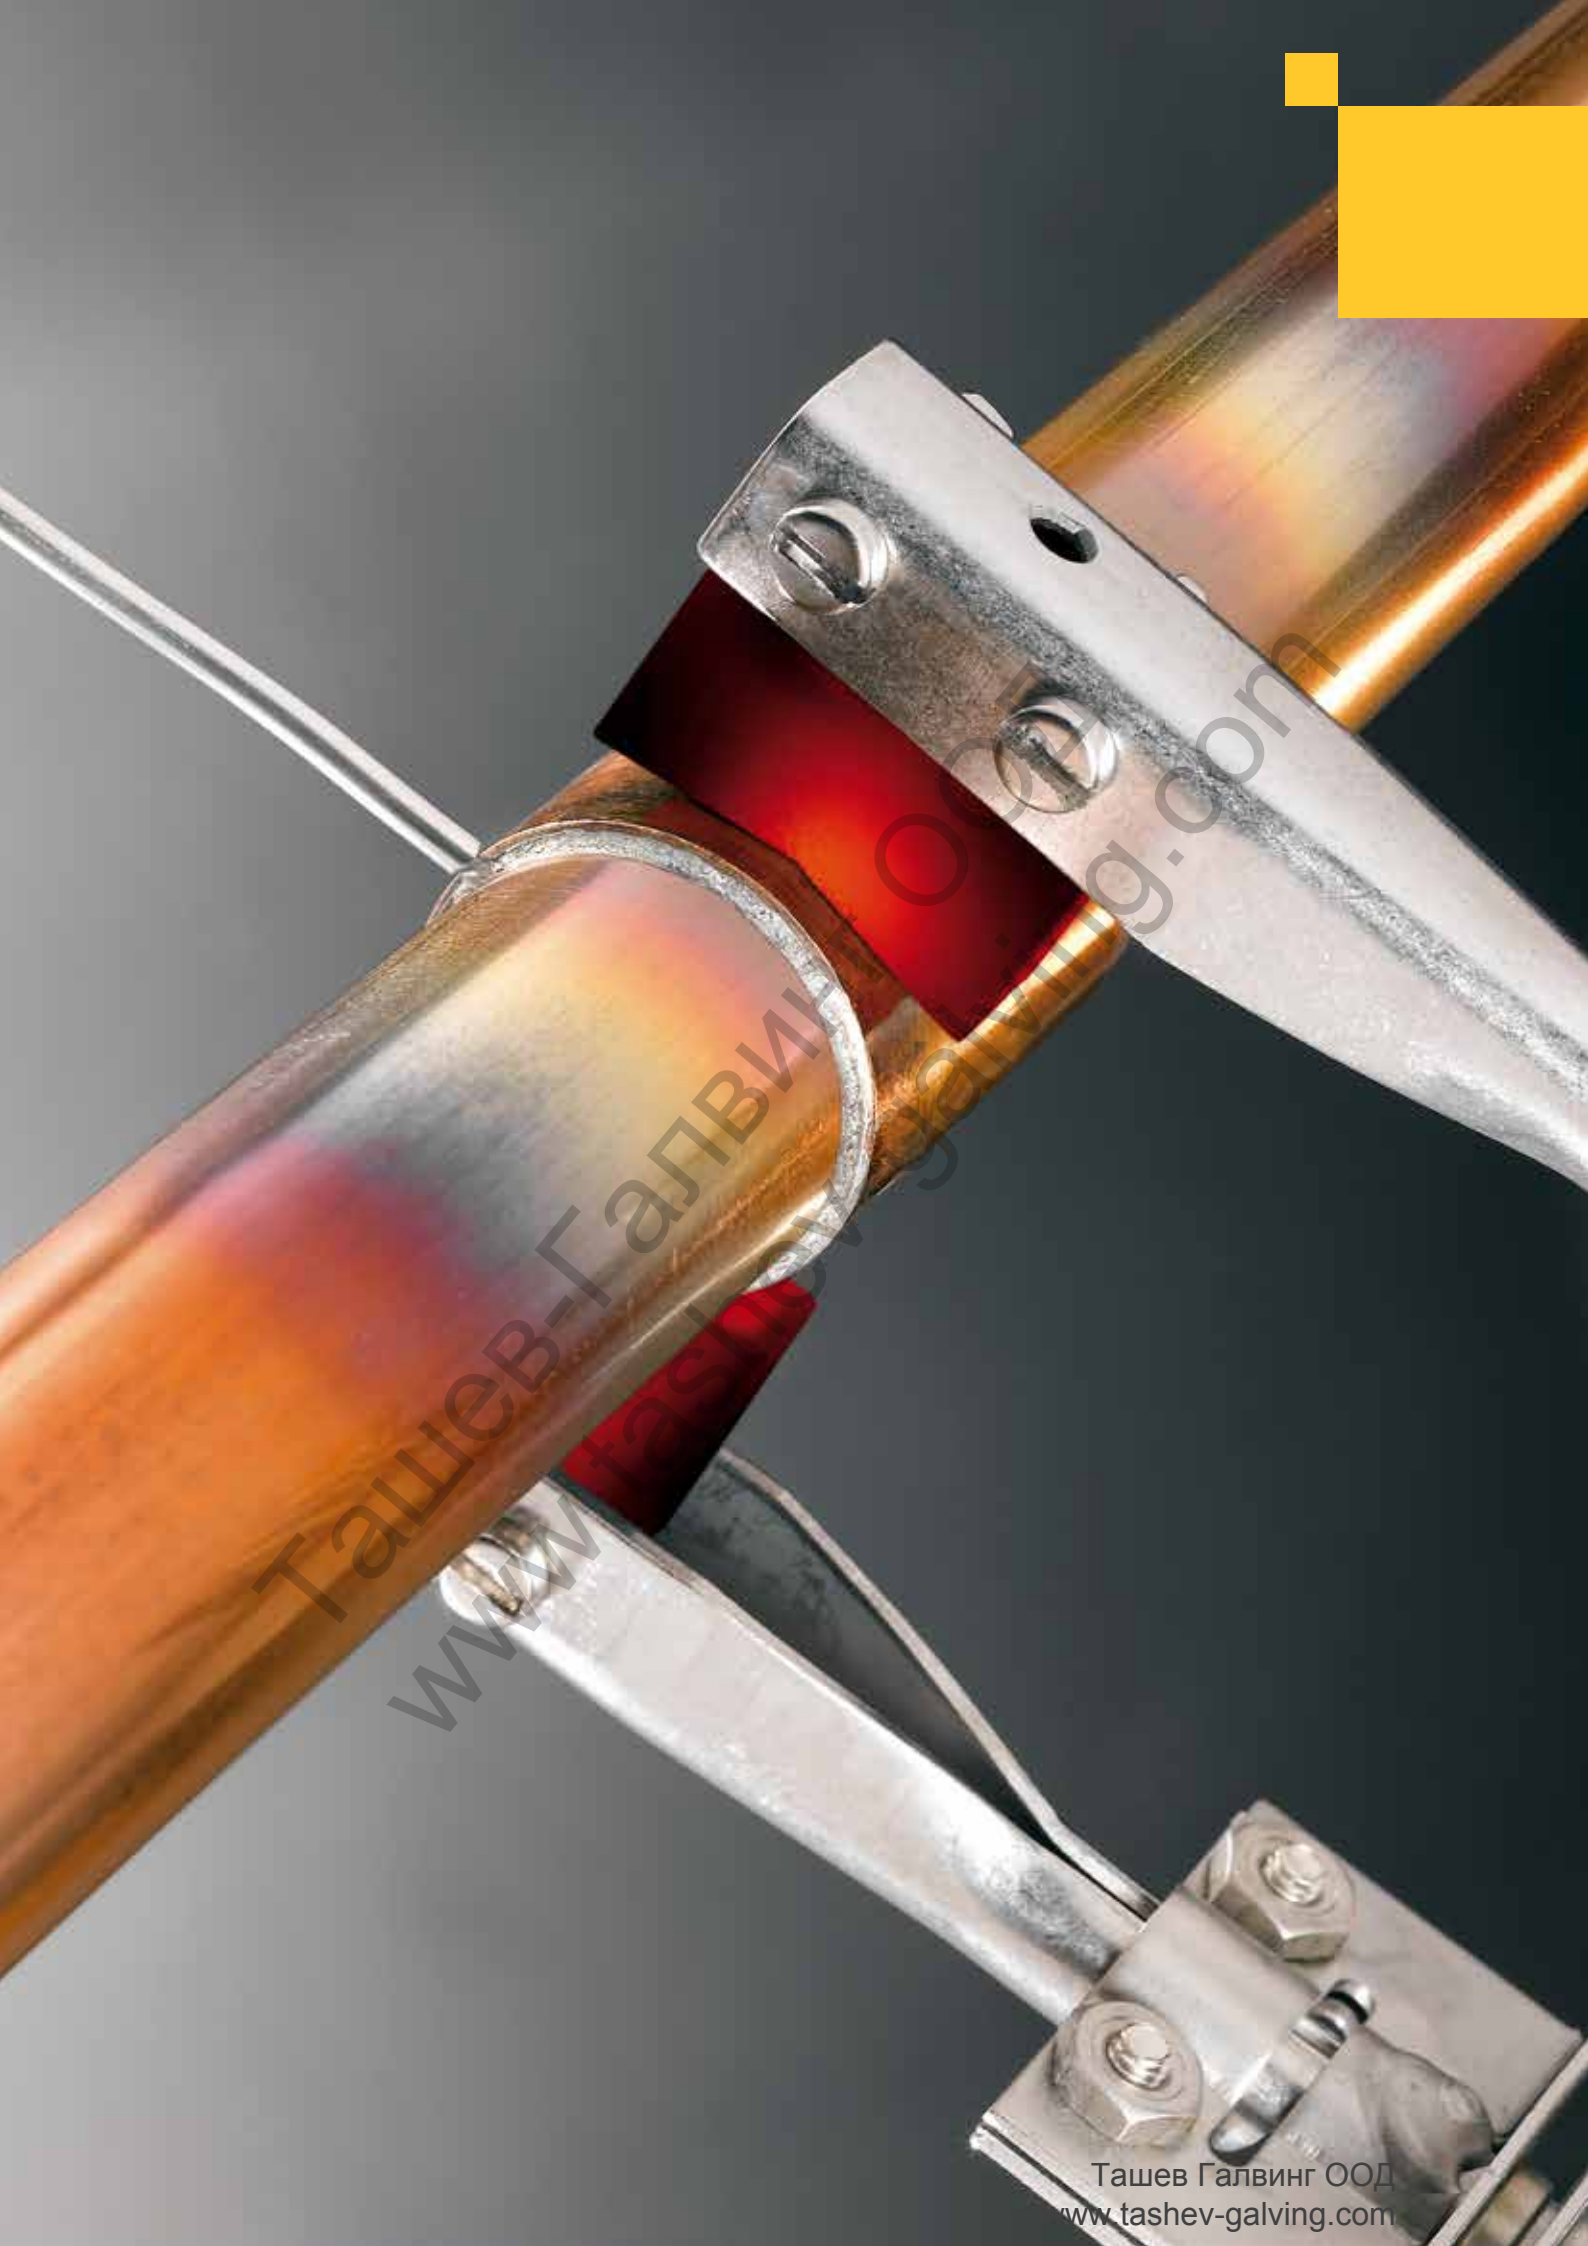

Ташев-Галвинг ООД
www.tashev-galving.com

Soldering

	**Cleaning pads**	**186**
	**Electric soldering pliers**	**186**
	**Electric soldering unit**	**187**
	**Turbo soldering torches**	**188**
	**Solder wire and solder paste**	**189**

Ташев-Галвинг ООД
www.tashev-galving.com

REMS Cu-Vlies

Cleaning pads

Metal-free, highly flexible cleaning pads for cleaning surfaces to be soldered on copper tubes and soldering fittings. Also for other materials.

REMS Cu-Vlies – clean surfaces according to DVGW.

Universal use, for many materials, highly flexible. Cleans metallic clear, dirt and oxide-free, according to DVGW work sheet GW 2. Clean finish. Multiple use, reusable by washing out, thus long service life. Can be used wet or dry.



German Quality Product

Supply format

REMS Cu-Vlies. Metal-free, highly flexible cleaning pad for cleaning areas to be soldered on copper pipes and soldering fittings. Pack of 10.

	Art.-No.	
	160300	

REMS Hot Dog 2

Electric soldering pliers

Efficient, light-weight electric tool for soft soldering. Directly connected to a socket, no transformer required. For trade and industry. For the building site and the workshop.

Copper tubes	Ø 10–28 mm Ø ⅜–1⅛"
Heating capacity	800°C

REMS Hot Dog 2 – the smallest and most powerful soldering pliers. Super fast without flame.

Super fast soldering, e.g. Ø 18 mm in only 15 s. Enormous heating capacity up to 800°C through 2 heating cartridges. For permanent use.

Super light and handy, complete only 0.7 kg. Can be used anywhere, in confined areas also.



German Quality Product

Ташев-Галвинг ООД
www.tashev-galving.com

Supply format

REMS Hot Dog 2. Electric soldering pliers for soft soldering copper tubes Ø 10–28 mm, Ø ⅜–1⅛". 230 V, 50–60 Hz, 440 W. 250 g REMS Lot Cu 3 and REMS Paste Cu 3. Cleaning brush. In steel case with fire retarding insert.

	Art.-No.	
	163020	

Other voltages on request.



Accessories

Description	Art.-No.	
REMS soldering material see page 189.		
Steel case with fire-proof inlay	163350	



Ташев Галвинг ООД
www.tashev-galving.com

REMS Contact 2000

Electric soldering unit

Compact, powerful electric tool for soft soldering. With safety transformer. For trade and industry. For the building site and the workshop.	
Copper tubes	Ø 6–54 mm Ø ¼–2⅛"
Heating capacity	900°C (1650°F)



REMS Contact 2000 – the smallest, strongest and fastest unit of its kind. 2000 W soldering power. 4 m long soldering tongs cable.

Handy, compact. Favourable weight, small in size for work and transport. L × W × H: 210 × 150 × 140 mm.

Enormous heating capacity (900°C) ensures super-fast soldering. Rated power = Soldering capacity = 2000 W! Soldering time, e.g. for Ø 18 mm in only 18 s.

Can be used anywhere, with rod electrodes in tight spots also. Ready to solder any time, to be connected to a socket only. No adjustment of soldering current necessary. Wide work radius thanks to 4 m cable length. Flexible cable protector hose.

Indifferent to temperature influences electric control of soldering current.

Prisma-electrodes for universal use, maximum use through favorable seat. Rod-electrodes for working in tight spots. Electrode holders and bolts in stainless steel. Electrodes can be easily replaced.

German Quality Product



Prisma-electrodes for universal use, maximum use through favorable seat.

Supply format

REMS Contact 2000. Electric soldering unit for soft soldering of copper tubes Ø 6–54 mm, Ø ¼–2⅛". 230 V, 50–60 Hz, 2000 W, control voltage 24 V. Soldering pliers with 4 m cable length. Safety transformer, 2 prism electrodes. In a carton.

	Art.-No.	
	164011	

Other voltages on request.



Supply format

REMS Contact 2000 Super-Pack. Electric soldering unit for soft soldering of copper tubes Ø 6–54 mm, Ø ¼–2⅛". 230 V or 110 V, 50–60 Hz, 2000 W, control voltage 24 V. Soldering pliers with 4 m cable length, safety transformer, 4 prism electrodes, 2 rod electrodes, 250 g quality soft solder REMS Lot Cu 3, 250 g quality soft solder paste REMS Paste Cu 3, 1 tubing cutter REMS RAS Cu-INOX 3-35, pack of 10 cleaning pads REMS Cu-Vlies. In sturdy steel case.

	Art.-No.	
	164050	

Accessories

Description	Art.-No.	
Prism electrodes (pack of 2)	164111	
Prism electrodes with holders (pack of 2)	164110	
Rod electrodes (pack of 2)	164115	
Steel case with insert	164250	
REMS soldering material see page 189.		



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Blitz

Turbo soldering torch propane

Handy self-lighting torch with turbo-flame for fast soft soldering and economic gas consumption.	
Copper tubes	Ø ≤ 35 mm
Heating, annealing, burning, melting, thawing, shrinking and similar thermal procedures.	
Flame temperature	1950°C (3500°F)



REMS Blitz – extremely fast soft soldering.

Piezo-electric self-lighting
Without igniter! Pull trigger – flame comes on! Release trigger – flame goes out! Little gas consumption, only 160 g/h!

Design
Super handy, ergonomic, with one hand only. No setting, no adjustment. Locking button for continuous operation. Only 1 universal flame tube. Small gas bottles can be used.

Turbo-flame
Spot-flame with turbo-twisting-booster for high heating capacity and super fast soft soldering.



Supply format

REMS Blitz. Turbo soldering torch propane for soft soldering of copper tubes Ø ≤ 35 mm. Piezo-electric self-lighting. Hose connector BSPP ⅜" LH. Hollow cap nut and socket BSPP ⅜" LH. In blister pack.

	Art.-No.	
	160010	

Accessories

Description	Art.-No.	
REMS soldering material see page 189.		
High pressure hose 3 m, BSPP ⅜ LH	152106	
Pressure reducer for 5 or 11 kg gas bottles (2 bar)	152109	



REMS Macho

Turbo soldering torch acetylene

Handy self-lighting torch with turbo-flame for extremely fast brazing and soft soldering. Economic gas consumption.	
Copper tubes and others	Ø ≤ 64 mm
Heating, annealing, burning, melting, thawing, shrinking and similar thermal procedures.	
Flame temperature	2500°C



REMS Macho – super fast brazing.

Piezo-electric self-lighting
Without igniter! Pull trigger – flame comes on! Release trigger – flame goes out! Little gas consumption, only 360 g/h!

Acetylene only
Injection torch burns atmospheric oxygen. Hence only acetylene necessary.

Design
Super handy, ergonomic, with one hand only. No setting, no adjustment. Locking button for continuous operation. Only 1 universal flame tube.

Turbo-flame
Spot-flame with turbo-twisting-booster for extremely high heating capacity and super fast brazing.



Supply format

REMS Macho. Turbo soldering torch acetylene for brazing and soft soldering of copper tubes and others Ø ≤ 64 mm. Piezo-electric self-lighting. Hose connector BSPP ⅜" LH. Hollow cap nut and socket ⅜" LH. In blister pack.

	Art.-No.	
	161010	

Accessories

REMS soldering material see page 189.	

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Lot Cu 3

Soft solder S-Sn97Cu3, EN 29453

Soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation ≤ 110°C (230°F).

In accordance with DVGW work sheet GW 2.

Alloy (weight %)	97 % Sn, 3 % Cu
Melting temperature	230 – 250°C (450 – 480°F)



German Quality Product

REMS Lot Cu 3 – quality soft solder.

Lead-free, harmless to health and environment.
Silver-free, complies with standards. Very low price.

Supply format

REMS Lot Cu 3. 250-g spool soft solder wire S-Sn97Cu3, EN 29453, Ø 3 mm, for soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation ≤ 110°C (230°F).

	Art.-No.	
	160200	

REMS Paste Cu 3

Soft solder paste of solder powder S-Sn97Cu3 according to EN 29453 and flux 3.1.1.C, EN 29454-1

Soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation ≤ 110°C (230°F).

In accordance with DVGW work sheet GW 7 (DVGW-Reg.-Nr. DV-0101AP2793)



German Quality Product

REMS Paste Cu 3 – quality soft solder paste.

Lead-free, harmless to health and environment.
Silver-free, complies with standards. Very low price.

No additional flux consumption, paste contains flux already.
Thus less danger of corrosion.

No overheating of tube and fitting because the melting of solder and the required temperature for soldering is clearly visible through the change of colour of paste.

High filling level of soldering joint, thereby good stability. Easy cleaning of remnants which are soluable in cold water.

Plastic bottle with brush integrated in cap which cannot get lost.

Supply format

REMS Paste Cu 3. 250-g soft solder paste of solder powder S-Sn97Cu3 according EN 29453 and flux 3.1.1.C, EN 29454-1, for soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation ≤ 110°C (230°F). DVGW approval mark FI 038. In plastic bottle with integrated brush.

	Art.-No.
	160210

REMS Lot P6

Brazing solder B-Cu94P-710/890, EN 1044

Brazing of copper tubes with copper, red copper cast and brass fittings in cold and hot water installation, gas installation, refrigerating and air conditioning applications.

In accordance with DVGW work sheet GW 2.

Alloy (weight %)	94 % Cu, 6 % P
Melting temperature	710 – 890°C (1310 – 1640°F)



REMS Lot P6 – quality brazing solder.

Universally applicable for almost all types of joints in copper pipe installations.

Specially useful for capillary brazing joints of copper pipe installations without fittings. Wide melting range due to low phosphor content result in higher toughness of soldering joint.

Silver-free, complies with standards. Very low price.

Supply format

REMS Lot P6. 1 kg brazing solder (rods) B-Cu94P-710/890, EN 1044, ⌀ 2 mm, for brazing of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, gas installation, refrigerating and air conditioning applications. In a carton.

	Art.-No.	
	160220	

Ташев Галвинг ООД
www.tashev-galving.com



Ташев Галвинг ООД
www.tashev-galving.com

Freezing

Ташев-Галвинг ООД
www.tashev-galving.com

	**Pipe freezer CO_2**	**192**
	**Electric pipe freezing unit**	**193**

REMS Eskimo

Pipe freezer

Simple, fast freezing of unemptied pipes with a carbon dioxide coolant. For repair, extensions of piping systems.	
Steel, copper, plastic, composite pipes	Ø ⅛–2" Ø 10–60 mm
Refrigerant: carbon dioxide.	
Refrigerating capacity to –79°C (–110°F).	
Non toxic, non flammable.	







German Quality Product

REMS Eskimo – freezing instead of draining. Super fast. Automatic refrigerant feed. High cooling capacity, e.g. ¾" steel pipe in only 5 min. Very small, indestructible freeze collars.

Refrigerant

Carbon dioxide coolant with high cooling performance up to –79°C. Non toxic. Non flammable. Easy to obtain.

Design

Tight contact between freeze collars and pipe and direct flow of the refrigerant onto the pipe ensure extremely short freezing times and economic refrigerant consumption. Freezing is possible on one or two sides, with additional T-distributors further freeze collars can also be connected.

Freeze collars

Easy. Rapid assembly, without special tools. Very small, highly flexible, indestructible freeze collars in cold-resistant thermoplastic elastomer, for operating even in the tightest spots. Clamping screws cannot get lost.

Handle piece with injector

Ergonomically designed handle pieces in plastic for comfortable operation. Unbreakable brass injector (injection nozzle). Fast and secure connection to freeze collars. No setting, the correct amount of refrigerant is automatically supplied.

High pressure hoses

Flexible, buckling-resistant and fractureproof high pressure hoses. Extra long for wide work radius. Extendable any time. Turnable hollow cap nut at bottle connector prevents high pressure hoses from tangling.

Supply format

REMS Eskimo Set. Pipe freezing device for carbon dioxide coolant. For steel, cast iron, lead, copper, plastic pipes Ø ⅛–2", Ø 10–60 mm. Two freezing jackets each in 10 different sizes for the whole working range, flange connection with T-junction, locking nut, 2 handles with injector, 2 high-pressure hoses. In sturdy carrying case.

	Art.-No.	
	130002	



Accessories

Description	Size		Art.-No.	
Freezing jacket	⅛"	10/12 mm	130450	
	¼"	15 mm	130455	
	⅜"	18 mm	130460	
	½"	22 mm	130465	
	¾"	28 mm	130470	
	1"	35 mm	130475	
	1¼"	42 mm	130480	
	1½"		130485	
		54 mm	130490	
	2"	60 mm	130495	
High-pressure hose 2 m			130415	
T-distributor for further collar			130207	
Locking nut			130209	
Double nipple			130208	
Handle piece with injector			130410	
Case with inlay			130430	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Frigo 2

Electric pipe freezing unit

Easy, fast freezing of pipes which are not drained.
Closed refrigerant circuit. Environmentally safe.
For repair and extension of piping systems.

Steel, copper, plastic,
composite pipes Ø ⅛–2"
Ø 10–60 mm

Refrigerant: R-404A.

REMS Frigo 2 – electrically freezing instead of draining. Super fast up to 2". High cooling capacity, e.g. ¾" steel pipe in only 9 min*.
Particularly compact, patented deep-freezer heads, for very fast assembly.

System advantage
Only one pipe freezing unit for the complete working range up to 2". One-size freezer heads for the core working range Ø ¼–1" / Ø 15–35 mm, no reducing inserts required. Aid the cooling process simply by spraying with water. Always clean freezer heads, no pastes/greases required.

Closed refrigerant circuit
Electric pipe freezing unit with closed refrigerant circuit. Environmentally safe. Can be used anywhere, also in closed rooms. Refrigerant R-404A. High cooling capacity. Ideal also for longer repairs.

Design
Robust, compact. Very small deep-freezer heads fitted parallel to the pipe leaving refrigerant hoses for working in confined areas and niches also. Single or double freezing possible.

Cooling aggregate
Very quiet. Cooling aggregate, 430 W, in sturdy sheet metal housing with ventilating side openings for optimum air circulation. Large top compartment, easily accessible, for refrigerant hoses and accessories. Weighs only 23 kg. Easy to carry.

Deep-freezer heads
Very compact deep-freezer heads with special geometrically shaped cavities for seating different pipe diameters **(Patent EP 1 108 944, Patent US 6,434,952).** Very small, only 50 mm wide. All pipe sizes from Ø ¼–1" resp. Ø 15–35 mm can be frozen with only one deep-freezer head. Deep-freezer inserts for the rest of the capacity up to 2", 60 mm. Tightening straps for simple and quick assembly of deep-freezer heads onto the pipe, without tools.

Refrigerant hoses
Flexible, extra-long refrigerant hoses in wear resistant, synthetic rubber for large work radius.

LCD-Digital-Thermometer
LCD-Digital-Thermometer for exact temperature display directly at the point of freezing as accessory.







German Quality Product



Super fast up to 2"

Supply format
REMS Frigo 2 Set. Electric pipe freezing unit with closed refrigerant circuit. For steel, copper, plastic, composite pipes, Ø ⅛–2", Ø 10–60 mm. Cooling aggregate 230 V or 110 V, 50 Hz, 430 W, 2 refrigerant hoses, 2 tightening straps, squirt bottle. Equipped for Ø ¼–1¼", 15–42 mm. In sturdy sheet metal housing.

	Art.-No.	
	131011	

Accessories

Description	Size	Art.-No.	
Extension kit up to 2", 60 mm	1½–2" / 54–60 mm	131160	
Deep-freeze inserts (pack of 2)	⅛" 10, 12 mm	131110	
	1½"	131156	
	54 mm	131157	
	2" 60 mm	131158	
LCD-Digital-Thermometer		131115	





*ambient/water temperature approx. 18 °C.

Ташев Галвинг ООД
www.tashev-galving.com



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Pipe and Drain inspection
Pipe and Drain cleaning

Ташев-Галвинг ООД
www.tashev-galving.com

	**Endoscope cameras**	**196**
	**Electronic camera inspection systems**	**200**
	**Drain cleaner for manual and electric operation**	**202**
	**Electric drain cleaning machine**	**203**
	**Electric pipe and drain cleaning machines**	**204**

REMS CamScope Wi-Fi

Endoscope camera with Wi-Fi radio standard

Mobile, handy endoscope camera with Wi-Fi radio standard for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Wireless transmission of photos and videos to Smartphones/tablet PCs with Android and iOS operating systems.

REMS CamScope Wi-Fi – Brilliant pictures and videos of cavities, shafts and pipes.

Wireless transmission of photos and videos to Smartphones/tablet PCs with Android and iOS operating systems.

Design

Ultra light and handy. Hand-held unit with camera cable set only 0.3 to 0.5 kg. Can be used everywhere, free hand, over head, also in very confined spaces Sturdy, impact-proof plastic housing with ergonomically shaped handle. On/off thumbwheel switch for continuous brightness control of the LEDs in the camera head. Power LED for indicating the operating state. Practical, removable battery holder for 4 commercially available 1.5 V, AA, LR6 batteries. Various camera cable sets can be used. Plug-screw connections for changing the camera cable sets and the push cable extensions without tools. Sturdy case for hand-held unit, camera cable set 16-1/9-1/4.5-1, push cable extension, controller unit, voltage supply/charger and accessories.

Controller unit

Controller unit with Wi-Fi radio standard for wireless transmission of photos and videos to Smartphones/tablet PCs with Android and iOS operating systems. REMS application software for Android or iOS operating systems required.

Application software

REMS CamScope App application software for real time monitoring of the inspection results on the high resolution display of a Smartphone/Tablet-PC. Voice recording for simple commentary during the video recording. Immediate playback of saved recordings or transmission to other devices via e-mail for easy documentation. Free REMS application software from the Apple App Store or Android App at Google Play.

Exchangeable camera cable set Color

Camera cable set Color, consisting of colour camera Ø 4,5 mm, Ø 9 mm or Ø 16 mm, with CMOS sensor with dimmable white light LEDs for optimum setting of the brightness and fixed focus function for automatic picture focus, protected against occasional immersion in water (IP 67). Camera cable set Color 16-1 and 9-1 with 1 m flexible push cable and add-on mirror, add-on hook, add-on magnet. Camera cable set Color 4.5-1 with 1 m flexible push cable, ideal for inspecting small pipe bends and narrow places, e.g. odour traps, bore holes, breakthroughs. Flexible 900 mm push cable extension, connectable up to a working length of 4.5 m, as an accessory. Camera cable set Color 16-1 90°, with right-angled colour camera Ø 16 mm, 640 × 480 pixels, with 1 m flexible push cable, as an accessory.













ANDROID APP ON Google play

Available on the App Store

Ташев-Галвинг ООД
www.tashev-galving.com

REMS CamScope Wi-Fi

Endoscope camera with Wi-Fi radio standard

Supply format

REMS CamScope Wi-Fi Set. Mobile, handy endoscope camera with Wi-Fi radio standard for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Wireless transmission of photos and videos with voice recording to Smartphones/tablet PCs with Android or iOS* operating systems. Controller unit with 4 batteries 1.5 V, AA, LR6. In sturdy case. Optional with camera cable set 4.5-1, camera cable set 9-1 or camera cable set 16-1.

Description	Version	Art.-No.	
Set 16-1	Camera cable set Color 16-1, consisting of colour camera Ø 16 mm, 704 × 576 pixels, with dimmable white light LEDs and fixed focus function and 1 m formable push cable. Add-on mirror, add-on hook, add-on magnet	175140	
Set 9-1	Camera cable set Color 9-1, consisting of colour camera Ø 9 mm, 640 × 480 pixels, with dimmable white light LEDs and fixed focus function and 1 m formable push cable. Add-on mirror, add-on hook, add-on magnet	175141	
Set 4,5-1	Camera cable set Color 4.5-1, consisting of colour camera Ø 4.5 mm, 320 × 240 pixels, with dimmable white light LEDs and fixed focus function and 1 m formable push cable. Ideal for inspecting small pipe bends and narrow places.	175142	


*REMS CamScope App required. Free from the Apple App Store or Android App at Google Play.



Ташев-Галвинг ООД
www.tashev-galving.com

Accessories

Description	Art.-No.	
Camera cable set Color 16-1, colour camera Ø 16 mm, 704 × 576 pixels, with 1 m flexible push cable. Add-on mirror, add-on hook, add-on magnet	175103	
Camera cable set Color 16-1 90°, right-angled colour camera Ø 16 mm, 640 x 480 pixels, with 1 m flexible push cable.	175106	
Camera cable set Color 9-1, colour camera Ø 9 mm, 640 × 480 pixels, with 1 m flexible push cable. Add-on mirror, add-on hook, add-on magnet	175104	
Camera cable set Color 4.5-1, colour camera Ø 4.5 mm, 320 × 240 pixels, with 1 m flexible push cable.	175102	
900 mm push cable extension, flexible, connectable up to a working length of 4.5 m	175105	

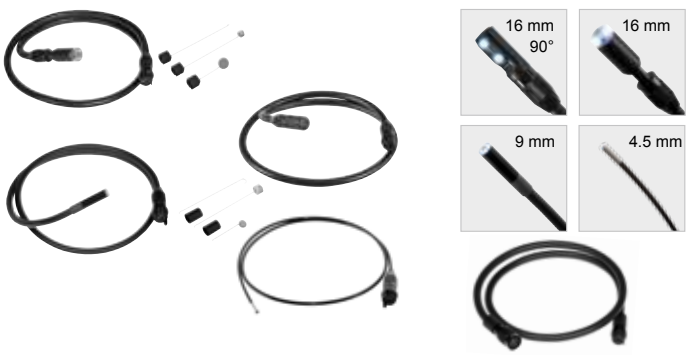

Ташев Галвинг ООД
www.tashev-galving.com

Mobile, handy endoscope camera with radio signal transmission for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Documentation of photos and videos on MicroSD card. REMS CamScope S with voice recording. For battery and mains operation.

REMS CamScope – Brilliant pictures and videos of cavities, shafts and pipes. Removable controller unit. Radio signal transmission MicroSD card slot.

REMS CamScope S – with voice recording.

Design

Ultra light and handy. Hand-held unit with camera cable set only 0.3 to 0.5 kg. Can be used everywhere, free hand, over head, also in very confined spaces Sturdy, impact-proof plastic housing with ergonomically shaped handle. On/off thumbwheel switch for continuous brightness control of the LEDs in the camera head. Power LED for indicating the operating state. Practical, removable battery holder for 4 commercially available 1.5 V, AA, LR6 batteries. Various camera cable sets can be used. Plug-screw connections for changing the camera cable sets and the push cable extensions without tools. Sturdy case for hand-held unit, camera cable set 16-1/9-1/4.5-1, push cable extension, controller unit, voltage supply/charger and accessories.

Controller unit with TFT-LCD colour display

Controller unit with 3.5" colour display with state of the art TFT-LCD technology for brilliant pictures and videos, 88 mm screen diagonal, 320 × 240 pixels, removable for radio signal transmission or securely pluggable to hand-held unit for direct signal transmission by contact pins. Very light and handy: REMS CamScope only 0.14 kg, REMS CamScope S only 0.24 kg. Sturdy plastic housing, spray water protected, REMS CamScope S with rubber impact protection. Small dimensions: REMS CamScope 102 × 71 × 25 mm, REMS CamScope S 105 × 92 × 42 mm. MicroSD card slot with spring release mechanism. Photos and videos can be saved on a MicroSD card for simple documentation of the inspection result. REMS CamScope S with voice recording for easy commentary during video recording. REMS CamScope S with 3× digital zoom. The date and time of the recording can be saved in the photo and video as an option. Immediate playback of saved recordings or transmission to other devices via MicroSD card. Playing of the voice recording in REMS CamScope S by external devices, e.g. PC or laptop. USB connector for direct connection to PC or laptop. Video output socket Composite-Video PAL/NTSC for connecting an external monitor. Connection for voltage supply/charger Li-Ion 100 – 240 V.

Cordless and mains operation

Li-Ion technology. Controller unit with integrated Li-Ion 3.7 V, 1.2 Ah battery. Powerful and light. High energy density for approx. 2 hours continuous operation. Voltage supply 100 – 240 V, 50 – 60 Hz, 9 W, for mains operation instead of battery with integrated electronic Li-Ion charger. No memory effect for maximum battery performance.

Exchangeable camera cable set Color

Camera cable set Color, consisting of colour camera Ø 4.5 mm, Ø 9 mm or Ø 16 mm, with CMOS sensor with dimmable white light LEDs for optimum setting of the brightness and fixed focus function for automatic picture focus, protected against occasional immersion in water (IP 67). Camera cable set Color 16-1 and 9-1 with 1 m flexible push cable and add-on mirror, add-on hook, add-on magnet. Camera cable set Color 4.5-1 with 1 m flexible push cable, ideal for inspecting small pipe bends and narrow places, e.g. odour traps, bore holes, breakthroughs. Flexible 900 mm push cable extension, connectable up to a working length of 4.5 m, as an accessory. Camera cable set Color 16-1 90°, with right-angled colour camera Ø 16 mm, 640 × 480 pixels, with 1 m flexible push cable, as an accessory.













Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Supply format

REMS CamScope Li-Ion Set. Mobile, handy endoscope camera with radio signal transmission for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Documentation of photos and videos on MicroSD card. Handheld unit with 4 batteries 1.5 V, AA, LR6 Removable controller unit with radio tsignal transmission, 3.5" TFT-LCD colour display, MicroSD card slot, USB port, video out socket PAL/NTSC, integrated Li-ion battery, 3.7 V, 1.2 Ah. 2 GB MicroSD card Voltage supply/charger Li-Ion 100–240 V, 50–60 Hz, 9 W, for controller unit. USB cable, video cable. In sturdy case. Optional with camera cable set 4.5-1, camera cable set 9-1 or camera cable set 16-1.

Description	Version	Art.-No.	
Set 16-1	Camera cable set Color 16-1, consisting of colour camera Ø 16 mm, 704 × 576 pixels, with dimmable white light LEDs and fixed focus function and 1 m formable push cable. Add-on mirror, add-on hook, add-on magnet	175110	
Set 9-1	Camera cable set Color 9-1, consisting of colour camera Ø 9 mm, 640 × 480 pixels, with dimmable white light LEDs and fixed focus function and 1 m formable push cable. Add-on mirror, add-on hook, add-on magnet	175111	
Set 4,5-1	Camera cable set Color 4.5-1, consisting of colour camera Ø 4.5 mm, 320 × 240 pixels, with dimmable white light LEDs and fixed focus function and 1 m formable push cable. Ideal for inspecting small pipe bends and narrow places.	175112	



Supply format


REMS CamScope S Li-Ion Set. Mobile, handy endoscope camera with radio signal transmission for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Documentation of photos and videos with voice recording on MicroSD card. Handheld unit with 4 batteries 1.5 V, AA, LR6 Removable controller unit with radio signal transmission, 3.5" TFT-LCD colour display, 3x digital zoom, MicroSD card slot, USB port, video out socket PAL/NTSC, integrated Li-ion battery, 3.7 V, 1.2 Ah. 2 GB MicroSD card Voltage supply/charger Li-Ion 100–240 V, 50–60Hz, 9 W, for controller unit. USB cable, video cable. In sturdy case. Optional with camera cable set 4.5-1, camera cable set 9-1 or camera cable set 16-1.

Description	Version	Art.-No.	
Set 16-1	Camera cable set Color 16-1, consisting of colour camera Ø 16 mm, 704 × 576 pixels, with dimmable white light LEDs and fixed focus function and 1 m formable push cable. Add-on mirror, add-on hook, add-on magnet	175130	
Set 9-1	Camera cable set Color 9-1, consisting of colour camera Ø 9 mm, 640 × 480 pixels, with dimmable white light LEDs and fixed focus function and 1 m formable push cable. Add-on mirror, add-on hook, add-on magnet	175131	
Set 4,5-1	Camera cable set Color 4.5-1, consisting of colour camera Ø 4.5 mm, 320 × 240 pixels, with dimmable white light LEDs and fixed focus function and 1 m formable push cable. Ideal for inspecting small pipe bends and narrow places.	175132	



Accessories

Description	Art.-No.	
Camera cable set Color 16-1, colour camera Ø 16 mm, 704 × 576 pixels, with 1 m flexible push cable. Add-on mirror, add-on hook, add-on magnet	175103	
Camera cable set Color 16-1 90°, right-angled colour camera Ø 16 mm, 640 x 480 pixels, with 1 m flexible push cable.	175106	
Camera cable set Color 9-1, colour camera Ø 9 mm, 640 × 480 pixels, with 1 m flexible push cable. Add-on mirror, add-on hook, add-on magnet	175104	
Camera cable set Color 4.5-1, colour camera Ø 4.5 mm, 320 × 240 pixels, with 1 m flexible push cable.	175102	
900 mm push cable extension, flexible, connectable up to a working length of 4.5 m	175105	

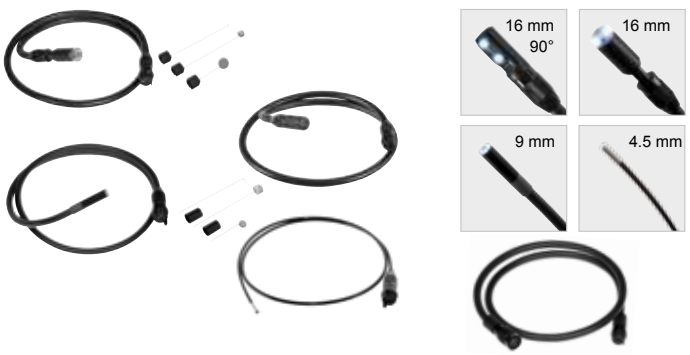

Ташев Галвинг ООД
www.tashev-galving.com

REMS CamSys

Electronic camera inspection system

Ultra light, handy camera inspection system for inexpensive inspection and damage analysis of pipes, drains, chimneys and other hollow cavities. With electronic metering. Also for inspection after pipe cleaning work and for acceptance of new installations or repairs. Documentation of pictures and videos on SD card.
For battery and mains operation.

Pipe	Ø (40) 50 – 150 mm
Drains, chimneys, other cavities	

**REMS CamSys Li-Ion – Brilliant pictures and videos of pipes and drains. SD card slot.
With electronic metering.
For battery and mains operation.**

System advantage

Only **one** controller unit with TFT-LCD colour display for connecting different camera cable sets for different requirements. Therefore inexpensive conversion possible.

Design

Ultra light and handy. Can be used everywhere, even in very narrow places. Controller unit connected to the camera cable set by a 2 m connecting cable, removable for easy cleaning of the camera cable set. Various camera cable sets can be used. Plug-screw connections for changing the camera cable sets and the controller unit without tools. Sturdy case for controller unit, voltage supply/charger and accessories.

Controller unit with TFT-LCD colour display

Controller unit with 3.5" colour display with state of the art TFT-LCD technology for brilliant pictures and videos, 89 mm screen diagonal, 320 × 240 pixels. Very light and handy, only 0.4 kg. Sturdy, impact-proof plastic housing, spray protected. Small dimensions: 172 × 121 × 58 mm. Keys for setting the brightness of the LEDs of the colour camera head. Full screen, 2x zoom and reflection possibility. SD card slot with spring release mechanism. Pictures and videos can be saved on an SD card for simple documentation of the inspection result. The date and time of the recording as well as the insertion depth of the camera can be saved in the picture and video as an option. Pictures can be taken during video recording without impairing the video recording. Immediate playback of saved recordings or transmission to other devices via SD card. Pictures can also be taken later from the video during playback of recorded videos on the controller's colour display. USB connector for direct connection to PC or laptop. Video output socket Composite-Video PAL/NTSC for connecting an external monitor. Connection for voltage supply/charger Li-Ion 100 – 240 V.

Cordless and mains operation

Li-Ion technology. Controller unit with integrated Li-Ion 3.7 V, 2.5 Ah battery. Powerful and light. High energy density for approx. 2 hours continuous operation. Power supply/charger 100 – 240 V, 50 – 60 Hz, 10 W, with USB port and USB cable for connecting power supply/charger, laptop or other voltage supply. No memory effect for maximum battery performance.

High resolution special colour camera

High resolution special colour camera Ø 25 mm with CMOS image sensor and 8 ultra bright, white LEDs with adjustable light intensity up to 330 mcd and concentrated radiation angle for brilliant colour pictures with even illumination. Low light requirement due to very high light sensitivity (0.5 lux). Fixed focus and special lens with 90° wide angle, also for detecting the smallest details.

Exchangeable cable camera sets

Camera cable sets S-Color, consisting of special colour camera with optional 30 m push cable Ø 5.4 mm, flexible, for Ø 50 – 150 mm, in the hasp with electronic metering or 10 m push cable Ø 3.6 mm with length marking, very flexible, for small pipe diameters and narrow pipe bends from Ø 40 mm, in cable cage, with connection for controller unit. Very small, rounded camera head Ø 25 mm, water-tight up to 20 m (0,2 MPa/2 bar/29 psi) and highly flexible sliding spring tapered towards the push cable for effortless feeding even through several pipe bends. Camera head with strong, quick-change protective cap made from high-strength polyacrylic with inserted mineral glass pane. Bend-manoeuvring push cable in hybrid technology, with glass fibre core, data cables and plastic sheath, very stable, for long life. Robust, powder-coated, easy to clean cable cage. Hasp with rotary cage for simple unwinding and winding of the push cable and integrated sensor for electronic metering.

Guide bodies

Various guide bodies for larger pipe diameters, firmly lockable on the camera head, as an accessory.













Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Supply format

REMS CamSys Li-Ion Set S-Color 10 K. Electronic camera inspection system for low-cost inspection and damage analysis. For pipes Ø 40–150 mm, drains, shafts, stacks and other cavities. Documentation of pictures and videos on SD card with specification of date and time. Controller unit in microprocessor technology with 3.5" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-ion battery, 3.7 V, 2.5 Ah, in sturdy, impact-proof plastic housing, spray protected. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100–240 V, 50–60 Hz, 10 W, SD card 4 GB, USB cable, video cable, in sturdy case. Camera cable set S-Color 10 K with high resolution special colour camera Ø 25 mm with CMOS image sensor and 10 m push cable Ø 3.6 mm with length marking, very flexible, in cable reel.

	Art.-No.	
	175008	



Supply format

REMS CamSys Li-Ion Set S-Color 30 H. Electronic camera inspection system for low-cost inspection and damage analysis. For pipes Ø 50–150 mm, drains, shafts, stacks and other cavities. Documentation of pictures and videos on SD card with specification of date, time and insertion depth of the camera. Controller unit in microprocessor technology with 3.5" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-ion battery, 3.7 V, 2.5 Ah, in sturdy, impact-proof plastic housing, spray protected. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100–240 V, 50–60 Hz, 10 W, SD card 4 GB, USB cable, video cable, in sturdy case. Camera cable set S-Color 30 H with high resolution special colour camera Ø 25 mm with CMOS image sensor and 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering.

	Art.-No.	
	175010	



Accessories

Description	Art.-No.	
REMS CamSys Li-Ion Basic-Pack Controller unit in microprocessor technology with 3.5" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-ion battery, 3.7 V, 2.5 Ah, in sturdy, impact-proof plastic housing, spray protected. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/ charger 100–240 V, 50–60 Hz, 10 W, SD card 4 GB, USB cable, video cable, in sturdy case.	175000	
Camera cable set S-Color 30 H with high resolution special colour camera Ø 25 mm with CMOS image sensor and 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering and connection for controller unit. For Ø 50–150 mm.	175011	
Camera cable set S-Color 10 K with high resolution special colour camera Ø 25 mm with CMOS image sensor, 10 m push cable Ø 3.6 mm with length marking, very flexible, with connection for controller unit, in cable reel. For small pipe diameters and narrow pipe bends from Ø 40 mm.	175016	
Guide body Ø 62 mm (pack of 2)	175057	
Guide body Ø 100 mm	175058	
Protective cap with mineral glass pane, sealing ring	175026	
Case with inlay	175018	





Ташев Галвинг ООД
www.tashev-galving.com

REMS Pull-Push

Suction and pressure cleaning device

Proven, reliable suction and pressure cleaning device for fast clearance of blockages.





REMS Pull-Push – fast clearance of blockages.

High pressing force by front, adjustable handle.

Optimum adaptation to the cleaning task by 2 sleeves:
Short sleeve for wash basins and baths, long sleeve for toilets.



Supply format

REMS Pull-Push. Suction and pressure cleaning device for fast clearance of blockages. With short and long sleeve. In a box.

	Art.-No.	
	170300	

REMS Mini-Cobra

Drain cleaner for manual and electric operation

Proven hand unit for quick application to remove pipe blockages in kitchen, bath, toilet.

For pipes	Ø 20–50 (75) mm
For cables	Ø 6, 8, 10 mm





German Quality Product

REMS Mini-Cobra – by hand or electric. Indispensable to remove small blockages.

Design

Simple, robust, practical design. Handy, light. Only 2.9 kg. Easy operation also in traps and tight bends. Easy insertion of cable directly through strainers in sinks and drains. Locking of cable by quick-action chuck.

Drain cleaning cables

Cables in high quality spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight bends. Cable end with bulbous head (sink strainer head), thus easy to bend.

Cable drum

In hot-galvanized spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends. Cable end with bulbous head. Corrosion-resistant cable drum in shock-proof, glass-fibre reinforced plastic prevents pollution of the environment. Ventilation of the cable drum interior enables self-drying of cable. View to cable at all times.

Drive

By hand with easy action, easy grip crank handle or with suitable electric drill/ with suitable electric screwdriver, speed ≤ 300 rpm. Hexagon adapter for electric drive located in the drum cover.



Supply format

REMS Mini-Cobra. Pipe cleaning device for pipes Ø 20–50 (75) mm, with crank handle and hexagonal driver for electric drill/screwdriver. For drain cleaning cables Ø 6, 8 and 10 mm. Cable drum in shock-proof, glass-fibre reinforced plastic. Quick-action chuck. Cable Ø 8 mm × 7.5 m long. In a carton.

	Art.-No.	
	170010	

Accessories

Description	Ø × Length	Art.-No.	
Drain cleaning cable	8 mm × 7.5 m 10 mm × 10 m	170200 170205	
Drain cleaning cable with core	8 mm × 7.5 m	170201	



Ташев Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

REMS Mini-Cobra A

Electric drain cleaning machine

Electric drain cleaning machine with automatic feed-forward and reverse. For effortless and quick application to remove pipe blockages in kitchen, bath, toilet.

For pipes	Ø 20 – 50 (75) mm
For cables	Ø 8, 10 mm

REMS Mini-Cobra A – quick removal of blockages. With automatic feed-forward and reverse.

Design

Compact unit of drive machine and cable drum. Handy, light. Only 5,2 kg. Combined thrust and grip handle for controlling the automatic feed-forward and reverse and for safe holding of the unit. Easy operation also in traps and tight bends. Easy insertion of cable directly through strainers in sinks and drains.

Drain cleaning cables

Drain cleaning cables in high quality spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends. Cable end with bulbous head (sink strainer head), thus easy to bend. Drain cleaning cables with core in high quality spring steel prevents ingress of dirt and generation of long fibres in the cable windings.

Cable drum

Corrosion resistant cable drum in shock-proof, glass-fibre reinforced plastic prevents pollution of the environment. Ventilation of the cable drum interior enables self-drying of cable. View of the cable at any time.

Drive

Proven drive unit with hexagon mount. Enormously powerful. Robust, maintenance-free gear with safety slipping clutch. Universal motor, 600 W, high-torque forward and reverse at low speed. Stepless, electronic speed control. The speed between 0 and 550 rpm is controlled by pressing the tip switch steplessly (acceleration switch).



German Quality Product



Supply format

REMS Mini-Cobra A. Electric drain cleaning machine with automatic feed-forward and reverse, for pipes Ø 20-50 (75) mm. For drain cleaning cables Ø 8 and 10 mm. Drive unit with maintenance-free gear, universal motor 230 V or 110 V, 50–60 Hz, 600 W, high-torque forward and reverse at low speed. Safety tip switch. Stepless, electronic speed control (acceleration switch). Cable drum in shock-proof, glass-fibre reinforced plastic. Cable Ø 8 mm , with core, 7.5 m long. In a carton.

	Art.-No.	
	170020	



Accessories

Description	Ø × Length	Art.-No.	
Drain cleaning cable with core	8 mm × 7.5 m	170201	
Drain cleaning cable	10 mm × 10 m	170205	
Case with inlay		185058	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Cobra 22/32

Handy, robust, compact machines for versatile use in pipe and drain cleaning. High-speed rotator with connectable cable sections. Proven technology.

For pipes	Ø 20 – 250 mm
For pipe and drain cleaning cables	Ø 8, 16, 22, 32 mm

All pipe and drain cleaning cables and tools can also be used for other makes.

REMS Cobra – clear pipe – easy and fast. High-speed rotator with cable sections for work length up to 100 m. Effective chain knocking and milling up to 740 rpm. Closed drive spindle protects motor and drive against dirt and water.

High speed rotator with connectable cable sections

High-speed rotator, 740 rpm (REMS Cobra 22) resp. 520 rpm (REMS Cobra 32), with cable sections for effective fast operation, e.g. during chain knocking or milling. Under difficult conditions also, e.g. roots and hard incrustations. Cable sections to be connected as needed up to 70 m (REMS Cobra 22) resp. 100 m (REMS Cobra 32) work length. No unnecessary rotating of long pipe and drain cleaning cables.

Design

Robust, practical, splash-proof. Maintenance-free. Small in size. Favourable weight, drive unit REMS Cobra 22 only 19 kg, drive unit REMS Cobra 32 only 24 kg. Machine frame made of distortion-free cast aluminium with protective covers in shock-proof plastic material. Chucking system which is located outside the machine housing with straight through undivided drive spindle for the pipe and drain cleaning cable. This enables a complete seal of the machine interior against dirt and water. Connecting cable with integrated personal protection switch (PRCD). Guide hose prevents excess rotation of pipe and drain cleaning cables and pollution of the environment. Legs with rubber caps guarantee a safe, floor-protecting stand.

High-performance pipe and drain cleaning cables

Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends. Rapid action coupling for fast extension and shortening. T-groove coupling with safety lock through spring-loaded thrust pin. Manual feed-forward for sensitive operation. Standard pipe and drain cleaning cable for universal pipe and drain cleaning jobs, highly flexible, specially suited for tight or several consecutive pipe bends. Pipe and drain cleaning cable S with thicker special spring steel for very difficult to remove obstructions, e.g. root cutting. Drain cleaning cables with weather-proof and temperature resistant plastic core prevents drain cleaning cable from dirt and generation of long fibres in the cable windings. Drive through REMS Cobra 22, REMS Cobra 32 or drive machines of other makes.

Clamping jaws for cable drive

Clamping jaws in high-grade hardened steel, resistant to wear and precise fit. Instant and exact clamping and opening of pipe and drain cleaning cables allow optimum control, power transmission and operating safety. REMS Cobra 22: Choice of pipe and drain cleaning cables Ø 16 mm and 22 mm, without changing the clamping jaws. Pipe and drain cleaning cable Ø 8 mm with adapter drum 22/8 and integrated clamping jaws, as accessory. REMS Cobra 32: Choice of drain cleaning cables Ø 22 and 32 mm, without changing the clamping jaws. Drain cleaning cables Ø 16 mm with clamping jaws 16, as accessory. Pipe and drain cleaning cable Ø 8 mm with adapter drum 32/8 and integrated clamping jaws, as accessory.

Drive

Powerful, quiet running capacitor motor with high torque, 750 W (REMS Cobra 22), 1050 W (REMS Cobra 32), right and left-hand rotation. Full transmission of motor power by a slipping-proof maintenance-free toothed belt drive. Straight through closed drive spindle. Permanently lubricated, maintenance-free roller bearings. Fast and secure run and stop of pipe and drain cleaning cable through strong, centrally located pressing lever provides central power input. Lever doubles as a carrying device without awkward locking.

Pipe and drain cleaning tools

Large variety of pipe and drain cleaning tools (page 206 – 207), also fit into pipe and drain cleaning machines of other makes.





German Quality Product



Straight through closed drive spindle protects motor and drive against dirt and water.

Ташев Галвинг ООД
www.tashev-galving.com

Supply format

REMS Cobra 22 Set. Electric pipe and drain cleaning machine for pipes Ø 20 – 150 mm. Drive unit with maintenance-free belt drive, capacitor motor 230 V, 50 Hz, 750 W, right and left-hand rotation, guide hose. Personal protection switch (PRCD). Choice of cable and tool set 16 or/and 22. In a carton.

Description	Ausführung	Art.-No.	
Set 16	5 cable sections 16 × 2.3 m in cable carrier, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator, 1 pair of guide gloves, steel case for tool set	172010	
Set 22	5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator 22/32, 1 pair of guide gloves, steel case for tool set	172011	
Set 16 + 22	5 cable sections 16 × 2.3 m in cable carrier, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator, 5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator 22/32, 2 pairs of guide gloves, steel case for each tool set	172012	



Supply format

REMS Cobra 32 Set. Electric pipe and drain cleaning machine for pipes Ø 20 – 250 mm (½ – 10"). Drive unit with maintenance-free belt drive, capacitor motor 230 V, 50 Hz, 1050 W, right and left-hand rotation, guide hose. Personal protection switch (PRCD). Choice of cable and tool set 32 or cable and tool sets 22 and 32 or 16 and 22. In a carton.

Description	Ausführung	Art.-No.	
Set 32	4 cable sections 32 × 4.5 m in cable carrier, straight auger 32, retrieving auger 32, funnel auger 32, toothed cross-blade borer 32/45, cable joint separator 22/32, 1 pair of guide gloves, case for tool set	174010	
Set 22 + 32	5 cable sections 22 x 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed-cross-blade borer 22/35, cable joint-separator 22/32, 4 cable sections 32 x 4.5 m in cable carrier, straight-auger 32, retrieving auger 32, funnel-auger 32, toothed cross-blade borer 32/45, cable joint separator 22/32,2 pairs of guide gloves, steel case/case for each tool set	174011	
Set 16 + 22	5 cable sections 16 x 2.3 m in cable carrier, 2 clamping jaws 16, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator 16, 5 cable sections 22 x 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator 22/32, 2 pairs of guide gloves,steel case for each tool set	174012	



Accessories

Description	Art.-No.	
REMS Cobra 22 drive unit with guide hose	172000	
REMS Cobra 32 drive unit with guide hose	174000	

Pipe and drain cleaning tools see page 206 – 207.





Ташев Галвинг ООД
www.tashev-galving.com

Description	Size	Art.-No.
Cable and tool set 16 consisting of 5 cable sections 16 × 2.3 m in cable carrier, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator, 1 pair of guide gloves, steel case for tool set		172050
Cable and tool set 22 consisting of 5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator, 1 pair of guide gloves, steel case for tool set		172051
Cable and tool set 32 consisting of 4 cable sections 32 × 4.5 m in cable carrier, straight auger 32, retrieving auger 32, funnel auger 32, toothed cross-blade borer 32/45, cable joint separator 22/32, 1 pair of guide gloves, case for tool set		174050
Adapter drum REMS Cobra 22/8 with cable Ø 8 mm × 7.5 m long, with bulbous head		170011
Adapter drum REMS Cobra 32/8 with cable Ø 8 mm × 7.5 m long, with bulbous head		170012
Clamping jaws 16 (pack of 2) for REMS Cobra 32 for clamping drain cleaning cables Ø 16 mm		174101
Pipe and drain cleaning cable for pipe-Ø 10 – 50 (75) mm for pipe-Ø 25 – 125 mm for pipe-Ø 50 – 150 mm for pipe-Ø 50 – 250 mm	8 × 7.5 m 16 × 2.3 m 22 × 4.5 m 32 × 4.5 m	170200 171200 172200 174200
Pipe and drain cleaning cable (5 pieces) in cable carrier for pipe-Ø 25 – 125 mm	16 × 2.3 m	171201
Pipe and drain cleaning cable (5 pieces) in cable carrier for pipe-Ø 50 – 150 mm	22 × 4.5 m	172201
Pipe and drain cleaning cable (4 pieces) in cable carrier for pipe-Ø 50 – 250 mm	32 × 4.5 m	174201
Pipe and drain cleaning cable S With thick special spring steel for high stability, e.g. during root cutting, milling, chain knocking for pipe-Ø 25 – 125 mm for pipe-Ø 50 – 150 mm for pipe-Ø 50 – 250 mm	 16 × 2 m 22 × 4 m 32 × 4 m	 171205 172205 174205
Pipe and drain cleaning cable with core prevents clogging of pipe and drain cleaning cable with dirt for pipe-Ø 25 – 125 mm for pipe-Ø 50 – 150 mm for pipe-Ø 50 – 250 mm	 16 × 2.3 m 22 × 4.5 m 32 × 4.5 m	 171210 172210 174210
Pipe and drain cleaning cable with core (5 pieces) in cable carrier for pipe-Ø 50 – 150 mm	22 × 4.5 m	172203
Pipe and drain cleaning cable with core (4 pieces) in cable carrier for pipe-Ø 50 – 250 mm	32 × 4.5 m	174203
Cable reduction 22/16 for connecting individual cables of different sizes	22/16	172154
Cable reduction 32/22 for connecting individual cables of different sizes	32/22	174154
Cable carrier (empty)	16 22 32	171150 172150 174150
Cable joint separator for releasing the safety lock	16 22/32	171151 172151



































Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Description	Size	Art.-No.
Straight auger for exploring the obstruction to withdraw a sample. Clearing of solid blockages caused by e.g. textiles, paper, kitchen waste	 16 22 32	 171250 172250 174250
Bulbous auger for minor obstructions caused by textiles and papers. Flexible, facilitates advancement in tight bends.	 16 22 32	 171265 172265 174265
Funnel auger for textile and paper obstructions in particular. Especially useful for cleaning larger diameter pipes. Also be used as a recovery tool for cables left in the pipe.	 16 22 32	 171270 172270 174270
Retrieving auger with extended, specially angled grappling arms. Used to recover cables left in the pipe. Not suitable for boring operations.	 16 22 32	 171275 172275 174275
Serrated blade borer for boring out greasy or heavily silted pipes, e.g. drains of washing machines, dishwashers. Riveted to the connector (not soldered or welded), so as to prevent any deformation of the hardened spring steel blades.	 16/25 22/35 22/45 32/55	 171280 172280 172281 174282
Serrated cross-blade borer Universal use for obstructions of all kinds, including incrustations, e.g. limescale deposites on the inside of the pipe. Riveted to the connector (not soldered or welded), so as to prevent any defor- mation of the hardened spring steel blades. Operation with pipe and drain cleaning cable S recommended.	 16/25 16/35 22/35 22/45 22/65 32/45 32/65 32/90 32/115	 171290 171291 172290 172291 172293 174291 174293 174295 174296
Forked cutter to remove moderate to severe silting or persistent grease contamination. Made of hardened spring steel.	 16	 171305
Cross-forked cutter to remove moderate to severe silting or persistent grease contamination. Made of hardened spring steel. Operation with pipe and drain cleaning cable S recommended.	 16	 171306
Serrated forked cutter Versatile use, e.g. for removal of slurries and for mincing (crushing) of root infested pipe. Made of hardened spring steel.	 22/65 32/65 32/90	 172305 174305 174306
Root cutter specially designed for root infested pipe. Hardened, replacable ring-type saw, cutting to front and rear. Operation with pipe and drain cleaning cable S recommended.	 22/65 32/65 32/90	 172310 174310 174311
Chain knocker, smooth rings for final pipe and drain cleaning for removal of grease deposites and incrustations, e.g. limescale deposites on the inside of the pipe. For sensitive pipes, e.g. plastic.	 16 22 32	 171340 172340 174340
Chain knocker, spiked links for final pipe and drain cleaning for removal of grease deposites and incrustations, e.g. limescale deposites on the inside of the pipe. For cast and concrete pipes.	 16 22 32	 171341 172341 174341
Guide gloves, pair for secure gripping and guiding of pipe and drain cleaning cables		 172610
Riveted guide glove, left **Riveted guide glove, right** for secure gripping and guiding of pipe and drain cleaning cables. Fully leather, inner surface riveted.		 172611 172612



Ташев-Галвинг ООД
www.tashev-galving.com

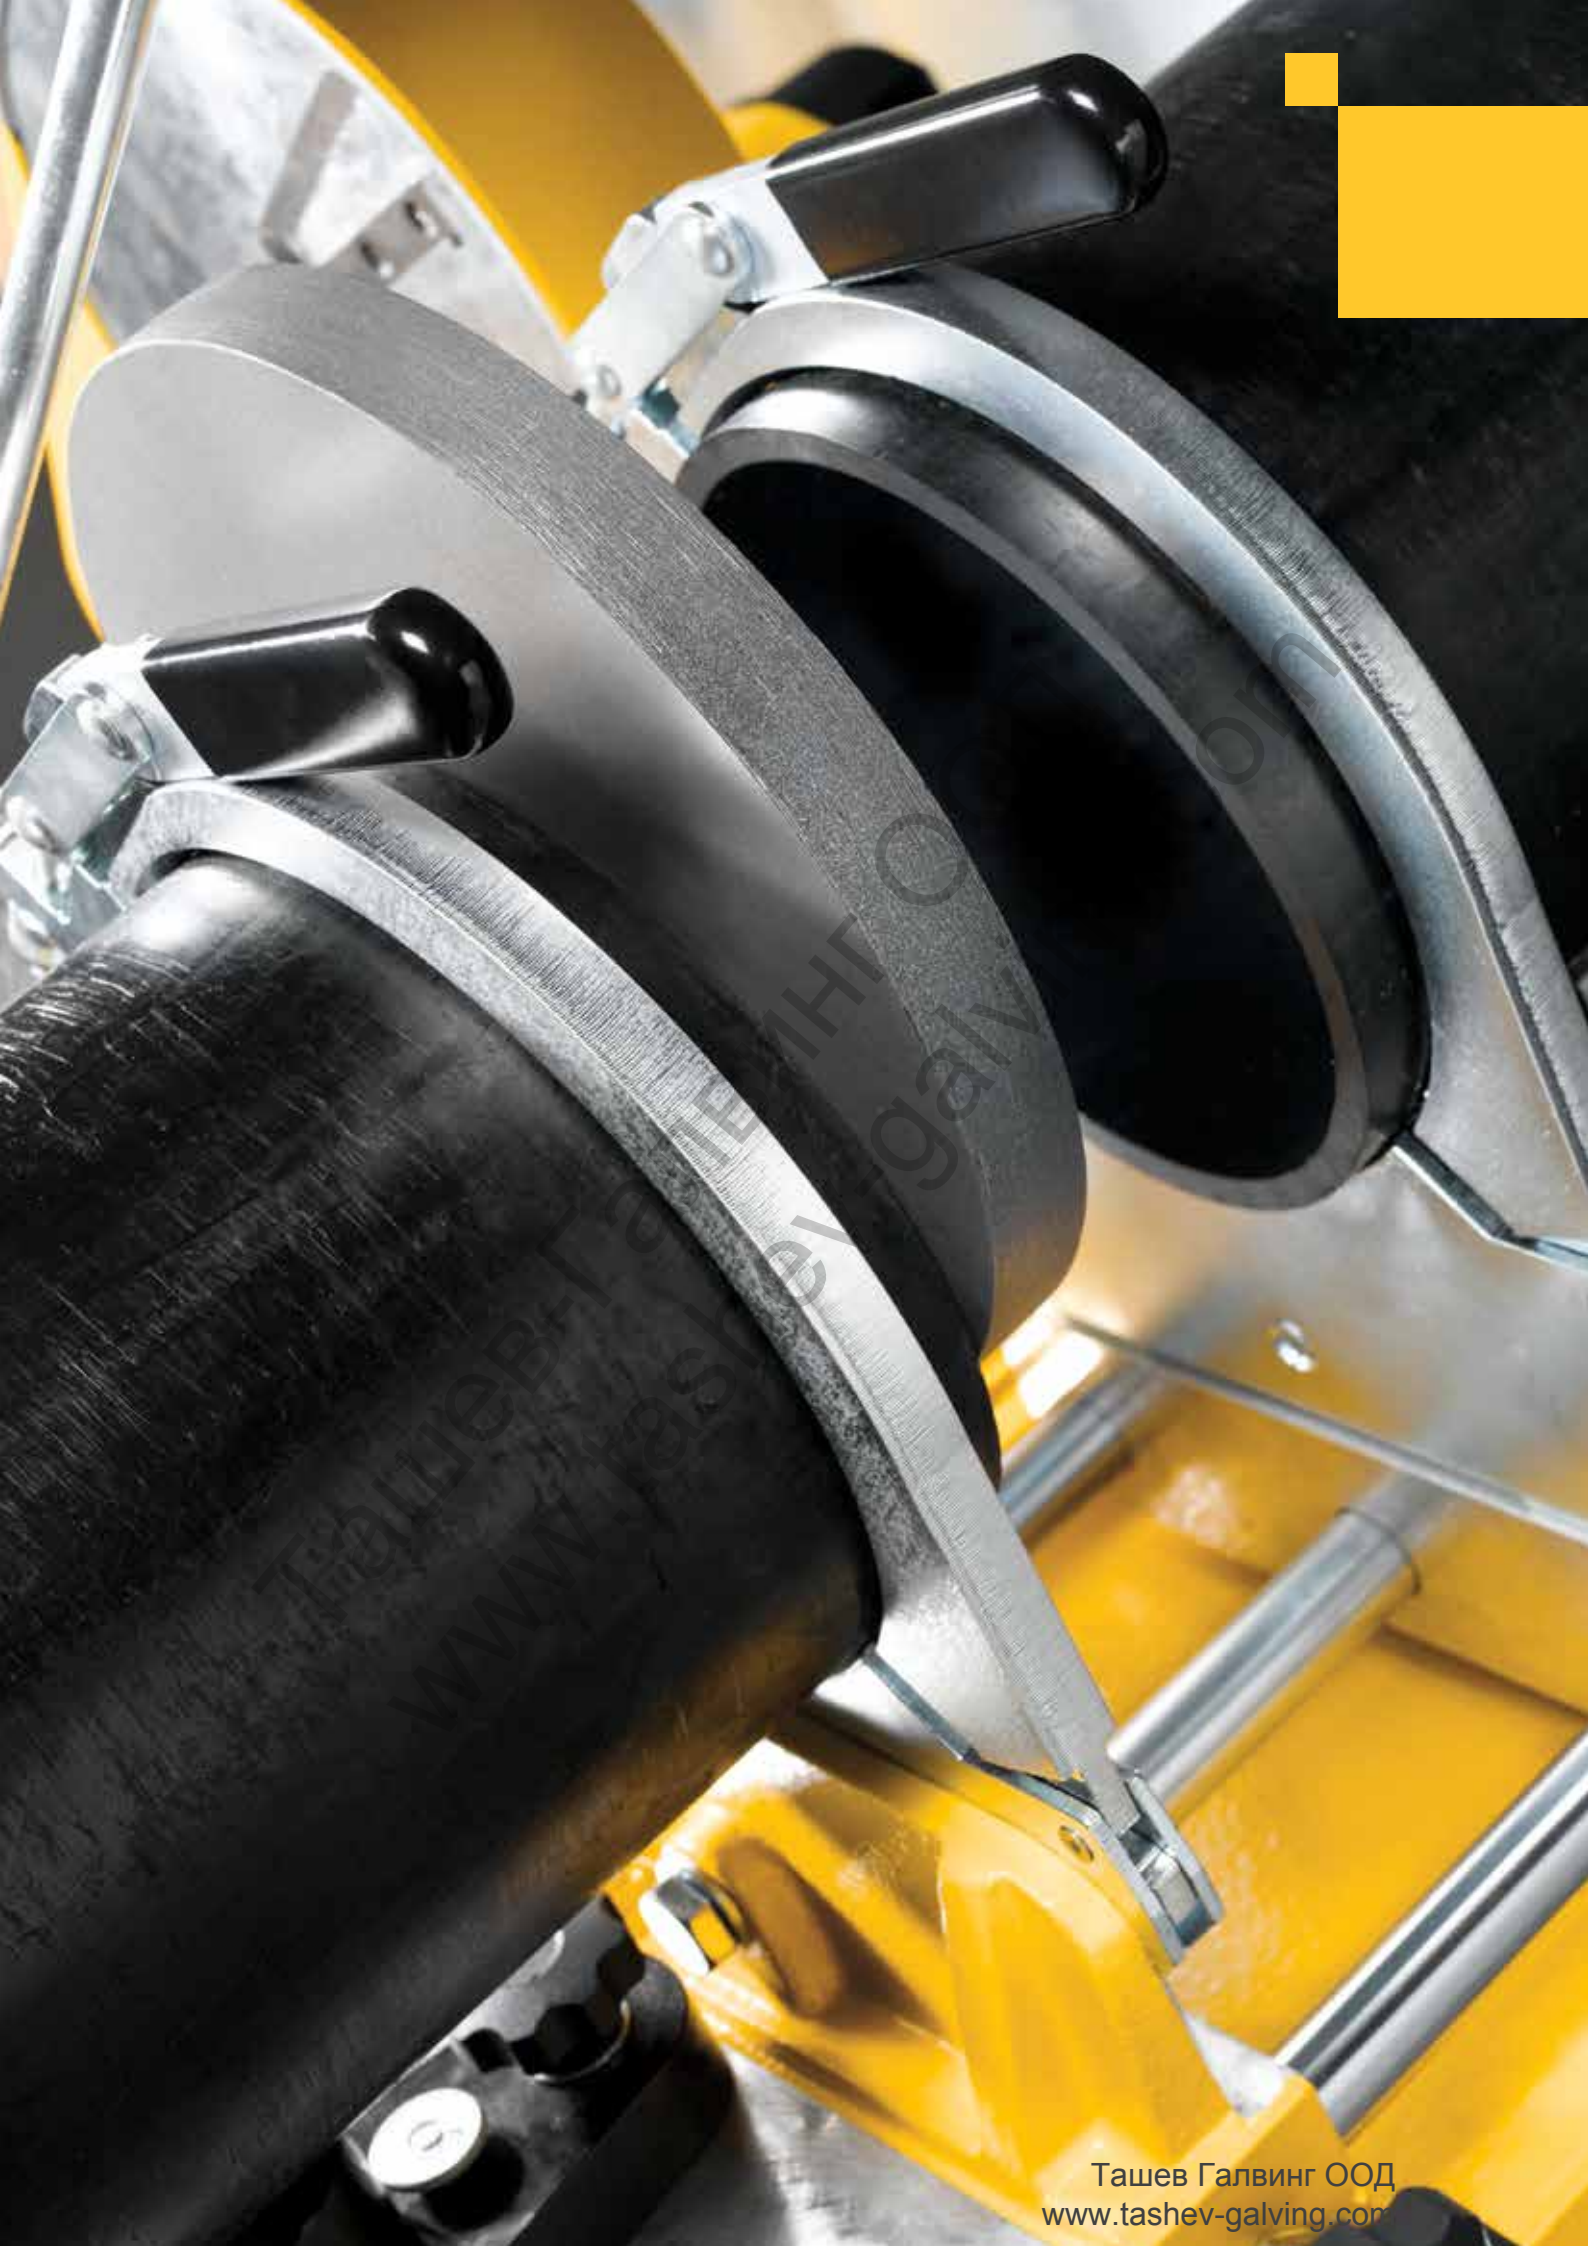

Ташев Галвинг ООД
www.tashev-galving.com

Plastic Pipe Welding

Ташев-Галвинг ООД
www.tashev-galving.com

	**Electric sleeve welding unit**	**210**
	**Sleeve welding units**	**211**
	**Butt welding machines**	**212**
	**Butt welding units**	**216**

REMS EMSG 160

Electric sleeve welding unit

Powerful, handy unit for welding plastic drain pipes with electric sleeves in PE.

Plastic pipes and electric sleeves in PE Ø 40 – 160 mm

For Geberit, Akatherm-Euro, Coes, Valsir, Waviduo, Vulcathene-Euro



REMS EMSG 160 – automatic welding. Electronic control. Acoustic and visual monitoring of welding process.

Smallest sizes. Super-handy, light, only 0.7 kg. Can be used anywhere.

Electronic control with micro controller for automatic adjustment of welding current (welding temperature) and welding time according to sleeve size.

Automatic compensation of welding time in accordance with the ambient temperature.

Acoustic and visual monitoring of welding process.

Wide work radius through extra-long cables.

Sturdy, shock-proof plastic casing with carrying strap. Splash-proof.

German Quality Product





Supply format

REMS EMSG 160. Electric sleeve welding unit 230 V, 50 Hz, 1150 W, for welding plastic drain pipes with electric sleeves in PE made by Akatherm-Euro, Coes, Geberit, Valsir, Waviduo, Vulcathene-Euro, Ø 40–160 mm. Electronic control, with acoustic and visual monitoring of welding process. In sturdy, shock-proof plastic casing. Welding leads 4.40 m, connecting cable 3 m. In a carton.

	Art.-No.	
	261001	

Accessories

Description	Art.-No.	
Case	151615	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Powerful electric tools for efficient sleeve welding.
Can be used anywhere, free-hand or on the work bench.

Plastic pipes and fittings
in PB, PE, PP, PVDF Ø 16 – 125 mm



REMS MSG – heating element according to DVS. High quality PTFE coating of heating spigots/sockets.

Design

Handy, light, safe. Free-hand or work bench assembly. Supplied in standard with supporting stand and bench support for mounting the unit in a horizontal or vertical position (bench support not supplied for MSG 25).


Heating element according to DVS

Plate-shaped, plane parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. Heating spigots and heating sockets according to DVS. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area. Fastening screws in stainless steel.

Temperature and temperature control

Choice of
– adjustable temperature 180 – 290°C, preadjusted to 260°C for PP pipes, with electronic temperature control with tight tolerance (EE) or
– fixed temperature to 260°C for PP pipes, with mechanical temperature control with a tolerance of +/– 10°C (FM).

The electronic and manual temperature control automatically controls the preadjusted temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

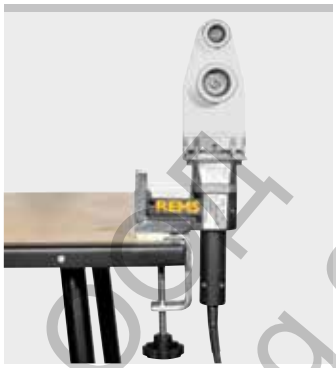



Supply format

REMS MSG. Sleeve welding unit for plastic pipes and fittings in PB, PE, PP, PVDF. Heating element 230 V, 50 – 60 Hz, without PTFE-coated heating spigots and heating sockets. Choice of adjustable temperature 180 – 290°C, preadjusted to 260°C for PP pipes, with electronic temperature control (EE) or fixed temperature to 260°C for PP pipes, with mechanical temperature control (FM). Support stand. Bench support for mounting the welding unit in a horizontal or vertical position (not for MSG 25). Hexagon key for assembly and dismantling of heating spigots and heating sockets. In a carton.

Description	Pipes Ø mm	Power W	Art.-No.
25 EE	16 – 25	500	256020
63 FM	16 – 63	800	256211
63 EE	16 – 63	800	256220
125 EE	16 – 125	1400	256320

Other voltages available.



Supply format

REMS MSG 63 FM Set. As REMS MSG 63 FM, but with PTFE-coated heating spigots, heating sockets for Ø 20, 25, 32 mm. Fastening screws in stainless steel. In steel case.

Description	Pipes Ø mm	Power W	Art.-No.
	16 – 63	800	256231

Other voltages available.



Supply format

REMS MSG 63 EE Set. As REMS MSG 63 EE, but with PTFE-coated heating spigots, heating sockets for Ø 20, 25, 32 mm. Fastening screws in stainless steel. In steel case.

Description	Pipes Ø mm	Power W	Art.-No.
	16 – 63	800	256240

Other voltages available.

Accessories

Description	Pipes Ø mm	Art.-No.
Heating spigot, heating socket, fastening screw in stainless steel	16	256400
	17	256410
	18	256420
	19	256430
	20	256440
	25	256450
	32	256460
	40	256470
	50	256480
	63	256490
	75	256500
	90	256510
	110	256520
	125	256530
Steel case		
REMS MSG 25		256042
REMS MSG 63		256242
REMS MSG 125		256342



Ташев Галвинг ООД
www.tashev-galving.com

REMS SSM 160RS

Butt welding machine

Handy, easy-to-carry compact machine. Complete only 48 kg. Ideal for sanitary installations and installation of drain pipes, chimney reconstruction with PVDF pipes. For job site and workshop.

Plastic pipes and fittings
in PB, PE, PP, PVDF — Ø 40 – 160 mm

PE Ø 40 – 90 mm	SDR ≥ 6
PE Ø 40 – 110 mm	SDR ≥ 9
PE Ø 40 – 125 mm	SDR ≥ 11
PE Ø 40 – 140 mm	SDR ≥ 17
PE Ø 40 – 160 mm	SDR ≥ 21



REMS SSM 160RS – ideal for the pipe fitter. Light and compact. Heating element according to DVS. Electronic temperature control. High-quality PTFE coating. Powerful facing cutter. Closed facing cutter housing.

Design

Light and compact. Low weight, complete only 48 kg.
Can be easily carried by one person.

- Base frame in cast aluminium
- Free suspension of butt welding unit REMS SSG 180 for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device, also suitable for angular branches.
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Can be used on the workbench or on the tubular stand provided as standard (= sub-frame = transport device).

Heating element according to DVS

Plate-shaped, plane parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area. Protective cover for heating element.

Electronic temperature control

Adjustable temperature 180–290°C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device, also for angular branches

Sturdy quick clamping device made of nickel-plated steel, consisting of 2 vices with 2 clamping inserts each for pipes of Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. Also suitable for angular branches.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for pipes Ø 160 mm for supporting and easy axial alignment of pipes and fittings. 2 pipe support inserts each for pipes Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm.



Supply format

REMS SSM 160RS. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF, PE Ø 40 – 90 mm SDR ≥ 6, PE Ø 40 – 110 mm SDR ≥ 9, PE Ø 40 – 125 mm SDR ≥ 11, PE Ø 40 – 140 mm SDR ≥ 17, PE Ø 40 – 160 mm SDR ≥ 21. Butt welding unit with PTFE-coated heating element 230 V, 50 – 60 Hz, 1200 W. Adjustable temperature 180 – 290°C, preset for PE pipes. Electronic temperature control. Protective cover for heating element. Electric planing device 230 V,50-60 Hz, 500 W. Pressing device. Quick clamping device, also for angular branches, consisting of 2 vices with 2 clamping inserts each Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. 2 pipe rests Ø 160 mm with pipe rest inserts Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm. Work key. Steel case for pipe support inserts and clamp inserts. Tubular stand = base frame = carrying device.

	Art.-No.	
	252026	

Accessories

Description	Art.-No.	
Planing blade (piece)	252103	



Ташев Галвинг ООД
www.tashev-galving.com

REMS SSM 160KS

Butt welding machine

Powerful, proven, easy-to-transport compact machine. Ideal for sanitary installation, drain pipe installation, chimney reconstruction with PVDF pipes. For job site and workshop.

Plastic pipes and fittings
in PB, PE, PP, PVDF — Ø 40 – 160 mm

PE Ø 40 – 90 mm	SDR ≥ 6
PE Ø 40 – 110 mm	SDR ≥ 9
PE Ø 40 – 125 mm	SDR ≥ 11
PE Ø 40 – 140 mm	SDR ≥ 17
PE Ø 40 – 160 mm	SDR ≥ 21



REMS SSM 160KS – ideal for the pipe fitter. Heating element according to DVS. Electronic temperature control. High-quality PTFE coating. Powerful facing cutter. Closed facing cutter housing.

Design

Compact, robust, job site-proven. Machine on sheet metal base weighs 90 kg. Easy to carry.

- Base frame in aluminium cast
- Free suspension of butt welding unit REMS SSG 180 for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device, also suitable for angular branches.
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Machine on sheet steel base with built-in drawer for clamping and pipe rest inserts
- Suitable for use on a work bench or on the standard supplied sheet metal cabinet (= carrying case).

Heating element according to DVS

Plate-shaped, plane-parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area. Protective cover for heating element.

Electronic temperature control

Adjustable temperature 180 – 290°C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device, also for angular branches

Sturdy quick clamping device made of nickel-plated steel, consisting of 2 vices with 2 clamping inserts each for pipes of Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. Also suitable for angular branches.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for pipes of Ø 160 mm for supporting and easy axial alignment of pipes and fittings. 2 pipe support inserts each for pipes Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm.



Supply format

REMS SSM 160KS. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF, PE Ø 40 – 90 mm SDR ≥ 6, PE Ø 40 – 110 mm SDR ≥ 9, PE Ø 40 – 125 mm SDR ≥ 11, PE Ø 40 – 140 mm SDR ≥ 17, PE Ø 40 – 160 mm SDR ≥ 21. Butt welding unit with PTFE-coated heating element 230 V 50 – 60 Hz, 1200 W. Adjustable temperature 180 – 290°C, preset for PE pipes. Electronic temperature control. Protective cover for heating element. Electric planing device 230 V,50-60 Hz, 500 W. Pressing device. Quick clamping device, also for angular branches, consisting of 2 vices with 2 clamping inserts each Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. 2 pipe rests Ø 160 mm with pipe rest inserts Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm. Sheet steel base with built-in drawer. Work key. Closed sheet metal cabinet = carrying case.

	Art.-No.	
	252046	

Accessories

Description	Art.-No.	
Planing blade (piece)	252103	



Ташев Галвинг ООД
www.tashev-galving.com

REMS SSM 250KS

Butt welding machine

Powerful, proven, easy-to-transport compact machine.
Ideal for sanitary installation, drain pipe installation, chimney reconstruction with PVDF pipes.
For job site and workshop.

Plastic pipes and fittings
in PB, PE, PP, PVDF — Ø 75–250 mm

PE Ø 75–140 mm	SDR ≥ 6
PE Ø 75–160 mm	SDR ≥ 9
PE Ø 75–180 mm	SDR ≥ 11
PE Ø 75–200 mm	SDR ≥ 13.6
PE Ø 75–225 mm	SDR ≥ 17.6
PE Ø 75–250 mm	SDR ≥ 22



REMS SSM 250KS – compact and robust.

Design
Compact, robust, job site-proven. Easy to carry.
Machine on sheet metal base weighs 109 kg.

- Base frame in aluminium cast
- Free suspension of butt welding unit for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device, also suitable for angular branches.
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Machine on sheet steel base with built-in drawer for clamping and pipe rest inserts.
- Suitable for use on a work bench or on the standard supplied sheet metal cabinet (= carrying case).

Heating element according to DVS
Plate-shaped, plane-parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area.

Electronic temperature control
Adjustable temperature 180–290°C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit
Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device for angular branches
Sturdy quick clamping device made of nickel-plated steel which grips the pipe all round, consisting of 2 clamps Ø 250 mm with jaws Ø 250 mm, with 2 clamping jaws and 2 clamping inserts each for pipes of Ø 75, 90, 110, 125, 160, 200 mm. Also suitable for angular branches. Clamping jaws and clamping inserts available for pipes of Ø 140, 180, 225 mm.

Pipe supports
Multiple adjustment, easy positioning of pipe supports for supporting and easy axial alignment of pipes and fittings. 2 pipe support inserts each for pipes Ø 75, 90, 110, 125, 140, 160, 180, 200, 225, 250 mm. Pipe rest inserts available for pipes of Ø 140, 180, 225 mm.



Supply format

REMS SSM 250K. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF. PE Ø 75–140 mm SDR ≥ 6, PE Ø 75–160 mm SDR ≥ 9, PE Ø 75–180 mm SDR ≥ 11, PE Ø 75–200 mm SDR ≥ 13,6, PE Ø 75–225 mm SDR ≥ 17,6, PE Ø 75–250 mm SDR ≥ 22. Butt welding unit with PTFE-coated heating element 230 V, 50–60 Hz, 1300 W. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Electric facing cutter unit 230 V, 50–60 Hz, 500 W. Quick clamping device, also for angular branches, consisting of 2 clamps Ø 250 mm with jaws Ø 250 mm, with 2 clamping jaws and 2 clamping inserts each for pipes of Ø 75, 90, 110, 125, 160, 200 mm. 2 pipe rests with pipe rest inserts Ø 75, 90, 110, 125, 160, 200, 250 mm. Sheet steel base with built-in drawer. Work key. Closed sheet metal cabinet = carrying case.

	Art.-No.	
	254025	

Accessories

Description	Art.-No.	
Planing blade (piece)	254103	



Ташев Галвинг ООД
www.tashev-galving.com

REMS SSM 315RF

Butt welding machine

Compact, easy-to-transport high-performance machine for sanitary installation, drain pipe installation, chimney reconstruction with PVDF pipes. For job site and workshop.

Plastic pipes and fittings in PB, PE, PP, PVDF — Ø 90–315 mm

PE Ø 90–180 mm	SDR ≥ 6
PE Ø 90–200 mm	SDR ≥ 7,4
PE Ø 90–225 mm	SDR ≥ 9
PE Ø 90–250 mm	SDR ≥ 13,6
PE Ø 90–280 mm	SDR ≥ 17
PE Ø 90–315 mm	SDR ≥ 21



REMS SSM 315RF – convenient for job site and workshop.

Design

Compact, robust, job site-proven. Weight including tubular stand on wheels 154 kg.

- Base frame in aluminium cast
- Free suspension of butt welding unit for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Standard supply with tubular wheel stand for secure standing and easy transport.

Heating element according to DVS

Plate-shaped, plane-parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area.

Electronic temperature control

Adjustable temperature 180–290°C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device

Sturdy quick clamping devices made of nickel-plated steel which grip the pipe all round, for pipes of Ø 315 mm. 4 clamping inserts each for pipes of Ø 90, 110, 125, 160, 200, 250 mm. Clamping inserts available for pipes of Ø 140, 180, 225, 280 mm.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for pipes Ø 315 mm for supporting and easy axial alignment of pipes and fittings. 2 pipe rest inserts each for pipes of Ø 90, 110, 125, 160, 200, 250 mm. Pipe rest inserts available for pipes of Ø 140, 180, 225, 280 mm.







Supply format

REMS SSM 315RF. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF. PE Ø 90–180 mm SDR ≥ 6, PE Ø 90–200 mm SDR ≥ 7,4, PE Ø 90–225 mm SDR ≥ 9, PE Ø 90–250 mm SDR ≥ 13,6, PE Ø 90–280 mm SDR ≥ 17, PE Ø 90–315 mm SDR ≥ 21. Butt welding unit with PTFE-coated heating element 230 V, 50–60 Hz, 3000 W. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Electric facing cutter unit 230 V, 50–60 Hz, 500 W. Pressing device. 2 quick clamping devices Ø 315 mm with 2 clamping inserts each for pipes of Ø 90, 110, 125, 160, 200, 250 mm. 2 pipe supports Ø 315 mm with pipe support inserts Ø 90, 110, 125, 160, 200, 250 mm. Ring spanner. Boxes for clamping and pipe rest inserts. Tubular stand on wheels.

	Art.-No.	
	255020	

Accessories

Description	Art.-No.	
Planing blade (piece)	255103	



Ташев Галвинг ООД
www.tashev-galving.com

Powerful electric tools for efficient butt welding.
Can be used anywhere, free-hand or on the work bench.

Plastic pipes and fittings
in PB, PE, PP, PVDF Ø ≤ 280 mm



REMS SSG – heating element according to DVS.
Electronic temperature control.
High-quality PTFE coating.

Design

Handy, light, safe. Free-hand or work bench assembly. Supplied as standard with supporting stand. Bench support available as accessory for mounting the unit in a horizontal or vertical position.

Heating element according to DVS

Plate-shaped, plane parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area.

Electronic temperature control

Adjustable temperature 180–290°C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.







Supply format

REMS MSG. Butt welding unit for plastic pipes and fittings in PB, PE, PP, PVDF. PTFE-coated heating element 230 V, 50–60 Hz. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Support stand. In a carton.

Description	Heating element Ø mm	Pipes Ø ≤ mm	Power W	Art.-No.	
110/45° EE	125	110	500	250020	
125 EE	145	125	700	250120	
180 EE	200	180	1200	250220	
280 EE	300	280	1300	250320	

Accessories

Description	Art.-No.	
Bench support for mounting the unit in a horizontal or vertical position		
REMS SSG 110/45°, 125, 180	250041	
REMS SSG 280	250341	
Steel case		
REMS SSG 110/45°	250042	
REMS SSG 125	250142	
REMS SSG 180	250242	
REMS SSG 280	250342	
Protection cover for heating element		
REMS SSG 110, 110/45°, 125	250143	
REMS SSG 180	250243	
REMS SSG 280	250343	



Ташев-Галвинг ООД
www.tashev-galving.com


Ташев Галвинг ООД
www.tashev-galving.com

Ташев-Галвинг ООД
www.tashev-galving.com



Ташев-Галвинг ООД
www.tashev-galving.com

Diamond core drilling
Diamond chasing and cutting machine
Wet and dry suction

	Electric diamond core drilling machines	220
	Drill stands	228
	Universal diamond core drilling crowns	230
	Universal diamond core drilling crowns LS	231
	Tile drilling	232
	Diamond chasing and cutting machines	234
	Diamond cutting discs	235
	Dry and wet extractor	236

Ташев-Галвинг ООД
www.tashev-galving.com

REMS Picus S1

Electric diamond core drilling machine

Compact, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Dry or wet drilling, hand held or with drill stand. For trade and industry.

Concrete, steel-reinforced concrete	up to Ø 102 (132) mm
Masonry and others	up to Ø 162 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 230 – 231.







REMS Picus S1 – Core drilling instead of chiselling. Easy, fast, vibration-free.

1 system – 4 applications. Ideal for plumbers.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. For many materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1¼ male, BSPP ½ female. Robust, suitable for the building site. Extra light, only 5.2 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min. Practical spade handle and stabiliser for hand held drilling. Throat Ø 60 mm for holding the drive machine in the drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick-coupling with water stop and hose connection ½". Suction rotor for sucking off dust for dry drilling with connection for conventional vacuum cleaner, as accessory.

Drive

Robust, powerful 1850 W universal motor. Load speed drilling spindle 580 rpm. Stable, maintenance-free gear. Blocking protection by safety slip clutch. Tip switch with lock. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 230 – 231). Connecting thread UNC 1¼ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of > 0.1 mg/m³). Observe the national regulations.

Suction rotor for dust extraction in dry drilling with connection for REMS Pull and other suitable extractors, as accessory. REMS Pull M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M, see page 236.

Water extractor unit

Water extractor unit for wet drilling up to Ø 170 mm, consisting of a water collector ring with connection for REMS Pull or other suitable wet extractors, compression ring, rubber washer Ø 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally, see page 228.



REMS Simplex 2



REMS Titan

Ташев Галвинг ООД
www.tashev-galving.com

REMS Picus S1

Electric diamond core drilling machine



REMS Picus S1 Basic-Pack



REMS Picus S1 Set 62

Supply format

REMS Picus S1 Basic-Pack. Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete up to Ø 102 (132) mm, masonry and other materials up to Ø 162 mm. For dry and wet drilling, hand held or with drill stand. Drive machine with drilling crown connecting thread UNC 1¼ male, BSPP ½ female, maintenance-free gear with safety slip clutch, universal motor 230 V, 50–60 Hz, 1850 W. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Load speed drilling spindle 580 rpm. Water supply device with adjustable shut-off valve and quick coupling with water stop and ½" hose connection. Stabiliser. Starting aid BSPP ½ with drill Ø 8 mm, Allen key size 3. Single open-ended wrench size 32. In sturdy steel case.

	Art.-No.
	180010

Other voltages on request.

Supply format

REMS Picus S1 Set 62. REMS Picus S1 Basic-Pack with REMS Universal diamond core drilling crown UDKB Ø 62 mm.

	Art.-No.	
	180020	

Other voltages on request.

Supply format

REMS Picus S1 Set 62 Simplex 2. REMS Picus S1 Basic-Pack with REMS Universal diamond core drilling crowns UDKB Ø 62 mm a REMS Simplex 2 drilling stand including tools and fastening kit for masonry and concrete.

	Art.-No.	
	180031	

Other voltages on request.



REMS Picus S1 Set 62 Simplex 2

Accessories

Description	Art.-No.	
REMS Picus S1 drive unit	180000	
Steel case with inlay	180600	
REMS Universal diamond core drilling crowns, inductively soldered, resolderable, see page 230.		
REMS universal diamond core drilling crowns LS, laser welded, high temperature-resistant, see page 231.		
REMS Pull L / M, dry and wet extractors, see page 236		
Additional accessories see page 228–229.		





Ташев Галвинг ООД
www.tashev-galving.com

REMS Picus S3

Electric diamond core drilling machine

Powerful, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Dry or wet drilling, hand held or with drill stand. For trade and industry.

Concrete, steel-reinforced concrete	up to Ø 152 (200) mm
Masonry and others	up to Ø 250 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 230 – 231.



REMS Picus S3 – Core drilling instead of chiselling. Easy, fast, vibration-free.

1 system – 4 applications. Ideal for plumbers.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Extremely versatile and efficient, e.g. drilling in steel-reinforced concrete, masonry and other materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1¼ male, BSPP ½ female. Robust, suitable for the building site. Only 7.4 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min. Practical spade handle and stabiliser for hand held drilling. Throat Ø 60 mm for holding the drive machine in the drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick-coupling with water stop and hose connection ½". Suction rotor for sucking off dust for dry drilling with connection for conventional vacuum cleaner, as accessory.





Drive

Robust, powerful 2200 W universal motor. Stable, maintenance-free 3-speed gear for optimum selection of load speed according to the drilling diameter. Load speed drilling spindle 530 rpm, 1280 rpm, 1780 rpm. Blocking protection by safety slip clutch. Tip switch with lock. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 230 – 231). Connecting thread UNC 1¼ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of > 0.1 mg/m³). Observe the national regulations.

Suction rotor for dust extraction in dry drilling with connection for REMS Pull and other suitable extractors, as accessory. REMS Pull M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M, see page 236.

Water extractor unit

Water extractor unit for wet drilling up to Ø 170 mm, consisting of a water collector ring with connection for REMS Pull or other suitable wet extractors, compression ring, rubber washer Ø 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally, see page 228.



REMS Simplex 2



REMS Titan

Ташев Галвинг ООД
www.tashev-galving.com

REMS Picus S3

Electric diamond core drilling machine



REMS Picus S3 Basic-Pack



REMS Picus S3 Set Titan



REMS Picus S3 Set 62-82-132 Titan

Supply format

REMS Picus S3 Basic-Pack. Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete up to Ø 152 (200) mm, masonry and other materials up to Ø 250 mm. For dry and wet drilling, hand held or with drill stand. Drive machine with drilling crown connecting thread UNC 1¼ male, BSPP ½ female, maintenance-free 3-speed gear with safety slip clutch, universal motor 230 V, 50–60 Hz, 2200 W. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock, personal protection switch (PRCD). Load speed drilling spindle 530 rpm, 1280 rpm, 1780 rpm. Water supply with adjustable shut-off valve and quick-coupling with water stop and hose connection ½". Stabiliser. Starting aid BSPP ½, Allen key size 3. Single open-ended wrench size 32. In sturdy steel case.

	Art.-No.
	180011

Other voltages on request.

Supply format

REMS Picus S3 Set Titan. REMS Picus S3 Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete.

	Art.-No.	
	180029	

Other voltages on request.

Supply format


REMS Picus S3 Set 62-82-132 Titan. REMS Picus S3 Basic-Pack with REMS Universal diamond core drilling crowns UDKB Ø 62-82-132 mm and REMS Titan drilling stand including fastening kit for masonry and concrete.

	Art.-No.	
	180028	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS Picus S3 drive unit	180001	
Steel case with inlay	180600	
REMS Universal diamond core drilling crowns, inductively soldered, resolderable, see page 230.		
REMS universal diamond core drilling crowns LS, laser welded, high temperature-resistant, see page 231.		
REMS Pull L / M, dry and wet extractors, see page 236		
Additional accessories see page 228–229.		

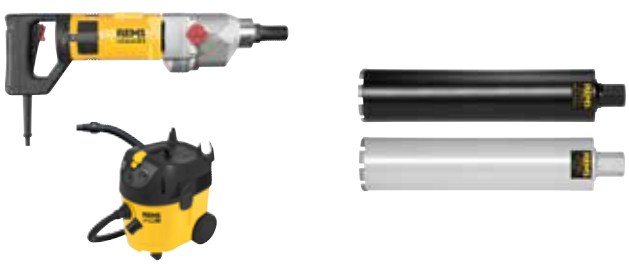

Ташев Галвинг ООД
www.tashev-galving.com

REMS Picus SR

Electric diamond core drilling machine
with speed regulation

Compact, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. With speed regulation. Dry or wet drilling, hand held or with drill stand. For trade and industry.

Concrete, steel-reinforced concrete	up to Ø 162 (200) mm
Masonry and others	up to Ø 250 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 230–231.

REMS Picus SR – Core drilling instead of chiselling. Easy, fast, vibration-free. With speed regulation.

1 system – 4 applications. Ideal for plumbers.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Extremely versatile and efficient, e.g. drilling in steel-reinforced concrete, masonry and other materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1¼ male, BSPP ½ female. Robust, suitable for the building site. Extra light, only 6.4 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min. Practical spade handle and stabiliser for hand held drilling. Throat Ø 60 mm for holding the drive machine in the drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick-coupling with water stop and hose connection ½". Suction rotor for sucking off dust for dry drilling with connection for conventional vacuum cleaner, as accessory.

Drive

Robust, powerful 2200 W universal motor. Temperature control of the motor's field wires with a PTC resistor (Positive Temperature Coefficient) as overheating protection. Stable, maintenance-free, 2-step gear. Blocking protection by safety slip clutch. Tip switch with lock. Connecting cable with integrated personal protection switch (PRCD).

Speed-Regulation

Stepless electronic speed regulation of the drive machine for selecting the speed according to the material. The speed is steplessly adjustable on the dial: 250 rpm to 500 rpm (1st gear) or 600 rpm to 1200 rpm (2nd gear). The electronic speed control that is being used keeps the selected speed constant, also under load. Advantage: The optimum drilling speed (load speed) selected for the respective material and the drilling crown diameter remains constant for the entire duration of the drilling. For the best drilling performance and maximum life of the drilling crowns.

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 230–231). Connecting thread UNC 1¼ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally, see page 228.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of > 0.1 mg/m³). Observe the national regulations.

Suction rotor for dust extraction in dry drilling with connection for REMS Pull and other suitable extractors, as accessory. REMS Pull M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M, see page 236.





Tested by electrosuisse

German Quality Product

With speed regulation for the best drilling performance and maximum life of the drilling crowns.



REMS Simplex 2



REMS Titan

Ташев Галвинг ООД
www.tashev-galving.com

REMS Picus SR

Electric diamond core drilling machine
with speed regulation

Water extractor unit

Water extractor unit for wet drilling up to Ø 170 mm, consisting of a water collector ring with connection for REMS Pull or other suitable wet extractors, compression ring, rubber washer Ø 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.



REMS Picus SR Basic-Pack



REMS Picus SR Set Titan

Supply format

REMS Picus SR Basic-Pack. For core drilling in concrete, steel-reinforced concrete up to Ø 162 (200) mm, masonry and other materials up to Ø 250 mm. For dry or wet drilling, hand held or with drill stand. Drive machine with drilling crown connection thread UNC 1¼ male, G ½ female, maintenance-free 2-step gear with safety slip clutch, universal motor 230 V, 50–60 Hz, 2200 W. Stepless electronic speed regulation 250 rpm to 500 rpm (1st gear) or 600 rpm to 1200 rpm (2nd gear), overheating protection. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Water supply device with adjustable shut-off valve and quick coupling with water stop and ½" hose connection. Stabiliser. Single open ended wrench size 32. In sturdy steel case.

	Art.-No.	
	183010	

Other voltages on request.

Supply format

REMS Picus SR Set Titan. REMS Picus SR Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete.

	Art.-No.	
	183022	

Other voltages on request.

Supply format

REMS Picus SR Set 62-82-132 Titan. REMS Picus SR Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete and REMS Universal diamond core drilling crowns UDKB Ø 62-82-132 mm.

	Art.-No.	
	183023	

Other voltages on request.



REMS Picus SR Set 62-82-132 Titan

Accessories

Description	Art.-No.	
REMS Picus SR drive unit	183000	
Spacer set, for additional fastening of the REMS Picus SR drive machine to the REMS Titan drilling stand, consisting of spacer and two M 8 x 65 cylinder head screws	183632	
Steel case with inlay	180600	
REMS Universal diamond core drilling crowns, inductively soldered, resolderable, see page 230.		
REMS universal diamond core drilling crowns LS, laser welded, high temperature-resistant, see page 231.		
REMS Pull L / M, dry and wet extractors, see page 236		
Additional accessories see page 228–229.		



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Picus S2/3,5

Electric diamond core drilling machine

Powerful. robust core drilling machine for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Dry or wet drilling with drill stand. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, masonry and others Ø 40 – 300 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 230 – 231.



REMS Picus S2/3,5 – Core drilling instead of chiselling. Easy, fast, vibration-free.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Extremely versatile and efficient, e.g. drilling in steel-reinforced concrete, masonry and other materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1¼ male. Light loosening ring, for light loosening of the diamond core crowns. Compact, robust, suitable for the building site. Weight just 14.4 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 2 min. Clamping plate for fast clamping to the drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick coupling with water stop and hose connection ½".

Drive

Robust, powerful 3420 W universal motor. Stable, maintenance-free 2-speed gear for optimum selection of load speed according to the drilling diameter. Load speed drilling spindle 320 rpm, 760 rpm. Blocking protection by safety slip clutch. Rocker switch. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 230 – 231). Connecting thread UNC 1¼ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.





Water extractor unit

Water extractor unit for wet drilling up to Ø 170 mm, consisting of a water collector ring with connection for REMS Pull or other suitable wet extractors, compression ring, rubber washer Ø 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.

Drill stand REMS Titan

Robust, highly stable drilling stand for core drilling in steel-reinforced concrete and other materials up to Ø 300 mm. For high demands. Drill column made of rigid, unbendable square precision steel tube ⍁ 50 mm, with extra narrow tolerance, for low-vibration guiding of the slide. Continuously tiltable with degree scale up to 45°, with double support by adjustable, single-part steel girders, for maximum thrust pressure. Highly stable, 3-sided guidance of the drill column in the base plate and triple cross fastening for high rigidity in vertical drilling. 4 Eyebolts for levelling unevenness of the floor, for exact standing position. Drill depth scale. Slide guided on all sides by adjustable, pretensioned plastic slide bearings. Precision in-feed drive ensures easy, low-vibration drilling and precise, low-vibration drill thrust. For high thrust pressure and long life of the drilling crowns. Spirit level integrated in the slide for exact alignment of the drill stand. Locking of the slide for simple assembly of the drilling crown and safe transport. Rigid connection plate made of wear-resistant spheroidal iron. Quick-clamping device for accommodating drive units with a suitable connection plate. Highly stable clamping bracket, unbendable and rigid, for accommodating drive units with Ø 60 mm clamping throat. Rack and pinion force transmission with ergonomically designed pressing lever which can be inserted in both sides of the slide. Wide steel rack. Base plate with groove for sealing ring of the vacuum fastening. Vacuum fastening as accessory. Drill column with adjustable clamping head for clamping the drill stand between the ceiling and floor or between two walls. Mobile drill stand for easy transport. Weight 19.5 kg.

With tools, consisting of Allen key size 6, single open ended wrench size SW 19 and SW 30 and fastening kit for masonry and concrete, consisting of 2 M12 splaying anchors, 10 M12 hammer anchors for concrete, setting iron for M12 hammer anchors, cord threaded bar M12 × 65, quick clamping nut, washer, carbide masonry drill Ø 15 mm SDS-plus, in box.



REMS Titan

Ташев Галвинг ООД
www.tashev-galving.com

REMS Picus S2/3,5


Electric diamond core drilling machine

Supply format

REMS Picus S2/3,5 Basic-Pack. Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed, up to Ø 300 mm. For dry and wet drilling with drill stand. Drive machine with drilling crown connecting thread UNC 11/4 male, maintenance-free 2-speed gear with safety slip clutch, universal motor 230 V, 50–60 Hz, 3420 W. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Load speed drilling spindle 320 rpm, 760 rpm. Water supply device with adjustable shut-off valve and quick coupling with water stop and hose connection ½". Light loosening ring. Single open-ended wrench size 32.
In a carton.

	Art.-No.	
	180012	

Other voltages on request.

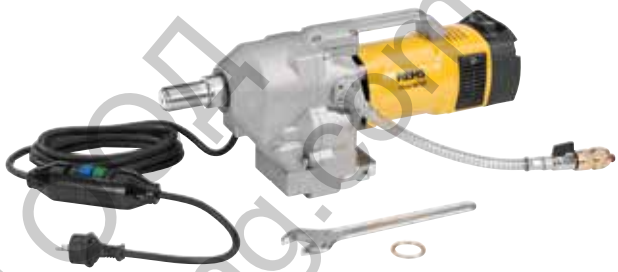



Supply format

REMS Picus S2/3,5 Set Titan. REMS Picus SR/3.5 Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete.

	Art.-No.	
	180030	

Other voltages on request.

Ташев-Галвинг ООД
www.tashev-galving.com

Accessories

Description
REMS Universal diamond core drilling crowns, inductively soldered, resolderable, see page 230.
REMS universal diamond core drilling crowns LS, laser welded, high temperature-resistant, see page 231.
REMS Pull L / M, dry and wet extractors, see page 236
Additional accessories see page 228–229.





Ташев Галвинг ООД
www.tashev-galving.com

Supply format

REMS Simplex 2. Robust, handy drilling stand for core drilling up to Ø 200 mm. Drill column made of rigid, unbendable square precision steel tube ⍁ 50 mm, with extra narrow tolerance, for low-vibration guiding of the slide. Drilling column guided in sturdy stand and double bolted for high rigidity during drilling. Steel section stand. 4 Set screws for levelling unevenness of the floor, for exact standing position. Clamping bracket for holding drive machines with clamping throat Ø 60 mm. Slide guided on all sides by adjustable, pretensioned plastic slide bearings. Precision in-feed drive ensures easy, low-vibration drilling and precise, low-vibration drill thrust. For high thrust pressure and long life of the drilling crowns. Spirit level integrated in the slide for exact alignment of the drill stand. Locking of the slide for simple assembly of the drilling crown and safe transport. Stable clamping bracket, unbendable and rigid, for accommodating drive units with Ø 60 mm clamping throat. Rack and pinion force transmission with ergonomically designed pressing lever which can be inserted in both sides of the slide. Wide steel rack Weight 12 kg.

With tools, consisting of Allen key size 6, single open ended wrench size SW 19 and SW 30 and fastening kit for masonry and concrete, consisting of 2 M12 splaying anchors, 10 M12 hammer anchors for concrete, setting iron for M12 hammer anchors, cord threaded bar M12 × 65, quick clamping nut, washer, carbide masonry drill Ø 15 mm SDS-plus, in box.

For REMS Picus S1, REMS Picus S3, REMS Picus SR and other makes.

	Art.-No.	
	183700	



Supply format

REMS Titan. Robust, highly stable drilling stand for core drilling in steel-reinforced concrete and other materials up to Ø 300 mm. For high demands. Drill column made of rigid, unbendable square precision steel tube ⍁ 50 mm, with extra narrow tolerance, for low-vibration guiding of the slide. Continuously tiltable with degree scale up to 45°, with double support by adjustable, single-part steel girders, for maximum thrust pressure. Highly stable, 3-sided guidance of the drill column in the base plate and triple cross fastening for high rigidity in vertical drilling. 4 Eyebolts for levelling unevenness of the floor, for exact standing position. Drill depth scale. Slide guided on all sides by adjustable, pretensioned plastic slide bearings. Precision in-feed drive ensures easy, low-vibration drilling and precise, low-vibration drill thrust. For high thrust pressure and long life of the drilling crowns. Spirit level integrated in the slide for exact alignment of the drill stand. Locking of the slide for simple assembly of the drilling crown and safe transport. Rigid connection plate made of wear-resistant spheroidal iron. Quick-clamping device for accommodating drive units with a suitable connection plate. Highly stable clamping bracket, unbendable and rigid, for accommodating drive units with Ø 60 mm clamping throat. Rack and pinion force transmission with ergonomically designed pressing lever which can be inserted in both sides of the slide. Wide steel rack. Base plate with groove for sealing ring of the vacuum fastening. Vacuum fastening as accessory. Drill column with adjustable clamping head for clamping the drill stand between the ceiling and floor or between two walls. Mobile drill stand for easy transport Weight 19.5 kg.

With tools, consisting of Allen key size 6, single open ended wrench size SW 19 and SW 30 and fastening kit for masonry and concrete, consisting of 2 M12 splaying anchors, 10 M12 hammer anchors for concrete, setting iron for M12 hammer anchors, cord threaded bar M12 × 65, quick clamping nut, washer, carbide masonry drill Ø 15 mm SDS-plus, in box.

System advantage: For REMS Picus S1, REMS Picus S3, REMS Picus SR, REMS Picus S2/3,5 and other makes.

	Art.-No.	
	183600	



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Accessories

For REMS Picus S1, REMS Picus SR, REMS Picus S3, REMS Picus S2/3,5 and other makes

Description	Art.-No.	
Water pressure tank for 10 ltr of water, for wet drilling without water connection	182006	
Titan drilling template for easy setting of the fastening holes. For REMS Titan drilling stand.	183605	
Carbide masonry drills Ø 15 mm SDS-plus for hammer anchors M12	079018	
Hammer anchor M12 (pack of 50), for concrete	079005	
Setting iron for hammer anchor M12	182050	
Carbide masonry drill Ø 20 mm SDS-plus for splaying anchors M12	079019	
Splaying anchor M12 (pack of 10), for masonry, reusable	079006	
Quick clamping set 160 for fastening the drilling stand with anchors, consisting of cord threaded bar 160 mm with M12 × 52 thread, quick clamping nut, washer.	079010	
Quick clamping set 500 for fastening the drilling stand without anchor, consisting of cord threaded bar 500 mm, 2 quick clamping nuts, 2 washers	183607	
Titan vacuum fastening, consisting of cover plate with nipple for ⅜" screw connection and sealing ring for base plate.	183603	
Vacuum pump, for vacuum ≤ -900 mbar (90%), consisting of dry running rotary slide pump, oil-free, performance 6 m3/h, condenser motor 230 V, 50–60 Hz, 250 W, splash water-protected, inside suction filter with silencer function and 5 m PVC fabric hose with bayonet coupling.	183670	
Laser drilling centre pointer	183604	
G ½ drill aid with carbide masonry drill Ø 8 mm	180150	
Carbide masonry drill Ø 8 mm for drilling aid	079013	
Single open ended wrench size 41 for loosening the universal diamond core drilling crowns	079003	
Light loosening ring, for light loosening of the diamond core crown	180015	
Drilling crown extension 200 mm	180155	
Sharpening stone for diamond core drilling crowns	079012	
Spirit level, magnetic, with 3 indicators for setting the stand 3-dimensionally	182009	
Suction rotor for dust extraction with G ½ male connecting thread, UNC 1¼ male connecting thread and with connection for REMS Pull and other suitable extractors.	180160	
Water suction device, for wet drilling up to Ø 170 mm, consisting of water collection ring with pressure ring, rubber washer Ø 200 mm and universal pressure pad for all REMS drilling stands.	183606	
Rubber washer Ø 200 mm (pack of 10), for water suction device	183675	
REMS Pull L / M, dry and wet extractor, certified as extractor and dust extractor for extracting health hazardous dusts in accordance with EN 60335-2-69, see page 236		



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Universal diamond core drilling crowns

For REMS Picus S1, REMS Picus SR, REMS Picus S3, REMS Picus S2/3,5 and other makes

High quality universal diamond core drilling crowns. Inductively soldered. Universally usable for dry and wet drilling, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed and other — Ø 32 – 300 mm



REMS Universal diamond core drilling crowns – Inductively soldered. Diamond segments with conical cut for fast, easy and quiet drilling. Versatile for many types of material.

Ideal for plumbers.

Universally usable for many materials, for dry and wet drilling, hand held or with drill stand.

Single connecting thread UNC 1¼ female. Drilling depth 420 mm.


Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with conical cut (”roof shape”) for fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Drive through all REMS Picus drive machines and suitable drive machines of other makes having connecting thread UNC 1¼ male. Adapter for using REMS Universal diamond core drilling crowns in drive machines having other connecting threads, as accessory.

German Quality Product






Supply format

REMS Universal diamond core drilling crown. Inductively soldered, resolderable. Universally usable for dry and wet drilling, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1¼ female. Drilling depth 420 mm. In a carton.

Ø × drilling depth × connection	Number of segments	Art.-No.	
UDKB 32 × 420 × UNC 1¼	4	181010	
UDKB 42 × 420 × UNC 1¼	4	181015	
UDKB 52 × 420 × UNC 1¼	5	181020	
UDKB 62 × 420 × UNC 1¼	6	181025	
UDKB 72 × 420 × UNC 1¼	7	181030	
UDKB 82 × 420 × UNC 1¼	7	181035	
UDKB 92 × 420 × UNC 1¼	8	181040	
UDKB 102 × 420 × UNC 1¼	8	181045	
UDKB 112 × 420 × UNC 1¼	9	181050	
UDKB 125 × 420 × UNC 1¼	10	181057	
UDKB 132 × 420 × UNC 1¼	11	181060	
UDKB 152 × 420 × UNC 1¼	12	181065	
UDKB 162 × 420 × UNC 1¼	12	181070	
UDKB 182 × 420 × UNC 1¼	12	181075	
UDKB 200 × 420 × UNC 1¼	12	181080	
UDKB 225 × 420 × UNC 1¼	13	181085	
UDKB 250 × 420 × UNC 1¼	14	181090	
UDKB 300 × 420 × UNC 1¼	22	181095	

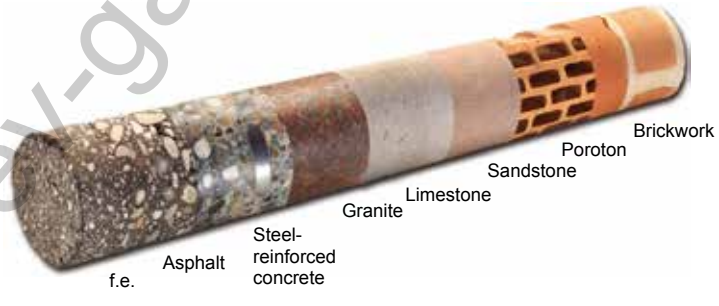



Accessories

Description	Art.-No.	
Light loosening ring, for light loosening of the diamond core crown	180015	
Drilling crown extension 200 mm	180155	
Adapter UNC 1¼ male – G ½ male	180052	
Adapter UNC 1¼ male – G ½ female	180056	
Adapter UNC 1¼ male – Hilti BI	180053	
Adapter UNC 1¼ male – Hilti BU	180054	
Adapter UNC 1¼ male – Würth	180055	
Sharpening stone for diamond core drilling crowns	079012	
Single open ended wrench size 41 for UDKB	079003	

Additional adapters for using REMS Universal diamond core drilling crowns LS in drive machines of other makes, on request.



Ташев Галвинг ООД
www.tashev-galving.com

REMS Universal diamond core drilling crowns LS

For REMS Picus S1, REMS Picus SR, REMS Picus S3, REMS Picus S2/3,5 and other makes

High quality universal diamond core drilling crowns. Laser welded. Universally usable for dry and wet drilling, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed and other — Ø 32 – 200 mm



REMS universal diamond core drilling crowns LS – laser welded. Diamond segments with conical cut for fast, easy and quiet drilling. Versatile for many types of material.

Ideal for plumbers.

Universally usable for many materials, for dry and wet drilling, hand held or with drill stand.

Single connecting thread UNC 1¼ female. Drilling depth 420 mm.

Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.


Diamond segments with conical cut ("roof shape") for fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Drive through all REMS Picus drive machines and suitable drive machines of other makes having connecting thread UNC 1¼ male. Adapter for using REMS Universal diamond core drilling crowns LS in drive machines having other connecting threads, as accessory.





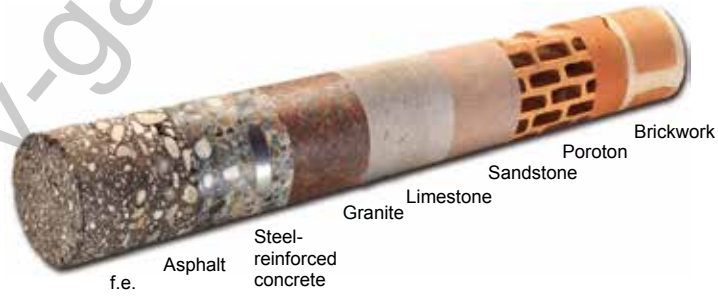

Supply format

REMS Universal diamond core drilling crown. Laser welded! High temperature-resistant! Universally usable for dry and wet drilling, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1¼ female. Drilling depth 420 mm. In a carton.

Ø × drilling depth × connection	Number of segments	Art.-No.
UDKB LS 32 × 420 × UNC 1¼	1	181410
UDKB LS 42 × 420 × UNC 1¼	4	181415
UDKB LS 52 × 420 × UNC 1¼	5	181420
UDKB LS 62 × 420 × UNC 1¼	6	181425
UDKB LS 72 × 420 × UNC 1¼	6	181430
UDKB LS 82 × 420 × UNC 1¼	7	181435
UDKB LS 92 × 420 × UNC 1¼	8	181440
UDKB LS 102 × 420 × UNC 1¼	9	181445
UDKB LS 112 × 420 × UNC 1¼	9	181450
UDKB LS 125 × 420 × UNC 1¼	10	181457
UDKB LS 132 × 420 × UNC 1¼	10	181460
UDKB LS 152 × 420 × UNC 1¼	11	181465
UDKB LS 162 × 420 × UNC 1¼	12	181470
UDKB LS 182 × 420 × UNC 1¼	13	181475
UDKB LS 200 × 420 × UNC 1¼	14	181480



Accessories

Description	Art.-No.
Light loosening ring, for light loosening of the diamond core crown	180015
Drilling crown extension 200 mm	180155
Adapter UNC 1¼ male – G ½ male	180052
Adapter UNC 1¼ male – G ½ female	180056
Adapter UNC 1¼ male – Hilti BI	180053
Adapter UNC 1¼ male – Hilti BU	180054
Adapter UNC 1¼ male – Würth	180055
Sharpening stone for diamond core drilling crowns	079012
Single open ended wrench size 41 for UDKB	079003

Additional adapters for using REMS Universal diamond core drilling crowns LS in drive machines of other makes, on request.



Ташев Галвинг ООД
www.tashev-galving.com

REMS tile drilling

Diamond tipped dry drilling crowns for fast, clean drilling in all kinds of tiles. Ideal for assembly and renovation.

Ceramic, fine clay, granite, marble etc.





REMS tile drilling – for dry drilling.

Can be used universally for dry drilling without hammering in ceramic, fine clay, granite, marble and other materials. No cracking of the tiles.

No water necessary.

Special wax filling inside the dry drilling crown as a cooling lubricant, becomes liquid when heated and cools the dry drilling crown.

Simple, free-hand starting by drill aid with vacuum fastening. Hexagon connection for ¼" bit holders.

Drive by cordless REMS Helix power drill (see page 93) and other electric drills/ screwdrivers (speed ≥ 1,000 rpm).



Supply format

REMS tile drilling Set 6-8-10. Diamond-studded dry drilling crowns with special wax filling. For ceramic, fine clay, granite, marble and other materials. Tile drilling Ø 6, 8, 10 mm, drill aid with vacuum fastening. In blister pack.

	Art.-No.	
	181700	

Accessories



Description	Art.-No.	
REMS tile drilling Ø 5 mm	181710	
REMS tile drilling Ø 6 mm	181711	
REMS tile drilling Ø 8 mm	181712	
REMS tile drilling Ø 10 mm	181713	
REMS tile drilling Ø 12 mm	181714	
REMS tile drilling Ø 14 mm	181715	
REMS Helix, cordless drill/screwdriver, see page 93		



Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Ташев-Галвинг ООД
www.tashev-galving.com

REMS Krokodil 125/180

Compact, handy power tool for dry chasing and cutting, e.g. of concrete, steel-reinforced concrete, all kinds of masonry, natural stone, all kinds of screed. For trade and industry.

REMS Krokodil 125	
Chase depth	≤ 38 mm
Chase width	≤ 43 mm
Number of diamond cutting discs	1 – 2
REMS Krokodil 180	
Chase depth	≤ 63 mm
Chase width	≤ 61 mm
Number of diamond cutting discs	1 – 3

REMS Universal diamond cutting discs, also for suitable drive machines of other makes, see page 235.

REMS Krokodil – chasing instead of chiselling. Full contact support plate. Multi-function electronics.

Universal use

Universal drive machine for dry chasing and cutting. Ideal for producing chases/grooves for laying pipes and electric cables in heating, sanitary and electrical installation, air-conditioning and cooling technology.

Design

REMS Krokodil 125: Compact, handy drive machine, only 5.8 kg. Robust, suitable for building site conditions. Fast, easy working, e.g. chases in masonry 500 mm long, 38 mm deep, only 25 s. Full contact support plate during the entire chasing/cutting process for guided plunge-in of the diamond cutting discs, dust-free, safe working and easy, even feed. Practical switch grip, adjustable in two positions, parallel or transversely to the machine axis and swivel handle, for optimum working position and ergonomic work. Locking of the drive shaft for easy changing of the universal diamond cutting discs. Continuously adjustable depth stop. Suction nozzle for connecting a dust extractor integrated into the housing.

REMS Krokodil 180: Compact, handy drive machine, only 7.2 kg. Robust, suitable for building site conditions. Fast, easy working, e.g. chases in masonry 500 mm long, 63 mm deep, only 34 s. Full contact support plate during the entire chasing/cutting process for guided plunge-in of the diamond cutting discs, dust-free, safe working and easy, even feed. Practical switch handle with triple force-transmitting leverage for easy plunge-in and effective feeding. Swivel handle, for optimum working position and ergonomic work. Locking of the drive shaft for easy changing of the universal diamond cutting discs. Continuously adjustable depth stop. Suction nozzle for connecting a dust extractor integrated into the housing.

Drive

REMS Krokodil 125: Robust, powerful universal motor, 1,850 W. Load speed of the drive shaft of the cutting discs 5,000 rpm. Strong, maintenance-free gear with safety slip clutch. Safety switch with lock.

REMS Krokodil 180: Robust, powerful universal motor, 2,000 W. Load speed of the drive shaft of the cutting discs 5,000 rpm. Strong, maintenance-free gear. Safety switch with lock.

Multi-function electronics

Multifunction electronics with start-up current limiting for soft starting for delicate engagement of the diamond cutting discs, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond cutting discs

Universally usable for straight chasing and cutting. Specially developed, high quality diamond segments with high diamond content and special bonding for excellent chasing/drilling performance and very long life. Optionally REMS Universal diamond cutting discs Eco, sintered, REMS Universal diamond cutting discs LS Turbo, laser-welded, high temperature-resistant, for fast cuts and cuts in hard materials or REMS Universal diamond cutting discs LS H-P, high-performance, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, with long life, (page 235). Metal body in accordance with EN 13236. Mounting bore Ø 22.23 mm

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of > 0.1 mg/m³). Observe the national regulations. REMS Pull M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M, see page 236.











Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com



Supply format

REMS Krokodil 125 Basic-Pack. Electric diamond chasing and cutting grinder for chasing and cutting concrete, steel-reinforced concrete, all kinds of masonry, natural stone, all kinds of screed. Chase depth 38 mm, continuously adjustable. Chase width ≤ 43 mm, stepped with spacer discs 3, 6, 10, 20 mm. Drive machine with drive shaft Ø 22.2 mm, for 1 or 2 diamond cutting discs in accordance with EN 13236, Ø ≤ 125 mm, with maintenance-free gear with safety slip clutch, 230 V, 50–60 Hz, 1,850 W universal motor. Multifunction electronics with soft start, idling speed limiting, overload protection. Safety switch with lock. Load speed 5,000 rpm. Suction nozzle for connecting an extractor/dust extractor. Pin wrench size 13. In sturdy steel case.

	Art.-No.	
	185010	

Other voltages on request.



Supply format

REMS Krokodil 180 Basic-Pack. Electric diamond chasing and cutting grinder for chasing and cutting concrete, steel-reinforced concrete, all kinds of masonry, natural stone, all kinds of screed. Chase depth 63 mm, continuously adjustable. Chase width ≤ 61 mm, stepped with spacer discs 3, 6, 10, 20 mm. Drive machine with drive shaft Ø 22.2 mm, for 1, 2 or 3 diamond cutting discs in accordance with EN 13236, Ø ≤ 180 mm, with maintenance-free gear, 230 V, 50–60 Hz, 2,000 W universal motor. Multifunction electronics with soft start, idling speed limiting, overload protection. Safety switch with lock. Load speed 5,000 rpm. Suction nozzle for connecting an extractor/dust extractor. Pin wrench size 13. In sturdy steel case.

	Art.-No.	
	185011	

Other voltages on request.

Accessories

Description	Art.-No.
REMS Krokodil 125 drive unit	185000
REMS Krokodil 180 drive unit	185001
REMS Universal diamond cutting disc Eco Ø 125 mm, sintered, with metal body in accordance with EN 13236	185020
REMS Universal diamond cutting disc LS-Turbo Ø 125 mm, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, with metal body in accordance with EN 13236	185021
REMS Universal diamond cutting disc LS H-P Ø 125 mm, high-performance, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, long life, with metal body in accordance with EN 13236.	185022
REMS Universal diamond cutting disc Eco Ø 180 mm, sintered, with metal body in accordance with EN 13236	185025
REMS Universal diamond cutting disc LS-Turbo Ø 180 mm, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, with metal body in accordance with EN 13236	185026
REMS Universal diamond cutting disc LS H-P Ø 180 mm, high-performance, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, long life, with metal body in accordance with EN 13236.	185027
Chasing chisel for removing the ridge after chasing	185024
Case with inlay	185058
REMS Pull L / M, dry and wet extractors, see page 236	



Ташев-Галвинг ООД
www.tashev-galving.com

REMS Pull L / M

Dry and wet extractor

Powerful, electric dry and wet extractor with automatic filter cleaning. For commercial use in trade and industry.

For extraction of dusts, dirt and liquids.

Ideal for dust extracting when chasing, cutting, drilling, core drilling and grinding.

Certified as extractor and dust extractor for extracting health hazardous dusts.

Ideal for extracting drilling sludge during core drilling.

REMS Pull L	
Dust class in accordance with EN 60335-2-69	L
Exposure limit/work place limit	> 1 mg/m³
Penetration level	≤ 1 %
REMS Pull M	
Dust class in accordance with EN 60335-2-69	M
Exposure limit/work place limit	> 0.1 mg/m³
Penetration level	≤ 0.1 %

REMS Pull – for dry and wet suction.
Constantly high suction performance by permanent automatic filter cleaning.
Certified for extracting health hazardous dusts.

Universal use

Powerful, handy extractor for dry and wet suction. For extraction of dusts, dirt and liquids. Excellently suited for dust extracting when chasing, cutting, drilling, core drilling and grinding. Certified as an extractor and dust extractor for extracting health hazardous dusts of dust class L or M in accordance with EN 60335-2-69. For commercial use in trade and industry.

Design

Compact, handy design. REMS Pull L only 12.5 kg, REMS Pull M only 12.7 kg. Light and manoeuvrable by rubber wheels and steerable castors, lockable by castor with brake Large tank capacity 35 l, filling volume for liquids 19 l. On/off switch and switch for automatic filter cleaning with integrated green LED to display operation stand-by of the automatic filter cleaning. Adapter for connecting a power tool to the extractor, individually adaptable to the suction nozzle of the used power tool. Flexible suction hose 2.5 m, practical suction hose extension 2.5 m, ergonomically angled handle, 2 insertable, chrome-plated metal suction tubes 0.5 m for adapting the suction pipe length. Wide wet/dry surface attachment 300 mm with rubber-coated castors, optionally brush strips for extracting dusts and dirt or rubber lips for extracting liquids. Joint attachment for confined spaces. Large working radius by long 7.5 m connecting lead. Holders for connecting lead, suction hose, metal suction tubes and accessories integrated into the extractor. Practical handle for easy transport .

REMS Pull M is suitable and certified for the extraction of health hazardous dusts of dust class M in accordance with EN 60335-2-69, with electronic volume flow monitoring, selector switch for adapting the suction power to different suction hose diameters (21, 27, 35 mm) and stopper for the suction hose connection nozzle.

Permanent automatic filter cleaning

REMS Pull L and REMS Pull M with innovative, patented, automatic filter cleaning, prevents clogging of the filter with dust, especially effective in fine dust applications. The flat folded filter is cleaned automatically every 15 s by targeted, powerful shots of air. The suction force remains constantly high during cleaning. Patented flat folded filter system.

Drive

Robust, powerful bypass motor, 1,200 W, with high-power turbine. High suction power, continuously adjustable up to an air rate ≤ 61 l/s, for optimum adaptation to the suction surface and the extracted product.

Automatic switch-off

Filling level limiting with automatic switch off on reaching the maximum liquid filling level when extracting electrically conductive liquids.

Automatic power tool on/off

Appliance socket for power tools up to 2,200 W, with electronic automatic on/off integrated into the extractor. The extractor switches on/off automatically when the power tool is switched on/off. For convenient working.

Anti-static system (REMS Pull M)

Static charge is dissipated to the earthed upper section of the extractor by electrically conductive metal suction pipes, electrically conductive handle E, electrically conductive suction hose E, electrically conductive suction hose extension E and electrically conductive suction hose connection nozzle.







Certified extractor and dust extractor for extracting health hazardous dusts in accordance with EN 60335-2-69.



Extraction of health hazardous dusts when chasing and cutting:
REMS Pull M Set



Extraction of health hazardous dusts when dry drilling:
REMS Pull M Set
+ Suction rotor for dust extraction

Ташев Галвинг ООД
www.tashev-galving.com

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of > 0.1 mg/m³. Observe the national regulations.

Water extraction

PES flat folded filter required for extraction of water. Use wet filter bag or polythene bag if necessary. Wet filter bags separate the water from the sucked up solids when extracting dirty water. Polythene bags simplify disposal of the dirt and prevent dirt from collecting in the tank.



Extraction of drilling sludge when wet drilling with REMS drill stands:

REMS Pull L Set
+ Flat folded filter PES
+ Water extractor unit

Supply format

REMS Pull L Set. Electric dry and wet extractor for commercial use. For extraction of dusts, dirt and liquids. Ideal for dust extracting when chasing, cutting, drilling, core drilling and grinding. Certified as an extractor and dust extractor for extracting health hazardous dusts of dust class L in accordance with EN 60335-2-69[1]. Exposure limit/work place limit > 1 mg/m³, penetration level ≤ 1 %. Bypass motor 230 V, 50–60 Hz, 1,200 W. On/off switch and switch for automatic filter cleaning with integrated green LED. Suction power switch for continuous adjustment of the air rate ≤ 61 l/s. Filling level limiting with automatic switch-off. Automatic filter cleaning. Appliance socket for power tools up to 2,200 W, with electronic automatic on/off. Large tank capacity 35 l, filling volume for liquids 19 l. Mobile, 2 wheels, castor/castor with brake. Connecting cable 7.5 m. 1 paper filter bag, 1 flat folded paper filter. 2 metal suction pipes 0.5 m each, handle, suction hose 2.5 m, suction hose extension 2.5 m. Wet/dry surface attachment 300 mm with rollers, brush strips, rubber lips. Joint attachment. Suction hose/power tool adapter. Integrated holders for connecting cable, suction hose and accessories. In a box.

	Art.-No.	
	185500	



Safety extractor of dust class L

Supply format

REMS Pull M Set. Electric dry and wet extractor for commercial use. For extraction of dusts, dirt and liquids. Ideal for dust extracting when chasing, cutting, drilling, core drilling and grinding. Certified as an extractor and dust extractor for extracting health hazardous dusts of dust class M in accordance with EN 60335-2-69[1]. Exposure limit/work place limit > 0.1 mg/m³, penetration level ≤ 0.1 %. Bypass motor 230 V, 50–60 Hz, 1,200 W. On/off switch and switch for automatic filter cleaning with integrated green LED. Suction power switch for continuous adjustment of the air rate ≤ 61 l/s. Electronic volume flow monitor with acoustic signal. Selector switch for suction hose diameter. Stopper for the suction hose connection nozzle. Filling level limiting with automatic switch-off. Automatic filter cleaning. Appliance socket for power tools up to 2,200 W, with electronic automatic on/off. Large tank capacity 35 l, filling volume for liquids 19 l. Mobile, 2 wheels, castor/castor with brake. Connecting cable 7.5 m. 1 paper filter bag, 1 flat folded paper filter. Anti-static system with 2 electrically conductive metal suction pipes of 0.5 m each, electrically conductive handle E, electrically conductive suction hose E 2.5 m, electrically conductive suction hose extension E 2.5 m and electrically conductive suction hose connection nozzle. Wet/dry surface attachment 300 mm with rollers, brush strips, rubber lips. Joint attachment. Suction hose/power tool adapter. Integrated holders for connecting cable, suction hose and accessories. In a box.

	Art.-No.	
	185501	



Safety extractor of dust class M

Accessories

Description	Art.-No.	
Paper filter bag (pack of 5), cellulose, 2-ply, for wet extraction, M-certified, for normal dirt, fine dusts	185510	
Felt filter bag (pack of 5), polyester felt, 3-ply, tear-proof, for wet and dry extraction, M-certified, for normal dirt, fine dusts, abrasive dusts, wet dirt	185511	
Wet filter bag (pack of 5), paper-polyester woven felt, tear-proof, for wet and dry extraction, for abrasive dusts, wet dirt, liquids	185512	
Polythene bag (pack of 10), for wet and dry extraction of non-health hazardous dusts, for normal dirt, fine dusts, abrasive dusts, wet dirt, liquids. Prevents soiling of the tank.	185513	
Flat, folded filter paper, cellulose, nano-coated, 1 piece, for dry extraction, M-certified	185514	
Flat folded filter PES, polyester, nano-coated, 1 piece, water-resistant, non-rotting, washable with water. For wet and dry extraction, M-certified	185515	
Adapter suction hose/power tool	185527	



[1] Observe the national regulations for the collection and disposal of health hazardous dusts.

Ташев Галвинг ООД
www.tashev-galving.com

Index

Symbols

4" Automatic die head ... 41

A

Akku-Cat ANC VE ... 63
Akku-Curvo ... 114, 115
Akku-Ex-Press Cu ACC ... 173
Akku-Ex-Press P ... 176
Akku-Ex-Press P ACC ... 175
Akku-Ex-Press Q&E ACC ... 178
Akku-Nano ... 77
Akku-Press ... 142
Akku-Press ACC ... 143
Akku-ROS P 40 ... 82
Amigo ... 27
Amigo 2 ... 28
Amigo 2 Compact ... 29
Amigo E ... 26
Aquila 3B ... 94
Aquila WB ... 94
Assembling ... 91
Attachment heads for button dies / intermediate rings / guide bushings ... 31
Axial Press Jointing ... 163
Ax-Press 25 / 25 L ACC ... 164, 165
Ax-Press 40 ... 169
Ax-Press HK / H ... 166

B

Battery LED Lamp ... 97
Bending ... 107
Bending formers and back formers ... 117
Blitz ... 188
Brazing solder B-Cu94P-710/890, EN 1044 ... 189
Butt welding machine ... 212, 213, 214, 215
Butt welding units ... 216

C

Cable shear ... 161
CamScope / CamScope S ... 198, 199
CamScope Wi-Fi ... 196, 197
CamSys ... 200, 201
Cat ANC VE ... 59
Catch S ... 92
Catch W ... 92
Cento ... 78, 79
Chain pipe vice ... 94
Chain pipe vice for workbench ... 94
Chamfering ... 69
Chasers ... 44
Chasers and Holders ... 44
Circular pipe sawing machine ... 66
Cleaning pads ... 186
CleanM ... 97
Cobra 22/32 ... 204, 205, 206, 207
Collum RG ... 51
Compression heads ... 167, 168
Confirmation of suitability ... 159
Contact 2000 ... 187
Cordless axial press ... 169
Cordless axial press with automatic return ... 164, 165
Cordless pipe cutter ... 77
Cordless pipe expander with automatic return ... 173, 175, 178
Cordless pipe expander with switch-off signal ... 176
Cordless pipe shears ... 82
Cordless power drill/screwdriver ... 93
Cordless radial press with automatic circuit control ... 121, 143
Cordless radial press with switch-off signal ... 142
Cordless tube bender ... 114, 115
Cordless universal reciprocating saw ... 63
Cropping tongs ... 161
Cropping tongs Mini ... 137
Curvo ... 112, 113
Curvo 50 ... 111
Cut 110 Cu-INOX ... 86
Cut 110 P ... 85
Cutter wheels ... 74
Cutting ... 69
Cu-Vlies ... 186

D

Deburring ... 69
Diamond chasing and cutting machine ... 219
Diamond chasing and cutting machines ... 234, 235
Diamond core drilling ... 219
Dies ... 30, 40
Drain cleaner for manual and electric operation ... 202
Drill stands ... 228
Dry and wet extractor ... 236, 237
DueCento ... 80, 81

E

Eco-Press ... 138
Electric diamond core drilling machine ... 220, 221, 222, 223, 226, 227
Electric diamond core drilling machine with speed regulation ... 224, 225
Electric die stock with quick-change die heads ... 26, 27, 28, 29
Electric drain cleaning machine ... 203
Electric filling and flushing unit ... 104, 105
Electric pipe and drain cleaning machines ... 204, 205
Electric pipe and tube bender ... 111, 112, 113
Electric pipe and tubing cutter ... 76
Electric pipe freezing unit ... 193
Electric pressure testing pump ... 99
Electric radial press ... 139
Electric reciprocating pipe saws ... 60, 61
Electric sleeve welding unit ... 210
Electric soldering pliers ... 186
Electric soldering unit ... 187
Electric tube expander ... 182, 183
Electric tube extractor ... 181, 183
Electro-hydraulic pipe expander with automatic return ... 179
Electro-hydraulic radial press with automatic retraction ... 141
Electro-hydraulic radial press with switch-off signal ... 140
Electronic camera inspection system ... 200, 201
Electronic flushing and pressure testing unit with compressor ... 100, 101, 102
EMSG 160 ... 210
Endoscope camera with radio signal transmission ... 198, 199
Endoscope camera with Wi-Fi radio standard ... 196, 197
E-Push 2 ... 99
Eskimo ... 192
Eva ... 24
Expander heads P ... 177
Expanding ... 171
Ex-Press Cu ... 172
Ex-Press H ... 174
Ex-Press P ... 174
Extracting ... 171

F

Filling ... 91
Flushing ... 91
Folding work bench ... 66, 67, 76, 77, 79
Folding work benches ... 95
Freezing ... 191
Frigo 2 ... 193

H

Hand and standing lamp ... 97
Hand die stock with quick-change die heads ... 24
Hand pressure testing pump ... 98
Hand tube bender ... 116
Hand tube expander ... 172, 174
Hand tube extractor ... 180
Helix VE ... 93
Herkules ... 96
Hold-Harmless and Indemnification Agreement ... 160
Hot Dog 2 ... 186
Hurrican ... 181
Hurrican H ... 180
Hydraulic pipe bender ... 108, 109

I

Inner pipe deburrer ... 87

Ташев-Галвинг ООД
www.tashev-galving.com

Ташев Галвинг ООД
www.tashev-galving.com

Index

J

Jumbo ... 95

K

Krokodil 125/180 ... 234, 235

L

Lot Cu 3 ... 189
Lot P6 ... 189

M

Machine cleaner ... 97
Macho ... 188
Magnum RG ... 52, 53
Magnum (up to 2") ... 34, 35
Magnum (up to 3") ... 36, 37
Magnum (up to 4") ... 38, 39
Manual axial press ... 166
Manual radial press ... 138
Material supports ... 41, 96
Mini-Cobra ... 202
Mini-Cobra A ... 203
Mini-Press ACC ... 121
MSG ... 211
Multi-Push ... 100, 101, 102

N

Nano ... 76
Nippelfix ... 48
Nippelspanner ... 48

O

One-hand axial press ... 166
One-hand pipe expander ... 174
Outer-inner pipe deburrer ... 88, 89
Outer-inner tube deburrer ... 87

P

Paste Cu 3 ... 189
Picus S1 ... 220, 221
Picus S2/3,5 ... 226, 227
Picus S3 ... 222, 223
Picus SR ... 224, 225
Pipe and Drain cleaning ... 195
Pipe and Drain inspection ... 195
Pipe chamfering tools ... 86
Pipe cutters ... 70
Pipe cutting and pipe chamfering tool ... 85
Pipe cutting machine ... 78, 80
Pipe cutting tool ... 86
Pipe freezer ... 192
Pipe shears ... 83, 84
Plastic Pipe Welding ... 209
Pneumatic reciprocating pipe saw ... 62
Portable pipe workstation with chain pipe vice ... 94
Power-Ex-Press Q&E ACC ... 179
Power-Press ... 140
Power-Press ACC ... 141
Power-Press SE ... 139
Pressing rings ... 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158
Pressing tongs ... 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158
Pressing tongs Mini ... 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136
Pull L / M ... 236, 237
Pull-Push ... 202
Puma VE ... 58
Push ... 98
Python ... 108, 109

Q

Quick-change die heads ... 30
Quick-change die heads S ... 25

R

Radial Press Jointing ... 119
RAG ... 86
RAS Cu ... 72
RAS Cu-INOX ... 70, 71
RAS P ... 73
RAS St ... 70
Reciprocating saws ... 56, 57
REG 3–35 ... 87
REG 8–35 ... 88
REG 10–42 ... 88
REG 10–54 ... 89
REG 10–54 E ... 89
REG St ¼–2" ... 87
REG Universal ... 87
Roll Grooving ... 23
Roll grooving attachment ... 50
Roll grooving machine ... 51, 52, 53
ROS ... 83, 84

S

Sanitol ... 49
Saw blades ... 65
Sawing ... 55
Single-hand tube bender ... 110
Sinus ... 116
Sleeve welding units ... 211
Soft solder paste of solder powder S-Sn97Cu3 according to EN 29453 and flux 3.1.1.C, EN 29454-1 ... 189
Soft solder S-Sn97Cu3, EN 29453 ... 189
Solar-Push ... 104, 105
Soldering ... 185
Special saw blades ... 64
Spezial ... 49
SSG ... 216
SSM 160KS ... 213
SSM 160RS ... 212
SSM 250KS ... 214
SSM 315RF ... 215
Suction and pressure cleaning device ... 202
Swedish pattern wrench 'S' ... 92
Swing ... 110

T

Testing ... 91
Thread-cutting oil ... 49
Threading ... 23
Threading attachment ... 41
Threading machine ... 32, 33, 34, 35, 36, 37, 38, 39, 42, 43, 46, 47
Thread tables ... 45
Tiger ANC pneumatic ... 62
Tiger ANC/VE/SR ... 60, 61
Tile drilling ... 232
Tornado ... 32, 33
Tubing cutters ... 70, 71, 72, 73
Turbo Cu-INOX ... 66
Turbo K ... 67
Turbo soldering torch acetylene ... 188
Turbo soldering torch propane ... 188
Twist ... 182
Twist/Hurrican ... 183

U

Unimat 75 ... 42, 43
Unimat 77 ... 46, 47
Universal circular metal sawing machine with automatic cooling lubricant unit ... 67
Universal deburrer ... 87
Universal diamond core drilling crowns ... 230
Universal diamond core drilling crowns LS ... 231
Universal electric reciprocating saw ... 58, 59
Universal saw blades ... 64

W

Water pump pliers ... 92
Wet and dry suction ... 219

Ташев Галвинг ООД
www.tashev-galving.com

List of articles

Art.-No.	DG	PU	Page
043052	Z		102, 105
047069	Z		102
074021	Z		180
074041	Z		180
076117	Z		180
079003	Z		229–231
079005	Z		229
079006	Z		229
079010	Z		229
079012	Z		229–231
079013	Z		229
079018	Z		229
079019	Z		229
110000	Z		48
110100	Z		48
110200	Z		48
110300	Z		48
110400	Z		48
110500	Z		48
110600	Z		48
110620	Z		48
110621	Z		48
111000	Z		48
111100	Z		48
111200	Z		48
111300	Z		48
111400	Z		48
111500	Z		48
111620	Z		48
111621	Z		48
111700	Z		48
111800	Z		48
111900	Z		48
113000	H		70
113100	H		70
113200	H	10	70
113210	V	10	71, 74, 85–86
113213	V	10	71, 74
113220	V	10	74
113225	V	10	72, 74
113240	H	10	70
113300	H	10	71
113320	H	8	72
113330	H	8	71
113340	H	10	72
113350	H	10	71
113351	H	10	71
113360	Z		71–72, 87
113370	H		72
113380	H		71
113400	H		71
113401	H		71
113410	H		72
113500	H		71
113810	H		88
113815	Z		88
113825	H	10	88
113830	H	10	89
113835	H	10	89
113840	Z		79
113900	H	10	87
113910	H	10	87
115000	H		98
115001	H		98
115045	Z		98–99, 102
115110	Z		98–99
115140	S		102
115217	Z		105
115220	Z		105
115221	Z		105
115311	M		105
115312	M		105
115314	Z		105
115315	Z		105
115319	Z		105
115323	Z		102, 105
115324	Z		105
115325	Z		105
115326	Z		105
115375	Z		105
115500	M		99
115602	Z		102
115610	M		102
115611	M		102
115618	Z		102
115621	Z		102
116000	H		92
116005	H		92
116010	H		92
116015	H		92
116020	H		92
116050	H		92
116055	H		92
116060	H		92
120120	Z		96
120130	H		96
120200	H		95
120240	H		95
120250	H		94
120270	H		94
130002	H		192
130207	Z		192
130208	Z		192
130209	Z		192
130410	Z		192
130415	Z		192
130430	Z		192
130450	Z		192
130455	Z		192
130460	Z		192
130465	Z		192
130470	Z		192
130475	Z		192
130480	Z		192
130485	Z		192
130490	Z		192
130495	Z		192
131011	M		193
131110	Z		193
131115	Z		193
131156	Z		193
131157	Z		193
131158	Z		193
131160	Z		193
140100	V	4	49
140101	V		49
140103	V		49
140105	V	12	49
140106	V	15	49
140110	V	4	49
140113	V		49
140115	V	12	49
140116	V	15	49
140119	V	15	97
140120	V	15	111, 113, 115–116
150000	H		172
150005	H		172
150006	H		172
150007	H		172
150010	H		172
150017	H		172
150018	H		172
150019	H		172
150020	H		172
150021	H		174
150022	H		174
150023	H		174
150025	H		174
150026	H		174
150027	H		174
150028	H		174
150029	H		174
150033	H		174
150100	Z		172
150105	Z		172
150110	Z		172
150120	Z		172
150125	Z		172
150130	Z		172
150140	Z		172
150145	Z		172
150150	Z		172
150155	Z		172
150160	Z		172
150165	Z		172
150170	Z		172
150175	Z		172
150180	Z		172
150185	Z		172
150190	Z		172
150195	Z		172
150205	Z		172
150210	Z		172
150220	Z		172
150225	Z		172
150230	Z		172
150235	Z		172
150240	Z		172
150245	Z		172
150250	Z		172
150500	Z		172
150510	Z		174
150550	H		174
150600	Z		172, 174
150812	Z		177
150814	Z		175
150826	Z		177
150828	Z		177
150842	Z		177
150843	Z		177
150845	Z		177
150846	Z		177
150849	Z		177
150851	Z		175
150855	Z		177
150858	Z		177
150868	Z		177
150873	Z		177
150882	Z		177
150883	Z		177
150885	Z		177
150886	Z		177
150887	Z		177
150888	Z		177
150890	Z		175
150894	Z		177
150897	Z		177
150912	Z		177
150913	Z		177
150914	Z		177
150915	Z		177
150916	Z		177
150918	Z		175
150919	Z		175
150923	Z		177
150926	Z		177
150943	Z		177
150944	Z		177
150945	Z		177
150946	Z		177
150947	Z		177
150950	Z		177
150952	Z		177
150957	Z		177
150958	Z		177
151000	E		181
151002	E		181
151003	H		180
151004	H		180
151005	H		180
151010	E		181
151105	Z		180–181, 183
151110	Z		180–181, 183
151120	Z		180–181, 183
151125	Z		180–181, 183
151130	Z		180–181, 183
151140	Z		180–181, 183
151145	Z		180–181, 183
151150	Z		180–181, 183
151155	Z		180–181, 183
151160	Z		180–181, 183
151165	Z		180–181, 183
151170	Z		180–181, 183
151175	Z		180–181, 183
151200	Z		180–181, 183
151210	Z		180–181, 183
151230	Z		180–181, 183
151240	Z		180–183
151401	Z		180–183
151600	Z		181–183
151615	Z		210
151618	Z		180
152106	Z		188
152109	Z		188
153020	H		110
153021	H		110
153022	H		110
153023	H		110
153025	H		110
153026	H		110
153027	H		110
153028	H		110
153029	H		110
153100	Z		110
153115	Z		110
153125	Z		110
153140	Z		110
153155	Z		110
153160	Z		110
153170	Z		110
153175	Z		110
153180	Z		110
153185	Z		110
153190	Z		110
153195	Z		110
153200	Z		110
153205	Z		110
153210	Z		110
153265	Z		110
153270	Z		110
154000	Z		116
154001	H		116
154002	H		116
154003	H		116
154004	H		116
154010	H		116
154160	Z		116
156000	E		182
156002	E		182
156004	E		182
156010	E		183
156012	E		183
156014	E		183
156150	Z		182–183
156200	Z		182–183
156225	Z		182–183
156250	Z		182–183
156300	Z		182–183
156350	Z		182–183
156375	Z		182–183
156400	Z		182–183
156425	Z		182–183
156450	Z		182–183
156475	Z		182–183
160010	H		188
160200	V	10	189
160210	V	10	189
160220	V	10	189
160300	V	25	186
161010	H		188
163020	E		186
163350	Z		186
164011	E		187
164050	E		187
164110	Z		187
164111	Z		187
164115	Z		187
164250	Z		187
170010	H		202
170011	Z		206
170012	Z		206
170020	E		203
170200	Z		202, 206
170201	Z		202–203
170205	Z		202–203
170300	H		202
171150	Z		206
171151	Z		206
171200	Z		206
171201	Z		206
171205	Z		206
171210	Z		206
171250	Z		207
171265	Z		207
171270	Z		207
171275	Z		207
171280	Z		207
171290	Z		207
171291	Z		207
171305	Z		207
171306	Z		207
171340	Z		207
171341	Z		207
172000	Z		205
172010	M		205
172011	M		205
172012	M		205
172050	Z		206
172051	Z		206
172150	Z		206
172151	Z		206
172154	Z		206
172200	Z		206
172201	Z		206
172203	Z		206
172205	Z		206
172210	Z		206
172250	Z		207
172265	Z		207
172270	Z		207
172275	Z		207
172280	Z		207
172281	Z		207
172290	Z		207
172291	Z		207
172293	Z		207
172305	Z		207
172310	Z		207
172340	Z		207
172341	Z		207
172610	Z		207
172611	Z		207
172612	Z		207
174000	Z		205
174010	M		205
174011	M		205
174012	M		205
174050	Z		206
174101	Z		206
174150	Z		206
174154	Z		206
174200	Z		206
174201	Z		206
174203	Z		206
174205	Z		206
174210	Z		206
174250	Z		207
174265	Z		207
174270	Z		207
174275	Z		207
174282	Z		207
174291	Z		207
174293	Z		207
174295	Z		207
174296	Z		207
174305	Z		207
174306	Z		207
174310	Z		207
174311	Z		207
174340	Z		207
174341	Z		207
175000	Z		201
175008	M		201
175010	M		201
175011	Z		201
175016	Z		201
175018	Z		201
175026	Z		201
175057	Z		201
175058	Z		201
175102	Z		197, 199
175103	Z		197, 199
175104	Z		197, 199
175105	Z		197, 199
175106	Z		197, 199
175110	E		199
175111	E		199
175112	E		199
175130	E		199
175131	E		199
175132	E		199
175140	E		197
175141	E		197
175142	E		197
175200	Z		93, 97, 121, 140–141, 165, 169, 173, 175–176, 178
180000	Z		221
180001	Z		223
180010	E		221
180011	E		223
180012	E		227
180015	Z		229–231
180020	E		221
180028	E		223
180029	E		223
180030	E		227
180031	E		221
180052	Z		230–231
180053	Z		230–231
180054	Z		230–231
180055	Z		230–231
180056	Z		230–231
180150	Z		229
180155	Z		229–231
180160	Z		229
180600	Z		221, 223, 225
181010	V		230
181015	V		230
181020	V		230
181025	V		230
181030	V		230
181035	V		230
181040	V		230
181045	V		230
181050	V		230

Ташев Галвинг ООД
www.tashev-galving.com

DG: discount group PU: packing unit (pieces)

Ташев Галвинг ООД
www.tashev-galving.com

List of articles

Art.-No.	DG	PU	Page
181057	V		230
181060	V		230
181065	V		230
181070	V		230
181075	V		230
181080	V		230
181085	V		230
181090	V		230
181095	V		230
181410	V		231
181415	V		231
181420	V		231
181425	V		231
181430	V		231
181435	V		231
181440	V		231
181445	V		231
181450	V		231
181457	V		231
181460	V		231
181465	V		231
181470	V		231
181475	V		231
181480	V		231
181700	V		232
181710	V		232
181711	V		232
181712	V		232
181713	V		232
181714	V		232
181715	V		232
182006	Z		229
182009	Z		229
182050	Z		229
183000	Z		225
183010	E		225
183022	E		225
183023	E		225
183600	Z		228
183603	Z		229
183604	Z		229
183605	Z		229
183606	Z		229
183607	Z		229
183632	Z		225
183670	Z		229
183675	Z		229
183700	Z		228
185000	E		235
185001	Z		235
185010	E		235
185011	E		235
185020	V		235
185021	V		235
185022	V		235
185024	Z		235
185025	V		235
185026	V		235
185027	V		235
185058	Z		203, 235
185500	M		237
185501	M		237
185510	Z		237
185511	Z		237
185512	Z		237
185513	Z		237
185514	Z		237
185515	Z		237
185527	S		237
190000	Z		93
190010	E		93
190051	Z		93
190053	Z		93
250020	E		216
250041	Z		216
250042	Z		216
250120	E		216
250142	Z		216
250143	Z		216
250220	E		216
250242	Z		216
250243	Z		216
250320	E		216
250341	Z		216
250342	Z		216
250343	Z		216
252026	M		212
252046	M		213
252103	Z		212–213
254025	M		214
254103	Z		214
255020	M		215
255103	Z		215
256020	E		211
256042	Z		211
256211	E		211
256220	E		211
256231	E		211
256240	E		211
256242	Z		211
256320	E		211
256342	Z		211
256400	Z		211
256410	Z		211
256420	Z		211
256430	Z		211
256440	Z		211
256450	Z		211
256460	Z		211
256470	Z		211
256480	Z		211
256490	Z		211
256500	Z		211
256510	Z		211
256520	Z		211
256530	Z		211
261001	E		210
290000	H		73
290016	V	10	73–74
290050	H		73
290100	H		73
290116	V	10	73–74
290200	H		73
290216	V	10	73–74
290300	H		73
290316	V	5	73–74
290400	H		85
290410	H		86
290411	H		86
290412	H		86
290420	Z		85
290421	Z		85
290422	Z		85
290423	Z		85
290424	Z		85
290425	Z		85
290426	Z		85
290427	Z		85
290430	Z		85
290431	Z		85
290432	Z		85
290433	Z		85–86
290437	Z		85
290440	Z		85–86
290444	Z		85
290445	Z		85
290446	Z		85
290447	Z		85
290448	Z		85
290449	Z		85
291000	H		84
291023	V		84
291100	H		84
291111	V		84
291200	H		84
291201	V		84
291220	H		84
291221	V		84
291240	H	8	83
291241	V		83
291250	H		84
291251	V		84
291270	H		84
291271	V		84
291281	V		84
291301	V		82
291310	E		82
292011	Z		86
292110	H		86
292210	H		86
340100	Z		37, 39
340110	Z		53
340200	M		33
340201	M		33
340202	M		33
340206	M		33
340207	M		33
340208	M		33
340220	M		35
340221	M		35
340222	M		35
340226	M		35
340227	M		35
340228	M		35
340230	M		53
340231	M		53
340232	M		53
341000	Z		33, 35, 37, 39
341401	S		40
341402	S		40
341403	S		40
341404	S		40
341406	S		40
341407	S		40
341408	S		40
341409	S		40
341411	S		40
341412	S		40
341413	S		40
341414	S		40
341416	S		40
341417	S		40
341418	S		40
341419	S		40
341426	S		40
341427	S		40
341428	S		40
341429	S		40
341430	S		40
341431	S		40
341432	S		40
341433	S		40
341434	S		40
341435	S		40
341436	S		40
341437	S		40
341438	S		40
341439	S		40
341440	S		40
341441	S		40
341442	S		40
341443	S		40
341444	S		40
341445	S		40
341446	S		40
341466	S		40
341467	S		40
341468	S		40
341469	S		40
341470	S		40
341471	S		40
341472	S		40
341473	S		40
341474	S		40
341475	S		40
341476	S		40
341477	S		40
341478	S		40
341479	S		40
341480	S		40
341481	S		40
341482	S		40
341483	S		40
341484	S		40
341485	S		40
341486	S		40
341487	S		40
341488	S		40
341489	S		40
341490	S		40
341491	S		40
341493	S		40
341494	S		40
341495	S		40
341496	S		40
341497	S		40
341498	S		40
341499	S		40
341614	V	10	33, 35, 37, 39, 70, 74
344100	Z		33, 35, 37, 39, 53
344105	Z		33, 35, 37, 39, 53
344150	Z		33, 35
347000	M		33, 35, 37, 39, 50
347001	M		50
347002	M		50
347003	M		50
347004	M		50
347006	E		51
347007	Z		50
347008	E		51
347009	E		51
347010	Z		51
347030	Z		50
347034	Z		50
347035	Z		50
347040	Z		50
347046	Z		50
347047	Z		50
347053	Z		50
370010	M		41
370011	M		41
370012	M		41
371109	S		41
371113	S		41
371117	S		41
371134	S		41
371138	S		41
371142	S		41
380303	M		37
380304	M		37
380305	M		37
380306	M		37
380307	M		37
380308	M		37
380309	M		37
380310	M		37
380311	M		37
380312	M		37
380313	M		37
380314	M		37
380426	M		39
380427	M		39
380428	M		39
380429	M		39
380430	M		39
380431	M		39
380441	M		39
380442	M		39
380443	M		39
380444	M		39
380445	M		39
380446	M		39
380447	M		39
380448	M		39
381000	Z		37, 39
381050	Z		37
381401	S		40
381405	S		40
381410	S		40
381415	S		40
381430	S		40
381431	S		40
381432	S		40
381433	S		40
381622	V	5	37, 39, 70, 74
520003	H		24
520004	H		24
520008	H		24
520009	H		24
520010	H		24
520013	H		24
520014	H		24
520015	H		24
520016	H		24
520017	H		24
520025	Z		25
520026	Z		25
520056	Z		25
521000	Z		30
521002	S		30
521010	Z		30
521012	S		30
521020	Z		30
521022	S		30
521026	Z		25
521030	Z		30
521032	S		30
521036	Z		25
521040	Z		30
521042	S		30
521046	Z		25
521050	Z		30
521052	S		30
521056	Z		25
521060	Z		30
521062	S		30
521066	Z		25
521070	Z		30
521072	S		30
521080	Z		30
521082	S		30
521100	Z		30
521102	S		30
521110	Z		30
521112	S		30
521120	Z		30
521122	S		30
521130	Z		30
521132	S		30
521140	Z		30
521142	S		30
521150	Z		30
521152	S		30
521160	Z		30
521162	S		30
521170	Z		30
521172	S		30
521180	Z		30
521182	S		30
521200	Z		30
521202	S		30
521210	Z		30
521212	S		30
521220	Z		30
521222	S		30
521230	Z		30
521232	S		30
521240	Z		30
521242	S		30
521250	Z		30
521252	S		30
521260	Z		30
521262	S		30
521270	Z		30
521272	S		30
521280	Z		30
521282	S		30
521300	Z		30
521302	S		30
521310	Z		30
521312	S		30
521320	Z		30
521322	S		30
521330	Z		30
521332	S		30
521340	Z		30
521342	S		30
521350	Z		30
521352	S		30
522000	Z		24–29
522051	Z		25
526050	Z		24
526052	Z		25
530000	Z		27
530003	Z		26
530013	E		26
530014	E		26
530020	E		27
530022	E		27
530023	E		27
533000	Z		26–27
536000	Z		26–27
540000	Z		28
540001	Z		29
540020	E		28
540022	E		28
540023	E		29
540024	E		29
540025	E		29
541401	Z		31
541404	Z		31
541406	Z		31
541410	Z		31
541413	Z		31
541414	Z		31
541415	Z		31
541416	Z		31
543000	Z		28
543010	Z		29
543100	Z		26–28, 61–62
546000	Z		28–29
560000	Z		61
560001	Z		61
560002	Z		62
560003	Z		58
560004	Z		59
560008	Z		61
560009	Z		63
560020	E		61
560022	E		62
560023	E		58
560026	E		61
560027	E		61
560040	E		59
560051	E		63
561001	V		64

Ташев Галвинг ООД
www.tashev-galving.com

List of articles

Art.-No.	DG	PU	Page
561002	V		64
561003	V		64
561004	V		64
561005	V		64
561006	V		64
561007	V		64
561008	V		64
561101	V		65
561102	V		65
561103	V		65
561104	V		65
561105	V		65
561106	V		65
561107	V		65
561108	V		65
561109	V		65
561110	V		65
561111	V		65
561112	V		65
561113	V		65
561114	V		65
561115	V		65
561116	V		65
561117	V		65
561118	V		65
561119	V		65
561120	V		65
561121	V		65
561122	V		65
561123	V		65
561124	V		65
561125	V		65
561126	V		65
563000	Z		61–62
563008	Z		61–62
563100	Z		61–62
563200	Z		61–62
565051	Z		67
565225	Z		63, 115
566025	Z		63
566051	Z		58–59, 61–62
570100	Z		143, 145–146, 150–151, 153–154, 156–157
570107	Z		143–146, 148–150, 153–154, 156–157
570110	Z		143–154, 156–157
570112	Z		144–145, 148, 153
570115	Z		143–150, 153–154, 156–157
570117	Z		144–145, 148, 153
570120	Z		143–154, 156–157
570125	Z		143–150, 153–154, 156–157
570130	Z		143–154, 156–157
570132	Z		153, 156
570135	Z		143–150, 153–154, 156–157
570137	Z		153, 156
570140	Z		143–154, 156–157
570145	Z		143–150, 153–154, 156–157
570150	Z		143–154, 156–157
570155	Z		143–150, 153–154, 156–157
570160	Z		143–146, 148–151, 154, 156–157
570165	Z		143–150, 153–154, 156–157
570170	Z		143–146, 148–151, 154, 156–157
570175	Z		143–150, 153–154, 156–157
570280	Z		137–139, 179
570290	Z		158
570295	Z		158, 161
570300	Z		143, 155
570310	Z		144–145, 148, 150, 152, 155
570315	Z		150
570320	Z		143–152, 154–155, 157
570330	Z		148, 155
570340	Z		143–146, 148, 150, 152
570350	Z		143–152, 154–155, 157
570360	Z		143, 146–148, 150, 155
570370	Z		143–152, 154–155, 157
570380	Z		143–152, 154–155, 157
570390	Z		143, 145–146, 148–152, 155
570400	Z		146
570410	Z		146
570420	Z		146
570430	Z		146
570440	Z		146
570450	Z		146
570452	Z		146–149, 157
570455	Z		143–152, 154–157
570457	Z		145–148, 152
570460	Z		143–152, 154–157
570462	Z		145–148, 152, 155, 157
570465	Z		143–152, 154–155, 157
570467	Z		146–148, 152
570470	Z		143–152, 154–157
570472	Z		148, 152
570475	Z		143–152, 154–157
570477	Z		148, 152
570480	Z		143–152, 154–157
570482	Z		147–148, 156
570485	Z		143–152, 154–157
570487	Z		144, 147–148, 154–155
570495	Z		144–152, 155
570610	Z		155
570620	Z		151, 155
570630	Z		155
570650	Z		151, 155
570670	Z		151, 155
570680	Z		151, 155
570685	Z		155
570690	Z		151
570695	Z		144, 155
570715	Z		144–146, 148–149, 152, 157
570720	Z		144, 146, 148, 152
570725	Z		144–146, 148–149, 152, 157
570730	Z		144, 146, 148–149, 152, 157
570735	Z		144, 146, 148–149, 152, 157
570742	Z		146, 148, 152
570745	Z		143–144, 146, 148–149, 152
570750	Z		143–144, 148–151
570760	Z		144–145, 149–150, 152, 155–157
570765	Z		143–152, 154–157
570770	Z		143–152, 154–157
570775	Z		143–152, 154–157
570780	Z		143–152, 154–157
570785	Z		143–152, 154–157
570790	Z		143–152, 154–157
570795	Z		143–152, 154–157
570845	Z		143–144, 148, 152
570850	Z		143–146, 148–149, 152, 155
570855	Z		143–144, 146, 148, 152
570860	Z		143–146, 148–149, 152, 155
570870	Z		143–146, 148–149, 152, 155
570880	Z		143–146, 148–149, 155
570910	Z		144, 146, 150, 156–157
570915	Z		144, 146, 150, 156–157
570920	Z		150, 156
570925	Z		144, 146, 150, 156–157
570930	Z		153–154, 157
570932	Z		153
570935	Z		144, 147, 153–154, 157
570937	Z		153
570940	Z		144, 147, 153–154, 157
570945	Z		144, 147, 153–154, 157
570950	Z		144, 147, 153–154, 157
570955	Z		144, 147, 153–154, 157
571003	Z		140
571004	Z		141
571013	E		140
571014	E		141
571290	Z		140–141
571320	Z		143–144, 150–152, 155
571325	Z		143–148, 150–152, 155
571330	Z		143–148, 150–152, 155
571335	Z		143–147, 150–152, 155
571337	Z		148, 151, 155
571340	Z		143, 145–147, 150–152, 155
571342	Z		148, 151, 155
571360	Z		149
571370	Z		149
571375	Z		149
571380	Z		149
571432	Z		145
571434	Z		145
571436	Z		145
571438	Z		145
571440	Z		145
571450	Z		143, 147, 156–157
571455	Z		143, 147, 156–157
571460	Z		143, 147, 156–157
571465	Z		143, 147, 156–157
571470	Z		143, 147, 156–157
571475	Z		143, 156–157
571477	Z		143, 157
571545	Z		93, 97, 121, 165, 173, 175–176, 178
571555	Z		93, 97, 121, 140–141, 165, 169, 173, 175–176, 178
571560	Z		63, 77, 93, 97, 115, 121, 140–141, 165, 169, 173, 175–176, 178
571565	Z		93, 97, 121, 140–141, 165, 169, 173, 175–176, 178
571630	Z		156
571635	Z		143, 156
571640	Z		143, 156
571645	Z		156
571744	Z		147, 150
571746	Z		147, 150
571748	Z		147, 150
571750	Z		156
571752	Z		156
571754	Z		156
571756	Z		156
571770	Z		143–145, 149–150, 156
571775	Z		143–145, 149–150, 156
571780	Z		143–145, 149–150, 156
571785	Z		143–145, 149–150, 156
571790	Z		143–145, 149–150, 156
571795	Z		143–145, 149–150, 156
571855	Z		155
571865	Z		161
571866	Z		135, 161
571870	Z		161
571871	Z		161
571887	Z		161
571889	Z		161
571890	Z		161
571891	Z		135, 161
571895	Z		161
571896	Z		135, 161
571900	Z		147, 151, 154
571902	Z		147, 151, 154
571980	Z		148
572101	E		137
572111	E		137
572365	Z		143–145, 147–152, 154–156
572385	Z		143–144, 146, 148–149, 152
572400	Z		143–152, 154–155, 157
572405	Z		143–152, 154–155, 157
572470	Z		146
572600	Z		148
572605	Z		148
572610	Z		148
572615	Z		148
572620	Z		148
572625	Z		148
572630	Z		155
572632	Z		155
572634	Z		155
572636	Z		155
572638	Z		155
572640	Z		155
572642	Z		143
572644	Z		143
572646	Z		143
572648	Z		143
572670	Z		152
572672	Z		152
572674	Z		152
572676	Z		152
572678	Z		152
572680	Z		152
572687	Z		149, 152, 156
572689	Z		149, 152, 156
572691	Z		149, 152, 156
572693	Z		149, 152, 156
572695	Z		149, 152, 156
572697	Z		149, 152, 156
572706	Z		143–149, 151–154, 156–157
572708	Z		143–149, 151–154, 156–157
572710	Z		153–154, 157
572712	Z		153–154, 157
572714	Z		152
572716	Z		152
572795	Z		158
572801	Z		158
572802	Z		158
572809	Z		158
572810	Z		158
572815	Z		150, 156
572816	Z		150, 156
572817	Z		150, 156
572818	Z		150, 156
572819	Z		145, 156
572820	Z		145, 156
572821	Z		145, 156
572822	Z		156
572823	Z		156
572824	Z		156
572828	Z		144, 147–152, 155–156
572829	Z		147–148, 150, 152, 155
572830	Z		143, 146, 152
572836	Z		152
572837	Z		143–145, 147–148, 150–152, 155–156
572839	Z		152
572840	Z		152
572841	Z		152
573003	Z		165
573004	Z		165
573006	Z		169
573033	E		165
573034	E		165
573035	E		165
573060	E		169
573061	E		169
573064	E		169
573100	Z		168–169
573102	Z		168–169
573106	Z		168–169
573108	Z		168–169
573120	Z		168
573122	Z		168
573124	Z		168
573126	Z		168
573128	Z		168
573154	Z		168
573156	Z		168
573160	Z		168
573162	Z		168
573164	Z		168
573166	Z		168
573168	Z		168
573170	Z		168
573172	Z		168
573176	Z		168
573178	Z		168
573180	Z		168
573184	Z		168
573186	Z		168
573188	Z		168
573190	Z		168
573282	Z		169
573284	Z		165
573320	Z		168
573325	Z		168
573330	Z		168
573335	Z		168
573360	Z		168
573364	Z		168
573367	Z		168
573370	Z		168
573400	Z		168
573402	Z		168
573404	Z		168
573406	Z		168
573430	Z		169
573432	Z		169
573434	Z		169
573436	Z		169
573438	Z		169
573616	Z		168
573624	Z		168
573628	Z		168
573630	Z		168
573632	Z		168
573636	Z		168
573640	Z		168
573644	Z		168
573646	Z		168
573647	Z		167
573648	Z		167
573649	Z		167
574000	H		136
574300	H		166
574302	H		166
574352	Z		166
574430	Z		136
574436	Z		76–77, 136
574437	Z		166
574500	Z		158
574502	Z		124, 126, 128, 130–131, 133, 145, 148–150, 153–154, 156–157
574504	Z		124, 126, 128, 130–131, 133, 145, 148–150, 153–154, 156–157
574506	Z		124, 126, 128, 130–131, 133, 145, 148–150, 153–154, 156–157
574508	Z		124, 126, 128, 130–131, 133, 145, 148–150, 153–154, 156–157
574510	Z		124, 126, 128, 130–131, 133, 145, 148–150, 153–154, 156–157
574512	Z		124, 126, 128, 130–131, 133, 145, 148–150, 153–154, 156–157
574516	Z		134, 158
574520	Z		125, 128, 130–134, 146, 150, 153–154, 156–157
574522	Z		124–125, 127–128, 130–134, 145–146, 149–150, 153–154, 156–157
574524	Z		124–125, 127–128, 130–134, 145–146, 149–150, 153–154, 156–157
574526	Z		124–125, 127–128, 130–134, 145–146, 149–150, 153–154, 156–157
574528	Z		124–125, 127, 130–134, 145–146, 149, 153–154, 156–157
574530	Z		124–125, 127, 130–134, 145–146, 149, 153–154, 156–157
575005	Z		178
575006	Z		173
575008	Z		165, 175
575009	Z		176
575015	E		178
575016	E		173
575017	E		179
575018	E		175
575019	E		176
575100	Z		179
577000	Z		139
577001	Z		138
577010	E		139

Ташев Галвинг ООД
www.tashev-galving.com

DG: discount group PU: packing unit (pieces)

Ташев Галвинг ООД
www.tashev-galving.com

List of articles

Art.-No.	DG	PU	Page
577011	E		138
578001	Z		121
578012	E		121
578290	Z		121, 165, 173, 175–176, 178
578295	Z		134–135
578310	Z		123–125, 128–134
578312	Z		123–134
578314	Z		123–134
578316	Z		123–134
578318	Z		123–134
578324	Z		123–126, 128, 130–133
578326	Z		123–124, 126, 131
578328	Z		123–126, 128, 130–133
578330	Z		123–124, 126, 131
578332	Z		123–126, 128, 130–133
578334	Z		123–126, 128, 130–133
578336	Z		123–126, 128, 130–133
578338	Z		131, 133
578340	Z		131, 133
578342	Z		125–127, 129–130
578344	Z		126–127, 133
578346	Z		125–128, 134
578348	Z		123–130, 132–134
578350	Z		124–127, 129
578352	Z		123–130, 132–134
578354	Z		124–127, 129–130, 132, 134
578356	Z		123–130, 132, 134
578358	Z		123–130, 132–134
578360	Z		124–130, 132
578362	Z		123–130, 132–134
578364	Z		123–130, 132–134
578368	Z		124, 126–127, 132
578372	Z		124, 127–128, 130, 132–134
578374	Z		123–130, 132–134
578376	Z		123–130, 132–134
578378	Z		123–130, 132–134
578380	Z		123–130, 132–134
578382	Z		123–130, 132–134
578386	Z		123–130, 132–133
578390	Z		123–127, 129–134
578392	Z		123–124, 127–129
578394	Z		128
578396	Z		123, 132
578398	Z		124, 127–128, 130, 132
578400	Z		123–130, 132, 134
578402	Z		127, 132
578404	Z		123–125, 127–128, 130
578406	Z		123–130, 132, 134
578408	Z		123, 125–128, 132
578410	Z		123–130, 132, 134
578412	Z		123–130, 132, 134
578418	Z		132
578420	Z		129, 132
578422	Z		132
578426	Z		129, 132
578430	Z		129, 132
578432	Z		129, 132
578434	Z		130
578436	Z		130
578438	Z		130
578440	Z		130
578442	Z		130
578444	Z		125
578446	Z		125
578448	Z		125
578450	Z		125
578452	Z		125
578454	Z		130
578456	Z		124–127, 129–130, 134
578458	Z		124–125, 127, 130
578460	Z		124–127, 129–130, 134
578462	Z		124–127, 129, 134
578464	Z		124–127, 129, 134
578466	Z		123–124, 127, 130
578468	Z		123–127, 130, 132
578470	Z		123–125, 127, 130
578472	Z		123–127, 130, 132
578474	Z		123–127, 130, 132
578476	Z		123–127, 132
578478	Z		125, 127, 129
578482	Z		124–125, 128, 133–134
578484	Z		124–125, 128, 133–134
578486	Z		128, 133
578488	Z		124–125, 128, 133–134
578490	Z		123–124, 128–130, 132
578492	Z		123–126, 128–130, 132
578494	Z		123–126, 128–130, 132
578496	Z		123–126, 128–130, 132
578498	Z		123–126, 128–129, 132
578510	Z		130–131, 133
578512	Z		131
578514	Z		123, 126, 130–131, 133
578516	Z		131
578518	Z		123, 126, 130–131, 133
578520	Z		123, 126, 130–131, 133
578522	Z		123, 126, 130–131, 133
578524	Z		127
578526	Z		127
578528	Z		127
578530	Z		127
578534	Z		123, 126, 133–134
578536	Z		123, 126, 133–134
578538	Z		123, 126, 133–134
578540	Z		123, 126, 133–134
578550	Z		133
578552	Z		123, 133
578554	Z		123, 133
578556	Z		133
578558	Z		134
578560	Z		126, 128
578562	Z		126, 128
578564	Z		126, 128
578566	Z		123–124, 128, 133
578568	Z		123–124, 128, 133
578570	Z		123–124, 128, 133
578576	Z		132
578578	Z		132
578580	Z		132
578582	Z		132
578584	Z		132
578586	Z		132
578588	Z		127, 129
578590	Z		127, 129
578592	Z		127
578594	Z		127
578596	Z		127
578598	Z		127
578600	Z		127
578602	Z		132
578604	Z		123–126, 128, 130–133
578606	Z		123–124, 128, 133
578608	Z		123
578610	Z		123
578612	Z		123
578614	Z		123
578618	Z		132
578620	Z		135
578621	Z		135
578622	Z		135
578624	Z		123–130, 132, 134
578630	Z		127, 129, 133
578632	Z		127, 129, 133
578634	Z		127, 129, 133
578636	Z		127, 129, 133
578638	Z		123
580000	Z		113, 116
580002	Z		115
580010	E		113
580012	E		115
580020	E		113
580021	E		113
580022	E		113
580023	E		113
580024	E		113
580025	E		113
580026	E		113
580027	E		113
580028	E		113
580029	E		113
580030	E		113
580031	E		113
580033	E		113
580034	E		113
580035	E		113
580070	E		115
580071	E		115
580072	E		115
580073	E		115
580074	E		115
580075	E		115
580076	E		115
580077	E		115
580078	E		115
580079	E		115
580081	E		115
580083	E		115
580084	E		115
580100	Z		111
580110	E		111
581070	Z		117
581080	Z		117
581110	Z		117
581130	Z		117
581150	Z		117
581180	Z		117
581200	Z		117
581210	Z		117
581220	Z		117
581230	Z		117
581240	Z		117
581260	Z		117
581270	Z		117
581280	Z		117
581310	Z		117
581320	Z		117
581330	Z		117
581350	Z		117
581370	Z		117
581380	Z		117
581390	Z		117
581400	Z		117
581410	Z		117
581420	Z		117
581430	Z		117
581440	Z		117
581450	Z		117
581460	Z		117
581470	Z		117
581500	Z		117
581510	Z		117
581520	Z		117
581530	Z		117
581540	Z		117
582036	Z		111, 113, 115–116
582110	Z		111
582120	Z		111
586000	Z		113
586012	Z		111
586015	Z		115
586100	Z		113, 115
586150	Z		113, 115
590000	Z		109
590020	E		109
590021	E		109
590022	E		109
590051	Z		109
590052	Z		109
590053	Z		109
590054	Z		109
590055	Z		109
590056	Z		109
590057	Z		109
590058	Z		109
590059	Z		109
590060	Z		109
590061	Z		109
590062	Z		109
590111	Z		109
590150	Z		109
590153	Z		109
590160	Z		109, 111
731200	Z		31
731205	Z		31
731210	Z		31
731220	Z		31
731230	Z		31
731240	Z		31
731250	Z		31
731301	Z		31
731302	Z		31
731303	Z		31
731304	Z		31
731305	Z		31
731306	Z		31
731307	Z		31
731308	Z		31
731309	Z		31
731310	Z		31
731311	Z		31
731312	Z		31
731320	Z		31
731321	Z		31
731322	Z		31
731323	Z		31
731324	Z		31
731325	Z		31
731326	Z		31
731700	Z		26–29, 87
750003	U		43
750004	U		43
751000	Z		43
751040	Z		43, 47
751050	Z		43, 47
751060	Z		43, 47
751070	Z		43, 47
751080	Z		43
751090	Z		43
751096	S		43
751097	S		43
751098	S		43
751100	Z		43
751102	Z		43
751501	S		44
751502	S		44, 47
751503	S		44, 47
751504	S		44
751505	S		44
751506	S		44, 47
751507	S		44, 47
751508	S		44
751509	S		44
751510	S		44
751511	S		44
751516	S		44
751517	S		44
751518	S		44
751519	S		44
751520	S		44
751521	S		44
751522	S		44
751523	S		44
751524	S		44
751525	S		44
751526	S		44
751527	S		44
751528	S		44
751544	S		44
751545	S		44, 47
751546	S		44, 47
751547	S		44, 47
751548	S		44
751549	S		44
751550	S		44, 47
751551	S		44, 47
751552	S		44, 47
751553	S		44
751557	S		44
751558	S		44
751559	S		44
751560	S		44
751561	S		44
751562	S		44
751563	S		44
751564	S		44
751565	S		44
751566	S		44
751567	S		44
751568	S		44
751569	S		44
751570	S		44
751571	S		44
753240	Z		43
759250	S		44
759251	S		44
759252	S		44
759253	S		44
759254	S		44
759255	S		44
759256	S		44
759257	S		44
759258	S		44
759259	S		44
759260	S		44
759261	S		44
759262	S		44
759263	S		44
759264	S		44
759265	S		44
759270	S		44
759271	S		44
759272	S		44
759273	S		44
759274	S		44
759275	S		44
759276	S		44
759277	S		44
759278	S		44
759279	S		44
759280	S		44
759281	S		44
759282	S		44
759330	S		44
759360	S		44
759361	S		44
759362	S		44
759363	S		44
759364	S		44
759365	S		44
759366	S		44
759367	S		44
759368	S		44
759369	S		44
759370	S		44
759371	S		44
759372	S		44
759373	S		44
759374	S		44
759375	S		44
759376	S		44
759377	S		44
759378	S		44
759379	S		44
759380	S		44
759381	S		44
759382	S		44
759383	S		44
759384	S		44
770003	U		47
770004	U		47
771000	Z		47
771110	S		47
771120	S		47
771130	S		47
771136	S		47
771140	S		47
771160	S		47
771170	S		47
771180	S		47
771186	S		47
771190	S		47
771210	S		47
771220	S		47
771230	S		47
771240	S		47
771246	S		47
771260	S		47
771270	S		47
771280	S		47
771290	S		47
771296	S		47
773060	Z		47
844010	E		76
844011	E		77
844050	Z		76–77
844051	Z		76–77
844510	Z		77
845001	M		78
845004	M		80
845050	Z		79, 81
845051	Z		79, 81
845052	Z		79, 81
845053	Z		79, 81
845055	Z		79, 81
845057	Z		81
845060	Z		81
845110	Z		79
845118	Z		79
845218	Z		79
845220	Z		81
845230	Z		81
849006	M		66
849007	M		67
849315	Z		51, 66–67, 79
849700	Z		67
849703	Z		66–67
849706	Z		66–67

Ташев Галвинг ООД
www.tashev-galving.com

REMS

www.rems.de

Head Office

Germany: REMS GmbH & Co KG
Postfach 1631 · D-71306 Waiblingen
Stuttgarter Straße 83 · D-71332 Waiblingen
Tel +49 7151 17 07-0 · Fax +49 7151 17 07-110
info@rems.de

Branch Offices

Denmark: REMS Scandinavia A/S
Snedkervej 1 · DK-4600 Køge
Tel +45 56 63 14 00 · Fax +45 56 63 11 78
DNK@rems.de

France: REMS S.à.r.l.
2, Rue du Stade · F-67250 Hoffen
Tel +33 388 80 44 53 · Fax +33 388 80 99 43
FRA@rems.de

Great Britain: REMS (UK) Ltd.
Unit 5 · Ash Industrial Estate
Flex Meadow · Harlow · Essex CM19 5TJ · U.K.
Tel +44 1279 413698 · Fax +44 1279 413704
GBR@rems.de

Italy: REMS S.r.l.
Via Sirtori, 13/D · I-20017 Passirana di Rho (Milano)
Tel +39 02 9 30 21 11 · Fax +39 02 9 31 02 45
ITA@rems.de

Poland: REMS POLSKA Sp. z o.o.
Dąbrowa · Ulica Piaskowa 19
PL 62-070 Dopiewo
Tel +48 61 654 09 00 · Fax +48 61 654 09 05
POL@rems.de

Spain: REMS ESPAÑA, S.A.U.
Pol. Ind. San José de Valderas
Calle Herramientas, 28 · E-28918 Leganés (Madrid)
Tel +34 916 444 833 · Fax +34 916 430 155
ESP@rems.de

Czech Republic: REMS Česká republika s.r.o.
Nádražní 271 · CZ 253 01 Hostivice
Tel +420 2 20 98 28 80 · Fax +420 2 20 98 28 83
CZE@rems.de

Turkey: REMS Makine ve El Aletleri Ltd. Şti.
Kaşüstü Mevkii · Samandıra Caddesi No. 28
TR-34858 Büyükbakkalköy/Maltepe/İstanbul
Tel +90 216 311 75 05 · Fax +90 216 311 75 06
TUR@rems.de

Sale through specialist dealers.

Ташев-Галвинг ООД
www.tashev-galving.com

M 11/13 094001 GBRoP · Subject to alterations and errors. © Copyright 2014 by REMS GmbH & Co KG, Waiblingen.

Ташев Галвинг ООД
www.tashev-galving.com