

Solar light

XSolar GL-S

Silver

EAN 4007841 671211



365TAGE
LICHT

Light 365 days of the year



20 qm



4000K neutral white



infrared sensor 140°



max. 5 m



IP44



2 lux



ideal 1 m

3 JAHRE
HERSTELLER
GARANTIE

manufacturer's warranty
steinel.de/garantie



CE

Function description

Efficient. Elegant. Versatile. Sensor-switched LED light XSolar GL-S for pathways, gardens and patios, no power connection needed, includes bases in three lengths, 140° coverage angle, 4,000 kelvins, LED system with 150 lm, rechargeable lithium-iron-phosphate battery, on-demand lighting for up to 60 days, optional basic light level.

Technical specifications

Dimensions (L x W x H)	188 x 194 x 1178 mm	Reach, tangential	r = 5 m (31 m ²)
Sensor Technology	passive infrared	Photo-cell controller	Yes
Output	1,2 W	Time setting	10 s – 0,5 Min.
Power supply, detail	Solar supply, no mains power required, Lithium-iron-phosphate rechargeable battery 2500 mAh	Basic light level function	Yes
Luminous flux	150 lm	Basic light level function time	all night
Colour temperature	4000 K	Functions	Motions sensor
Colour variation LED	SDCM5	Soft light start	No
Colour Rendering Index CRI	80-89	Impact resistance	IK03
With lamp	Yes, STEINEL LED system	IP-rating	IP44
Lamp	LED cannot be replaced	Protection class	III
LED life expectancy (max. °C)	50000 h	Ambient temperature	-20 – 40 °C
Drop in luminous flux in accordance with LM80	L70B10	Housing material	Aluminium
LED cooling system	Passive Thermo Control	Cover material	Plastic, transparent
Detection angle	140 °	Manufacturer's Warranty	3 years
Sneak-by guard	Yes	Version	Silver
Reach, radial	r = 1.5 m (3 m ²)	PU1, EAN	4007841671211

<https://www.steinel.de>

Subject to technical modifications

01.2021 Page 1 from 2

Solar light


XSolar GL-S

Silver

EAN 4007841 671211




Detection Zone

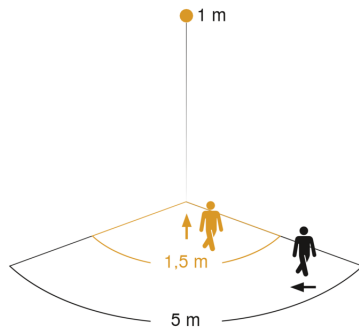

Mögliche Montagehöhe: –
Orange: radial
Schwarz: tangential

Dimension Drawing

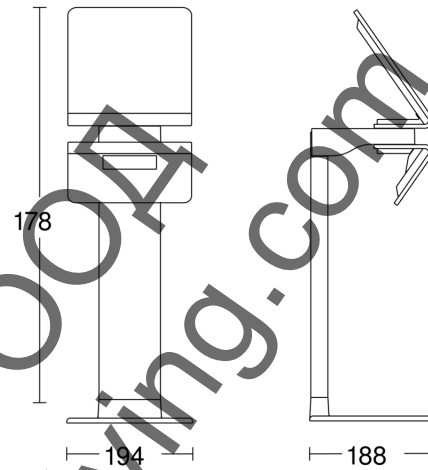

Ташев-Галвинг ООД
www.tashev-galving.com