

L 190 S



Exclusive SensorLights in classic lantern design for prestigious exteriors.

High-quality stainless steel (170/180- series) or long-life, intricately ornamented die-cast aluminium (190- series) combined with uncompromising STEINEL multi-sensor technology.


This is how it works

- Integrated soft light start
- Basic brightness can be adjusted from 0 – 50% (Watt-o-matic). When movement is detected, the light switches to full power for the time selected.
- Manual override (4h) at power switch.

Settings

- Reach can be set to a maximum of 12 m or 5 m by turning the multi-lens.
- Detection zone can be limited by fitting the shrouds supplied.
- Comfort function buttons for precision adjustment of light "ON" time, twilight threshold and brightness.

Main features at a glance

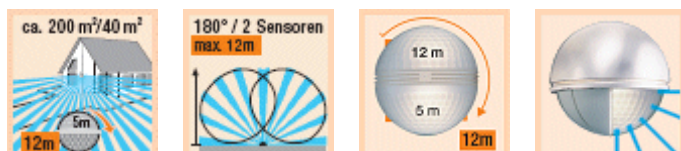

2 basic reach settings possible

Detection zone

Turning multi-lens

Coverage angle reduction



Coverage angle reduction



Soft light start



Manual override 2 x OFF/ON



Comfort function buttons

L 190 S

EAN **black**

4007841 644413

EAN **white**

4007841 644512

Dimensions (h x w x d)

335 x 217 x 147 mm

Enclosure

IP 44

Output

100 W max. / E 27

Voltage

230 – 240 V / 50 Hz

Angle of coverage

180° with 90° angle of aperture

Reach

12 m max. or 5 m
(temperature-stabilised)

Twilight setting

2 – 2000 lux

Time setting

5 sec. – 15 min.

Brightness control

0 – 50 % (Watt-o-matic)

Manual override

4 hrs. selectable

Protection class

II

Subject to technical modifications.