


Sensor-switched indoor light

RS LED D2

V3

EAN 4007841 052539



LED

30 years (Ø 4,5h / day)



3000K warm-white



high frequency sensor 360°



Ø 3 - 8 m



2 - 2000 lux



5 sec - 15 min



manual override



indoor



energy saving

3 JAHRE HERSTELLER GARANTIE

steinel.de/garantie
manufacturer's warranty
steinel.de/garantie

Function description


Shining light. STEINEL high-frequency sensor-switched indoor light RS LED D2 with brushed stainless-steel surround, ideal for corridors, hallways, stairwells and bathrooms. 9,5 W with 795 lm, STEINEL LED lighting system, 360° high-frequency sensor with 3-8 m reach, switches light ON without a sound, with ambient light, night-light function and 4-hour manual override (3000 K).

Ташев-Гарант ООД
www.tashev-garant.com

Technical specifications

Dimensions (L x W x H)	66 x 300 x 300 mm	Capability of masking out individual segments	No
Mains power supply	220 – 240 V / 50 – 60 Hz	Electronic scalability	Yes
Sensor Technology	High frequency	Mechanical scalability	No
Transmitter power	< 1 mW	Reach, radial	Ø 8 m (50 m ²)
HF-system	5,8 GHz	Reach, tangential	Ø 8 m (50 m ²)
Output	9,5 W	Continuous light	selectable 4h
Power consumption	0,38 W	Photo-cell controller	Yes
Interconnection	No	Twilight setting	2 – 2000 lx
Type of interconnection	Master/master	Time setting	5s – 15 Min.
Luminous flux	795 lm	Basic light level function	Yes
Colour temperature	3000 K	Basic light level function time	10/30 min, all night
Colour variation LED	SDCM3	Soft light start	No
Colour Rendering Index CRI	80-89	Impact resistance	IK03
With lamp	Yes, STEINEL LED system	IP-rating	IP20
Lamp	LED cannot be replaced	Protection class	II
LED life expectancy (max. °C)	50000 h	Ambient temperature	-10 – 40 °C
Drop in luminous flux in accordance with LM80	L70B10	Housing material	Plastic
Base	without	Cover material	Plastic, opal
LED cooling system	Passive Thermo Control	Manufacturer's Warranty	3 years
With motion detector	Yes	Settings via	Potentiometers
Detection	also through glass, wood and stud walls	With remote control	No
Detection angle	360 °	Installation site	wall, ceiling
Angle of aperture	160 °	PU1, EAN	4007841052539

Detection Zone

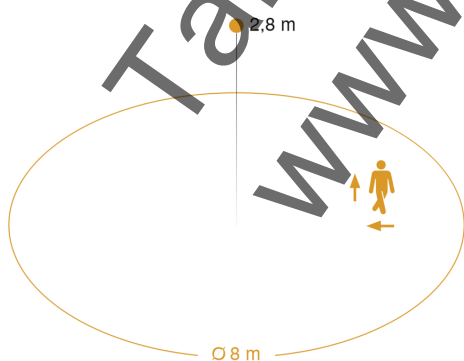

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

