


# XLED curved

V2 white

EAN 4007841 012083



**LED**



3000K warm-white



4000K neutral white



infrared sensor 160°



max. 8 m



IP44



2-1000 lux



2 sec - 70 min



ideal 2 m



energy saving

## Function description

Illuminating compact model. Sensor LED floodlight XLED curved with 9 W compact and discreet lighting solution for building entrances, pathways and co., attractive luminous efficiency (1125 lm) requiring very little energy, sensor reach of up to 8 m, tilting range of +/-30°.

## Technical specifications

Dimensions (L x W x H)	107 x 160 x 120 mm	Reach, radial	r = 4 m (22 m <sup>2</sup> )
Mains power supply	220 – 240 V / 50 – 60 Hz	Reach, tangential	r = 8 m (89 m <sup>2</sup> )
Mounting height max.	4,00 m	Photo-cell controller	Yes
Sensor Technology	passive infrared	Twilight setting	2 – 1000 lx
Output	9 W	Time setting	2 s – 70 Min.
Power consumption	0,5 W	Basic light level function	No
Interconnection	No	Main light adjustable	No
Luminous flux	1125 lm	Settings via	Potentiometers
Colour temperature	3000 K	Soft light start	No
Colour variation LED	SDCM3	Impact resistance	IK03
Colour Rendering Index CRI	80-89	IP-rating	IP44
With lamp	Yes, STEINEL LED system	Protection class	II
Lamp	LED cannot be replaced	Ambient temperature	-20 – 40 °C
LED life expectancy (max. °C)	50000 h	Housing material	HCMC
Drop in luminous flux in accordance with LM80	L70B10	Cover material	Plastic, opal
LED cooling system	Passive Thermo Control	Manufacturer's Warranty	3 years
With motion detector	Yes	PU1, net weight	0,39 kg
Detection angle	160 °	Version	white
Sneak-by guard	Yes	PU1, EAN	4007841012083
Capability of masking out individual segments	Yes		

Sensor-switched LED floodlight


# XLED curved

V2 white

EAN 4007841 012083



Detection Zone

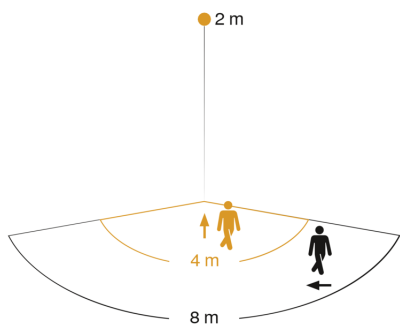


Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

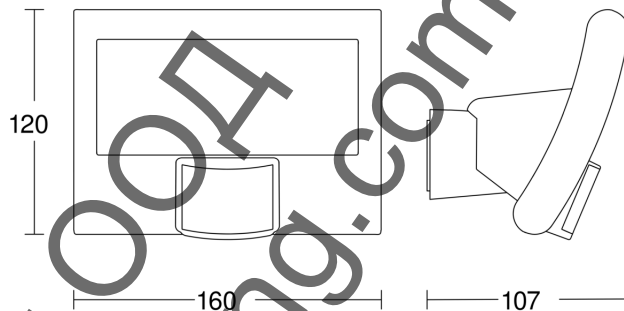

Ташев-Галвинг ООД  
www.tashev-galving.com