


Sensor-switched indoor light

RS LED M1

V2 Stainless steel

EAN 4007841 052492



LED

30 years (Ø 4,5h / day)



3000K warm-white



high frequency sensor 360°



Ø 3 - 8 m



2 - 2000 lux



5 sec - 15 min



manual override



indoor



energy saving

3 JAHRE HERSTELLER GARANTIE

steinel.de/garantie
manufacturer's warranty
steinel.de/garantie

Function description

Tasteful design for indoors. High-quality and, at only 9,5 W, extremely energy-efficient RS LED M1 indoor light in stainless-steel finish. With a 360° high-frequency sensor inside the enclosure (Ø 3 - 8 m reach). Night-light function and 4-hour manual override (3000 K). Light output of 560 lm for classy ambient lighting and perfect illumination in corridors, hallways or stairwells.

Ташев-Гарвинг ООД
www.tashev-garving.com


RS LED M1

V2 Stainless steel
EAN 4007841 052492

Technical specifications

Dimensions (L x W x H)	53 x 200 x 200 mm	Capability of masking out individual segments	No
Mains power supply	220 – 240 V / 50 – 60 Hz	Electronic scalability	Yes
Sensor Technology	High frequency	Mechanical scalability	No
Transmitter power	< 1 mW	Reach, radial	Ø 8 m (50 m ²)
HF-system	5,8 GHz	Reach, tangential	Ø 8 m (50 m ²)
Output	9,5 W	Continuous light	selectable 4h
Power consumption	0,38 W	Photo-cell controller	Yes
Interconnection	Yes	Twilight setting	2 – 2000 lx
Type of interconnection	Master/master	Time setting	5s – 15 Min.
Interconnection via	Cable	Basic light level function	Yes
Luminous flux	560 lm	Basic light level function time	10/30 min, all night
Colour temperature	3000 K	Soft light start	No
Colour variation LED	SDCM3	Impact resistance	IK03
Colour Rendering Index CRI	80-89	IP-rating	IP20
With lamp	Yes, STEINEL LED system	Protection class	II
Lamp	LED cannot be replaced	Ambient temperature	-10 – 30 °C
LED life expectancy (max. °C)	65000 h	Housing material	Plastic
Drop in luminous flux in accordance with LM80	L70B10	Cover material	Plastic, opal
Base	without	Manufacturer's Warranty	3 years
LED cooling system	Passive Thermo Control	Settings via	Potentiometers
With motion detector	Yes	With remote control	No
Detection	also through glass, wood and stud walls	Installation site	wall, ceiling
Detection angle	360 °	Version	Stainless steel
Angle of aperture	160 °	PU1, EAN	4007841052492

Detection Zone

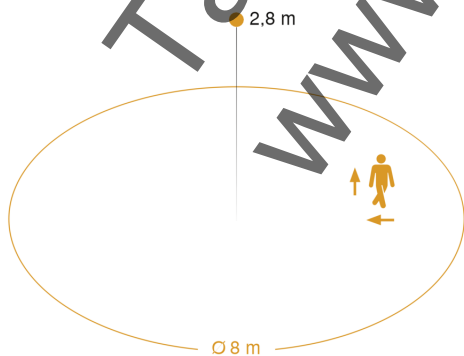

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

