


Sensor-switched LED floodlight

# XLED home 2 Connect

black

EAN 4007841 065447



LED

30 years (Ø 4,5h / day)



3000K warm-white



infrared sensor 140°



max. 10 m



IP44



180° horizontal, 180° vertical



180° horizontal, 90° vertical



2 - 2000 lux



5 sec - 60 min



connectable via bluetooth

## Function description

Top seller. Now even better. Sensor-switched outdoor floodlight XLED home 2 Connect for even greater security and wireless control via Bluetooth and via app. Fully swivelling LED panel in classy opal look. For the most exacting of demands on design and maximum lighting convenience. 1472 lm from a power consumption of just 13,5 W. Swivelling precision IR sensor (horizontally: 180°, vertically: 90°). 180° angle of coverage, 10 m reach. High thermal conductivity magnesium composite cooling system (HCMC).

# XLED home 2 Connect


black

EAN 4007841 065447

## Technical specifications

Dimensions (L x W x H)	161 x 180 x 218 mm	Reach, tangential	r = 10 m (157 m <sup>2</sup> )
Mains power supply	220 – 240 V / 50 – 60 Hz	Photo-cell controller	Yes
Mounting height max.	2,00 m	Twilight setting	2 – 2000 lx
Sensor Technology	passive infrared	Time setting	5 s – 60 Min.
Output	13,5 W	Basic light level function	No
Power consumption	0,5 W	Functions	Group parameterisation, Manual ON / ON-OFF, Neighbouring-group function, Master/slave override, Nighteconomy mode, Digital timer
Interconnection	Yes	Settings via	Bluetooth
Type of interconnection	Master/master, Master/slave	Soft light start	No
Luminous flux	1472 lm	Continuous light	selectable
Colour temperature	3000 K	Impact resistance	IK03
Colour variation LED	SDCM3	Rating	IP44
Colour Rendering Index CRI	80-89	Protection class	II
With lamp	Yes, STEINEL LED system	Ambient temperature	-20 – 40 °C
Lamp	LED cannot be replaced	Housing material	HCMC
LED cooling system	HCMC (High Conductive Magnesium Composite)	Cover material	Plastic, opal
With motion detector	Yes	Manufacturer's Warranty	5 years
Detection angle	180 °	PU1, net weight	0,576 kg
Angle of aperture	90 °	Version	black
Capability of masking out individual segments	Yes	PU1, EAN	4007841065447
Reach, radial	r = 5 m (39 m <sup>2</sup> )		

## Detection Zone

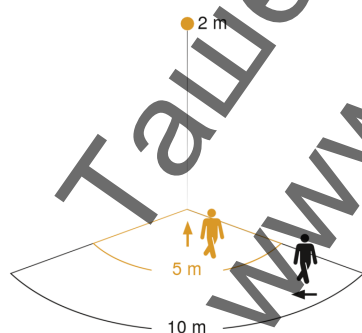


Mögliche Montagehöhe: 1,80 m – 2,00 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

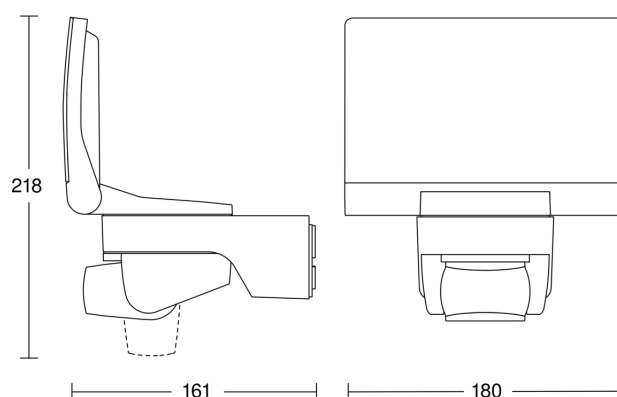


# XLED home 2 Connect

black

EAN 4007841 065447




## Light Distribution Curve



Output	13,5 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	1472 lm
Colour temperature	3000 K
Colour Rendering Index CRI	80-89
LED cooling system	HCMC (High Conductive Magnesium Composite)

## Master/master interconnection circuit diagram

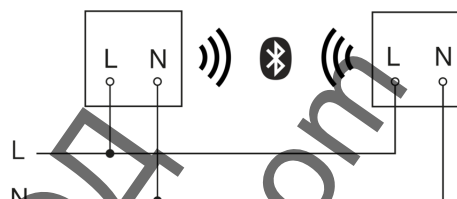

Ташев-Галвинг ООД  
www.tashev-galving.com