Sensor-switched outdoor light

GL 60 LED

EAN 4007841 007881



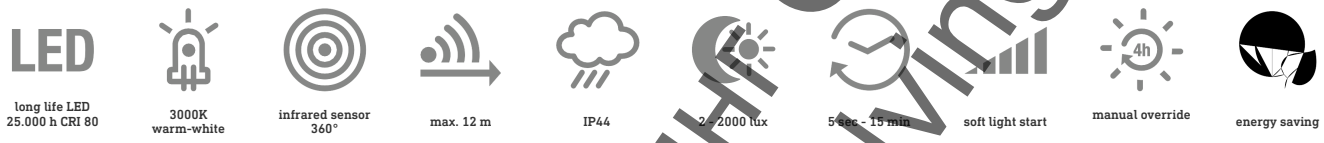

long life LED 25.000 h CRI 80 | 3000K warm-white | infrared sensor 360° | max. 12 m | IP44 | 2 – 2000 lux | 5 sec - 15 min | soft light start | manual override | energy saving

Function description

Timeless classic with efficient LEDs. Sensor-switched outdoor light STEINEL GL 60 LED, ideal for gardens, drives or pathways. 8,6 W STEINEL LED lighting system, 812 lm, 360° infrared sensor with 12 m reach, including basic light function, soft light start and optional manual override.

Technical specifications

Mains power supply	230 – 240 V / 50 Hz	Electronic scalability	No
Sensor Technology	passive infrared	Mechanical scalability	No
Output	8,6 W	Reach, radial	Ø 12 m (113 m^2)
Interconnection	No	Reach, tangential	Ø 24 m (452 m^2)
Slave modeselectable	No	Photo-cell controller	Yes
Luminous flux	812 lm	Twilight setting	2 – 2000 lx
Colour temperature	3000 K	Time setting	5 s – 15 Min.
Colour variation LED	SDCM6	Basic light level function	Yes
Colour Rendering Index CRI	80-89	Soft light start	Yes
With lamp	Yes	Continuous light	selectable, 4h
Lamp	LED can be replaced	Impact resistance	IK03
LED life expectancy (max. °C)	25000 h	IP-rating	IP44
Base	E27	Protection class	II
LED cooling system	Passive Thermo Control	Housing material	Stainless steel
With motion detector	Yes	Cover material	Glass opal
Detection angle	360 °	Manufacturer's Warranty	3 years
Angle of aperture	30 °	Settings via	Potentiometers
Sneak-by guard	Yes	Cover material	shrouds
Capability of masking out individual segments	Yes	PU1, EAN	4007841007881

Ташев-Галвинг ООД
www.tashev-galving.com

Sensor-switched outdoor light

GL 60 LED

EAN 4007841 007881

Accessories

EAN 4007841 008321	LED linear lamp for GL 60 LED
EAN 4007841 001346	Replacement glass shade for GL 60 S
EAN 4007841 001339	Replacement electronics unit for GL 60 S

Detection Zone

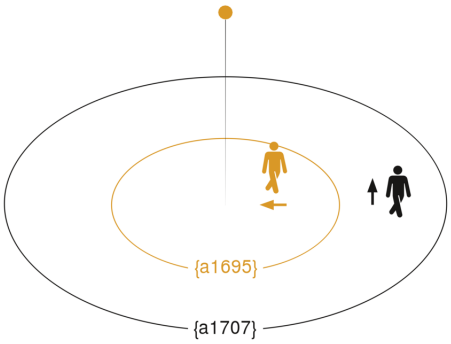

Mögliche Montagehöhe: –
Orange: radial
Schwarz: tangential

Dimension Drawing

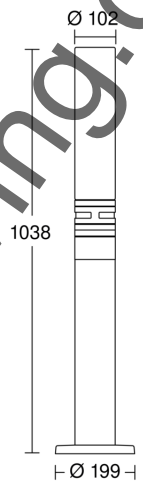

Ташев-Галвинг ООД
www.tashev-galving.com