

## ICH

Помпи центробежни едностъпални

Clean water
 Domestic use
 Industrial use



### PERFORMANCE RANGE

- Flow rate up to **600 l/min** (36 m<sup>3</sup>/h)
- Head up to **33 m**

### APPLICATION LIMITS

- Manometric suction lift up to **7 m**
- Liquid temperature between **-10 °C** and **+90 °C**
- Ambient temperature up to **+40 °C**
- Max. working pressure:
  - **6 bar** for ICH 100
  - **10 bar** for ICH 150, 200, 300, 150B, 200A
- Continuous service **S1**

### CONSTRUCTION AND SAFETY STANDARDS


EN 60335-1  
IEC 60335-1  
CEI 61-150

EN 60034-1  
IEC 60034-1  
CEI 2-3



### CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz | n = 2900 min<sup>-1</sup> | HS = 0 m

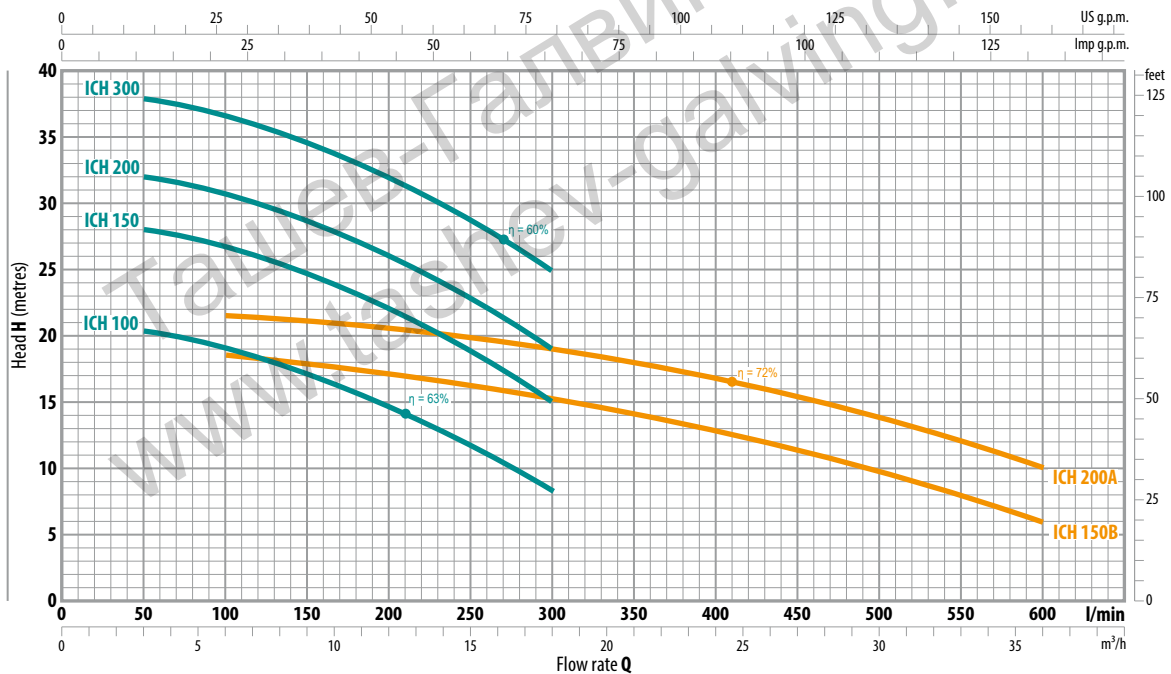

MODEL		POWER (P <sub>2</sub> )		Q	Flow rate															
Single-phase	Three-phase	kW	HP		m <sup>3</sup> /h	0	3	6	9	12	15	18	21	24	30	36				
				l/min	0	50	100	150	200	250	300	350	400	500	600					
ICH 100M	ICH 100	0.75	1	H metres	21.2	20.2	19	17	14.5	11.6	8.4									
ICH 150M	ICH 150	1.1	1.5		29	28	26.5	24.5	22	18.5	15									
ICH 200M	ICH 200	1.5	2		33	32	30.5	28.5	26	22.5	19									
-	ICH 300	2.2	3		39	38	36.5	34.5	32	28.5	25									
ICH 150BM	ICH 150B	1.1	1.5		19	-	18.5	18	17	16	15.2	14	12.8	9.7	6					
ICH 200AM	ICH 200A	1.5	2	22	-	21.5	21	20.5	19.8	19	18	16.8	13.8	10						

Q = Flow rate  
H = Total manometric head  
HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

## INSTALLATION AND USE

Suitable for use in civil and agricultural applications.


The high efficiency and continuous duty capabilities makes these pumps ideal for use in applications such as flood and spray irrigation, drawing water from lakes, rivers and wells, or for any number of different industrial applications where the characteristics of high flow rates and mid to low head are required.

The pump should be installed in an enclosed environment or sheltered from inclement weather.

## CONSTRUCTION CHARACTERISTICS

<b>PUMP BODY</b>	Cast iron complete with threaded ports in compliance with ISO 228/1
<b>IMPELLER</b>	Brass
<b>MOTOR SHAFT</b>	Stainless steel EN 10088-3 - 1.4104
<b>MECHANICAL SEAL</b>	<b>ICH 100:</b> Ceramic - Graphite - NBR  <b>ICH 150, 200, 300, 150B, 200A:</b> Graphite - Ceramic - NBR
<b>ELECTRIC MOTOR</b>	The three-phase pumps are fitted with high performance motors in class IE3 (IEC 60034-30)

## DIMENSIONS AND WEIGHT

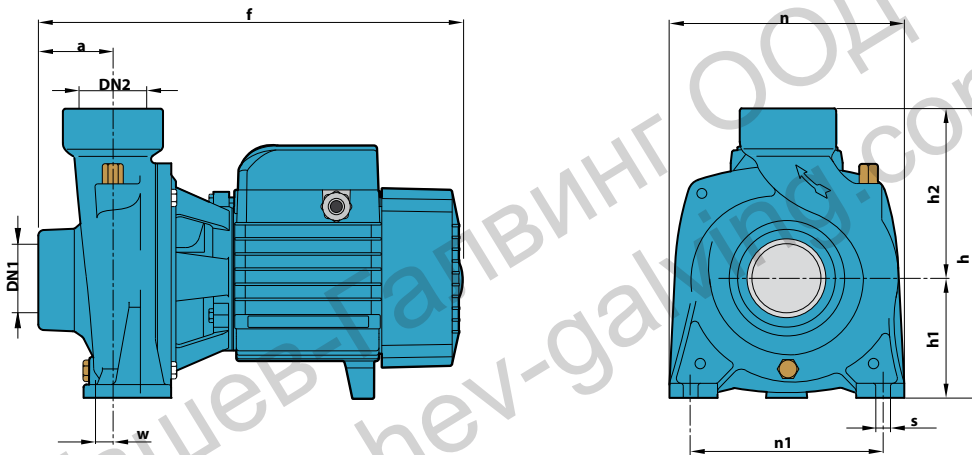

MODEL		PORTS		DIMENSIONS mm									kg	
Single-phase	Three-phase	DN1	DN2	a	f	h	h1	h2	n	n1	w	s	1~	3~
ICH 100M	ICH 100	1½"	1½"	45	300	225	92	133	190	160	4	10	13.0	12.0
ICH 150M	ICH 150			48.5	373	269	114	155	216	171	12	12	19.0	18.6
ICH 200M	ICH 200			21.8	20.5									
-	ICH 300	-	-	-	-	-	-	-	-	-	-	-	-	21.9
ICH 150BM	ICH 150B	2"	2"	59	386	260	110	150	208	160	12.5	11	20.1	19.2
ICH 200AM	ICH 200A												21.5	20.8

## ABSORPTION

MODEL	VOLTAGE		
	Single-phase	230 V	240 V
ICH 100M	5.6 A	5.3 A	11.2 A
ICH 150M	8.0 A	7.6 A	16.0 A
ICH 200M	10.0 A	9.0 A	20.0 A
ICH 150BM	7.7 A	7.1 A	14.8 A
ICH 200AM	10.1 A	9.7 A	20.5 A

MODEL	VOLTAGE					
	Three-phase	230 V	400 V	690 V	240 V	415 V
ICH 100	4.4 A	2.5 A	1.5 A	4.0 A	2.3 A	1.3 A
ICH 150	5.7 A	3.3 A	1.9 A	5.5 A	3.2 A	1.8 A
ICH 200	7.4 A	4.3 A	2.5 A	7.1 A	4.1 A	2.4 A
ICH 300	9.5 A	5.5 A	3.2 A	9.1 A	5.3 A	3.1 A
ICH 150B	5.7 A	3.3 A	1.9 A	5.5 A	3.2 A	1.8 A
ICH 200A	7.1 A	4.1 A	2.4 A	6.5 A	3.7 A	2.1 A