



# HOMMY<sup>®</sup>

Fully stainless-steel submersible vortex electric pump for wastewater



**City**<sup>®</sup>*pumps*

**MADE IN ITALY**

## Submersible electric pump with vortex impeller

HOMMY is the CityPumps submersible pump designed to handle common domestic drainage operations simply and effectively. Easy to install and operate, it is suitable for handling clear or slightly dirty water in various everyday applications.

The vortex impeller allows free passage of solids up to Ø 30 mm, ensuring smooth operation even in the presence of impurities and reducing the risk of clogging.

The AISI 304 stainless steel construction guarantees good corrosion resistance and contributes to a long service life.

Compact and easy to handle, HOMMY is suitable for draining sump pits, collection tanks, basements and cellars.

A practical and versatile solution, ideal for those seeking simplicity, reliability and cost-effectiveness.



※ Hose adapter included.



### PERFORMANCE RANGE

- Flow rate up to **250 l/min** (15 m<sup>3</sup>/h)
- Head up to **10 m**

### APPLICATION LIMITS

- Max. immersion depth below water level: **5 m** (with a suitable power cable length)
- Maximum liquid temperature **+40 °C**
- **Minimum immersion for continuous service: 160 mm**

### STANDARD EQUIPMENT


- Supplied complete with:
- ※ **5 m** long power cable
  - ※ Float switch
  - ※ Hose adapter

### OPTIONS AVAILABLE ON REQUEST

- ※ Other voltages or 60 Hz frequency
- ※ HOMMY® GM version



## CHARACTERISTIC CURVES AND PERFORMANCE DATA

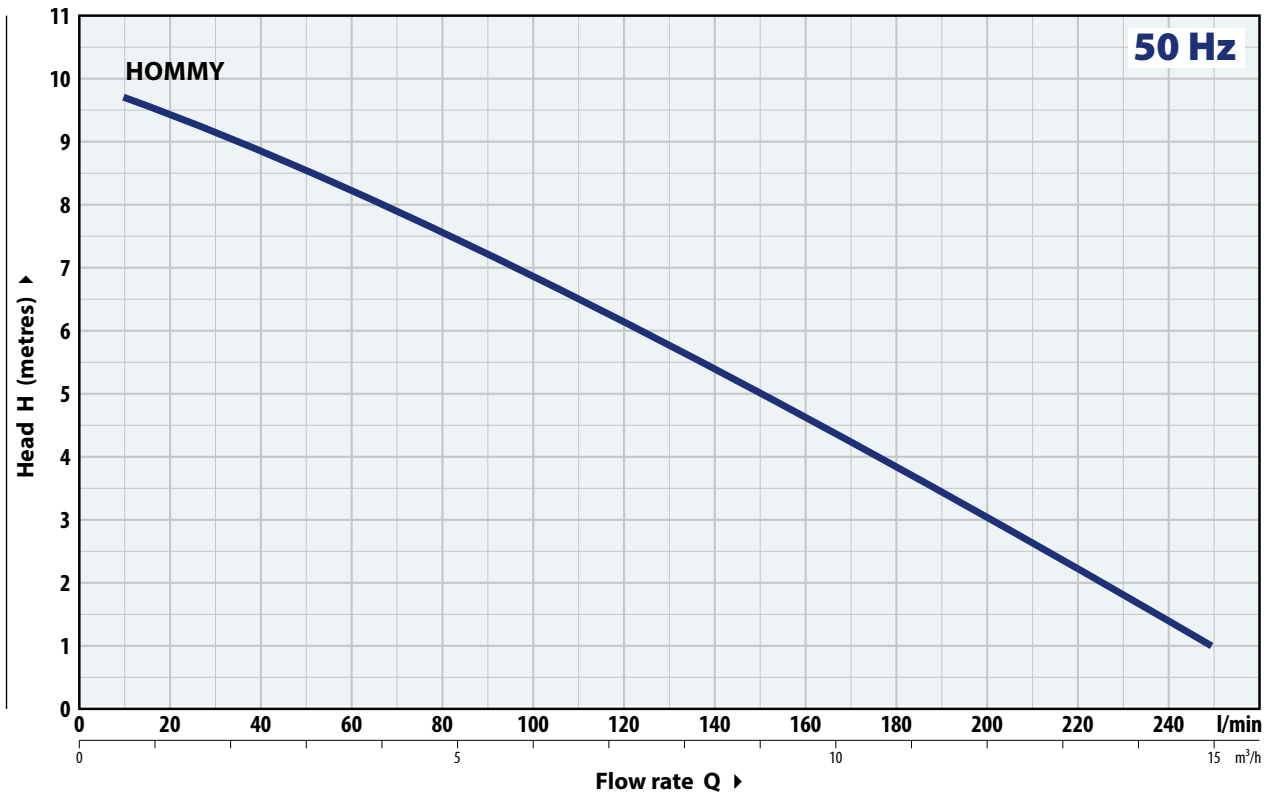

MODEL Single-phase	POWER (P <sub>2</sub> )		Q	0	0.6	1.2	3.6	6	8.4	10.8	13.2	15	ABSORBED CURRENT
	kW	HP		l/min	0	10	20	60	100	140	180	220	
HOMMY	0.50	0.70	H metres	10	9.7	9.4	8.2	7	5.4	3.7	2.2	1	3.0 A

Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

## HOMMY®-GM


Submersible electric pump with magnetic float switch

The HOMMY submersible pump is also available in the GM version, featuring a vertically sliding magnetic float switch.


Ideal for installations in confined spaces, it ensures reliable operation even in small sump pits, guaranteeing maximum versatility and practicality.




## DIMENSIONS AND WEIGHT

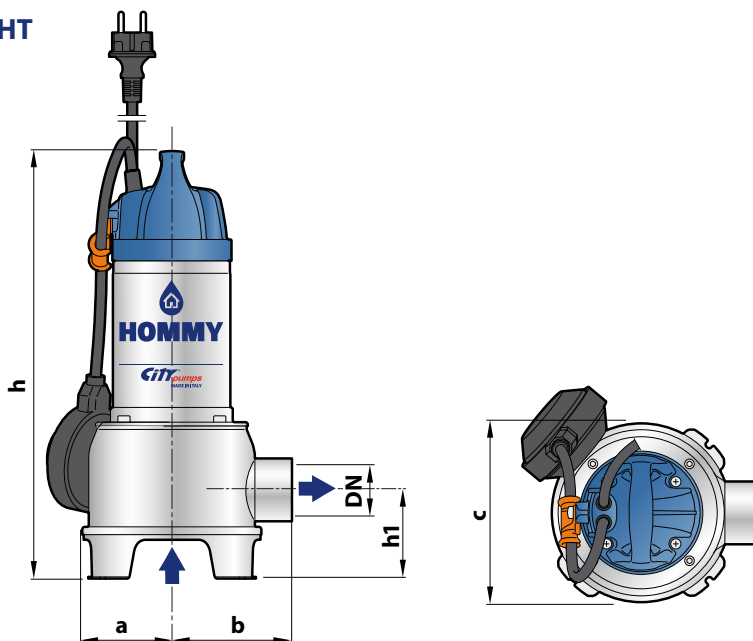

## TYPICAL INSTALLATION HOMMY<sup>®</sup>

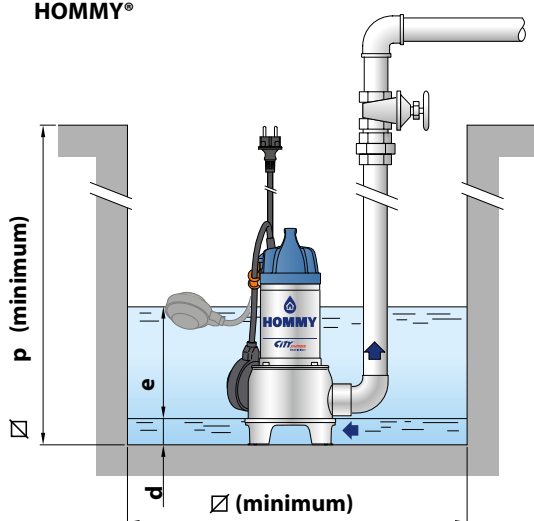

## TYPICAL INSTALLATION HOMMY<sup>®</sup>-GM

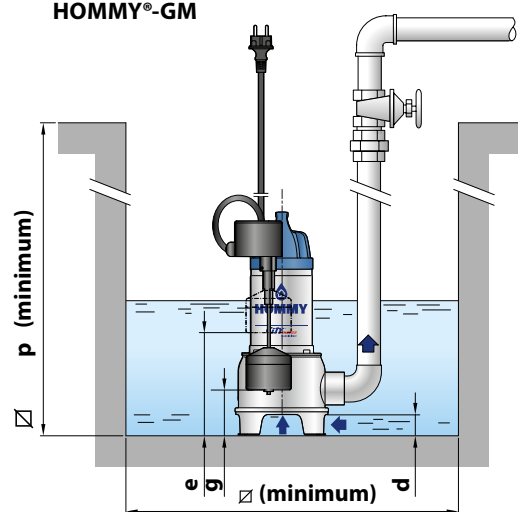

MODEL	PORT	Free passage of solids	DIMENSIONS mm									kg	
			a	b	c	h	h1	d	e	p	∅		
Single-phase	DN												1~
<b>HOMMY</b>	<b>1½"</b>	<b>∅ 30 mm</b>	70	93	140	333	68	30	adjustable	450	450	7.0	

### PALLETISATION

no. of pumps

80

MODEL	PORT	Free passage of solids	DIMENSIONS mm									kg	
			a	b	c	h	h1	d	e	g (adjustable)	p		∅
Single-phase	DN												1~
<b>HOMMY-GM</b>	<b>1½"</b>	<b>∅ 30 mm</b>	75	93	210	333	69	30	180	80	450	230	7.0

### PALLETISATION

no. of pumps

80

The data contained in this publication are not to be considered binding.  
CITY PUMPS S.r.l. reserves the right to make any changes it deems appropriate to improve its production.