


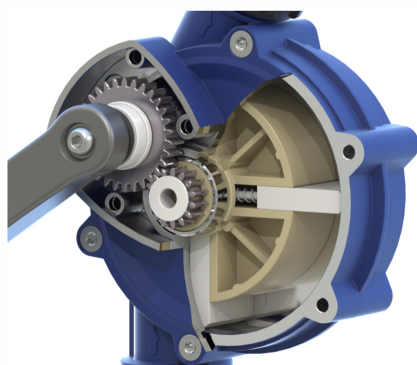

Rotary pump blue

SRL 355-955 mm-18 l/min

Item number: 13 055
EAN: 4103810130557
Discount group: A

Technical data

Delivery rate (l/rotation): 0,3
Delivery rate at 60 rotations/min;
pumping medium diesel (l/min): 18
Pumping media: self-lubricating and non-aggressive media:
 fuel oil
 diesel
 petroleum
 cooling fluid (undiluted)
 do not use aqueous solutions
 radiator antifreeze only undiluted
 machine maintenance:
 hydraulic oil
 cutting fluid
 gear oil, oils up to SAE 90
Container: 60/200/220 l
Application: for filling measuring vessels, storage cans,
 canisters and machines
Discharge: discharge spout
Length, three-part suction pipe (mm): 355 - 955
Barrel screw coupling: G 2" male
Material pump housing: impact-resistant zinc die casting ZL 410
Colour crank: silver
Colour gear cover and gear housing: blue
Color of housing: blue
Weight (kg): 2,371

Specification

- Telescopic suction tube (13 094), with infinitely variable length (from 355 to 955 mm)
- With suction filter (13 097 003)
- Barrel screw coupling G 2" (04 464 001)
- Discharge spout (13 098)

Special notes

- Smooth hand-rotating operation
- The pump is continuously positionable in 360°
- Suction tube flexible in length from 355 to 955 mm
- Assembly, commissioning and container change without tools
- CNC machined, thus optimum pump efficiency
- All connections sealed trough gaskets and O-rings
- Completely dismountable - easy to clean
- Spare parts available for 10 years
- Available in 4 colour variantes
- Variations: discharge hose 2 m (13 056); discharge hose 2 m and meter (13 057)
- Warranty 5 years when using the supplied suction basket (excluding wear parts)
- 0,3 liter per revolution