


# 6SR12

## CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 rpm

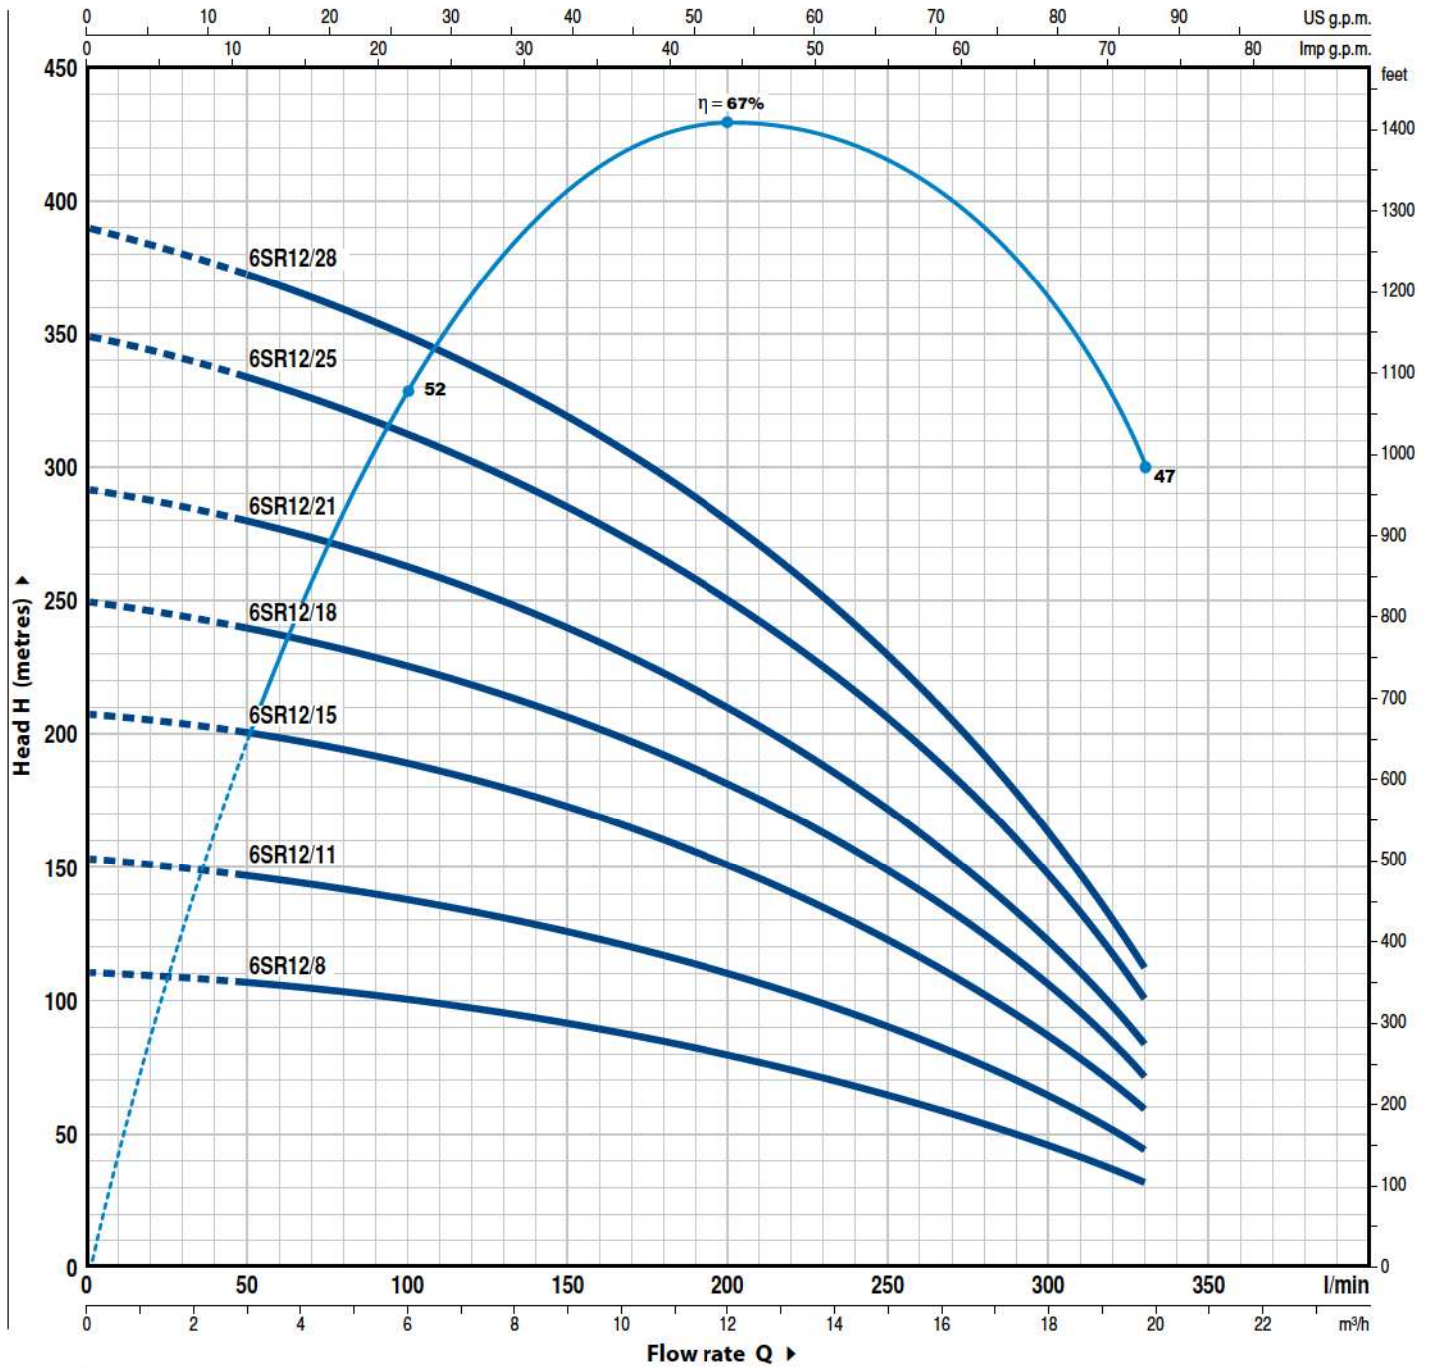

MODEL	POWER (P <sub>2</sub> )		Q	Flow rate (l/min)								
	kW	HP		0	3.0	6.0	9.0	12.0	15.0	18.0	19.8	
Three-phase				0	50	100	150	200	250	300	330	
6SR12/8	4	5.5	H metres	111	106	100	91	80	66	47	32	
6SR12/11	5.5	7.5		153	146	138	125	110	91	65	44	
6SR12/15	7.5	10		208	199	189	171	150	124	88	60	
6SR12/18	9.2	12.5		250	239	225	205	180	149	106	72	
6SR12/21	11	15		292	279	263	239	210	174	124	84	
6SR12/25	13	17.5		349	331	313	285	250	206	147	100	
6SR12/28	15	20		390	371	350	319	280	231	165	112	

Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.