



PRODUCT DETAIL TEMPLATE

TİP-1: BTO-12

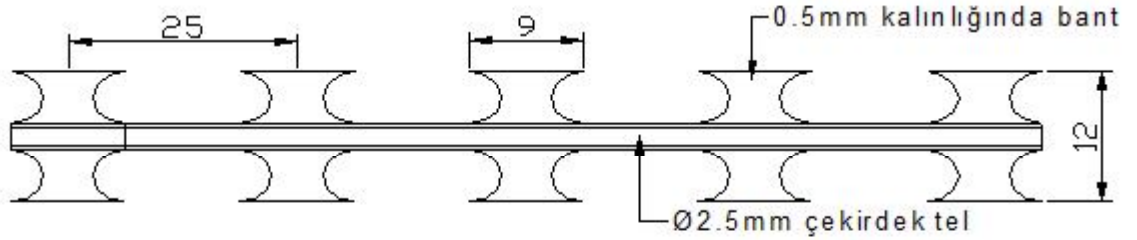

TİP-2: BTO-22

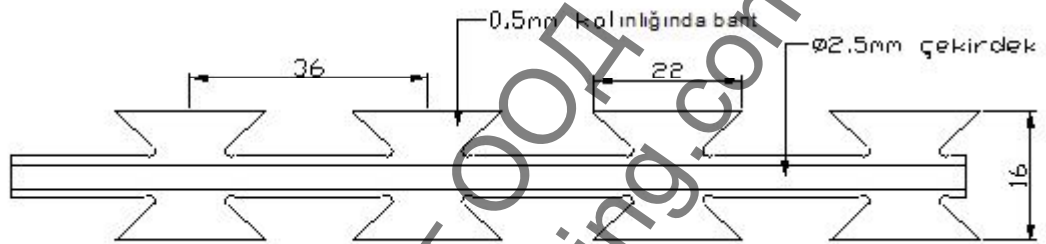

CONCERTINA RAZOR WIRE TECHNICAL INFORMATION

Concertina Razor Wire Types

- a) 0.50mm (± 0.08 mm) stainless steel (AISI 304 Quality)
- b) 0.50mm (± 0.08 mm) stainless steel (AISI 430 Quality)
- c) 0.50mm (± 0.08 mm) Galvanize sheet (200 gr/m²)

Core Wire Types

- Quality** : DIN 17140 upon D 70-2E
- Diameter** : 2,5mm (± 0.10 mm)
- Tensile Strength** : 160 kg/mm² (min)
- Galvanize Thickness** : 200 gr/m² (min)

Dimensions	Ø 965 mm	Ø 700 mm	Ø 600 mm	Ø 450 mm
Diameter	Ø 965 mm	Ø 700 mm	Ø 600 mm	Ø 450 mm
Unit Of Roll Winding	56 (~72° with Clips)	56 (~72° with Clips)	56 (~72° with Clips)	56 (~120° with Clips)
Maximum Distance of Opening	15 m	11 m	9,3 m	7 m
Roll Weight	15kg ($\pm 0,3$ kg)	11 kg ($\pm 0,2$ kg)	9,3 kg ($\pm 0,4$ kg)	7 kg ($\pm 0,3$ kg)

APPLICATION EXAMPLES

