




DOUBLE CHANNEL SDME3,0 50x160



Usage: universal channel system for building fastening systems, with repeatable perforation and serrated edges in order to lock the accessories better; they have a cut centimeter scale on the channel side.

 Sendzimir galvanized

 S250GD steel


 Permissible load

Length L [mm]	Weight [kg]	Designation for the order	Catalogue number
3000	29,400	SDME3,0L3000	80850603030
4000	39,200	SDME3,0L4000	80850603040
6000	58,800	SDME3,0L6000	80850603060

Detailed information referring to maximum recommended loads are specified in [Chapter 20](#).

Lining strip is available for the channel on [page 91](#).

CANTILEVER ARM SSC2,0 30x16

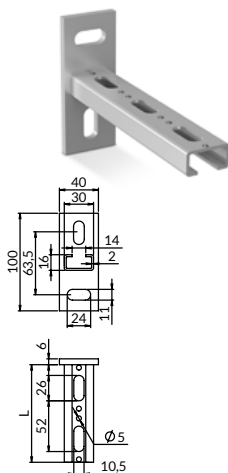

Usage: universal channel system for building fastening systems, with repeatable perforation; with cut centimeter scale on the channel side.

 electro-galvanized

 steel S235JR

 Permissible load

Length L [mm]	Weight [kg]	Designation for the order	Catalogue number
208	0,370	SSC2,0L200	80930162000
260	0,420	SSC2,0L250	80930162500
312	0,470	SSC2,0L300	80930163000
416	0,580	SSC2,0L400	80930164000
520	0,680	SSC2,0L500	80930165000

Detailed information referring to maximum recommended loads are specified in [Chapter 20](#).

Lining strip is available for the channel on [page 91](#).