


HBC Beam Clamp

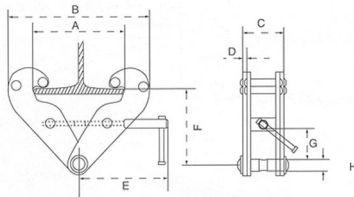

More Information This beam clamp is designed to reduce stress levels on the beam flange caused by heavy loads, by distributing the load away from the I-beam flange edges. It can be easily mounted with its threaded handle while fitting a range of flange widths and beams. The suspension bar provides lower headroom for those applications where the load can be very close to the beam. Conforms to ANSI/ASME safety standards.

Model	HBC-1	HBC-2	HBC-3	HBC-5	HBC-10
Capacity (Kg)	1,000	2,000	3,000	5,000	10,000
Beam Width mm	75-220	75-220	80-320	80-320	90-310
Dimensions A	260	260	354	354	310
Min B	180	180	235	235	268
Max B	360	360	490	490	480
C	64	74	103	110	118
D	5	6	8	10	12
E	215	215	260	260	275
Max F	155	155	225	225	185
Min F	102	102	140	140	133
Min G	25	25	45	45	66
H	22	22	24	28	38
Net Weight (kg)	4.5	5	10.5	11	16
Gross Weight (kg)	5.5	6	11.5	12	18