

# Технически характеристики

# **X-CORE**<sup>™</sup>

This simple irrigation controller offers optional on-site smart ET watering adjustments and handheld remote operation.

#### **KEY BENEFITS**

- · Number of stations:
  - 2, 4, 6, or 8 (fixed models)
- Solar Sync<sup>™</sup> accessory saves water based on local weather conditions
- · Built-in key lock on outdoor models protects against vandalism
- 3 flexible programs with 4 start times each and up to 4-hour run times
- QuickCheck™ provides simple diagnostics of faulty field wiring
- Hide Programs setting shows 1 program and 1 start time for simplification
- Suspend irrigation up to 99 days during the off-season
- Short-circuit protection detects wiring faults and skips the station without system damage
- Easy Retrieve™ memory backs up the full irrigation schedule
- Delay Between Stations for slow-closing valves or pump recharge
- Cycle and Soak prevents water waste and runoff in areas with elevation changes or tight soils
- Seasonal adjustment for quicker schedule adjustments without changing run times

#### **OPERATING SPECIFICATIONS**

- Transformer input: 120 VAC or 230 VAC
- Transformer output (24 VAC): 1 A
- Station output (24 VAC): 0.56 A
- P/MV output (24 VAC): 0.28 A
- Sensor inputs: 1
- Approvals: Plastic IP54 (outdoor), UL, cUL, FCC, CE, RCM
- · Warranty period: 2 years




#### Plastic Indoor

Height: 16.5 cm Width: 14.6 cm Depth: 5 cm



#### **Plastic Outdoor**

Height: 22 cm Width: 17.8 cm Depth: 9.5 cm

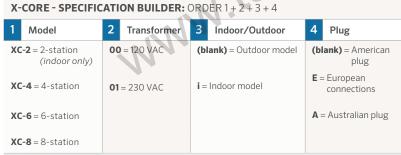

#### Examples:

XC-801i-E = 8-station controller, 230 VAC European wall adapter, indoor

XC-801-A = 8-station controller, 230 VAC internal transformer, outdoor with Australian plug

## Compatible with:







ROAM Remote Page 137 ROAM XL Remote Page 138



Soil-Clik Sensor Page 151



### Smart WaterMark

Recognised as a responsible water-saving tool when used with a Solar Sync sensor