






RENNSTEIG

ТЕХНИЧЕСКА ХАРАКТЕРИСТИКА

Челюсти резервни за клещи за кабели

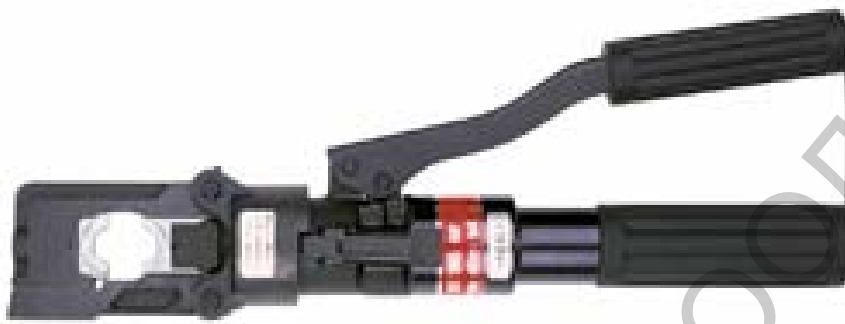

Profile – профил на челюстите	Range of application- област на приложение	Art. No. – арт.номер	Dies - челюсти	Capacity mm ² Cu – капацитет в мм ² за медни	Capacity mm ² Al – капацитет в мм ² за алуминий
	Hexagon Crimping dies for copper terminals/connectors (DIN 46 235) and aluminium terminals/connectors (DIN 46 329)	630 201 5	K 6/K 16-7	10+70	50
		630 202 5	K 8/K 12-7	16+35	10+25
		630 203 5	K 10/K 14-7	25+50	16+35
		630 204 5	K 18-5	95	
		630 205 5	K 18-7		70
		630 206 5	K 20-5	120	
	за медни и алуминиеви терминали/кабели, с(профил шестостен) – съответно (DIN 46 235) и (DIN 46 329)	630 207 5	K 22-5	150	
		630 208 5	K 22-7		95+120
		630 209 5	K 25-5	185	
		630 210 5	K 25-7		150