

LN ROPE WINCH

2 loading capacities and 2 versions with or without a rope – loading capacity 0.5t and 1t

Use:
For manual lifting and towing of loads

- as a service hoist for installation and maintenance work in technological facilities of all types
- for loading passenger vehicles or boats onto trailers
- for manipulation activities on small boats (hoisting the sails, etc.)
- can also be used in environments with a risk of explosion (NEXP symbol)


Properties:

- simple, light construction
- simple operation
- anti-corrosion surface treatment by galvanisation
- prepared for installation to a structure
- minimum maintenance demands

Supplied in two versions with or without a rope.

Type	Lifting capacity (t)	Main dimensions (mm)										Technical parameters				
		A	B	C	D	E	F*	G*	G1	L	R	Rope (mm)	Lift (m)	Gear ratio	Operating force on crank max. (N)	Weight of winch with the rope (kg)
LN	0,5t	264	167	344	193	186	144	115	19	5	200	Ø5	10	1:8	250	9,5
	1t	373	207	460	240	209	160	160	19	8	300	Ø8	10	1:6	320	15,2
* hole distances for anchoring of the rope winch Ø of anchorage holes – LN/0,5t – 9mm, LN/1t – 11mm																



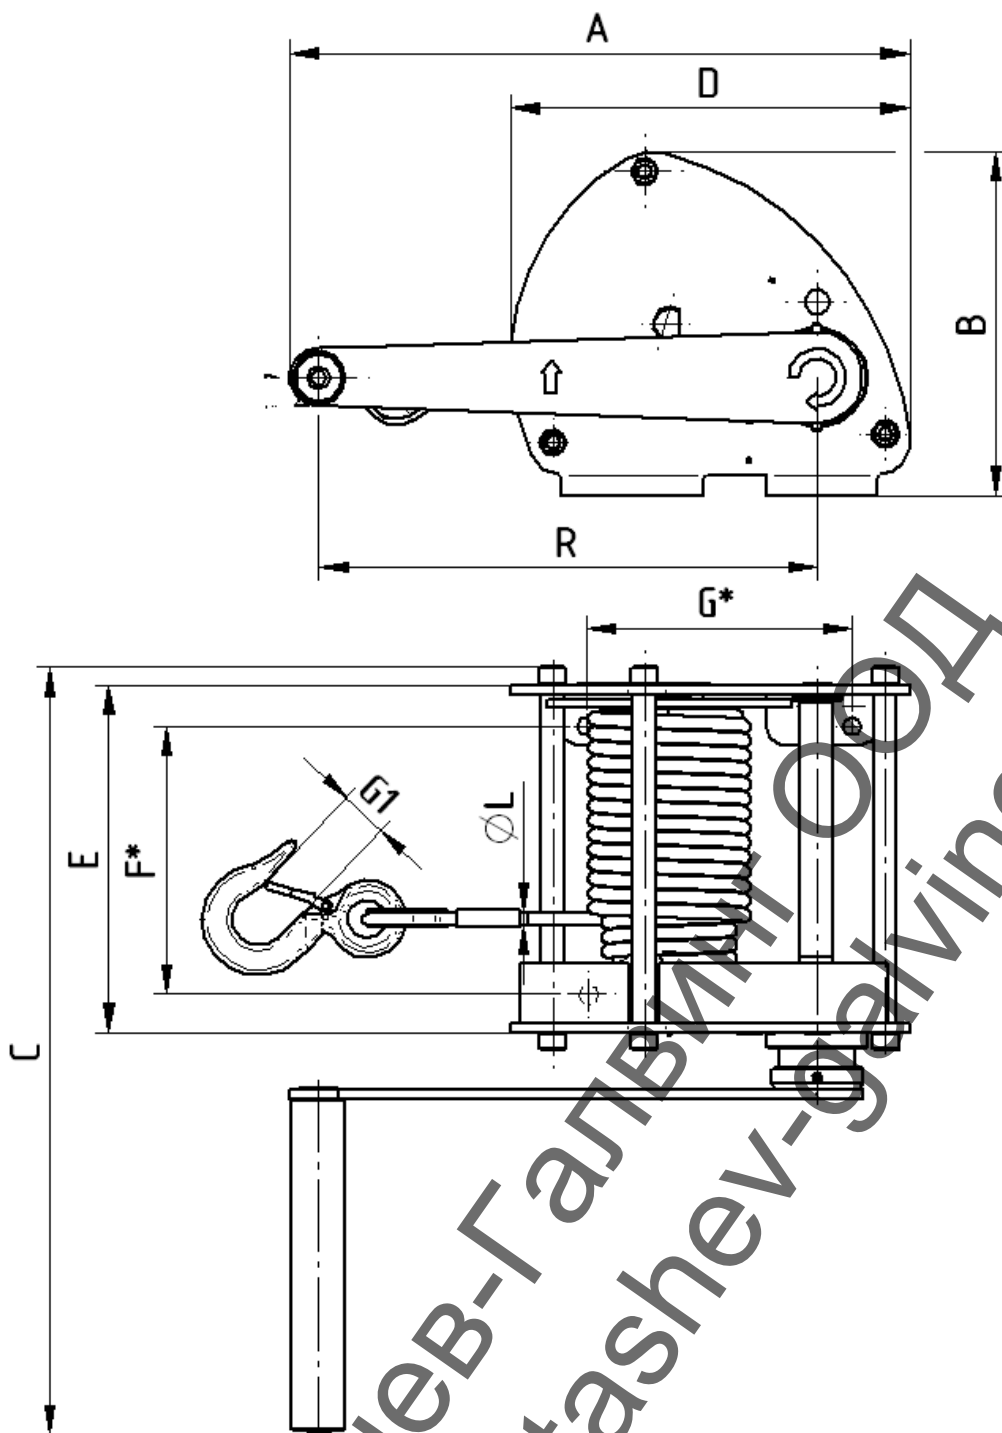

DOWNLOADABLE FILES

Operation manual – Rope winch – [cz sk en de pl rus](#)

Operation manual – Rope with hook – [cz sk en de pl rus](#)

[EC Declaration of conformity – LN](#)

[EC Declaration of conformity – Rope](#)

Ташев-Галвинг ООД
www.tashev-galving.com