
Технически характеристики

Нож REMS за саблен трион за газобетон 150 мм, 4.2 TPI, 150-4.2

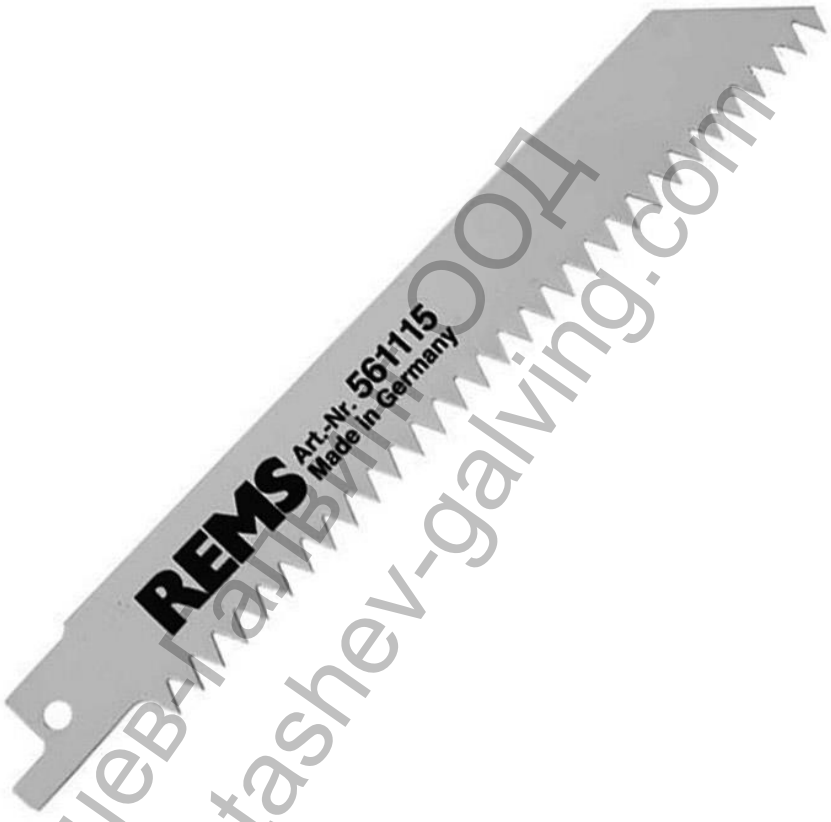

Ташев-Галвинг ООД
www.tashev-galving.com

REMS saw blades

For REMS Puma VE, REMS Cat ANC VE, REMS Tiger ANC/VE/SR, REMS Akku-Cat ANC VE and other makes

Saw blades for free-hand sawing for different materials.

Alternating tooth pitch (combi-teeth) for fast, smooth cut, also when sawing mixed materials (wood/metal).

Flexible saw blades, also for sawing flush with wall.

- Corrugated teeth for smooth cut with low tooth pitch.
- Straight-set teeth for aggressive cut with coarse tooth pitch.
- Straight teeth for saw blades with very wide carbide teeth.
- **Carbide-granulate** for materials that are difficult to cut.

German Quality Product

REMS saw blades for metal ☆ REMS Puma, REMS Cat, REMS Tiger, etc.	Length mm	Tooth pitch mm	Material*	Teeth	Colour		Art.-No.
REMS saw blade 150-1			HSS-Bi				
sheet metal, metal, also stainless steel, ≥ 1.2 mm **REMS saw blade 200-1**	150	1	flexible		red	5	561105
			HSS-Bi				
sheet metal, metal, also stainless steel, ≥ 1.2 mm **REMS saw blade 90-1,4**, curved blade	200	1	flexible		red	5	561106
metal, also stainless steel, ≥ 1.5 mm **REMS saw blade 150-1,4**	90	1,4	HSS-Bi		red	5	561107
			HSS-Bi				
metal, also stainless steel, ≥ 1.5 mm **REMS saw blade 200-1,4**	150	1,4	flexible		red	5	561104
			HSS-Bi				
metal, also stainless steel, ≥ 1.5 mm **REMS saw blade 100-1,8**	200	1,4	flexible		red	5	561108
			HSS-Bi				
metal, also stainless steel, ≥ 2 mm **REMS saw blade 150-1,8**	100	1,8	flexible		red	5	561101
			HSS-Bi				
metal, also stainless steel, ≥ 2 mm **REMS saw blade 200-1,8**	150	1,8	flexible		red	5	561103
			HSS-Bi				
metal, also stainless steel, ≥ 2 mm **REMS saw blade 200-2,5**	200	1,8	flexible		red	5	561102
			HSS-Bi				
metal, also stainless steel, ≥ 3 mm **REMS saw blade 280-2,5**	200	2,5	flexible		red	5	561109
			HSS-Bi				
metal, also stainless steel, ≥ 3 mm	280	2,5	flexible		red	5	561112

German Quality Product

REMS saw blades for wood and metal ☆ REMS Puma, REMS Cat, REMS Tiger, etc.	Length mm	Tooth pitch mm	Material*	Teeth	Colour		Art.-No.
REMS saw blade 210-1,8/2,5							
round tip, no sticking		Combo	HSS-Bi				
pallets, wood, wood with nails, metal ≥ 2.5 mm **REMS saw blade 150-2,5**	210	1,8/2,5	flexible		black	5	561113
			HSS-Bi				
wood, wood with nails, pallets, metal ≥ 3 mm **REMS saw blade 225-2,5**, extra thick, for disassembly	150	2,5	flexible		black	5	561110
wood, wood with nails, metal ≥ 3 mm	225	2,5	HSS-Bi		black	3	561114
REMS saw blade 300-2,5, extra thick, for disassembly wood, wood with nails, metal ≥ 3 mm	300	2,5	HSS-Bi		black	3	561116
REMS saw blade 300-4,2 wood	300	4,2	WS		black	5	561111
REMS saw blade 225-3,2/5,0 wood, wood with nails	225	Combo 3,2/5,0	HSS-Bi flexible		black	5	561117
REMS saw blade 290-5,0/6,35		Combo					
green wood	290	5,0/6,35	WS		black	5	561118
REMS saw blade 150-6,35							
wood	150	6,35	WS		black	5	561119

Ташев-Галвинг ООД
www.tashev-galving.com

Продукт: Нож REMS за саблен трион за газобетон 150 мм, 4.2 TPI, 150-4.2
Категория: Консумативи за саблени триони
Бранд: REMS
Категория бранд: Нож REMS