






Dry cutter saw blades

226

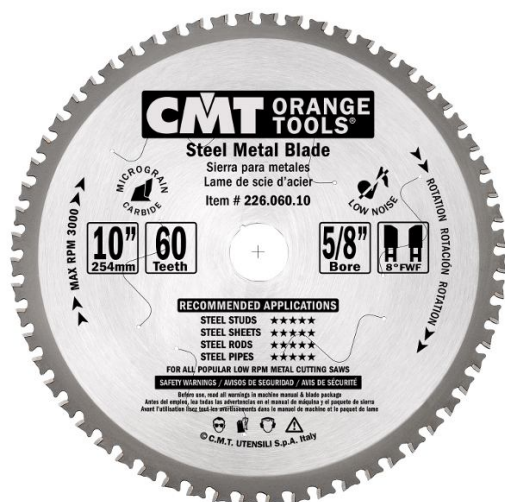

EXCELLENT

For iron, steel, PVC, compound materials, melamine



For crosscutting on different kinds of materials.

MACHINES: dry-cutter and mitre saws without lubrication.

MATERIAL: for ferrous materials and constructional steel.

WARNING: not recommended for non-ferrous metals, wood, glass, concrete, plastic.



Tungsten carbide

Tipped



Low noise
saw blade



Cardboard box
for saw blades

D mm	B mm	RPM	RPM max	Z	K mm	P mm	α	β	ORDER NO.
136,5*	10	5500	10900	30	1,5	1,2	0°	TCG	226.030.05
136,5*	20	5500	10900	30	1,5	1,2	0°	TCG	226.030.05H
160	20	4700	9300	30	2,0	1,6	0°	TCG	226.030.06H
165	15,87<>	4600	9000	36	1,5	1,2	0°	TCG	226.036.06
165	20	4700	9300	36	1,5	1,2	0°	TCG	226.036.06H
184	15,87<>	4100	8000	48	2,0	1,6	0°	TCG	226.048.07
190	30	4000	8000	40	2,0	1,6	0°	TCG	226.040.07M
210	15,87<>	3600	7300	48	2,2	1,8	0°	TCG	226.048.08
210	30	3600	7300	48	2,2	1,8	0°	TCG	226.048.08M
235	30	3200	6400	48	2,2	1,8	0°	TCG	226.048.09M
254	15,87	3000	5900	48	2,2	1,8	0°	8° FWF	226.048.10
254	15,87	3000	5900	60	2,2	1,8	0°	8° FWF	226.060.10
254**	30	3000	5900	60	2,2	1,8	0°	8° FWF	226.060.10M
305	25,4	2500	4900	60	2,2	1,8	0°	8° FWF	226.060.12
305	25,4	2500	4900	80	2,2	1,8	0°	8° FWF	226.080.12
305**	30	2500	4900	80	2,2	1,8	0°	8° FWF	226.080.12M
355	25,4	2100	4200	80	2,2	1,8	0°	8° FWF	226.080.14
355	25,4	2100	4200	90	2,2	1,8	0°	8° FWF	226.090.14
355**	30	2100	4200	90	2,2	1,8	0°	8° FWF	226.090.14M

* Non-low noise

** Saw blade in cardboard box