


10xD

Twist Drills

Steam Oxide
>2.36 mm dia.

External Coolant



Straight Shank


Speeds & Feeds
information pg 339

Series 217

General Purpose

HSS, general purpose (Type N), taper length, 118° point, Form A web
thinned >14.0mm dia., standard straight shank, RH helix

Cut / Shank Dia. = h8 tolerance range

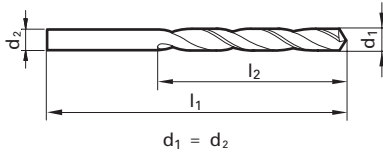d₁ = d₂

Application Materials:



General Steels/Brass



Universal Steels



Cast Iron

Diameter (d1)		Wire / letter	l1 mm	l2 mm
Dec. inch	Fract. inch			
0.0157	1/64		30.00	10.00
0.0173			30.00	10.00
0.0185			30.00	10.00
0.0197			32.00	12.00
0.0205			32.00	12.00
0.0217			35.00	15.00
0.0224	74		35.00	15.00
0.0236			35.00	15.00
0.0244			38.00	18.00
0.0256			38.00	18.00
0.0276			42.00	21.00
0.0287			42.00	21.00
0.0295			42.00	21.00
0.0299			46.00	25.00
0.0311	1/32	68	46.00	25.00
0.0315			46.00	25.00
0.0323			46.00	25.00
0.0335			46.00	25.00
0.0354			51.00	29.00
0.0362			51.00	29.00
0.0374			51.00	29.00
0.0382	62		56.00	33.00
0.0394			56.00	33.00
0.0402	60		56.00	33.00
0.0413			56.00	33.00
0.0421	58		60.00	37.00
0.0429	57		60.00	37.00
0.0433			60.00	37.00
0.0441			60.00	37.00
0.0453			60.00	37.00
0.0465	3/64	56	60.00	37.00
0.0469			65.00	41.00
0.0472			65.00	41.00
0.0492			65.00	41.00
0.0512			65.00	41.00
0.0520	55		65.00	41.00
0.0531			70.00	45.00
0.0551	54		70.00	45.00
0.0571			70.00	45.00
0.0591			70.00	45.00
0.0594	53		76.00	50.00
0.0610			76.00	50.00
0.0626	1/16		76.00	50.00
0.0630			76.00	50.00
0.0634	52		76.00	50.00
0.0650			76.00	50.00
0.0669	51		76.00	50.00
0.0689			80.00	53.00
0.0701	50		80.00	53.00
0.0709			80.00	53.00
0.0728	49		80.00	53.00
0.0748			80.00	53.00
0.0760	48		85.00	56.00
0.0768			85.00	56.00

Diameter (d1)		Wire / letter	l1 mm	l2 mm
Dec. inch	Fract. inch			
0.0780	5/64		85.00	56.00
0.0787			85.00	56.00
0.0799			85.00	56.00
0.0807			85.00	56.00
0.0811	46		85.00	56.00
0.0819	45		85.00	56.00
0.0827			85.00	56.00
0.0846			90.00	59.00
0.0858	44		90.00	59.00
0.0866			90.00	59.00
0.0886			90.00	59.00
0.0890	43		90.00	59.00
0.0906			90.00	59.00
0.0913			90.00	59.00
0.0925			90.00	59.00
0.0933	42		95.00	62.00
0.0937	3/32		95.00	62.00
0.0945			95.00	62.00
0.0961	41		95.00	62.00
0.0965			95.00	62.00
0.0980	40		95.00	62.00
0.0984			95.00	62.00
0.0996	39		95.00	62.00
0.1004			95.00	62.00
0.1016	38		95.00	62.00
0.1024			95.00	62.00
0.1031			95.00	62.00
0.1039	37		95.00	62.00
0.1043			95.00	62.00
0.1063			100.00	66.00
0.1067	36		100.00	66.00
0.1083			100.00	66.00
0.1094	7/64		100.00	66.00
0.1098	35		100.00	66.00
0.1102			100.00	66.00
0.1122			100.00	66.00
0.1130	33		100.00	66.00
0.1142			100.00	66.00
0.1161	32		100.00	66.00
0.1181			100.00	66.00
0.1201	31		106.00	69.00
0.1220			106.00	69.00
0.1240			106.00	69.00
0.1248	1/8		106.00	69.00
0.1260			106.00	69.00
0.1280			106.00	69.00
0.1283	30		106.00	69.00
0.1299			106.00	69.00
0.1319			106.00	69.00
0.1339			112.00	73.00
0.1358	29		112.00	73.00
0.1378			112.00	73.00
0.1398			112.00	73.00
0.1406	9/64	28	112.00	73.00

Diameter (d1)		Wire / letter	l1 mm	l2 mm
Dec. inch	Fract. inch			
0.1417			112.00	73.00
0.1437			112.00	73.00
0.1441	27		112.00	73.00
0.1457			112.00	73.00
0.1476			112.00	73.00
0.1496	25		119.00	78.00
0.1516			119.00	78.00
0.1520	24		119.00	78.00
0.1535			119.00	78.00
0.1539	23		119.00	78.00
0.1555			119.00	78.00
0.1563	5/32		119.00	78.00
0.1571	22		119.00	78.00
0.1575			119.00	78.00
0.1591	21		119.00	78.00
0.1594			119.00	78.00
0.1610	20		119.00	78.00
0.1614			119.00	78.00
0.1634			119.00	78.00
0.1654			119.00	78.00
0.1661	19		119.00	78.00
0.1673			119.00	78.00
0.1693	18		126.00	82.00
0.1713			126.00	82.00
0.1720	11/64		126.00	82.00
0.1728	17		126.00	82.00
0.1732			126.00	82.00
0.1752			126.00	82.00
0.1772	16		126.00	82.00
0.1799	15		126.00	82.00
0.1811			126.00	82.00
0.1819	14		126.00	82.00
0.1831			126.00	82.00
0.1850	13		126.00	82.00
0.1870			126.00	82.00
0.1874	3/16		132.00	87.00
0.1890	12		132.00	87.00
0.1909	11		132.00	87.00
0.1929			132.00	87.00
0.1937	10		132.00	87.00
0.1949			132.00	87.00
0.1961	9		132.00	87.00
0.1969			132.00	87.00
0.1988			132.00	87.00
0.1992	8		132.00	87.00
0.2008			132.00	87.00
0.2012	7		132.00	87.00
0.2028			132.00	87.00
0.2031	13/64		132.00	87.00
0.2039	6		132.00	87.00
0.2047			132.00	87.00
0.2055	5		132.00	87.00
0.2067			132.00	87.00
0.2087			132.00	87.00

Series 217

Speeds & Feeds information pg 339

Diameter (d1)					
Dec. inch	Fract. inch	Wire / letter	mm	I1 mm	I2 mm
0.2091		4	5.310	139.00	91.00
0.2106			5.350	139.00	91.00
0.2126			5.400	139.00	91.00
0.2130		3	5.410	139.00	91.00
0.2146			5.450	139.00	91.00
0.2165			5.500	139.00	91.00
0.2185			5.550	139.00	91.00
0.2189	7/32		5.560	139.00	91.00
0.2205			5.600	139.00	91.00
0.2209		2	5.610	139.00	91.00
0.2224			5.650	139.00	91.00
0.2244			5.700	139.00	91.00
0.2264			5.750	139.00	91.00
0.2280		1	5.790	139.00	91.00
0.2283			5.800	139.00	91.00
0.2303			5.850	139.00	91.00
0.2323			5.900	139.00	91.00
0.2343	15/64		5.950	139.00	91.00
0.2362			6.000	139.00	91.00
0.2402			6.100	148.00	97.00
0.2421		C	6.150	148.00	97.00
0.2441			6.200	148.00	97.00
0.2461		D	6.250	148.00	97.00
0.2480			6.300	148.00	97.00
0.2500	1/4	E	6.350	148.00	97.00
0.2520			6.400	148.00	97.00
0.2559			6.500	148.00	97.00
0.2598			6.600	148.00	97.00
0.2638			6.700	148.00	97.00
0.2657	17/64	H	6.750	156.00	102.00
0.2677			6.800	156.00	102.00
0.2717		I	6.900	156.00	102.00
0.2756			7.000	156.00	102.00
0.2795			7.100	156.00	102.00
0.2811	9/32	K	7.140	156.00	102.00
0.2835			7.200	156.00	102.00
0.2854			7.250	156.00	102.00
0.2874			7.300	156.00	102.00
0.2913			7.400	156.00	102.00
0.2953			7.500	156.00	102.00
0.2969	19/64		7.540	165.00	109.00
0.2992			7.600	165.00	109.00
0.3031			7.700	165.00	109.00
0.3051			7.750	165.00	109.00
0.3071			7.800	165.00	109.00
0.3110			7.900	165.00	109.00
0.3126	5/16		7.940	165.00	109.00
0.3150			8.000	165.00	109.00
0.3189			8.100	165.00	109.00
0.3228		P	8.200	165.00	109.00
0.3248			8.250	165.00	109.00
0.3268			8.300	165.00	109.00
0.3280	21/64		8.330	165.00	109.00
0.3307			8.400	165.00	109.00
0.3346			8.500	165.00	109.00
0.3386			8.600	175.00	115.00

Diameter (d1)					
Dec. inch	Fract. inch	Wire / letter	mm	I1 mm	I2 mm
0.3425			8.700	175.00	115.00
0.3437	11/32		8.730	175.00	115.00
0.3445			8.750	175.00	115.00
0.3465			8.800	175.00	115.00
0.3504			8.900	175.00	115.00
0.3543			9.000	175.00	115.00
0.3583			9.100	175.00	115.00
0.3594	23/64		9.130	175.00	115.00
0.3622			9.200	175.00	115.00
0.3642			9.250	175.00	115.00
0.3661			9.300	175.00	115.00
0.3701			9.400	175.00	115.00
0.3740			9.500	175.00	115.00
0.3748	3/8		9.520	184.00	121.00
0.3780			9.600	184.00	121.00
0.3819			9.700	184.00	121.00
0.3839			9.750	184.00	121.00
0.3858		W	9.800	184.00	121.00
0.3898			9.900	184.00	121.00
0.3906	25/64		9.920	184.00	121.00
0.3937			10.000	184.00	121.00
0.3976			10.100	184.00	121.00
0.4016			10.200	184.00	121.00
0.4035			10.250	184.00	121.00
0.4055			10.300	184.00	121.00
0.4063	13/32		10.320	184.00	121.00
0.4094			10.400	184.00	121.00
0.4134			10.500	184.00	121.00
0.4173			10.600	184.00	121.00
0.4213			10.700	195.00	128.00
0.4220	27/64		10.720	195.00	128.00
0.4232			10.750	195.00	128.00
0.4252			10.800	195.00	128.00
0.4291			10.900	195.00	128.00
0.4331			11.000	195.00	128.00
0.4374	7/16		11.110	195.00	128.00
0.4409			11.200	195.00	128.00
0.4429			11.250	195.00	128.00
0.4449			11.300	195.00	128.00
0.4488			11.400	195.00	128.00
0.4528			11.500	195.00	128.00
0.4531	29/64		11.510	195.00	128.00
0.4567			11.600	195.00	128.00
0.4626			11.750	195.00	128.00
0.4646			11.800	195.00	128.00
0.4689	15/32		11.910	205.00	134.00
0.4724			12.000	205.00	134.00
0.4764			12.100	205.00	134.00
0.4803			12.200	205.00	134.00
0.4823			12.250	205.00	134.00
0.4843	31/64		12.300	205.00	134.00
0.4921			12.500	205.00	134.00
0.5000	1/2		12.700	205.00	134.00
0.5020			12.750	205.00	134.00
0.5039			12.800	205.00	134.00
0.5118			13.000	205.00	134.00

Diameter (d1)					
Dec. inch	Fract. inch	Wire / letter	mm	I1 mm	I2 mm
0.5157	33/64		13.100	205.00	134.00
0.5197			13.200	205.00	134.00
0.5311	17/32		13.490	214.00	140.00
0.5315			13.500	214.00	140.00
0.5413			13.750	214.00	140.00
0.5433			13.800	214.00	140.00
0.5469	35/64		13.890	214.00	140.00
0.5512			14.000	214.00	140.00
0.5591			14.200	220.00	144.00
0.5610			14.250	220.00	144.00
0.5626	9/16		14.290	220.00	144.00
0.5709			14.500	220.00	144.00
0.5780	37/64		14.680	220.00	144.00
0.5906			15.000	220.00	144.00
0.5937	19/32		15.080	227.00	149.00
0.6004			15.250	227.00	149.00
0.6063			15.400	227.00	149.00
0.6094	39/64		15.480	227.00	149.00
0.6102			15.500	227.00	149.00
0.6248	5/8		15.870	227.00	149.00
0.6299			16.000	227.00	149.00
0.6406	41/64		16.270	235.00	154.00
0.6496			16.500	235.00	154.00
0.6563	21/32		16.670	235.00	154.00
0.6693			17.000	235.00	154.00
0.6720	43/64		17.070	241.00	158.00
0.6874	11/16		17.460	241.00	158.00
0.6890			17.500	241.00	158.00
0.7087			18.000	241.00	158.00
0.7185			18.250	247.00	162.00
0.7189	23/32		18.260	247.00	162.00
0.7283			18.500	247.00	162.00
0.7343	47/64		18.650	247.00	162.00
0.7480			19.000	247.00	162.00
0.7500	3/4		19.050	254.00	166.00
0.7677			19.500	254.00	166.00
0.7811	25/32		19.840	254.00	166.00
0.7874			20.000	254.00	166.00
0.8071			20.500	261.00	171.00
0.8126	13/16		20.640	261.00	171.00
0.8169			20.750	261.00	171.00
0.8268			21.000	261.00	171.00
0.8465			21.500	268.00	176.00
0.8661			22.000	268.00	176.00
0.8748	7/8		22.220	268.00	176.00
0.9374	15/16		23.810	282.00	185.00
0.9449			24.000	282.00	185.00
0.9843	63/64		25.000	282.00	185.00

Alternative Drill Series:

- #667 HSS, GP, 10xD, 118 pt, TiN
- #317 Cobalt, GP, 10xD, 118 pt, Oxide
- #617 Cobalt, Ti, 10xD, 130 pt, Bright
- #669 Cobalt, Ti, 10xD, 130 pt, TiN