


Twist drills with straight shank HSS-G standard, type N

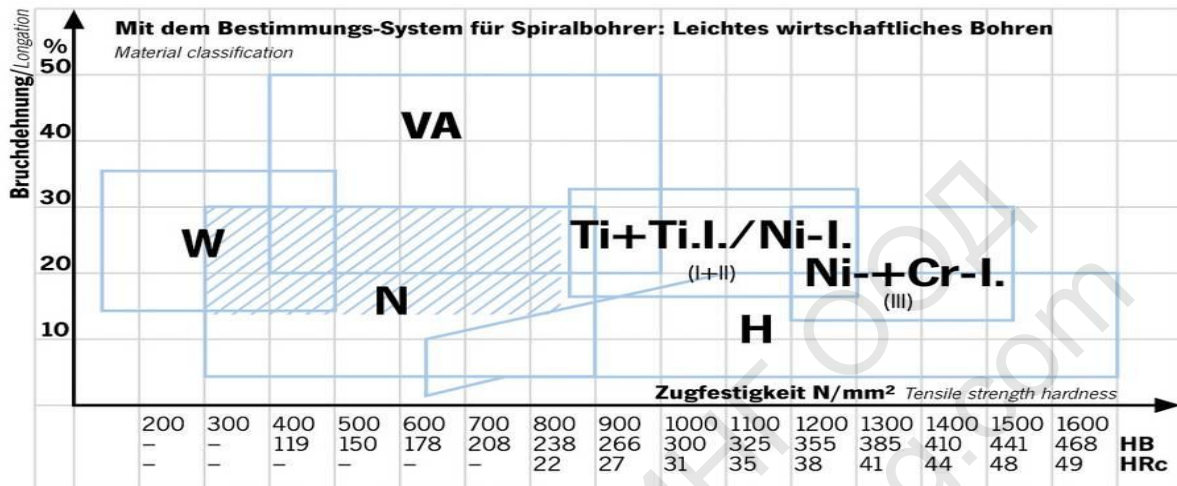

- tolerance h8
- Material HSS-G
- Point angle 118 °
- Core thickness normal
- Taper normal
- Side rake angle (helix angle)
 normal
- Other design features
according to DIN 1414

Twist drills with straight shank

Powerful drill,

118 ° split point with

3-facet on the shaft, for better form fit, optimal power transfe

High concentricity

Very good cutting performance

Right-cutting, long-life

For normal drilling work in conventional materials

use:

For alloyed and unalloyed steel and cast steel, cast iron, sintered iron, ductile iron, graphite, bronze, ductile brass, aluminum, gun meta
Verpackung:
Einzeln-SB

Φ mm	L	L2	Art.Nr.
10	152	76	495 100
10.5	152	76	495 105
11	152	76	495 110
11.5	152	76	495 115
12	152	76	495 120
12.5	152	76	495 125
13	152	76	495 130
13.5	152	76	495 135
14	152	76	495 140
14.5	152	76	495 145
15	152	76	495 150
15.5	152	76	495 155
16	152	76	495 160
16.5	152	76	495 165
17	152	76	495 170
17.5	152	76	495 175
18	152	76	495 180
18.5	152	76	495 185
19	152	76	495 190
19.5	152	76	495 195
20	152	76	495 200
20.5	152	76	495 205
21	152	76	495 210
21.5	152	76	495 215
22	152	76	495 220
22.5	152	76	495 225
23	152	76	495 230
23.5	152	76	495 235
24	152	76	495 240
24.5	152	76	495 245
25	152	76	495 250
25.5	152	76	495 255
26	152	76	495 260
26.5	152	76	495 265
27	152	76	495 270
27.5	152	76	495 275
28	152	76	495 280

28.5	152	76	495 285
29	152	76	495 290
29.5	152	76	495 295
30	152	76	495 300

Shank Diamety 10.5-16.0=10.0 mm

ab/ from 16.5=12.7 mm

ТАШЕВ-ГАЛВИНГ ООД
www.tashev-galving.com