

# 4 Flute Dowel Drills

Saw Blades

Router Bits

Router Bits Sets

Jigs & Accessories


CNC Router Bits & Chucks

Dowel Drills

Boring Bits

Cutter Heads & Knives

Spare Parts

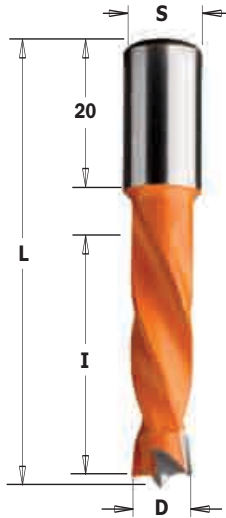


## 308

CARBIDE TIPPED Z2 V2 RH LH

ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation	D		I	L	S
		inches	mm	mm	mm	mm
308.040.11	308.040.12	5/32	4	26	57.5	10x20
308.050.11	308.050.12		5	30	57.5	10x20
308.060.11	308.060.12		6	30	57.5	10x20
308.064.11	308.064.12	1/4	6.35	30	57.5	10x20
308.070.11	308.070.12		7	30	57.5	10x20
308.080.11	308.080.12		8	30	57.5	10x20
308.090.11	308.090.12		9	30	57.5	10x20
308.095.11	308.095.12	3/8	9.52	30	57.5	10x20
308.100.11	308.100.12		10	30	57.5	10x20
308.110.11	308.110.12		11	30	57.5	10x20
308.120.11	308.120.12		12	30	57.5	10x20
308.127.11	308.127.12	1/2	12.7	30	57.5	10x20
308.130.11	308.130.12		13	30	57.5	10x20
308.140.11	308.140.12		14	30	57.5	10x20
308.150.11	308.150.12		15	30	57.5	10x20
308.160.11	308.160.12		16	30	57.5	10x20

### Spare parts

990.003.00 Screw M5x10mm

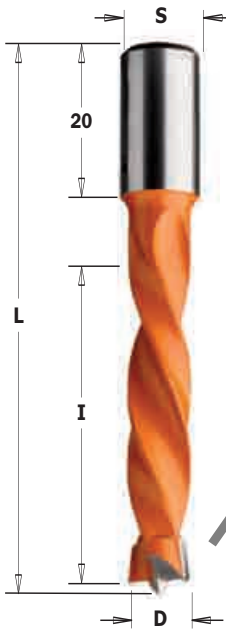

## 309

CARBIDE TIPPED Z2 V2 RH LH


ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation	D		I	L	S
		inches	mm	mm	mm	mm
309.040.11	309.040.12	5/32	4	30	70	10x20
309.050.11	309.050.12		5	43	70	10x20
309.060.11	309.060.12		6	43	70	10x20
309.064.11	309.064.12	1/4	6.35	43	70	10x20
309.070.11	309.070.12		7	43	70	10x20
309.075.11	309.075.12		7.5	43	70	10x20
309.080.11	309.080.12		8	43	70	10x20
309.090.11	309.090.12		9	43	70	10x20
309.095.11	309.095.12	3/8	9.52	43	70	10x20
309.100.11	309.100.12		10	43	70	10x20
309.110.11	309.110.12		11	43	70	10x20
309.120.11	309.120.12		12	43	70	10x20
309.127.11	309.127.12	1/2	12.7	43	70	10x20
309.130.11	309.130.12		13	43	70	10x20
309.140.11	309.140.12		14	43	70	10x20
309.150.11	309.150.12		15	43	70	10x20
309.160.11	309.160.12		16	43	70	10x20

### Spare parts

990.003.00 Screw M5x10mm

### TECHNICAL DETAILS:

- Super-strength steel
- Spiral portion coated with orange or black P.T.F.E.
- T.C.T. head with precision balanced center point
- 2 precision ground T.C.T. cutting edges (Z2)
- 4 spiral flutes
- 2 negatively ground spurs (V2)
- Parallel shank with driving flat and adjustable screw.



Negatively ground spurs

**APPLICATION:** used on boring machines equipped with adaptors or chucks. Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.