

Recessed installation

Recessed clamps for conduits

USE Recessed clamp single

For the simple laying of flexible conduits without plastering (on concrete, hollow brick, plaster walls, aerated concrete).

Material halogen-free, PP, light grey, temperature range: -10 to +85 °C. HO = halogen-free

Type	Article number	Clamping range mm	Dowel length mm	Content Pack/Box
USE 16-20/55 HO	12110	16-20	55	100 / 3,200
USE 20-25/55 HO	12120	20-25	55	100 / 2,400
USE 25-32/55 HO	12130	25-32	55	100 / 2,000



Simply brilliant: the integrated nib on the interior side of the clip enables the conduit to tense between the two clips for easier cable insertion.


USD Recessed clamp double

For the simple laying of flexible conduits without plastering, on plasterboard, concrete and hollow brick, for laying two conduits.

Material halogen-free, PP, light grey, temperature range: -10 to +85 °C. HO = halogen-free

* IEC / EN 61386-1:2008, IEC / EN 61386-25:2011 tested

Type	Article number	Clamping range mm	Dowel length mm	Content Pack/Box
USD 16-20/25 HO*	12220	16-20	25	200 / 4,800
USD 20-25/25 HO*	12230	20-25	25	100 / 3,200
USD 25-32/25 HO*	12240	25-32	25	100 / 1,600
Hollow brick USD 16-20/55 HO	12170	16-20	55	100 / 3,200
USD 20-25/55 HO	12180	20-25	55	100 / 2,400
USD 25-32/55 HO	12190	25-32	55	100 / 1,600

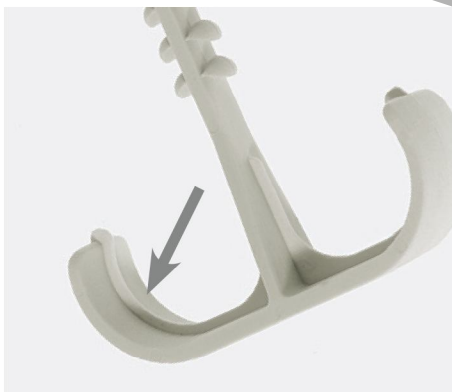

Two conduits are mounted at the same time with the USD with just one borehole.

Thanks to the integrated nib on the interior clip side, the conduit can be tensed for easier cable insertion.