


HEX REDUCERS MALE/FEMALE RZW




 electro-galvanized

Usage: change of the metric thread diameter; connection of two various threads: external and internal.

Possibility of moving from the metric thread to the pipe thread.

 Permissible load

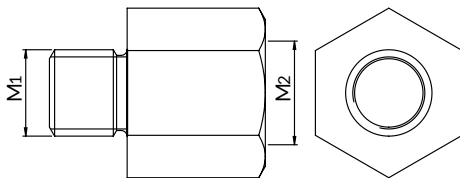

Thread M ₁ /M ₂	Weight [kg]	Quantity [pcs/pkg]	Designation for the order	Catalogue number
M6/M8	0,010	25	RZW-M6/8	81401106080
M8/M6	0,010	25	RZW-M8/6	81401108060
M8/M10	0,010	20	RZW-M8/10	81401108100
M10/M8	0,020	20	RZW-M10/8	81401110080
M10/M12	0,020	20	RZW-M10/12	81401110120
M10/M16	0,060	5	RZW-M10/16	81401110160
M10/1/2"	0,050	5	RZW-M10/G1/2	81401110200
M12/M8	0,018	25	RZW-M12/8	81401112080
M12/M16	0,060	5	RZW-M12/16	81401112160
M12/1/2"	0,050	5	RZW-M12/G1/2	81401112200
M16/1/2"	0,100	5	RZW-M16/G1/2	81401116200

Ташев-Галвинг ООД
www.tashev-galving.com