

STABILO
Professional

Mobile scaffold series 10

The professional aluminium mobile scaffold for fast and quick assembly.

- + TÜV-approved, suitable for a load of 200 kg/m² (scaffold class 3) in accordance with DIN EN 1004-1
- + Working height up to 14.40 m
- + The safe construction is ensured due to the fixation of the rail frame GuardMatic-System® before the next higher platform will be assembled. When climbing through the next platform a complete railing and therefore a fall protection is available
- + The integration of the diagonal braces into the GuardMatic-System® guarantees an easy and safe assembly. For transport or storage the rail frame GuardMatic-System® can be folded space-saving
- + The 6-point fixation of the GuardMatic-System® provides a maximum of safety in the height. The unique KRAUSE self-locking system with a form-fit connection enables an easy, quick and safe erection and dismantling
- + The innovative structure of the diagonal braces ensures maximum floor space on the platform and disturbs in no way
- + Maximum platform distance of 2 m for comfortable and safe erection without tools
- + High-strength steel stabilisers for a maximum of stability (starting with a working height of 4.40 m)
- + Height-adjustable castors (Ø 150 mm) with integrated spindle thread enable the use on uneven ground (stepless adjustment range: 220 - 335 mm)
- + Starting with a working height of 7.40 m the easy-to-fit outriggers with stepless telescopic swivel feet (adjustment range up to 230 mm) provide bracing on each ground and stability for large heights
- + Field lengths: 2.00 m and 2.50 m
- + Scaffold field width: 0.75 m
- + Field width: 0.75 m



45% Faster assembly!
Assembly times are approx. 45% faster than with the old system


| STABILO Series 10 | | | | | |
|-------------------|-------------|---------------------|----------------------------|------------|----------------|
| Field length | Field width | max. working height | Castors | Stabiliser | Ascent via |
| 2.00 m | 0.75 m | 14.40 m | Ø 150 mm height-adjustable | Steel | Vertical frame |
| 2.50 m | | | | | |

Field length: 2.00 m – Field width: 0.75 m

| | A up to approx. | m | 3.00 | 4.40 | 5.40 | 6.40 | 7.40 | 8.40 | 9.40 | 10.40 | 11.40 | 12.40 | 13.40 | 14.40 |
|-----------------|-----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| B approx. | m | 1.00 | 2.40 | 3.40 | 4.40 | 5.40 | 6.40 | 7.40 | 8.40 | 9.40 | 10.40 | 11.40 | 12.40 | 13.40 |
| C approx. | m | 2.30 | 3.50 | 4.50 | 5.50 | 6.50 | 7.50 | 8.50 | 9.50 | 10.50 | 11.50 | 12.50 | 13.50 | |
| Floor area max. | m | 2.20 x 0.90 | 2.20 x 1.75 | 2.20 x 1.75 | 2.20 x 1.75 | 3.85 x 3.20 | 3.85 x 3.20 | 3.85 x 3.85 | 3.85 x 3.85 | 3.85 x 3.85 | 3.85 x 3.85 | 3.85 x 3.85 | 3.85 x 3.85 | 3.85 x 3.85 |
| Weight | kg | 49.5 | 105.5 | 139.5 | 146.5 | 193.5 | 201.0 | 248.0 | 255.0 | 289.0 | 296.5 | 330.5 | 337.5 | |
| Art.-No. | | | 771018 | 771025 | 771032 | 771049 | 771056 | 771063 | 771070 | 771087 | 771094 | 771100 | 771117 | 771124 |

Field length: 2.50 m – Field width: 0.75 m

| | A up to approx. | m | 3.00 | 4.40 | 5.40 | 6.40 | 7.40 | 8.40 | 9.40 | 10.40 | 11.40 | 12.40 | 13.40 | 14.40 |
|-----------------|-----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| B approx. | m | 1.00 | 2.40 | 3.40 | 4.40 | 5.40 | 6.40 | 7.40 | 8.40 | 9.40 | 10.40 | 11.40 | 12.40 | 13.40 |
| C approx. | m | 2.30 | 3.50 | 4.50 | 5.50 | 6.50 | 7.50 | 8.50 | 9.50 | 10.50 | 11.50 | 12.50 | 13.50 | |
| Floor area max. | m | 2.70 x 0.90 | 2.70 x 1.75 | 2.70 x 1.75 | 2.70 x 1.75 | 4.35 x 3.20 | 4.35 x 3.20 | 4.35 x 3.85 | 4.35 x 3.85 | 4.35 x 3.85 | 4.35 x 3.85 | 4.35 x 3.85 | 4.35 x 3.85 | 4.35 x 3.85 |
| Weight | kg | 54.5 | 116.0 | 153.5 | 162.0 | 212.5 | 221.5 | 272.0 | 280.5 | 318.0 | 327.0 | 364.5 | 373.0 | |
| Art.-No. | | | 772015 | 772022 | 772039 | 772046 | 772053 | 772060 | 772077 | 772084 | 772091 | 772107 | 772114 | 772121 |

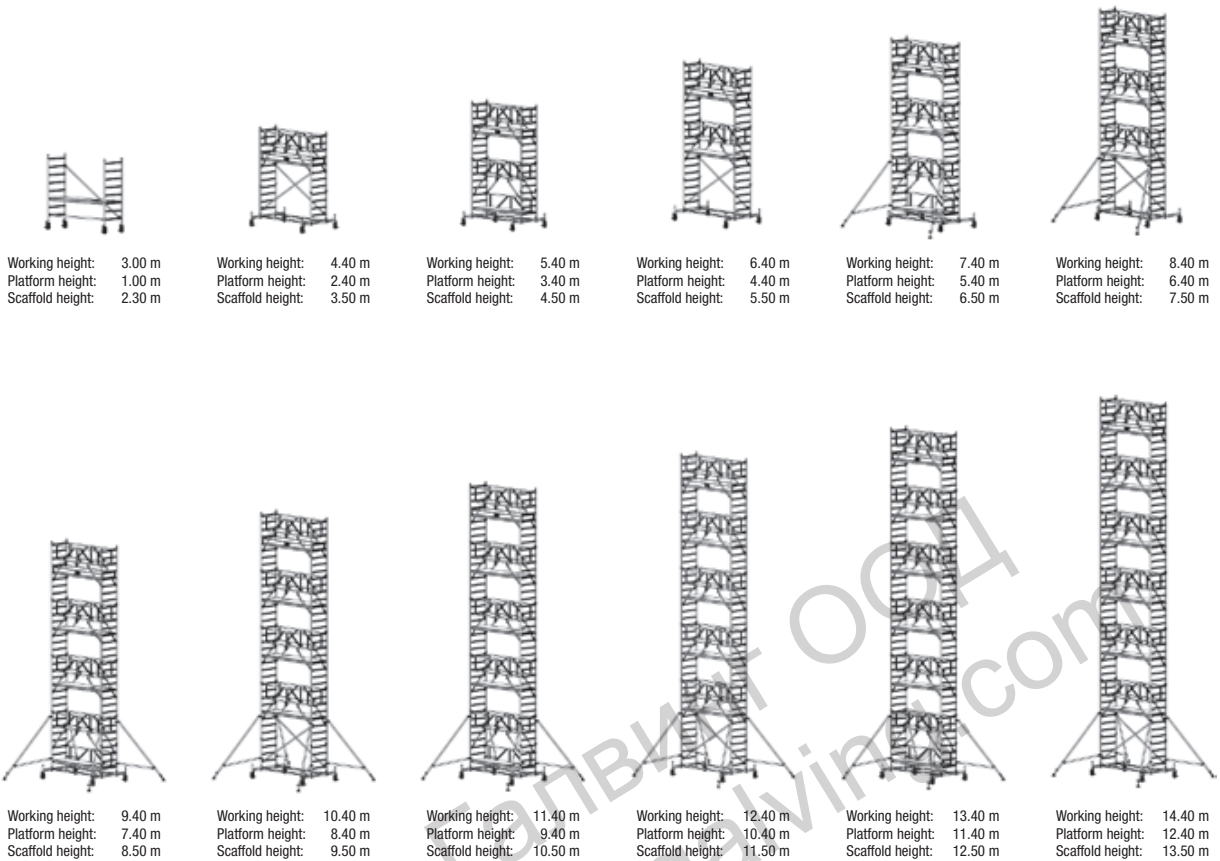

| Working height m | Field length | | 3.00 m | 4.40 m | 5.40 m | 6.40 m | 7.40 m | 8.40 m | 9.40 m | 10.40 m | 11.40 m | 12.40 m | 13.40 m | 14.40 m |
|---|--------------|----------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|---------|---------|
| Platform height m | 2.00 m | 2.50 m | 1.00 m | 2.40 m | 3.40 m | 4.40 m | 5.40 m | 6.40 m | 7.40 m | 8.40 m | 9.40 m | 10.40 m | 11.40 m | 12.40 m |
| Scaffold height m | | | 2.30 m | 3.50 m | 4.50 m | 5.50 m | 6.50 m | 7.50 m | 8.50 m | 9.50 m | 10.50 m | 11.50 m | 12.50 m | 13.50 m |
| Part list | Art.-No. | Art.-No. | Piece | Piece | Piece | Piece | Piece | Piece | Piece | Piece | Piece | Piece | Piece | Piece |
| Vertical frame 2.00 m | 705167 | 705167 | 2 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| Vertical frame 1.00 m | 705174 | 705174 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Platform with hatch | 701213 | 701220 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 5 | 6 | 6 |
| Railing frame | 702517 | 702500 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| GuardMatic-System® | 702579 | 702586 | 0 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 10 | 12 | 12 |
| Diagonal brace | 702852 | 702845 | 1 | 2 | 0 | 2 | 0 | 2 | 0 | 2 | 0 | 2 | 0 | 2 |
| Rail brace | 702210 | 702203 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Base brace | 912848 | 912831 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Stabiliser | 914071 | 914071 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Outrigger | 702760 | 702760 | 0 | 0 | 0 | 0 | 2 | 2 | 4 | 4 | 4 | 4 | 4 | 4 |
| Transversal board | 703743 | 703743 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Longitudinal board | 703712 | 703729 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Foot plate galvanised | 914026 | 914026 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Set of castors Ø 150 mm height-adjustable | 914323 | 914323 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Gravity pin | 704405 | 704405 | 0 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 |

| Accessories | | | | |
|--------------------------|--------------------------|-----------------|--|-------------------------------|
| Set of stabilisers 1.2 m | Set of stabilisers 1.5 m | Ballast weight | Castor Ø 150 mm, height-adjustable (piece) | Castor Ø 150 mm rubber-coated |
| Weight 6.9 kg | Weight 8.4 kg | Weight 10.0 kg | Weight 3.8 kg | Weight 3.8 kg |
| Art.-No. 910059 | Art.-No. 910066 | Art.-No. 704306 | Art.-No. 914118 | Art.-No. 914330 |