




RECYFIX® STANDARD 100

RECYFIX® STANDARD 100 - Combi article, A 15

Type 60 with slotted grating
SW 75/9, locked*



Type 01 with slotted grating
SW 75/9, locked

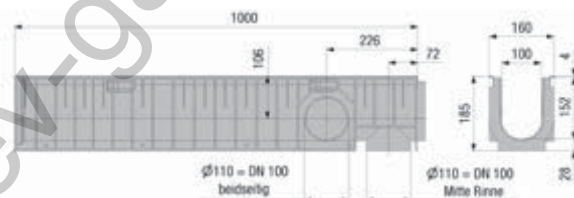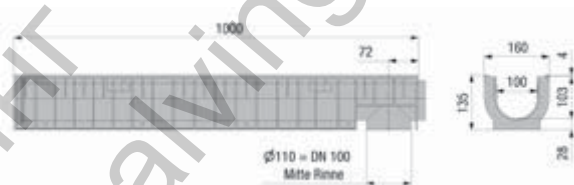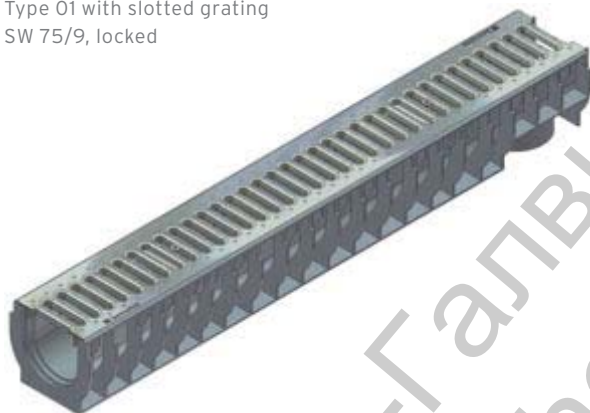

	Length mm	Width mm	Height mm	Drainage cross- sect. cm ²	Intake cross- sect. cm ² /m	Weight kg	Article No. galvanised	Article No. stainless steel
Type 60 with slotted grating SW 75/9, locked*	1000	146	60	25	280	3,0	40236	41204
Type 80 with slotted grating SW 75/9, locked*	1000	146	80	45	280	3,1	40246	41206
Type 60 with mesh grating MW 30/10, locked*	1000	146	60	25	650	4,2	40237	41214
Type 80 with mesh grating MW 30/10, locked*	1000	146	80	45	650	4,3	40247	41216
Type 01 with slotted grating SW 75/9, locked	1000	160	135	92	280	4,4	40231	41200
Type 010 with slotted grating SW 75/9, locked	1000	160	185	142	280	5,3	40296	41202
Type 01 with mesh grating MW 30/10, locked	1000	160	135	92	650	5,2	40232	41210
Type 010 with mesh grating MW 30/10, locked	1000	160	185	142	650	6,6	40297	41212

The quality of the stainless steel material is according CNS 1.4301.