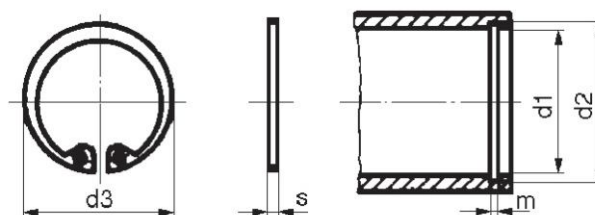


Зегер**стомана****DIN 472****за отвор****без покритие****БДС 2170-77**

Арт. номер	d 1	d 3	толеранс	d 2	s	m
190 005 001	8	8.7		8.4	0.80	0.90
190 005 002	9	9.8		9.4	0.80	0.90
190 005 003	10	10.8		10.4	1.00	1.10
190 005 004	11	11.8		11.4	1.00	1.10
190 005 005	12	13.0	+ 0.36	12.5	1.00	1.10
190 005 006	13	14.1	- 0.10	13.6	1.00	1.10
190 005 007	14	15.1		14.6	1.00	1.10
190 005 008	15	16.2		15.7	1.00	1.10
190 005 009	16	17.3		16.8	1.00	1.10
190 005 010	17	18.3		17.8	1.00	1.10
190 005 011	18	19.5		19.1	1.00	1.10
190 005 012	19	20.5	+ 0.42	20.0	1.00	1.10
190 005 013	20	21.5	- 0.13	21.0	1.00	1.10
190 005 014	21	22.5		22.0	1.00	1.10
190 005 015	22	23.5		23.0	1.00	1.30
190 005 016	23	24.6		24.1	1.20	1.30
190 005 017	24	25.9		25.2	1.20	1.30
190 005 018	25	26.9	+ 0.42	26.2	1.20	1.30
190 005 019	26	27.9	- 0.21	27.2	1.20	1.30
190 005 020	27	29.1		28.4	1.20	1.30
190 005 021	28	30.1		29.4	1.20	1.30
190 005 022	29	31.1		30.4	1.20	1.30
190 005 023	30	32.1		31.4	1.20	1.30
190 005 024	31	33.4		32.7	1.20	1.30
190 005 025	32	34.4		33.7	1.20	1.30
190 005 026	33	35.5	+ 0.50	34.7	1.20	1.30
190 005 027	34	36.5	- 0.25	35.7	1.50	1.60
190 005 028	35	37.8		37.0	1.50	1.60
190 005 029	36	38.8		38.0	1.50	1.60
190 005 030	37	39.8		39.0	1.50	1.60
190 005 031	38	40.8		40.0	1.50	1.60
190 005 032	39					
190 005 033	40	43.5		42.5	1.75	1.85
190 005 034	41					
190 005 035	42	45.5	+ 0.90	44.5	1.75	1.85
190 005 036	43		- 0.39			
190 005 037	44	47.5		46.5	1.75	1.85
190 005 038	45	48.5		47.5	1.75	1.85
190 005 039	46					



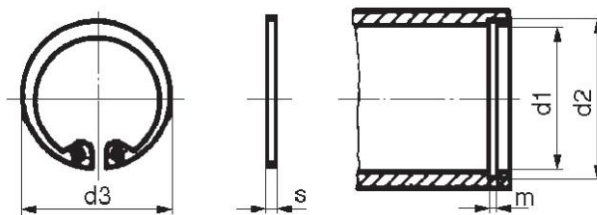
Машини и инструменти
ул."Струга"23

Крепешни елементи
ул."Струга"25

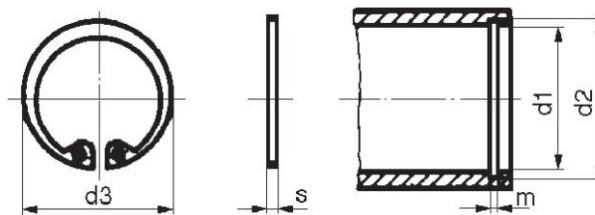
Сервиз
ул."Неофит Рилски" 22

www.bashmajstora.com
тел./факс: 052 / 64 30 30
64 30 32
64 30 35
e-mail: instro@gbg.bg

Ташев Галвинг ООД
www.tashev-galving.com

Зегер**стомана****DIN 472****за отвор****без покритие****БДС 2170-77**

Арт. номер	d 1	d 3	толеранс	d 2	s	m
190 005 040	47	50.5		49.5	1.75	1.85
190 005 041	48	51.5		50.5	1.75	1.85
190 005 042	49					
190 005 043	50	54.2		53.0	2.0	2.15
190 005 044	51					
190 005 045	52	56.2		55.0	2.0	2.15
190 005 046	53					
190 005 047	54	58.2	+ 1.10	57.0	2.0	2.15
190 005 048	55	59.2	- 0.46	58.0	2.0	2.15
190 005 049	56	60.2		59.0	2.0	2.15
190 005 050	57					
190 005 051	58	62.2		61.0	2.0	2.15
190 005 052	59					
190 005 053	60	64.2		63.0	2.0	2.15
190 005 054	62	66.2		65.0	2.0	2.15
190 005 055	63	67.2		66.0	2.0	2.15
190 005 056	65	69.2	+ 1.10	68.0	2.5	2.65
190 005 057	67		- 0.46			
190 005 058	68	72.5		71.0	2.5	2.65
190 005 059	70	74.5		73.0	2.5	2.65
190 005 060	72	76.5		75.0	2.5	2.65
190 005 061	75	79.5		78.0	2.5	2.65
190 005 062	77					
190 005 063	78	82.5		81.0	2.5	2.65
190 005 064	80	85.5		83.5	2.5	2.65
190 005 065	82	87.5		85.5	2.5	2.65
190 005 066	85	90.5		88.5	3.0	3.15
190 005 067	87					
190 005 068	88	93.5		91.5	3.0	3.15
190 005 069	90	95.5	+ 1.30	93.5	3.0	3.15
190 005 070	92	97.5	- 0.54	95.5	3.0	3.15
190 005 071	95	100.5		98.5	3.0	3.15
190 005 072	97					
190 005 073	98	103.5		101.5	3.0	3.15
190 005 074	100	105.5		103.5	3.0	3.15
190 005 075	102	108.0		106.0	4.0	4.15
190 005 076	105	112.0		109.0	4.0	4.15

Зегер**стомана****DIN 472****за отвор****без покритие****БДС 2170-77**

Арт. номер	d 1	d 3	толеранс	d 2	s	m
190 005 077	107					
190 005 078	108					
190 005 079	110	117.0		114.0	4.0	4.15
190 005 080	112					
190 005 081	115	122.0		119.0	4.0	4.15
190 005 082	117					
190 005 083	118					
190 005 084	120	127.0		124.0	4.0	4.15
190 005 085	122					
190 005 086	125	132.0		129.0	4.0	4.15
190 005 087	127					
190 005 088	128					
190 005 089	130	137.0		134.0	4.0	4.15
190 005 090	132					
190 005 091	135	142.0		139.0	4.0	4.15
190 005 092	137					
190 005 093	198					
190 005 094	140	147.0	+ 1.50	144.0	4.0	4.15
190 005 095	142		- 0.63			
190 005 096	145	152.0		149.0	4.0	4.15
190 005 097	147					
190 005 098	148					
190 005 099	150	158.0		155.0	4.0	4.15
190 005 100	155	164.0		160.0	4.0	4.15
190 005 101	160	169.0		165.0	4.0	4.15
190 005 102	165	174.5		170.0	4.0	4.15
190 005 103	170	179.5		175.0	4.0	4.15
190 005 104	175	184.5		180.0		4.15
190 005 105	180	189.5		185.0		4.15
	185	194.5		190.0		4.15
	190	199.5		195.5		4.15
	195	204.5	+ 1.70	200.0		4.15
	200	209.5	- 0.72	205.0		4.15
	210	222.0		216.0		5.15
	220	232.0		226.0		5.15
	225	237.0		231.0		5.15
	230	242.0		236.0		5.15
	240	252.0	+ 2.00	246.0		5.15
	250	262.0	- 0.81	256.0		5.15