


## Профил I-образен /HEA/

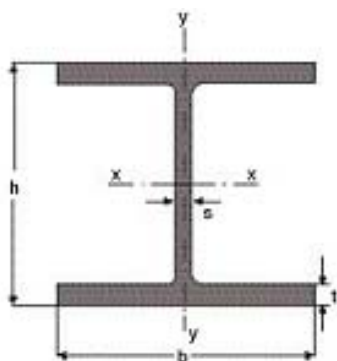

| HEA  | ТЕГЛО<br>Kg/m | РАЗМЕРИ<br>mm |     |      |      | ПЛОЩ<br>cm <sup>2</sup><br>F | cm <sup>3</sup> |                |
|------|---------------|---------------|-----|------|------|------------------------------|-----------------|----------------|
|      |               | h             | b   | s    | t    |                              | W <sub>x</sub>  | W <sub>y</sub> |
| 100  | 16,7          | 96            | 100 | 5,0  | 8,0  | 21,24                        | 72,76           | 26,7           |
| 120  | 19,9          | 114           | 120 | 5,0  | 8,0  | 25,34                        | 106,3           | 38,4           |
| 140  | 24,7          | 133           | 140 | 5,5  | 8,5  | 31,42                        | 155,4           | 55,6           |
| 160  | 30,4          | 152           | 160 | 6,0  | 9,0  | 38,77                        | 220,1           | 76,9           |
| 180  | 35,5          | 171           | 180 | 6,0  | 9,5  | 45,25                        | 293,6           | 102,7          |
| 200  | 42,3          | 190           | 200 | 6,5  | 10,0 | 53,83                        | 388,6           | 133,6          |
| 220  | 50,5          | 210           | 220 | 7,0  | 11,0 | 64,34                        | 515,2           | 177,7          |
| 240  | 60,3          | 230           | 240 | 7,5  | 12,0 | 76,84                        | 675,1           | 230,7          |
| 260  | 68,2          | 250           | 260 | 7,5  | 12,5 | 86,82                        | 836,4           | 282,1          |
| 280  | 76,4          | 270           | 280 | 8,0  | 13,0 | 97,26                        | 1013,0          | 340,2          |
| 300  | 88,3          | 290           | 300 | 8,5  | 14,0 | 112,50                       | 1260,0          | 420,6          |
| 320  | 97,6          | 310           | 300 | 9,0  | 15,5 | 124,4                        | 1479,0          | 465,7          |
| 340  | 105,0         | 330           | 300 | 9,5  | 16,5 | 133,50                       | 1678,0          | 495,7          |
| 360  | 112,0         | 350           | 300 | 10,0 | 17,5 | 142,80                       | 1891,0          | 525,8          |
| 400  | 125,0         | 390           | 300 | 11,0 | 19,0 | 159,00                       | 2311,0          | 570,9          |
| 450  | 140,0         | 440           | 300 | 11,5 | 21,0 | 178,00                       | 2896,0          | 631,0          |
| 500  | 155,0         | 490           | 300 | 12,0 | 23,0 | 197,50                       | 3550,0          | 691,1          |
| 550  | 166,0         | 540           | 300 | 12,5 | 24,0 | 211,80                       | 4146,0          | 721,3          |
| 600  | 178,0         | 590           | 300 | 13,0 | 25,0 | 226,50                       | 4787,0          | 751,4          |
| 650  | 190,0         | 640           | 300 | 13,5 | 26,0 | 241,60                       | 5474,0          | 781,6          |
| 700  | 204,0         | 690           | 300 | 14,5 | 27,0 | 260,50                       | 6241,0          | 811,9          |
| 800  | 224,0         | 790           | 300 | 15,0 | 28,0 | 285,80                       | 7682,0          | 842,6          |
| 900  | 252,0         | 890           | 300 | 16,0 | 30,0 | 320,50                       | 9485,0          | 903,2          |
| 1000 | 272,0         | 990           | 300 | 16,5 | 31,0 | 346,80                       | 11190,0         | 933,6          |

|                                |   |
|--------------------------------|---|
| <b>Вид</b>                     | Горещо валцовани профили HEA (IPBL).  |
| <b>Марка стомана</b>           | S275JR съгласно EN 10025 (St 44.2 съгласно DIN 17100).<br>S235JRG2 съгласно EN 10025 (RSt 37,2 съгласно DIN 17100). |
| <b>Дължина</b>                 | Дължина на прътите: 6, 12 и 15 m.   |
| <b>Размери, тегло, допуски</b> | Съгласно EN 10034-95.   |

Ташев-Галвинг ООД  
[www.tashev-galving.com](http://www.tashev-galving.com)