Makita®

JAPAN No.1 POWER TOOLS SELLING BRAND
JENAMA KUASA NOMBOR SATU JUALAN ALAT ELEKTRIK DI JEPUN | 日本销量第一电动工具品牌

GENERAL CATALOGUE

Katalog Komprehensif | 综合目录



DRILLING
Gerudi 钻孔



CUTTING
Pemotong 切割



GRINDING
Pengisar 研磨



CLEANING
Pembersih 清洁



GARDENING
Perkebunan 园艺

2018/19

GROUP HISTORY

Sejarah Korporat | 集团历史

ESTABLISHED 1915



Mosaburo Makita founded Makita Electric Works (proprietorship) in Nagoya City. Began selling and repairing lighting equipment, motors, and transformers.
Mosaburo adalah pengasas Makita Electric Works (milik persendirian) di Nagoya City. Ia bermula dengan menjual dan membaiki peralatan lampu, motor dan transformer.
牧田茂三郎于名古屋市创立了個人商店Makita电机制作所，销售和维修电灯器具、电机和变压器。

1915

1935



First exported electric generators and motors to the Soviet Union
Makita adalah Industri pertama mengexport penjana elektric dan motor ke Soviet union
第一台出口到苏联的发电机和电动机

1938



Incorporated the proprietorship's business form and established Makita Electric Works, Inc.
Makita ditubuhkan sebagai Makita Electric Works, Inc apabila Makita menjadi perusahaan penuh milik.
合并独资企业，成立了Makita Electric Works, Inc.。

1945

Moved the plant, in an attempt to avoid air raid, to the current head office in Sumiyoshi-Cho, Anjo-City.
Kilang Makita dipindah ke Sumiyoshi-Cho, Anjo-City demi mengelakkan serangan udara.
工厂被搬到爱知县安城市住吉町的现任总部避免空袭。

1958





Started marketing 1000 portable electric planers, the first product in Japan.
Mula memasarkan produk pertama iaitu 1000 pengetam elektrik mudah alih di Jepun.
开始上市1000台电动创削 — (在日本的第一个产品)

1958

1962

マキタ
Makita

Changed the trade name to Makita Electric Works, Ltd.
Mengubah nama perdagangan kepada Makita Electic Works, Ltd.
贸易名称改为Makita electric works, Ltd。

1963

Became an entirely debt-free company.
Manjadi hutang bebas syarikat sepenuhnya.
成为一个完全无债务公司。

1965

Celebrated 50th anniversary.
Menyambut Ulang tahun ke-50.
庆祝五十周年。

1969



6500D battery-powered drill (first rechargeable power tool).
Pertama memperkenalkan 6500D gerudi bateri yang boleh dicas semula.
推出6500D型号，全世界第一款可充电式电钻。

1970

1978



Launched 6010D rechargeable drill (first nickel cadmium battery tool).
Pertama memperkenalkan 6010D gerudi bateri nickel cadmium.
推出6010D型，是全世界第一款镍镉电池充电电钻。

1981





Launched AN5000 pneumatic nailer and AC6001 air compressor (first air tools).
Pertama memperkenalkan AN5000 pistol paku pneumatik dan AC6001 pemampat udara.
推出第一款气动工具AN5000气动钉枪和AC6001空气压缩机。

1981

Established Makita Brasil Ferramentas Elétricas Ltda. (in Brazil) (Started production of power tools in South America.)
Menubuhkan Makita Brasil Herramientas Eletricas Ltda Kilang di Brazil untuk meluaskan pengeluaran alatan kuasa
于巴西成立Makita Brasil Ferramentas Eletricas Ltda.（并在南美地区开始生产电动工具）

1985



Started production of power tools in the United States.
Memulakan pengeluaran alatan kuasa di Amerika Syarikat untuk meluaskan pengeluaran alatan kuasa.
在美国开始生产电动工具。

1989

Takeshi Kato became Chairman and Masahiko Goto became President.
Takeshi Kato menjadi pemgerusi syarikat dan Masahiko Goto menjadi presiden syarikat.
加藤武就任会长，後藤昌彦被委任为社长。

1989

Three power tools (circular saw, grinder, drill) designed by Giorgetto Giugiaro exhibited at the Word Design Exposition held in Nagoya City.
Mempamerkan tiga alat kuasa (Gergaji Bulat, Pengisar, Gerudi) di Work Design Exposition (Nagoya City) yang direka oleh Giorgetto Giugiaro.
由Giorgetto Giugiaro设计的三台电动工具（圆锯，研磨机，电钻机）在名古屋市举办的设计博览会上展出。

1989

Established Makita Manufacturing Europe Ltd. (in the United Kingdom)
Menubuhkan Makita Manufacturing Europe Ltd di United Kingdom untuk meluaskan perniagaan di Europe
于英国成立Makita Manufacturing Europe Ltd.。

Since entering the U.S. market in 1970, Makita has established directly operated business bases in over 40 countries around the world, and has upgraded its sales network and after-sales service capabilities to become one of the leading companies of its industry.In addition, Makita is active in manufacturing outside Japan.
Sejak memasuki pasaran U.S. pada tahun 1970. Makita telah menubuhkan cawangan perniagaan di 40 negara di seluruh dunia dan meningkatkan rangkaian jualan dan mutu perkhidmatan selepas jual untuk menjadi salah satu syarikat termuka di industrinya. Selain itu, Makita juga aktif dalam pengeluaran alatan kuasa di luar negara Jepun.
从1970年进入美国市场，Makita在全球40多个国家建立了营业基地，并将网络销售和售后服务升级为行业领先的企业之一。此外Makita同时也活跃于日本以外的制造业。

In 1958, Makita Corporation, which was founded in 1915 as an electric motor sales and repair company, became the first company in Japan to manufacture and sell electric planers. Over the half century since, Makita has worked to build a steady position as a manufacturer of portable power tools and, today, continues its quest forward to provide products and services that are beneficial to all types of customers engaged in housing construction. Makita's history also parallels that of the evolution of power tools and, over the course of its history, Makita has worked to dovetail its products to its customers' developing needs.

Makita Corporation diasaskan daripada syarikat yang menjual dan membaiki elektrik motor pada tahun 1915. Pada tahun 1958 Makita adalah syarikat yang pertama menjual pengetam elektrik di Jepun. Lebih dari setengah abad, Makita berusaha membina kedudukan mantap sebagai pengeluaran alatan kuasa mudah alih, tetapi kini Makita berusaha untuk menyediakan produk dan perkhidmatan yang memberi manfaat kepada semua jenis pelangan dalam sektor pembinaan rumah. Makita sejarah berubah selari dengan evolusi alat kuasa Makita. Kini, Makita masih berusaha untuk menghasilkan produk yang memenuhi kehendak dan keperluan pelanggan yang berbeza dan selalu bertukar.

Makita于1915年成立也作为电动机销售和维修公司，并在1958年成为日本第一家生产和销售电刨机的公司。半个多世纪以来，Makita以作为便携式电动工具的制造商，并建立了一个稳定的姿势，而至今仍然继续寻求提供有益于所有类型的房子建设客户的产品和服务。Makita的历史也平行于电动工具的发展，在他的历史中，Makita一直致力于将其产品与客户的发展需求进行相互配合。

1991

Introduced corporate identity (CI) program. Changed the name to Makita Corporation.
Memperkenalkan atur cara identiti korporat (CI) dan mengubahkan nama syarikat kepada Makita Corporation.
实施企业形象(CI)，并改为Makita Corporation标准。

1997



6213D rechargeable driver-drill exhibited at the Chicago Hardware Show (first nickel hydride battery tool).
Mempamerkan 6213D gerudi pemandu yang pertama mengunakan bateri hidrida nikel di Chicago Hardware Show.
于芝加哥五金展览展示第一台使用镍氢电池的6213D充电式钻机。

1998



In 1998, NASA's website posted a picture of using Makita rechargeable driver drill 6213D within their International Space Station, Beside, 6213D also has been display at the astronaut memorial museum in Russia 's Astronaut Memorial Museum' Tool in Spaceship 'section.
Pada tahun 1998, NASA's mempamerkan gambar pengunaan Makita 6213D gerudi pemandu di Stesen Angkasa Antarabangsa dalam laman web NASA. Disamping itu, 6213D juga dipamerkan sebagai peralatan angkasa di Russia's Astronaut Memorial Museum.
在1998年，在NASA网站上载有关于国际太空站内使用了Makita 6213D充电式钻机的图片。
除此之外，6213D也作为宇宙飞航工具，在俄罗斯的“宇航员纪念博物馆”内展出。

1991



Started production of power tools in Europe (U.K)
Memulakan pengeluaran alatan kuasa di Eropah (U.K.) untuk meluaskan pengeluaran alatan kuasa.
在欧洲开始生产电动工具。

1991

2013



Established Makita Power Tools (Malaysia) Sdn. Bhd. (in Malaysia)
Menubuhkan Makita Power Tools (Malaysia) Sdn. Bhd. di Malaysia
于马来西亚成立Makita Power Tools (Malaysia) Sdn. Bhd.





2003



Finished construction of new corporate headquarters.
Membina Ibu pejabat korporat yang baru.
新建公司总部完工。

2017

NEW Service Centre in Sarawak & Johor
Pusat Servis dan Pameran baru di Sarawak dan Johor
砂拉越和柔佛新服务与展示中心

1991


2018

1993



Established Makita (China) Co., Ltd. (in China)
Menubuhkan Makita (China) Co., Ltd di China untuk meluaskan perniagaan di China.
于中国成立Makita (China) Co., Ltd.。

2000



Established Makita (Kunshan) Co., Ltd. (in China)
Menubuhkan Makita (Kunshan) Co., Ltd di Kunshan untuk meluaskan perniagaan di China
于中国成立Makita (Kunshan) Co., Ltd.。

2005

2007



Started production of power tools in Romania.
Memulakan pengeluaran alatan kuasa di Romania untuk meluaskan pengeluaran alatan kuasa.
在罗马尼亚开始生产电动工具。

1995



Started production of power tools in China.
Memulakan pengeluaran alatan kuasa di China untuk meluaskan pengeluaran alatan kuasa.
在中国开始生产电动工具。

2002




Began mass production of the 2nd brand maktec.
Memulakan pengeluaran jenama maktec ke-2 secara besar-besaran
开始批量生产第二品牌 — Maktec。

2005



Launched TD130D (first Lithium-ion Battery tool).
Pertama memperkenalkan TD130D bateri Lithium-ion.
推出TD130D第一款使用锂电池电动工具。

2012



Started production of power tools in Thailand.
Memulakan pengeluaran alatan kuasa di Thailand untuk meluaskan pengeluaran alatan kuasa.
在泰国开始生产电动工具。

Including a facility that commenced operations in the United States in 1985, Makita has expanded its global manufacturing base for power tools and other products to encompass China, the United Kingdom, Germany, Brazil, Romania and Thailand. At present, the Makita Group manufactures approximately 80% of its products overseas.
Pada tahun 1985, Makita mula menghasilkan alatan kuasa secara besar-besaran di luar negara Jepun bermula dari Amerika. Sejak tahun 1985, Makita telah mengembangkan perkilangannya kepada negara China, United Kingdom, Jerman, Brazil, Romania, dan Thailand. Kini, 80% Makita produk dibuat daripada negara luar.
包括于1985年在美国开始的业务设施，Makita已扩大了电动工具和其他产品的全球制造基地，如中国，英国，德国，巴西，罗马尼亚和泰国。目前，Makita集团在海外生产了大约80%的产品。

Index | Indeks | 索引

Cordless Tanpa Kord 充电式 15 - 88

Drilling | Fastening Gerudi | Pengetat 钻孔 | 紧固 89 - 104

Impact Drilling | Demolition Gerudi | Pemecah 石工锻孔 | 整型加工 105 - 120

Cutting Pemotong 切割 121 - 130

Grinding | Sanding Pengisar | Pelicin 研削 | 研磨 131 - 157

Sawing Gergaji 锯切 158 - 171

Planing | Routering Pengetam | Tanggam 创削 | 雕刻 172 - 176

Vacuum Cleaner Pembersih Vakum 吸尘机 177 - 188

Others Lain-lain 其他 189 - 192

Outdoor Power Equipment Alatan Kerja Luar 园林·户外 193 - 217

Accessories Aksesori 配件 218 - 224

Makita mt 225 - 236

1

1805N 174
1911B 173

2

2012NB 174
2107F 125
2416S 129
2712 162

3

3501N 174
3600H 176
3612BR 176
3709 175
3901 175

4

4100KB 123
4100NH 122
4100NH2Z 122
4100NH3Z 122
4105KB 123
4107R 123
4112HS 123
4114S 124
4131 124
4300BV 168
4327 168
4327M 168
4350CT 167
4351CT 168
4403 176

5

5008MG 164
5016B 200
5103N 165
5402 165
5806B 164

6

6016 93
6413 93
6905B 103
6906 102
6910 103
6922NB 104
6924N 104

9

9031 155
9035H 156
9045B 156
9215SB 149
9237C 149
9401 155
9404 154
9553HBG 138
9553HNG 138
9556HB 137
9556HNG / HN / NB 136
9556HPG / PB 136
9557HNG / NBG 139
9557PB 140
9558HNG / NBG 142
9558PB 143
9563C 136
9565CR / PC 142
9903 154
9911 155
9924DB 155

A

ADP05 68
ADP06 81
ADP08 81

B

BHX2500 210
BO3710 155
BO4510H 156
BO4540 156
BO4556 157
BO4901 156
BO5031 157
BO5041 157
BO6050J 157

C

CA5000X 128
CC300DW / Z 84 / 122
CC301DWME / WAE / Z 79 / 122
CF100DZ 80
CG100DZA 77
CL070DZ 87 / 183
CL100DW / Z 85 / 180
CL102DW / Z 86 / 183
CL104DWYX / WY 86 / 183
CL105DW / WX 86 / 183
CL106FDWYW / Z 79 / 180
CL107FDWYW / Z 79 / 180
CL111DWI / WR 86 / 183
CP100DSM / WA / Z 77 / 128

D

DA3010F 94
DA332DWAE / Z 76
DBO180Z 52 / 157
DCG180RFE / Z / RFEB / ZB 68
DCL180FRFW / Z / RFB / ZB 63 / 180
DCL182FRFW / FZW 63 / 180
DCL500Z 62 / 179
DCL501Z 62 / 179
DCO180Z 56
DCS231T 203
DCS430-45 202
DCS4610-40 202
DCS520-53 202
DCS550RFE / Z 45 / 124
DCS551RMJ / RFJ / Z 45 / 124
DCS6401-50 202
DCS7301-60 202
DCS7901-70 203
DCS9010-76 203
DCU180Z 64 / 217
DDA351Z 37 / 94
DDF083RTE / RFE / Z 29 / 91
DDF453RME / RFE / SYE / Z 29 / 91
DDF458RME / RFE / Z 28 / 90
DDF459RME / Z 28 / 90
DDF481RME / RFE / Z 27 / 90
DDF482RME / RFE / Z 28 / 90
DDF483RME / RFE / Z 29 / 91
DDF484RME / RFE / Z 28 / 90
DF001DW 88 / 100
DF010DSE 87 / 93
DF012DSE 87 / 92
DF030DWE 83 / 92
DF031DSME / WAE / WYE / Z 72 / 92
DF032DSME / SAE / Z 71 / 92
DF330DWE 83 / 92
DF331DSME / WAE / WYE / Z 71 / 91
DF332DSME / SAE / Z 71 / 91
DFJ201ZM / ZL / ZXL 59
DFJ202ZL / ZXL 59
DFJ300ZL / ZXL 60
DFJ400ZL / ZXL 60
DFR550Z 38 / 100
DFS250RTE / RFE / Z 38 / 98
DFS251RTE / RFE / Z 38 / 98
DFS452Z 37 / 98
DGA402RFE / Z 49 / 135
DGA404RME / RF2J / RFE / Z 49 / 135
DGA405RFE / Z 49 / 135
DGA406RME / RFE / Z 49 / 134
DGA408RME / RFE / Z 49 / 135
DGA411Z 48 / 134
DGA414ZU 48 / 134
DGA418ZU 48 / 134
DGA452RME / RFE / Z 50 / 139
DGA456RFE / Z 50 / 138
DGA458RFE / Z 50 / 138
DGA505RFE / Z 51 / 141
DGA508RFE / Z 51 / 141
DGA511Z 50 / 141
DGA514ZU 50 / 140
DGA518ZU 51 / 141
DGA700Z 18 / 144
DGA900Z 18 / 146
DGD800Z 51 / 150
DGD801Z 51 / 150
DHP453RME / RFE / SYE / Z 32 / 107
DHP458RME / RFE / Z 31 / 106
DHP459RME / RFE / Z 32 / 106
DHP481RME / RFE / Z 31 / 106
DHP482RME / RFE / RFX1 / Z 31 / 106
DHP483RME / RFE / Z 32 / 107
DHP484RME / RFE / Z 31 / 106
DHR165RME / RFE / Z 43 / 108
DHR171Z 43 / 109
DHR202RME / RFE / Z 43 / 110
DHR241RFE / Z 43 / 109
DHR242RME / RFE / Z 43 / 110
DHR263PM4 / RF4 / Z 16 / 111
DHS630RME / RFE / Z 53 / 163
DHS680RMJ / RFJ / Z 53 / 163

Double Insulation Penebat Berganda | 双重绝源

Variable Speed Kelajuan Boleh Ubah | 无段变速

Brake Brek | 电子自动刹车

Reversing Mengundur | 正逆转

Electronic Ignition Penyalaan Elektronik | 电子式启动装置

Mechanical 2-Speed 2-kelajuan Mekanikal | 机器式双速

Electronic 2-Speed 2-kelajuan Elektronik | 电子式双速

Electronic 3-Speed 3-kelajuan Elektronik | 电子式三速

Electronic 4-Speed 4-kelajuan Elektronik | 电子式四速

Keyless Chuck Chuck Pengetatan Diri | 自锁夹头

Torque Setting 6 Pelarasan Tork 6 | 6档扭力调整

Torque Setting 9 Pelarasan Tork 9 | 9档扭力调整

Torque Setting 16 Pelarasan Tork 16 | 16档扭力调整

Torque Setting 18 Pelarasan Tork 18 | 18档扭力调整

Torque Setting 20 Pelarasan Tork 20 | 20档扭力调整

Torque Setting 21 Pelarasan Tork 21 | 21档扭力调整

SDS-PLUS Shank Batang SDS-PLUS | 四坑柄

SDS-MAX Shank Batang SDS-MAX | 五坑柄

DHS710RM2J / RF2J 16 / 162
DJN161Z 46 / 125
DJR181RFE / Z 54 / 169
DJR183Z 55 / 170 / 204
DJR186RME / RFE / Z 54 / 169
DJR187RME / RFE / Z 54 / 169
DJR188Z 54 / 169
DJR360RF4 / Z 16 / 169
DJS101Z 46 / 127
DJS130RFE / Z 46 / 127
DJS161Z 46 / 126
DJV180RFE / Z 55 / 166
DJV181RFE / Z 55 / 166
DJV182RME / RFE / Z 55 / 166
DKP180RFE / Z 56 / 173
DLM380Z 24 / 211
DLM431Z 24 / 211
DLS600Z 52 / 159
DLS713RME / Z 52 / 159
DLS714PM2 / Z 17 / 159
DML186 69
DML801 69
DML802 69
DML805 69
DML808 69
DPB180Z 45 / 125
DPB181Z 45 / 125
DPC6430 214
DPJ180Z 56 / 174
DPT353Z 57 / 191
DRC200Z 61 / 179
DRT50Z 58 / 175
DS4012 93
DS5000 93
DSC162Z 44 / 130
DSC191Z 44 / 130
DSC250ZK 44 / 130
DSD180Z 56 / 171
DSP600Z 17 / 166
DSS501Z 53 / 163
DSS610Z 53 / 163
DST221Z 57 / 192
DTD149RFE / Z 36 / 95
DTD152RME / RFE / Z 36 / 95
DTD153RTE / RFE / Z 35 / 94
DTD154RME / RFE / Z 35 / 94
DTD155RME / Z 36 / 95
DTD170RME / RFE / Z 34 / 94
DTL061Z 37 / 97
DTL063Z 42 / 103
DTM50Z 52 / 152
DTM51RFEX8 / Z 52 / 152
DTP141RFE / Z 36 / 95
DTS141RFE / Z 37 / 95
DTW1001RMJ / RFJ / Z 40 / 101
DTW1002RMJ / RFJ / Z 41 / 101
DTW190RME / RFE / Z 42 / 102
DTW251RME / RFE / Z 41 / 102
DTW285RME / RFE / Z 41 / 101
DTW450RME / RFE / Z 41 / 101
DTW800RMJ / RFJ / Z 41 / 101
DUB182Z 68
DUB183Z 68 / 209
DUB361Z 24 / 209
DUB362RM2 / Z 24 / 208
DUC122RME / Z 65 / 199
DUC252PM4 / RF2 / Z 21 / 199
DUC353Z 21 / 199
DUH523RME / RFE / Z 65 / 206
DUH651Z 24 / 205
DUM168Z 67 / 207
DUM604Z 67 / 207
DUP361Z 22 / 217
DUR182LRF / Z 65 / 195
DUR184LZ 66 / 196
DUR187LRFE / Z 66 / 195
DUR188LRFE / Z 66 / 195
DUR188URFE 66 / 195
DUR189Z 66 / 196
DUR364LPM4 / RM2 / Z 22 / 195
DUX60ZM3 / Z 23 / 198
DVC260Z / ZX 19 / 178
DVC350Z 62 / 179
DVC860LZ 20 / 178
DVC862LRT2 / Z 20 / 178
DVC863LRT2 / Z / ZX 20 / 178
DVF104Z 67 / 217
DVF154Z 67 / 216
DVP180RT / Z 57
DVR450Z 68
E
EA3110T30B 203
EA3201S40B 201
EA3502S40B 201
EA4301F45B 201
EA5600F53G 203
EA6100P60E 201
EA7900P60E 201
EB5300TH 210
EB7650TH 209
EB7660TH 209
EBH340R 198
EBH340U 196
EE2650H 205
EH5000W 207
EH6000W 206
EH7500SX 206
EK6101 213
EK7301 213
EK7651H / X1 213
EK8100 214
ELM3311X 212
ELM3711X 211
ELM4612X 211
EM2511LH 197
EM2600U 198
EM2654LH 197
EM3400L 197
EM3400U 197
EM4350RH 198
EN4951SH 205
EPH1000X 214
ER2600L 196
ETR2500 205
EVH2000 217
EW2051H 214
EW3051H 214
EX2650LH 198
EY2650H25H 204
F
FJ203DZM / DZL / DZLL 59
FJ301DZM / DZL / DZLL 60
FJ401DZL / DZLL / DZ3L 60
FS2300 99
FS2500 99
FS2700 99
FS4200 99
FS6300 100
G
GA4030 137
GA4030R 137
GA4031 137
GA4034 137
GA4040 136
GA4040C 136
GA4041C 135
GA4530 140
GA4530R 140
GA4540 139
GA4540R 139
GA4541C 139
GA5010 142
GA5020 142
GA5030 143
GA5030R 143
GA5034 143
GA5040 142
GA5041C 141
GA6010 144
GA6020C 144
GA6040 144
GA7020 146
GA7040R 146
GA7050 146
GA7060 145
GA7060R 145
GA7061R 145
GA7062 145
GA7063R 145
GA9020 148
GA9040R 147
GA9050 147
GA9060 147
GA9060R 147
GA9061R 147
GB602 153
GB801 153
GD0600 150
GD0601 150
GD0603 151
GD0800C 151
GD0801C 151
GD0811C 151
GS5000 151
GS6000 152
GV5010 148
GV6010 148
GV7000C 149
H
HB500 104
HG5012 191
HG5030 191
HG6030 191
HG6031V 191
HK1820 118
HM0810TA 116
HM0870C 116
HM0871C 116
HM1201 116
HM1203C 117

17mm Hex Shank
Batang Heksagon 17mm | 17mm六角柄

30mm Hex Shank
Batang Heksagon 30mm | 30mm六角柄

21mm Hex Shank
Batang Heksagon 21mm | 21mm六角柄

28.6mm Hex Shank
Batang Heksagon 28.6mm | 28.6mm六角柄

Torque Limiter
Pengehad Tork | 扭力限制器（安全离合器）

Constant Speed
Kelajuan Tetap | 电子定速

Soft Start
Penghidupan Secara Perlahan | 缓速起动

Bevel Cutting L45 R5
Pemotongan Serong Kiri 45° Kanan 5° | 斜角切割(左45°/右5°)

Bevel Cutting 45 left
Pemotongan Serong Kiri 45° | 斜角切割(左45°)

Bevel Cutting 45 LR
Pemotongan Serong Kiri Kanan 45° | 斜角切割(左右各45°)

Orbital Cutting
Pemotongan Orbit | 轨道切割

Makita Shank Jig Saw Blade
Bilah Gergaji Ukir Makita | M型式锯片

Bayonet Shank Jig Saw Blade
Bilah Gergaji Ukir Jenis Bayonet | B型曲线锯锯片

Laser Marker
Penanda Laser | 雷射标志

Hook & Loop
Strap Velco | 魔术贴式

Depth Adjustment
Pelarasan Kedalaman | 深度调整

Anti Vibration
Anti Getaran | 防震

Automatic Oiling
Fungsi Pelinciran Automatik | 自动润滑功能

HM1213C 116
HM1214C 117
HM1306 117
HM1307C 117
HM1317C 117
HM1810 118
HM1812 118
HP1630 108
HP2050 / X1 108
HP330DWE / X100 83 / 107
HP331DSME / WAX1 / WAE / WYE / Z 72 / 107
HP332DSME / SAE / Z 72 / 107
HR140DSMJ / WAJ / Z 73 / 108
HR166DSMJ / WAE1 / WAJ / Z 73 / 108
HR1830 109
HR1840 109
HR1841F 109
HR2020 110
HR2230 110
HR2320T / X2 110
HR2470X5 111
HR2611FT 111
HR2630X3 111
HR2631FT / X2 111
HR2650 112
HR2651 112
HR2810 112
HR3200C 113
HR3210C 113
HR3530 113
HR4001C 113
HR4002 113
HR4003C 114
HR4013C 114
HR4030C 114
HR4501C 115
HR4511C 115
HR5202C 115
HR5211C 115
HR5212C 115
HS0600 165
HS100 192
HS300DW 84
HS301DSME / WAE / Z 79
HS6100 163
HS6600 164
HS7010 164
HS7600 164
HTR4901 207
HTR5600 206
HTR7610 206
HW111 216
HW1200 215
HW121 216
HW1300 215
HW151 216

J
JN1601 126
JN3201 126
JR100DWE 85 / 170 / 204
JR102DWE 85 / 170 / 204
JR105DWAE / Z 74 / 170 / 204
JR3050T 170
JR3070CT 171
JS1300 127
JS1601 126
JS1602 127
JS3201 128
JV0600K 168
JV100DWE 84 / 167
JV101DWAE / Z 75 / 167
JV102DZ 75 / 167
JV103DSMJ / WAJ / Z 75 / 167

K
KP0800X 173
KP0810 173

L
LB1200F 171
LC1230 129
LD030P 190
LD050P 190
LD080P / PI 190
LF1000 162
LH1200FL 161
LH1201FL 161
LS0714 160
LS1018L 160
LS1019L 159
LS1040 160
LS1216 160
LS1219L 159
LS1440 160
LW1400 129
LW1401 129

M
ML103Z 81
ML106 81
MLT100 161
MR052Z 80

N
N1900B 173
N5900B 165

P
PC5000C 154
PC5001C 154
PJ7000 174
PK5001C 148
PLM4620N2 212
PLM4621N 212
PLM5120 212
PLM5120N2 212
PM7650H 210
PO5000C 149
PO6000C 149
PT354DZ 78 / 192
PTR2500 205
PV7000C 150
PW5001C 154

R
RBC411U 197
RP0900 175
RP1801 176
RP2301FC 176
RT0700C / X2 175

S
SA5040C 148
SD100DWAJ / Z 74 / 171
SG1251J 124
SJ401 171
SK104Z 190
SK209GDZ 82 / 190
SK312GDZ 82 / 190
SP6000J 166
ST113DWAJ / Z 78 / 192

T
TD0100 98
TD0101F 98
TD020DSW 87 / 97
TD022DSE 87 / 96
TD090DWE 83 / 96
TD091DWE 84 / 96
TD110DSME / WAE / WYE / Z 72 / 96
TD111DSME / WAE / WYE / Z 72 / 96
TL064DSME / WAE / Z 76 / 97
TL065DSME / WAE / Z 76 / 97
TM3000C 152
TM3010CX6 / CK 153
TM30DWAEX1 / WAE / Z 79 / 152
TW0200 103
TW0350 103
TW100DWE 84 / 102
TW1000 102

U
UB1103 192
UC3520A 200
UC3530A 200
UC3541A 200
UC3551A 199
UC4020A 200
UC4030A 200
UC4041A 200
UC4051A 199
UH200DW 85 / 208
UH201DWAX / Z 80 / 207
UM164DW 85 / 208
UM600DWA / Z 80 / 208
UR100DSME 80 / 196
UT1305 100
UT2204 100

V
VC1310LX1 185
VC2211M 185
VC2510L 185
VC3210L 185
VC3211M 185

Makita mt

M0400G 234
M0600G 226
M0801G 227
M0900G 229
M0910G 229
M1100G 234
M1901G 235
M1902G 235
M2300G 233
M2400G 232
M2401G 233
M3600G 235
M3601G 235
M3700G 235
M3701G 236
M4000G 236
M4001G 236
M4100G 234
M4301G 233
M4501G 234
M5801G 233
M6001G 226
M6200G 226
M6501G 226
M6600G / XG 227
M8100G 227
M8103G 227
M8600G 228
M8700G 228
M8701X3G 228
M9000G 231
M9001G 231
M9002G 230
M9200G 232
M9201G 232
M9202G 232
M9204G 231
M9400G 231
M9503G 230
M9506G 229
M9508G 230
M9509G 229
M9511G 230
M9512G 229
M9513G 229

Chain Brake
Brek Rantai | 链条刹车

Primer Pump
Pam Utama | 按压吸油

Capacitor Discharge Ignition
Pencucuhan Nyahcas Kapasitor | 电容放电式点火

Decompression Valve
Injap Penyahmampatan | 减压阀

Auto Decompression
Penyahmampatan Automatik | 自动减压

Rapid Start
Penghidupan Cepat | 快速启动

Stainless Tank
Tangki Tahan Karat | 不锈钢箱体

Revolving Hose
Hos Pusingan | 旋转软管

Static Free Hose
Hos Bebas Statik | 无静电胶管

Dust Collecting
Pengumpulan Habuk | 吸尘器连接

Built-in Job Light
Lampu Kerja Terbina | 内置工作灯

Wooden Carrying Case
Kotak Peralatan Kayu | 木制携带箱

Carrying Case
Kotak Peralatan | 携带箱

Sequential or Bump-fire
Sentakan Tunggal atau Berangkai | 连发模式

Auto Firing Stop
Nyalaan Terhenti Secara Auto | 自动停止发射

THE NEWEST TECHNOLOGY!

which enhanced dust and drip-resistant performance of the tools

TEKNOLOGI TERBARU!
Prestasi tahan debu dan tahan titisan air

最新技术!
提高工具的防尘与防水滴性能, 令工具更耐用

XPT
EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术



Image is for advertising effects only
Imej hanya untuk kesan iklan
图片仅为广告特效

High Performance with Brushless DC Motor

Prestasi tinggi dengan motor tanpa berus
高性能的无碳刷马达工具

BL MOTOR
Motor tanpa berus
无碳刷马达



Smaller
Lebih kecil
小巧

Lighter
Lebih ringan
轻身

Stronger
Lebih kuat
强劲

BL MOTOR
Motor tanpa berus
无碳刷马达

Long Life
Panjang umur
长寿

Smarter
Mudah diguna
易用

More Work
Lebih kerja
运作时间长

Brushless DC motor
Motor tanpa berus 免更换碳刷的麻烦

More work amount on a single full battery charge
Lebih banyak jumlah kerja dengan bateri tunggal yang penuh caj 更多的工作量于一个完整充电的电池

Durable against continuous long operation
Tahan lama untuk operasi yang berterusan 马达更持久耐用

Optimum Charging System

Sistem Pengecasan Terbaik 智能充电系统

FAST CHARGING
Pengecasan Cepat 快速充电

22 MINUTES
to fully charge a 3.0Ah slide Li-ion battery

LITHIUM-ION

* **Charge time may vary depending on battery model or conditions of use**
Masa pengecasan mungkin berbeza bergantung kepada model bateri atau syarat penggunaan
充电时间可能因电池型号或使用条件而异

with Cooling Fan

Pengecas cepat dengan kipas penyejuk
快速充电与冷却风扇



The charging time in practical condition

Masa pengecasan dalam keadaan praktikal
实际的充电时间

In case that the battery that became 70° right after use is charged in the environment of 25°.

Jika bateri ini adalah 70 darjah Celsius selepas digunakan dan dicaj pada 25 darjah Celsius
如果此电池在使用后为摄氏70度，而且在摄氏25度的环境下进行充电时



Makita Charging Time
Masa Pengecasan 充电时间
Total Jumlah 总计 **34** min minit 分钟



Competitor A Charging Time
Masa Pengecasan 充电时间
Total Jumlah 总计 **70** min minit 分钟

It is necessary to cool down the battery before you begin to charge it when you charge the battery, which is the high temperature after use. MAKITA developed the original charger system; Built-in the cooling fan. The stand-by time until the charge starts is greatly shortened by cooling efficiently. In addition, the charger keeps cooling while charging it, and the rapid charge is achieved.

Bateri yang baru diguna bersuhu tinggi, ia perlu didinginkan sebelum pengecasan bermula. Pengecas Cepat Makita dilengkapi dengan kipas untuk menyejukkan bateri dengan berkesan, memendekkan masa untuk pengecasan bermula. Kipas akan terus menyejukkan bateri semasa pengecasan untuk mencapai pengecasan cepat.

刚使用完的电池处于高温状态，要冷却后才能开始充电。
牧田快速充电器则内置均等冷却装置，以风扇有效为电池降温，
令充电更早开始。开始充电后，风扇会持续冷却电池，令充电时间更短。

Well Balanced Cooling

Penyejukan seimbang
均等冷却效果


The design which air flows efficiently overall and it can cool cell evenly and rapidly. Well-balanced cooling system prevents the load only to a part of cell and makes battery life longer.

Aliran udara keseluruhan menyejukkan setiap sel bateri secara rata, mengelakkan kapasiti komponen bateri yang tidak sekata, dengan itu memanjangkan hayat bateri!

整体流动空气，能有效及平均地为每个电池元件降温，
避免出现电池元件容量不均状况，从而延长电池寿命！


MAKITA's Optimum Air flow

Aliran udara yang terbaik
最佳的空气流动

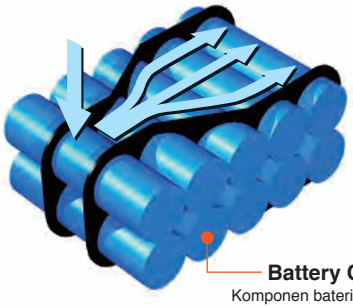

Competiter A Unbalanced Cooling Out of air flow

Penyejukan tidak seimbang
不平均冷却



High
Tinggi 高

Low
Rendah 低

Temperature
Suhu 温度



Firm Holding

Terminal bateri berbilang 多重电池端子

Multi-contact terminals reduce electrical resistance and increase connection stability with standing against vibration, and ultimately ensures Stable current supply to the tool.

Terminal hubungan berganda mengurangkan rintangan dan meningkatkan kestabilan sambungan, menguarangkan getaran dan mengekalkan bekalan elektrik berterusan untuk alat.

多重電池端子能降低电阻和增加连接的稳定性，抵抗震动，确保稳定电流供应于工具。



430%

Extreme Stamina

Life time work volume

Tahan lama dengan jumlah kerja yang banyak
耐力持久

The charger communicates with the individual cell in battery and then it controls current, voltage, and temperature. The both rapid and optimum charge was achieved. It made battery life longer.

Pengecas berkomunikasi dengan setiap sel unit dan mengawal arus, voltan dan suhu, membolehkan pengecasan pantas dan memanjangkan hayat bateri.

充电器与每个单元电池进行通信并控制电流，电压和温度，实现了快速充电，且演唱电池使用寿命。

LXT LITHIUM-ION


Teknologi Ekstrim Litium-ion
锂离子技术




Total Power Delivery Amount of each battery's service lifetime

Jumlah caj yang dikeluarkan bersama-sama dengan hayat setiap bateri
总电量释放合计与每个电池的使用寿命

Traditional Charging Method



Optimum Charging





Li-ion 6.0Ah	850
Li-ion 5.0Ah	710
Li-ion 4.0Ah	570
Li-ion 3.0Ah	430

Built-In-CPU

CPU dibina dalam 内置CPU

The built-in CPU in battery records the battery usage history and transmits it to the charger.

Kad memori terbina dalam bateri merakam status penggunaan, mesej dihantar kepada cip pengecasan.

电池内置记忆卡，能自动记录使用状况，并把讯息传送到充电的晶片。



Digital Communication
Komunikasi Digital 数位通信



Built-In-CPU

CPU dibina dalam 内置记忆卡

The CPU built in the charger analyzes its condition; high temperature, re-charge after full charged, over-discharging. The battery lasts long life because it can be charged at the best method and time.

Cip terbina dalam pengecas boleh menganalisis maklumat kad memori bateri (sama ada bateri panas atau over-charge, kekerapan penggunaan bateri, dll.) Cip akan menentukan masa dan kaedah pengecasan terbaik untuk sel bateri.

充电器内置晶片，能分析电池记忆卡内的资料 (电池是否高温或过度充电及电池使用次数等) 晶片会根据情况，设定最佳充电时间及方法，为每个电池元件均等充电。


Well Balanced Charging Caj Seimbang 平衡充电

MAKITA: Capacity Balanced Battery Pack
Kapasiti bateri seimbang 电池容量平衡

1. It is designed that an individual cell whose condition is full, discharge, empty works well. It is hard to become the over-discharge and an overcharge because the individual cell capacity prevent to anomalies.
2. It is possible to use it efficiency because the capacity of each cell is not uneven and discharge evenly.

1. Kapasiti setiap komponen bateri adalah seragam, mengelakkan pengecasan serta penggunaan berlainan pada stiap sel bateri, dengan itu memanjangkan hayat bateri.
2. Pelepasan arus seimbang untuk bekalan elektrik yang lebih tahan lama.

1. 每个电池元件的容量均一，所以不会发生个别电池元件过度充或放电问题，有效延长电池寿命。
2. 电池元件平均放电，有效利用整个电池容量，令供电更持久。

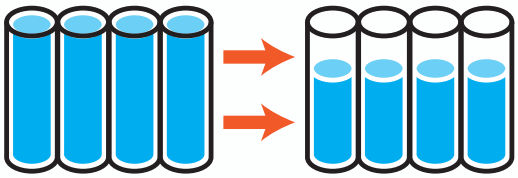


Competitor A : Capacity Unbalanced Battery Pack
Jenama lain : kapasiti bateri yang tidak seimbang 其他牌子 : 电池元件容量不均

1. Competitor charging system causes to decrease the capacity of the cell, which weakened by the heavy load work because Competitors do not install an optimum charge.
2. Discharge stops by using the capacity of the weakened cell completely, when you use the power tool in the condition, noted as above.
Therefore the capacities of other cells are not used completely, so that workloads are decreased at a charge.

1. Kapasiti yang berlainan bagi setiap sel bateri mungkin menyebabkan kerosakan akibat pengecasan atau pelepasan yang berlebihan.
2. Bateri tidak boleh digunakan sekiranyan ada kerosakan pada salah satu sel bateri.
Pelepasan arus yang tidak seimbang meyebabkan penggunaan kapasiti bateri tidak seimbang, ini mengakibatkan kehausan elektrik dengan cepat.

1.因每个电池元件容量不一，所以个别电池元件会出现过度充或放电问题。
2.当某个电池元件故障时，整个电池将不能再使用。
电池元件放电不平均，无法有效使用整个电池容量，很快没电。

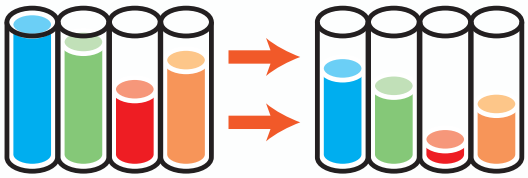

Anytime Charge

Caj pada bila-bila masa 随时充电

- **No Memory Effect**
- **No discharging required**
- Tiada Kesan Memori
- Tiada pelepasan diperlukan
- 不受记忆影响・不需要放电



Shock Absorbing

Tahan getaran 坚固耐震

Heavy Duty Pack
Pembungkusan tugas berat 重型包装



Longtime Storage

Simpanan lama 长时间的存储

Low Self Discharge
Pelepasan rendah 低放电



Batteries and Chargers for Optimum Charging System

Sistem Pengecasan Pintar 智能充电系统

18V LITHIUM-ION

18V Litium-ion
18V锂离子



6.0Ah (BL1860B)
5.0Ah (BL1850B)
4.0Ah (BL1840B)
3.0Ah (BL1830B)

1.5Ah (BL1815N)



DC18RC

Li-ion Battery & Charger Time Reference, Compatibility Chart

Panduan tempoh pengecasan dan bateri Li-ion | 锂电池充电时间参考表，兼容性图表



18V
Lithium-ion



DC18RC
(195586-8)
Rapid Charger
Pengecas Pantas | 快速充电器



DC18RD
(196934-4)
Two Port Multi Rapid Charger
Pengecas Pantas Dua Port
两端快速充电器



DC18SF
(196427-1)
Four Port Multi Charger
Pengecas Biasa Empat Port
四端多功能充电器



DC18SD
(194534-4)
Standard Charger
Pengecas Standard | 标准充电器



DC18SE
(194618-8)
Automotive Charger
Pengecas Automotif | 汽车充电器

6.0Ah	 **BL1860B** (197422-4) **With battery fuel gauge** Dengan penunjuk tahap bateri 备有电池电量计	**55min.** **Fast Charging** Pengecas Pantas 快速充电	**130min.** 1 to 2 Batteries 1 to 2 Bateri | 1到2个电池 **260min.** 3 to 4 Batteries 3 to 4 Bateri | 3到4个电池	**130min.**
5.0Ah	 **BL1850B** (197282-4) **With battery fuel gauge** Dengan penunjuk tahap bateri 备有电池电量计	**45min.** **Fast Charging** Pengecas Pantas 快速充电	**110min.** 1 to 2 Batteries 1 to 2 Bateri | 1到2个电池 **220min.** 3 to 4 Batteries 3 to 4 Bateri | 3到4个电池	**110min.**
4.0Ah	 **BL1840B** (197265-4) (197267-0) **With battery fuel gauge** Dengan penunjuk tahap bateri 备有电池电量计	**36min.** **Fast Charging** Pengecas Pantas 快速充电	**90min.** 1 to 2 Batteries 1 to 2 Bateri | 1到2个电池 **180min.** 3 to 4 Batteries 3 to 4 Bateri | 3到4个电池	**90min.**
3.0Ah	 **BL1830B** (197600-6) **With battery fuel gauge** Dengan penunjuk tahap bateri 备有电池电量计	**22min.** **Fast Charging** Pengecas Pantas 快速充电	**60min.** 1 to 2 Batteries 1 to 2 Bateri | 1到2个电池 **120min.** 3 to 4 Batteries 3 to 4 Bateri | 3到4个电池	**60min.**
1.5Ah	 **BL1815N** (196235-0) (196449-1)	**15min.** **Fast Charging** Pengecas Pantas 快速充电	**30min.** 1 to 2 Batteries 1 to 2 Bateri | 1到2个电池 **60min.** 3 to 4 Batteries 3 to 4 Bateri | 3到4个电池	**30min.**
1.3Ah	 **BL1815** (194513-2)	**15min.** **Fast Charging** Pengecas Pantas 快速充电	**30min.** 1 to 2 Batteries 1 to 2 Bateri | 1到2个电池 **60min.** 3 to 4 Batteries 3 to 4 Bateri | 3到4个电池	**30min.**



12Vmax Lithium-ion

		Speed Charger DC10SB (197346-4) Pengecas Pantas | 高速充电器	Standard Charger DC10WD (197450-9) Pengecas Standard | 标准充电器
4.0Ah	**BL1041B** (197406-2) **With battery fuel gauge** Dengan penunjuk tahap bateri | 备有电池电量计	60min. Fast Charging Pengecas Pantas 快速充电	130min.
2.0Ah	**BL1021B** (197396-9) **With battery fuel gauge** Dengan penunjuk tahap bateri | 备有电池电量计	30min. Fast Charging Pengecas Pantas 快速充电	70min.
1.5Ah	**BL1016** (197393-5)	22min. Fast Charging Pengecas Pantas 快速充电	50min.

10.8V Lithium-ion

		DC10WA (194589-9) Standard Charger Pengecas Standard | 标准充电器
1.3Ah	**BL1013** (194550-6)	50min.

7.2V Lithium-ion

		DC10WA (194589-9) Standard Charger Pengecas Standard | 标准充电器
1.0Ah	**BL7010** (194355-4)	30min.

MAKPAC Power Source Kit | Set Bateri MAKPAC | MAKPAC锂电池套装



MKP1RF181
(197973-7)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Rapid Charger
Pengecas Pantas | 快速充电器
DC18RC (195586-8)

3 1 x 3.0Ah Battery
Bateri | 锂电池
BL1830B (197600-6)

Power Source Kit
Set Bateri | 锂电池套装
Basic 18V 3.0Ah



MKP1RF182
(197974-5)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Rapid Charger
Pengecas Pantas | 快速充电器
DC18RC (195586-8)

3 2 x 3.0Ah Battery
Bateri | 锂电池
BL1830B (197600-6)

Power Source Kit
Set Bateri | 锂电池套装
Power 18V 3.0Ah



MKP1SY122
(197654-3)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Speed Charger
Pengecas Pantas
高速充电器
DC10SB (197346-4)

3 2 x 1.5Ah Battery
Bateri | 锂电池
BL1016 (197393-5)

Power Source Kit
Set Bateri | 锂电池套装
Basic 12Vmax 1.5Ah



MKP1RT181
(197801-6)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Rapid Charger
Pengecas Pantas | 快速充电器
DC18RC (195586-8)

3 1 x 5.0Ah Battery
Bateri | 锂电池
BL1850B (197282-4)

Power Source Kit
Set Bateri | 锂电池套装
Basic 18V 5.0Ah



MKP1RT182
(197803-2)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Rapid Charger
Pengecas Pantas | 快速充电器
DC18RC (195586-8)

3 2 x 5.0Ah Battery
Bateri | 锂电池
BL1850B (197282-4)

Power Source Kit
Set Bateri | 锂电池套装
Power 18V 5.0Ah




MKP1SA122
(197664-0)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Speed Charger
Pengecas Pantas
高速充电器
DC10SB (197346-4)

3 2 x 2.0Ah Battery
Bateri | 锂电池
BL1021B (197396-9)

Power Source Kit
Set Bateri | 锂电池套装
Power 12Vmax 2.0Ah

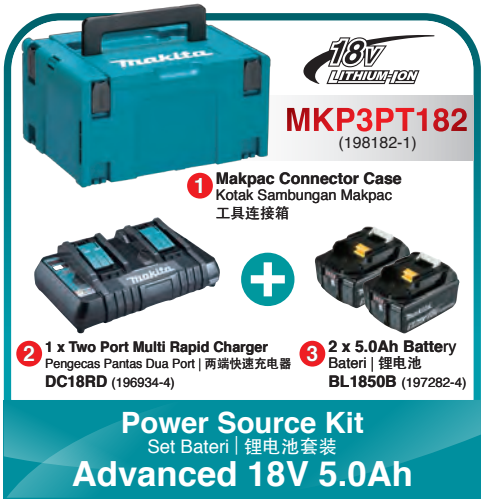

MKP3PT182
(198182-1)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Two Port Multi Rapid Charger
Pengecas Pantas Dua Port | 两端快速充电器
DC18RD (196934-4)

3 2 x 5.0Ah Battery
Bateri | 锂电池
BL1850B (197282-4)

Power Source Kit
Set Bateri | 锂电池套装
Advanced 18V 5.0Ah



MKP3PT184
(197627-6)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Two Port Multi Rapid Charger
Pengecas Pantas Dua Port | 两端快速充电器
DC18RD (196934-4)

3 4 x 5.0Ah Battery
Bateri | 锂电池
BL1850B (197282-4)

Power Source Kit
Set Bateri | 锂电池套装
Ultimate 18V 5.0Ah




MKP1SM122
(197640-4)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Speed Charger
Pengecas Pantas
高速充电器
DC10SB (197346-4)

3 2 x 4.0Ah Battery
Bateri | 锂电池
BL1041B (197406-2)

Power Source Kit
Set Bateri | 锂电池套装
Ultimate 12Vmax 4.0Ah

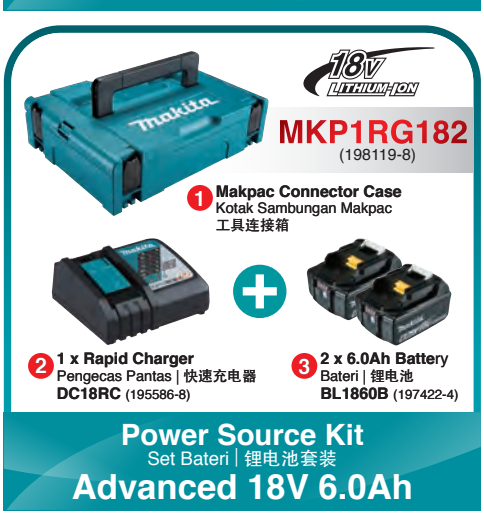

MKP1RG182
(198119-8)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Rapid Charger
Pengecas Pantas | 快速充电器
DC18RC (195586-8)

3 2 x 6.0Ah Battery
Bateri | 锂电池
BL1860B (197422-4)

Power Source Kit
Set Bateri | 锂电池套装
Advanced 18V 6.0Ah



MKP3PG184
(198095-6)

1 Makpac Connector Case
Kotak Sambungan Makpac
工具连接箱

2 1 x Two Port Multi Rapid Charger
Pengecas Pantas Dua Port | 两端快速充电器
DC18RD (196934-4)

3 4 x 6.0Ah Battery
Bateri | 锂电池
BL1860B (197422-4)

Power Source Kit
Set Bateri | 锂电池套装
Ultimate 18V 6.0Ah

18V Lithium-ion

LXT®

Teknologi Ekstrim Litium-ion
锂离子技术

CORDLESS COMBO KIT

Pakej kombo peralatan tanpa kord 充电式工具套装

NEW BARU | 新

18V LITHIUM-ION
18V Litium-ion I 18V锂离子

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装
DLX2248PT1









18V X2 36V

BL MOTOR
Motor tanpa berus 无碳刷马达

1 1x DVC260
Cordless Backpack Vacuum Cleaner
Pembersih Vakum Beg Galas Tanpa Kord
充电式背负吸尘机
2x 5.0Ah Battery (BL1850B)
Bateri 5.0Ah (BL1850B)
5.0Ah 电池 (BL1850B)

2 1x DCL181F Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机
1x 5.0Ah Battery (BL1850B)
Bateri 5.0Ah (BL1850B)
5.0Ah 电池 (BL1850B)



3 1x Makita Tool Bag
Beg Peralatan Makita
Makita 工具袋



4 1x Two Port Multi Rapid Charger (DC18RD)
Pengecas Pantas Dua Port (DC18RD)
两端快速充电器 (DC18RD)



1x Round Brush (198877-6)
Berus Bulat 圆刷
1x Flexible Rubber Nozzle (197900-4)
Muncung Getah Fleksibel 弹性吸嘴
1x Nozzle Assembly (199037-3)
Komponen Muncung 吸嘴组件
1x Corner Nozzle (198918-8)
Muncung Sudut 角落吸嘴
1x Flexible Hose (198867-9)
Hos Fleksibel 软管

10pcs Filter (198914-6)
Penapis 尘袋



10pcs Paper Dust Bag (197902-0)
Beg Habuk Kertas
纸制集尘袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装
DLX2218X

18V LITHIUM-ION
18V Litium-ion I 18V锂离子



1 1x Rapid Charger (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)

XPT
Teknologi Perlindungan Ekstrim
防尘防水强技术



2 1x DHR165 16mm (5/8")
Cordless Rotary Hammer
Tukul Berputar Tanpa Kord 充电式电锤
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B) 3.0Ah 电池 (BL1830B)



3 1x DTW190 12.7mm (1/2")
Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B)
3.0Ah 电池 (BL1830B)



4 1x Makita Aluminium Suitcase
Beg Bimbit Aluminium Makita
Makita 铝合金工具箱

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2161X

18V LITHIUM-ION
18V Litium-ion I 18V锂离子



1 **1x Rapid Charger** (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)



BL MOTOR Motor tanpa berus 无碳刷马达
XPT Teknologi Perlindungan Ekstrim 防尘防水满技术

2 **1x DHR242** 24mm (15/16")
Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord 充电式冲击电钻电锤
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B) 3.0Ah 电池 (BL1830B)



3 **1x DGA404** 100mm (4")
Cordless Angle Grinder
Mesin Canai Tanpa Kord 角向磨光机
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B) 3.0Ah 电池 (BL1830B)



4 **1x Makita Aluminium Suitcase**
Beg Bimbit Aluminium Makita
Makita 铝合金工具箱

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2162X

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

18V LITHIUM-ION
18V Litium-ion I 18V锂离子



1 **1x Rapid Charger** (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)



BL MOTOR Motor tanpa berus 无碳刷马达
XPT Teknologi Perlindungan Ekstrim 防尘防水满技术

2 **1x DTD148 Cordless Impact Driver**
Pemutar Skru Impak Tanpa Kord 充电式冲击螺丝起子机
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B)
3.0Ah 电池 (BL1830B)





3 **1x DGA404** 100mm (4")
Cordless Angle Grinder
Mesin Canai Tanpa Kord 角向磨光机
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B) 3.0Ah 电池 (BL1830B)
1x Depressed Centre Wheel (A-80852)
Mata Canai Berlekuk 钹形砂轮片(研磨)



4 **1x Makita Aluminium Suitcase**
Beg Bimbit Aluminium Makita
Makita 铝合金工具箱

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2088M

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

18V LITHIUM-ION
18V Litium-ion I 18V锂离子



1 **1x Rapid Charger** (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)



XPT Teknologi Perlindungan Ekstrim 防尘防水满技术

2 **1x DUC252 Cordless Chain Saw**
Gergaji Berantai tanpa Kord 充电式链锯机
2x 4.0Ah Battery (BL1840B)
Bateri 4.0Ah (BL1840B) 4.0Ah 电池 (BL1840B)



3 **1x DTD148 Cordless Impact Driver**
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机
1x 4.0Ah Battery (BL1840B)
Bateri 4.0Ah (BL1840B)
4.0Ah 电池 (BL1840B)

BL MOTOR Motor tanpa berus 无碳刷马达
XPT Teknologi Perlindungan Ekstrim 防尘防水满技术



4 **1x Makita Tool Bag**
Beg Peralatan Makita
Makita 工具袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DLX2220

18V LITHIUM-ION
18V Litium-ion I 18V锂离子



1 **1x Rapid Charger** (DC18RC)
Pengecas Pantas (DC18RC)
快速充电器 (DC18RC)

2 **1x DTD155 Cordless Impact Driver**
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B)
3.0Ah 电池 (BL1830B)



BL MOTOR Motor tanpa berus 无碳刷马达
XPT Teknologi Perlindungan Ekstrim 防尘防水满技术

3 **1x DDF483** 13mm (1/2")
Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻
1x 3.0Ah Battery (BL1830B)
Bateri 3.0Ah (BL1830B)
3.0Ah 电池 (BL1830B)



BL MOTOR Motor tanpa berus 无碳刷马达
XPT Teknologi Perlindungan Ekstrim 防尘防水满技术



4 **1x Makita Tool Bag**
Beg Peralatan Makita
Makita 工具袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DK0090SWX1



1 **1x Standard Charger** (DC18SD)
Pengecas Standard (DC18SD)
标准充电器 (DC18SD)



2 **1x 1.5Ah Battery** (BL1815N)
Bateri 1.5Ah (BL1815B)
1.5Ah 电池 (BL1815B)

18V LITHIUM-ION
18V Litium-ion I 18V锂离子

3 **1x DCL180 Cordless Cleaner** (White)
Pembersih Vakum Tanpa Kord (Putih)
充电式便携吸尘机 (白)



1x **Filter** (443060-3)
Penapis 过滤器
1x **Pre Filter** (451208-3)
Penapis Depan
前置过滤器
1x **Flexible Hose** (198867-9)
Hos Fleksibel 软管
1x **Round Brush** (198877-6)
Berus Bulat 圆刷
1x **Shelf Brush** (198872-6)
Berus Rata 扁毛刷



4 **1x DF001D 3.6V Cordless Screwdriver** (Built-in Battery)
Pemutar Skru Tanpa Kord (Bateri terbina dalam)
充电式螺丝起子机 (内置电池)

5 **1x ADP07 Adapter** for USB
Pengecas
充电器





6 **1x Makita Tool Bag**
Beg Peralatan Makita
Makita 工具袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

DK0089WX1



1 1x Standard Charger (DC10WD)
Pengecas Standard (DC10WD)
标准充电器 (DC10WD)



2 1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

12V max LITHIUM-ION
12V Litium-ion I 12V锂离子

CXT
Teknologi Ekstrim Kompak
紧凑极限技术



5pcs Paper Filter (194566-1)
Penapis Kertas
纸制尘袋

1x Flexible Hose (198867-9)
Hos Fleksibel 软管
1x Round Brush (198877-6)
Berus Bulat 圆刷
1x Shelf Brush (198872-6)
Berus Rata 扁毛刷

3 1x CL107FD Cordless Cleaner (White)
Pembersih Vakum
Tanpa Kord (Putih)
充电式便携吸尘机 (白)



4 1x DF001D 3.6V Cordless Screwdriver (Built-in Battery)
Pemutar Skru Tanpa Kord (Bateri terbina dalam)
充电式螺丝起子机 (内置电池)



5 1x ADP07 Adapter for USB
Pengecas
充电器



6 1x Makita Tool Bag
Beg Peralatan Makita
Makita 工具袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

CLX201



1 1x Standard Charger (DC10WD)
Pengecas Standard (DC10WD)
标准充电器 (DC10WD)



2 1x TD110D Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机
1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

12V max LITHIUM-ION
12V Litium-ion I 12V锂离子

CXT
Teknologi Ekstrim Kompak
紧凑极限技术



3 1x DF331D Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻
1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

12V max LITHIUM-ION
12V Litium-ion I 12V锂离子

CXT
Teknologi Ekstrim Kompak
紧凑极限技术



4 1x Makita Tool Bag
Beg Peralatan Makita
Makita 工具袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

CLX201X1

NEW BARU|新



1 1x Standard Charger (DC10WD)
Pengecas Standard (DC10WD)
标准充电器 (DC10WD)



2 1x TD110D Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机
1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

12V max LITHIUM-ION
12V Litium-ion I 12V锂离子

CXT
Teknologi Ekstrim Kompak
紧凑极限技术



3 1x DF331D Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻
1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

12V max LITHIUM-ION
12V Litium-ion I 12V锂离子

CXT
Teknologi Ekstrim Kompak
紧凑极限技术



4 1x Makita Tool Bag
Beg Peralatan Makita
Makita 工具袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

CLX206AX2



1 1x Standard Charger (DC10WD)
Pengecas Standard (DC10WD)
标准充电器 (DC10WD)



2 1x TM30D Cordless Multi Tool
Mesin Pemotong Pelbagai Guna Tanpa Kord
充电式多功能切磨机
1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

12V max LITHIUM-ION
12V Litium-ion I 12V锂离子

CXT
Teknologi Ekstrim Kompak
紧凑极限技术



3 1x DF331D Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻
1x 1.5Ah Battery (BL1016)
Bateri 1.5Ah (BL1016)
1.5Ah 电池 (BL1016)

12V max LITHIUM-ION
12V Litium-ion I 12V锂离子

CXT
Teknologi Ekstrim Kompak
紧凑极限技术



4 1x Makita Tool Bag
Beg Peralatan Makita
Makita 工具袋

CORDLESS COMBO KIT
Pakej kombo peralatan tanpa kord 充电式工具套装

LCT204



1 1x Standard Charger (DC10WA)
Pengecas Standard (DC10WA)
标准充电器 (DC10WA)

10.8V LITHIUM-ION
10.8V Litium-ion I 10.8V锂离子



2 1x TD090D Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机
1x 1.3Ah Battery (BL1013)
Bateri 1.3Ah (BL1013)
1.3Ah 电池 (BL1013)



3 1x DF330D Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻
1x 1.3Ah Battery (BL1013)
Bateri 1.3Ah (BL1013)
1.3Ah 电池 (BL1013)



4 1x Makita Aluminium Suitcase
Beg Bimbit Aluminium Makita
Makita 铝合金工具箱



Cordless

Tanpa Kord 充电式





18V X2 36V

VIDEO CLIP

This movie was filmed in Japan.
Models and specs may vary by country.

18v + 18v → 36v

18V x2 Lithium-ion

Two 18V Li-ion batteries can be directly installed on the machine to supply energy to the powerful 36V DC motor drive system
Dua bateri Li-ion 18V boleh dipasang secara langsung pada mesin untuk membekalkan tenaga berkuasa 36V
两颗18V锂电池能够直接安装于工具上，提供36V电能

When different capacity batteries are used together (for example, 1.5Ah BL1815N and 3.0Ah BL1830B, or fully charged BL1830B and 70% charged BL1830B), the machine stops when the battery with less capacity gets empty
Apabila bateri kapasiti berlainan digunakan bersama-sama (contohnya, 1.5Ah BL1815N dan 3.0Ah BL1830B, atau BL1830B penuh cas dan BL1830B dicas 70%), mesin berhenti apabila bateri yang berkapasiti rendah menjadi kosong
当不同的电池一起使用时（例如，1.5Ah BL1815N 和 3.0Ah BL1830B，或充满电的 BL1830B 和充电 70% 的 BL1830B），其中一颗电池电力耗尽，工具将自动停止

DHR263PM4 / RF4 / Z 26mm (1")

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击钻锤



- **3-Mode operation for Rotation Only, Hammering with Rotation or Hammering Only**
  Menggerudi, Menukul sambil Menggerudi, Menukul
  仅钻，仅锤钻，仅锤

*Side Handle, Depth Gauge, Dust Cup (country-specific), Cleaning cloth (country-specific), Bit Grease (country-specific)

- PM4 : 1 x Two Port Multi Rapid Charger, 4 x 4.0Ah Battery
- RF4 : 1 x Rapid Charger, 4 x 3.0Ah Battery
- ZX : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 442

18V X2 | 3 modes



Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.5J** **Our experimental conditions: 3.0J**
Capacity Kapasiti 能力	**Concrete/ Steel/ Wood:** **26/ 13/ 32mm (1"/ 1/2"/ 1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 5,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,250**
Dimensions (L x W x H) Dimensi 体积	**350x116x232mm** **(13-3/4"x4-9/16"x9-1/8")**
Net Weight Berat Bersih 淨重	**4.1 - 5.1kg (9.0 - 11.3lbs)**

DJR360RF4 / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Electric 2 speed provides ideal RPM of high speed for wooden cutting and low speed for metal cutting** | 2 kelajuan elektrik menyediakan RPM kelajuan tinggi untuk pemotongan kayu dan kelajuan rendah untuk pemotongan logam | 2速选择，高速适用于木质切割，低速适用于金属切割

*Recipro Saw Blades

- RF4 : 1 x Rapid Charger, 4 x 3.0Ah Battery
- ZX : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V X2



Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High/ Low: 0 - 3,000/ 0 - 2,300**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**449x116x243mm** **(17-3/4"x4-9/16"x9-9/16")**
Net Weight Berat Bersih 淨重	**4.0 - 4.7kg (8.9 - 10.3lbs)**

DHS710RM2J / RF2J 190mm (7-1/2")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



- **Lightweight for operator comfort**
  Ringan untuk keselesaan
  轻便，操作舒适

*TCT Saw Blade, Rip Fence (Guide Rule), Hex Wrench, Dust Nozzle (country-specific)

- RM2J : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RF2J : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 442

18V X2




Blade Diameter Diameter Bilah 锯片直径	**190/ 185mm (7-1/2"/ 7-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 68.5/ 66mm** **(2-11/16"/ 2-5/8")**
	45°: 49/ 47.5mm **(1-15/16"/ 1-7/8")**
	50°: 44/ 42.5mm **(1-3/4"/ 1-11/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,800**
Dimensions (L x W x H) Dimensi 体积	**356x217x298mm** **(14"x8-1/2"x11-3/4")**
Net Weight Berat Bersih 淨重	**3.9 - 4.6kg (8.6 - 10.1lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DLS714PM2 / Z 190mm (7-1/2")

Cordless Slide Compound Miter Saw

Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯



- **Large cutting capacity; Crosscuts up to 52 x 300 mm (2-1/16" x 11-3/4") at 90°** Potongan serong sehingga 52 x 300mm (2-1/16"x 11-3/4") pada 90° 在90° 斜角切割处的交叉点高达52 x 300mm (2-1/16"x 11-3/4")

*TCT Saw Blade, Dust Bag, Holder Set, Vertical Vise, Hex Wrench, Triangular Rule

- PM2 : 1 x Two Port Multi Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Blade Diameter Diameter Bilah 锯片直径	**190mm (7-1/2")**
Miter Angle Sudut Miter 斜接角	**47°L / 57°R**
Bevel Angle Sudut Bevel 斜角	**45°L / 5°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 52 x 300mm (2-1/16" x 11-3/4")** **at 45° left: 40x300mm (1-9/16"x11-3/4")** **at 5° right: 40x300mm (1-9/16"x11-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,700**
Dimensions (L x W x H) Dimensi 体积	**655x430x445mm (25-3/4"x17"x17-1/2")**
Net Weight Berat Bersih 净重	**12.6kg (27.8lbs)**



DSP600Z 165mm (6-1/2")

Cordless Plunge Cut Saw

Gergaji Piring Tanpa Kord
充电式圆锯



- **Up to 40% Faster Cutting**
  40% potongan lebih cepat
  切割速度快40%

*TCT Saw Blade, Hex Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5




Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Bevel Capacity Kapasiti Bevel 斜角容量	**-1° - 48°**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 56mm (2-3/16")** **45°: 40mm (1-9/16")** **48°: 38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,500 - 6,300**
Dimensions (L x W x H) Dimensi 体积	**346x241x272mm (13-5/8"x9-1/2"x10-3/4")**
Net Weight Berat Bersih 净重	**4.4 - 5.1kg (9.8 - 11.2lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DGA700/900 Cordless Angle Grinder
Pengisar Sudut Tanpa Kord | 充电式角向磨光机

180 / 230mm High Power

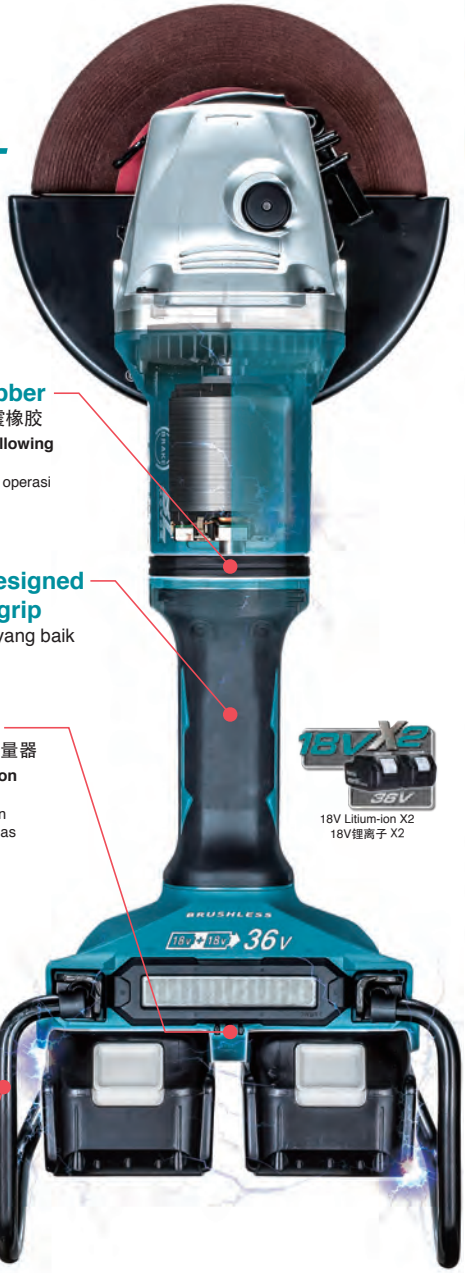

BL MOTOR
Motor tanpa berus
无碳刷马达

Faster Cutting with High power and High torque brushless motor
Pemotongan yang lebih cepat dengan motor tanpa berus berkuasa tinggi
无碳刷马达使切割更快速

Better gravity balance
Imbangan graviti yang lebih baik 更好的重力平衡


High maneuverability in any angle since it is possible to grab the center of gravity
Ketangkasan tinggi di mana-mana sudut dengan pegangan pada pusat graviti
重心抓握，提高于任何角度使用的敏捷性

NEW BARU 新

ADT
Automatic Torque Drive Technology
Teknology Tork Automatik
自动扭力驱动科技

Automatically changes the cutting speed according to load conditions for an optimum operation:
Fungsi pertukaran kalajuan automatik: 自动变速功能：

- **On light duty: high-speed rotation mode**
- **On heavy duty: high torque mode**
- Pada tugas ringan: mod putaran berkelajuan tinggi
- Pada tugas berat: mod tork tinggi
- 轻载: 高速旋转模式
- 重载: 高扭矩模式



BRAKE
Electric Brake System
Sistem Brek Elektrik 电子自动刹车系统

Electric brake
Brek elektrik 电子自动刹车

Electric brake is activated after the tool is switched off
Brek elektrik diaktifkan selepas alat dimatikan
电子自动刹车在工具关闭后被启动

Large switch lever
Tuas suis yang besar 大开关杆


with lock-off function (without lock-on function)
Lock-off function prevents the switch lever from being accidentally pulled
dengan fungsi mengunci
menghalang tuas suis daripada ditarik secara tidak sengaja
锁定功能可防止开关杆被意外拉动

Anti-restart function
Fungsi anti-restart 防止意外重启功能

The motor does not start up if battery is inserted when the switch slid to "on".
Selepas memuatkan bateri, motor tidak bermula jika suis ditetapkan ke kedudukan "ON"
装入电池后，若开关设于「开启」位置时，马达不会启动

AFT
Active Feedback Sensing Technology
Teknologi Sensor Maklum Balas Automatik
自动回顾感应科技

Shuts down the tool to protect the user, if the rotation speed suddenly slows down
Jika kelajuan putaran tiba-tiba dikurangkan, alat akan dimatikan secara automatik untuk melindungi pengguna
若旋转速度突然降低，工具将自动关闭以保护保护使用者



Anti-vibration rubber
Getah anti-getaran 防震橡胶
provides less vibration, allowing comfortable operation
Mengurangkan getaran untuk operasi yang selesa
减少振动，使操作舒适

Ergonomically designed handle with soft grip
Pemegang ergonomik yang baik
最理想人体工学把手

Battery indicator
Penunjuk Bateri 电池电量器
- **Over-discharge protection**
- **Overheat protection**
- Elakkan daripada perlepasan
- Perlindungan terlampau panas
- 避免过度放电
- 过热保护




18V Litium-ion X2
18V锂离子 X2

Battery guard
Pengawal bateri
电池守护

DGA700Z 180mm (7")

Cordless Angle Grinder
Pensidar Sudut Tanpa Kord
充电式角向磨光机



- **Electric brake stops the grinding wheel in 4.5 seconds or less for increased operator safety**
Brek elektrik menghentikan roda dalam 4.5 saat atau masa lebih pendek, untuk meningkatkan perlindungan keselamatan pengguna
电子自动刹车器在4.5秒或更短的时间内停止磨轮，以提高保护使用者的安全

*Toolless Wheel Cover / Wheel Cover, Side Grip, Lock Nut Wrench
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



NEW BARU 新

Wheel Diameter Diameter Mata Canai 砂轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**7,800**
Dimensions (L x W x H) Dimensi 体积	**499x200x158mm (19-5/8"x7-7/8"x6-1/4")**
Net Weight Berat Bersih 淨重	**5.0 - 6.0kg (11.02 - 13.23lbs)**

DGA900Z 230mm (9")

Cordless Angle Grinder
Pensidar Sudut Tanpa Kord
充电式角向磨光机



- **Electric brake stops the grinding wheel in 4.5 seconds or less for increased operator safety**
Brek elektrik menghentikan roda dalam 4.5 saat atau masa lebih pendek, untuk meningkatkan perlindungan keselamatan pengguna
电子自动刹车器在4.5秒或更短的时间内停止磨轮，以提高保护使用者的安全

*Toolless Wheel Cover / Wheel Cover, Side Grip, Lock Nut Wrench
- Z : Without Charger & Battery


Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



NEW BARU 新

Wheel Diameter Diameter Mata Canai 砂轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,000**
Dimensions (L x W x H) Dimensi 体积	**499x250x158mm (19-5/8"x9-7/8"x6-1/4")**
Net Weight Berat Bersih 淨重	**5.2 - 8.0kg (11.46 - 17.64lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

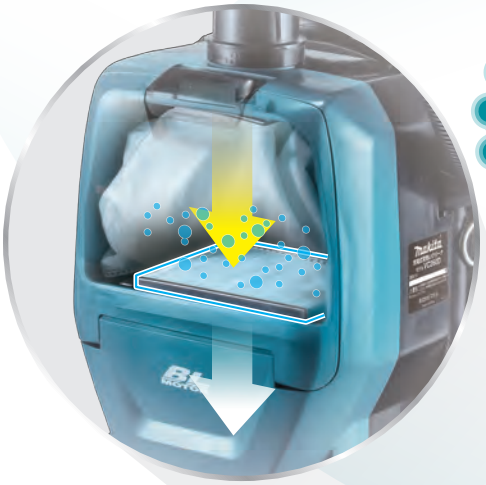

2L
Dust Bag
Beg Debu 2L
2L尘袋

45w
Powerful Suction Power
Kuasa sedutan kuat
超级吸力

4.3kg
Light & Comfortable
Ringan dan selesa
轻量及舒适



Comfortable harness
Abah-abah yang selesa | 舒适的线束

Featuring shoulder and waist belts adjustable to suit user's size for less fatigue even after long continuous operation
Memaparkan tali bahu dan tali pinggang boleh laras yang boleh disesuaikan dengan saiz pengguna bagi mengurangkan keletihan walaupun selepas operasi yang panjang
可调整肩带和腰带，根据需要调节松紧度，即使在长时间连续操作后也能减少疲劳

HEPA Filter
Penapis HEPA | HEPA过滤系统

Is used as the main filter to capture very fine particles effectively, able to capture 99.97% of particles as small as 0.3-1μm, exhaust air is as clean as that of air cleaner
Digunakan sebagai penapis utama untuk menangkap zarah sangat halus. Mampu menangkap 99.97% zarah sekecil 0.3-1μm, Udara ekzos adalah bersih seperti pembersih udara
被用作捕获非常细颗粒的主要过滤器，能够捕获小至0.3-1μm的99.97%的颗粒，确保灰尘和细小至0.3微米的颗粒物锁于机身内，同时排出清洁空气。

DVC260
Cordless Backpack Vacuum Cleaner
Pembersih Vakum Beg Galas Tanpa Kord
充电式背负吸尘机

HEPA filter




18V X2 36V

BL MOTOR
Motor tanpa berus
无碳刷马达



The weight of tool body is removed from user's wrist and hand, enabling Easy corner-to-corner cleaning for longer time with less fatigue
Berat alat dikeluarkan dari pergelangan tangan dan tangan pengguna, membolehkan pembersihan sudut-ke-sudut dengan mudah untuk masa yang lebih lama dengan kurang keletihan
从用户的手腕和手上取下工具的重量，轻松进行角落式清洁更长时间，减少疲劳

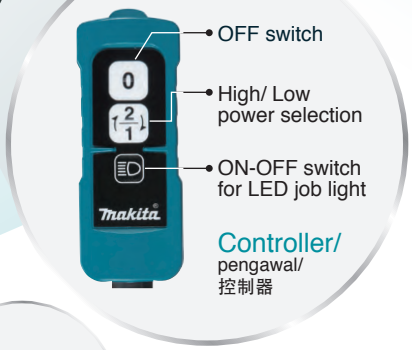

LED Job Light/
Lampu LED/ LED工作指示灯

Convenient for operation in dark job sites
Lampu LED memudahkan kerja dalam keadaan yang gelap
LED灯光照射，方便了黑暗环境下工作



DVC260Z / ZX

Cordless Backpack Vacuum Cleaner
Pembersih Vakum Beg Galas Tanpa Kord
充电式背负吸尘机



- **Max suction power 45W**
  45W kuasa sedutan yang kuat 最大吸力45W

*DVC260Z : HEPA filter assembly, Backpack shoulder harness, Floor nozzle, Flexible rubber nozzle, Telescopic pipe assembly, Hose 28mm-1.0M, Bent pipe, Hose band, Filter bag
*DVC260ZX : HEPA filter assembly, Backpack shoulder harness, Hose band, Front cuff 24, Paper filter bag set, Front cuff 22, Hose complete 28mm-1.5M

• Z : Without Charger & Battery • ZX : Without Charger & Battery

Li-ion AN 6.0 5.0 4.0 3.0 2.0 1.5

18V X2 36V

HEPA filter



Capacity Kapasiti 容量	**Filter bag/ Paper dust bag: 2.0L** **Cloth dust bag: 1.5L**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B: High: 60** **with BL1850B: Low: 90**
Max Air Flow Aliran Udara 最大空气流量	**1.5m³/ min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**7.1kPa (710mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High/ Low: 45/ 25W**
Dimensions (L x W x H) Dimensi 体积	**230x152x373mm (9"x6"x14-3/4")**
Net Weight Berat Bersih 淨重	**3.8kg (8.5 lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



WET Basah 湿 DRY Kering 干

DVC860L

Corded & Cordless Vacuum Cleaner (Wet & Dry)

Pembersih Vakum Kuasa Elektrik Dan Tanpa Kord (Basah dan Kering)
充电式 + 电源驱动吸尘机(干湿两用)

Washroom
Tandas | 卫生间

Wet Floor
Lantai yang basah
地面湿滑

18V X2 36V

CORDLESS POWER
Kuasa Tanpa Kord/ 充电式功率

Suction Power Kuasa Sedutan/ 吸力	Max Air Flow Aliran Udara/ 最大空气流量	Max Sealed Suction Sedutan Terkedap/ 最大密封吸力
70W	2.1m²/min	9.0kpa

AC ALTERNATING CURRENT

CORDED POWER
Kuasa Arus Elektrik/ 电源驱动功率

Suction Power Kuasa Sedutan/ 吸力	Max Air Flow Aliran Udara/ 最大空气流量	Max Sealed Suction Sedutan Terkedap/ 最大密封吸力
320W	3.6m²/min	24.0kpa

DVC860LZ

Corded & Cordless Vacuum Cleaner (Wet & Dry)
Pembersih Vakum Kuasa Elektrik Dan Tanpa Kord (Basah dan Kering)
充电式 + 電源驱动吸尘机(干湿两用)



- **Cloth filter type: for both wet & dry vacuum cleaning**
  Jenis penapis kain: untuk menyedut kotoran kering atau lembap
  布类过滤器类型：适用于干和湿集尘清洁

*Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Connection cord (country-specific)

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V X2 36V AC ALTERNATING CURRENT

WET Basah 湿
DRY Kering 干



Capacity Kapasiti 尘袋容量	**Dust/ Water: 8/ 6L**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x 2: 65**
Max Air Flow Aliran Udara 最大空气流量	**AC/ DC: 3.6/ 2.1m³/ min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**AC/ DC: 24/ 9kPa**
Suction Power Kuasa Sedutan 吸力	**AC/ DC: 320/ 25 - 70W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm (14-3/8"x13-1/8"x14-1/2")**
Net Weight Berat Bersih 淨重	**8.6kg (19.0lbs.)**

DVC862LRT2/ Z

Cordless Vacuum Cleaner (Wet & Dry)
Pembersih Vakum Tanpa Kord (Basah dan Kering)
充电式吸尘机(干湿两用)

- **For both wet and dry vacuum cleaning**
  Untuk pembersihan vakum basah dan kering
  适用于干和湿集尘清洁

*Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box

- RT2 : 1 x Rapid Charger, 2 x 5.0Ah Battery
- Z : Without Charger & Battery

BL MOTOR XPT

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V X2 36V

WET Basah 湿
DRY Kering 干



Capacity Kapasiti 尘袋容量	**Dust/ Water: 8/ 6L**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x 2: 40**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**9.8kPa**
Suction Power Kuasa Sedutan 吸力	**90W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm (14-3/8"x13-1/8"x14-1/2")**
Net Weight Berat Bersih 淨重	**7.0kg (15.5lbs.)**

DVC863LRT2 / Z / ZX

Cordless Vacuum Cleaner (Dry)
Pembersih Vakum Tanpa Kord (Kering)
充电式吸尘机(干用)

- **8L Large dust bag capacity enables continuous cleaning work** Kapasiti beg debu 8L membolehkan kerja pembersihan berterusan 8L大容量集尘袋可延续清洁工作

- RT2 : 1 x Rapid Charger, 2 x 5.0Ah Battery
- Z : Without Charger & Battery
*Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box
- ZX : Without Charger & Battery
*Hose, Joint, Plastic Dust Bag x10

BL MOTOR XPT

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V X2 36V

DRY Kering 干



Capacity Kapasiti 尘袋容量	**Dust: 8L**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x 2: 40**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**9.8kPa**
Suction Power Kuasa Sedutan 吸力	**90W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm (14-3/8"x13-1/8"x14-1/2")**
Net Weight Berat Bersih 淨重	**7.7kg (17.1lbs.)**

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DUC353 Cordless Chain Saw Cutting Logs Power Similar to 30mL Class Engine Chain Saw

Kecekapan Gergaji Rantai Batery DUC353 Setanding Dengan Gergaji Rantai Bermotor 30ml Kelas
充电式链锯DUC353效率似30ml级发动机链锯

VIDEO CLIP

This movie was filmed in Japan.
Models and specs may vary by country.

DUC353
Cordless Chain Saw
Gergaji Berantai Tanpa Kord
充电式链锯



Outer Rotor Brushless Motor direct-drive system
System pemacu terus, pemusing rantai motor tanpa berus
直接驱动外转无碳刷马达

Front-hand-guard-activated chain brake
Brek rantai kawalan tangan
前置手控链锯刹车

Soft grip for non-skid operation
Pemegang mencegah gelincir yang lembut dan selesa
柔软舒适的防滑手柄

BL MOTOR
Motor tanpa berus
无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

18V X2 36V
18V Litium-ion X2
18V锂离子 X2

Lock-off lever
Pengunci tuil
锁定杆



Main power switch
Kuasa suis utama
主电源开关



Metal spike bar
Bar tajam besi
金属钉板



Metal chain catcher
Penangkap besi rantai
金属链锯防护板



Tool-less chain tension adjustment
Menyeleraskan ketegangan rantai tanpa alat | 免工具调节链锯导板

Extendable lever Yang boleh dipanjangkan 伸缩杆

1. allows for: • Easier chain tightening
   • More powerful torque
2. Chain can be quickly retrated at any angle.
3. Reduces the area projecting from Sprocket cover.

Membolehkan: • Pengetatan rantai dengan lebih mudah
• Tok yang lebih berkuasa

允许: • 简易调整链条紧缩
• 更高的拧紧力矩

Variable speed trigger switch
Suis pencetus untuk menukar kelajuan 无段变速开关



Battery capacity warning lamp
Penunjuk kapasiti bateri
电池容量警示灯



Adjustable automatic chain lubrication
Penyesuaian rantai pelincir automatik 可调自动链条润滑油



Chain oil indicator level
Penunjuk tahap paras minyak 链条油液位窗口



Rotory switch for easier chain tension adjustment Suis berputar untuk kemudahan menyelaraskan ketegangan rantai
旋转开关更容易调整锯链张力





DUC353Z 350mm (14")

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯



- **Cordless Chain Saw DUC353 Efficiency Similar to 30ml Class Engine Chain Saw**
  Kecekapan Gergaji Rantai Batery DUC353 Setanding Dengan Gergaji Rantai Bermotor 30ml Kelas
  充电式链锯DUC353效率似30ml级发动机链锯

*Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific)

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Guide Bar Length Panjang Batang Gergaji 切割长度	**350mm (14")**
Chain Pitch Kerapatan Rantai 链条齿距	**9.5mm (3/8")**
Chain Gauge Ketebalan Rantai 链条厚度	**1.1/ 1.3mm (0.043" / 0.050")**
Chain Speed Kelajuan Rantai 链条速度	**0 - 20m/s (0 - 1,200m/min) (0 - 3,940FPM)**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**200mL (N/A US oz)**
Dimensions (L x W x H) Dimensi 体积	**773x215x235mm (30-1/2"x8-1/2"x9-1/4")**
Net Weight Keberatan 净重	**4.7kg (10.4 lbs)**

DUC252PM4 / RF2 / Z 250mm (10")

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯



- **Low noise level and zero emissions for operator comfort**
  Bunyi rendah & tanpa perlepasan asap untuk keselesaan pengguna
  低噪音且无排气

*Saw Chain, Guide Bar, Guide Bar Cover, Spike Bumper

- PM4 : 1 x Two Port Multi Rapid Charger, 4 x 4.0Ah Battery
- RF2 : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 442 MM



Guide Bar Length Panjang Batang Gergaji 切割长度	**250mm (10")**
Chain Pitch Kerapatan Rantai 链条齿距	**3/8"**
Chain Gauge Ketebalan Rantai 链条厚度	**1.3mm (0.05")**
Chain Speed Kelajuan Rantai 链条速度	**8.3m/s (500m/min) (1,650FPM)**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**85mL (2.9US oz)**
Dimensions (L x W x H) Dimensi 体积	**545x234x198mm (21-1/2"x9-1/4"x7-3/4")**
Net Weight Keberatan 净重	**4.1 - 4.7kg (9.0 - 10.3lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Smooth cutting similar to that of a hand pruner

Potongan lancar seperti gunting pemangkasan manual 像手动修枝剪一样平滑的切割



XPT
EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

Provided that Ø15mm grapevines are cut:
Potong batang ø15mm
切割 Ø15mm 蔓枝
71,000
(two BL1850)

0.8kg
Lightweight
Ringan 轻量



DUP361
Cordless Pruning Shear
Gunting Pemangkas tanpa Kord | 充电式电剪

Extra-sharp forged blade with made-in-Japan quality
Bilah tajam khas asli dari Jepun
日本原装特别锋利的刀片

Smooth and fine cutting thanks to the followings:
- **Upper blade specially formed for less cutting resistance**
- **Sharp edges**
- **Higher blade strength obtained by using a special material for pruning scissors**

- Reka bentuk bilah atas mengurangkan rintangan pemotongan
- Tajam
- Bahan khas untuk meningkatkan kekerasan pisau gunting pemangkas


- 上刀片的设计减少切削阻力
- 锋利的边缘
- 特殊材料增加修枝剪的刀片硬度

Blade opening adjustment
Pelarasan pembukaan bilah
剪刀开口调节



DUP361Z

Cordless Pruning Shear
Gunting Pemangkas tanpa Kord
充电式电剪



- **Extra sharp, Made-in-Japan forged blade**
  Bilah tajam khas asli dari Jepun
  日本原装特别锋利的刀片

*Oil supply (country-specific), Wrench set, Diamond File, Cord Holder, Holster, Harness, Arm Band, Tool bag, Shear Blade

- Z : Without Charger & Battery

XPT

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Max Output Keluaran Maksima 最大输出	**200W**
Capacity Kapasiti 能力	**Max cutting : 33mm** **Max blade opening: 54mm**
Dimensions (L x W x H) Dimensi 体积	**305x43x106mm** **(12"x1-11/16"x4-3/16")**
Net Weight Keberatan 净重	**0.8kg (1.8lbs)**

DUR364LPM4 / RM2 / Z

Cordless Grass Trimmer
Pemotong Rumput tanpa Kord
充电式割草机



- **2-Speed options allows the operator to match speed to application**
  Pilihan 2-kelajuan memudahkan pengguna
  2档变速方便使用者

*Safety Goggles, Nylon Cutting Head, Accessory Bag, Hex Wrench

- PM4 : 1 x Two Port Multi Rapid Charger, 4 x 4.0Ah Battery
- RM2 : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

BL MOTOR XPT

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 350mm (13-3/4")** **Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 6,500/ 5,000**
Spindle Size Saiz Spindel 主轴尺寸	**M8 x 1.25RH**
Dimensions (L x W x H) Dimensi 体积	**1,754x310x229mm** **(69"x12-1/4"x9")**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**with BL1850B: 100**
Net Weight Keberatan 净重	**3.6 - 4.4kg (8.0 - 9.7lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Multi Function

Various attachements ideal for wide range of applications

Alat pelbagai fungsi 多功能

Pelbagai aksesori sesuai untuk pelbagai aplikasi

各种配件适合多种用途



XPT EXTREME PROTECTION TECHNOLOGY

Teknologi Perlindungan Ekstrim

防尘防水滴技术

18V X2 36V

18V Litium-ion X2

18V锂离子 X2

VIDEO CLIP

This movie was filmed in Japan.
Models and specs may vary by country.

NEW BARU | 新



High power BL motor

BL Motor berkuasa tinggi

高功率无碳刷马达

DUX60

Cordless Multi Function Power Head

Powerhead Pelbagai Fungsi Tanpa Kord

充电式多功能动力头

High/ Medium/ Low 3-speed selection and variable speed control by trigger

Pilihan 3 kelajuan tinggi/ sederhana/ rendah dan kawalan kelajuan boleh ubah oleh pencetus

高/中/低三档变速控制

Loop handle with rubberized soft grip

Pemegang getah lembut

软橡胶手柄

BL MOTOR

High operating efficiency

BL Motor provides high operating efficiency

BL Motor menjadikan operasi berkecekapan tinggi

无刷马达提供高运行效率



String trimmer
Mesin potong rumput 割草器
ER400MP
Part No. 196073-0

Brushcutter
Mesin potong rumput 割草器
EM400MP Part No. 195657-1
EM403MP Part No. 198760-7
(Picture 4)

Coffee harvester
Penuai Kopi 咖啡豆采收器
EJ400MP
Part No. 197163-2

Pole saw
Batang gergaji 高枝链锯
EY401MP
Part No. 196100-3

Edger
Kemasan tepi 草坪修边机具
EE400MP
Part No. 196752-0

Pole hedge trimmer
Pemangkas tanaman 篱笆修剪器
EN410MP Part No. 197742-6

Ground trimmer
Pemangkas tanaman
地面修剪器
EN420MP (Picture 1)
Part No. 198061-3

Pole hedge trimmer
Pemangkas tanaman 篱笆修剪器
EN401MP (Picture 2)
Part No. 196341-1

Shaft extension attachment
Penyambung alat 延伸杆
LE400MP Part No. 196031-6
Length: 1,080mm (42-1/2")
for Pole saw, Pole hedge trimmer and Coffee harvester

Cultivator
Penggembur 耕耘器
KR400MP (Picture 3) Part No. 195716-1
KR401MP Part No. 199185-8









AFT



Active Feedback Sensing Technology

turns the motor off if rotation speed suddenly slows

Teknologi Sensing Maklum Balas Aktif


Motor terhenti jika kelajuan putaran tiba-tiba menjadi perlahan

自动回馈感应科技，当旋转速度突然减慢，马达将停止

DUX60ZM3 / Z

Cordless Multi Function Power Head

Powerhead Pelbagai Fungsi Tanpa Kord | 充电式多功能动力头



- **Multi-tool system consisting of power head and versatile optional attachments is ideal for a wide range of applications**
  Boleh disambungkan dengan pelbagai alat kepala
  能接驳多款工具头

• ZM3 : (Without Charger & Battery) Brushcutter Attachment EM403, Nylon Cutting Head, 3 Tooth Blade, 3 Tooth Blade Cover, Tool bag, Box Wrench 17, Metal Blade Fixing Tool (Clamp Washer, Nut, Cup)
• Z : Without Charger & Battery

Li-ion AN 6.0 5.0 4.0 3.0 2.0 1.5

18V X2



NEW BARU | 新

No Load Speed (RPM) Kelajuan Tanpa Beban 回转速	**High: 0 - 9,700/ Medium: 0 - 8,200** **Low: 0 - 5,700**
Dimensions (L x W x H) Dimensi 体积	**1,011x320x216mm** **(39-3/4"x12-5/8"x8-1/2")**
Net Weight Berat Bersih 净重	**4.1 - 8.7kg (8.9 - 19.2lbs)**

BL MOTOR XPT AFT

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DUH651Z 650mm (25-1/2")

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar tanpa Kord
充电式篱笆修剪机



- **5-Position rotating rear handle for increased comfort during vertical and angle trimming**
  Pemegang boleh diputar untuk memudahkan kerja yang berlainan
  可旋转手柄方便不同场合工作

*Blade Cover

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 442 mm



Blade Length Panjang bilah 刀片长度	**650mm (25-1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,000 - 3,600**
Tooth Spacing Selang Gigi 牙齿间隔	**36mm (1-7/16")**
Dimensions (L x W x H) Dimensi 体积	**1,135x225x200mm (44-3/4"x8-7/8"x7-7/8")**
Net Weight Keberatan 净重	**4.7 - 5.5kg (10.3 - 12.0lbs)**

DLM431Z 430mm (17")

Cordless Lawn Mower
Mesin Pemotong Rumput tanpa Kord
充电式手推割草机



- **Large 50L capacity grass basket reduces the need for emptying**
  Kapasiti besar 50L
  50L大容量

*Blade, Socket Wrench

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Blade Type Jenis Bilah 刀片类型	**2 Tooth, Rotary Type**
Cutting Width Lebar Keratan 切割宽度	**430mm (17")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 75mm (13/16" - 2-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**50L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,600**
Recommended Mowing Area Julat Memotong Yang Disyorkan 推荐的割草范围	**with BL1850B x2: 475 - 950m²**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x2: 30**
Wheel Size Saiz Roda 轮片尺寸	**Front/ Rear: 140/ 160mm (5-1/2 / 6-5/16")**
Dimensions (L x W x H) Dimensi 体积	**1,450-1,490x460x950-1,020mm (57-58-3/4"x18-1/8"x37-1/2"-40-1/4")**
Net Weight Keberatan 净重	**17.8 - 18.4kg (39.2 - 40.6lbs)**

DLM380Z 380mm (15")

Cordless Lawn Mower
Mesin Pemotong Rumput tanpa Kord
充电式手推割草机



- **Zero emissions and reduced maintenance**
  Tanpa perlepasan asap
  无排气

*Blade, Wrench

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Blade Type Jenis Bilah 刀片类型	**2 Tooth, Rotary Type**
Cutting Width Lebar Keratan 切割宽度	**380mm (15")**
Cutting Height Ketinggian Pemotongan 切割高度	**25 - 75mm (1" - 2-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**40L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,700**
Recommended Mowing Area Julat Memotong Yang Disyorkan 推荐的割草范围	**with BL1830B x2: 270 - 540m²**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1830B x2: 17**
Wheel Size Saiz Roda 轮片尺寸	**Front/ Rear: 140/ 190mm (5-1/2 / 7-1/2")**
Dimensions (L x W x H) Dimensi 体积	**1,145x465x1,023-1,070mm (45"x18-1/4"x40-1/4"-42")**
Net Weight Keberatan 净重	**14.5kg (32.0lbs)**

DUB362RM2 / Z

Cordless Blower
Mesin Blower tanpa Kord
充电式吹风机



- **6-stage air velocity/volume selection dial with variable speed control trigger/** Dail pilihan kelajuan udara/ isi padu 6 tahap dengan picu pengawal kelajuan/ 6档风速控制

*Shoulder Belt, Nozzle

• RM2 : 1 x Rapid Charger, 2 x 4.0Ah Battery
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x 2: 85**
Max Air Volume Isipadu Angin Maksimum 最大风量	**13.4m³/min (473CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**54m/s (120MPH)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,400 - 21,500**
Dimensions (L x W x H) Dimensi 体积	**830/880/930x205x295mm (32-3/4"/34-3/4"/36-5/8"x8-1/8"x11-5/8")**
Net Weight Berat Bersih 淨重	**3.5kg (7.7lbs)**

DUB361Z

Cordless Blower
Mesin Blower tanpa Kord
充电式吹风机



- **Long blowing nozzle with curved tip for optimal blowing performance/** Muncung peniup panjang dengan hujung lengkung untuk prestasi tiupan optima/ 弯尖喷咀，卓越吹风性能

*Shoulder Belt, Nozzle

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 430 mm



Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1840B x 2: 73**
Max Air Volume Isipadu Angin Maksimum 最大风量	**High: 4.4m³/min (155CFM)** **Low: 2.6m³/min (92CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**High: 93m/s (208MPH)** **Low: 57m/s (128MPH)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 17,000** **Low: 10,000**
Dimensions (L x W x H) Dimensi 体积	**905x141x194mm (35-5/8"x5-5/8"x7-5/8")**
Net Weight Berat Bersih 淨重	**2.6kg (5.9lbs)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

makita®

JAPAN No.1
JENAMA NOMBOR SATU UJALAN ALAT ELEKTRIK DI JEPUN | 日本销量第一电动工具品牌
POWER TOOLS SELLING BRAND

Recipro Saw
Stapler
Slide Compound Miter Saw
Rotary hammer
Concrete Vibrator
Pin Nailer
Rechargeable Flashlight
Caulking Gun
Finish Nailer
Combination Hammer
Vacuum Pump
Corded and Cordless LED Worklight
Brad Nailer
LED Flashlight
Shear Wrench
Flashlight Radio
Wheelbarrow
Fan
18V x2
Fan Jacket
Heated Jacket
Heated Vest
Coffee Maker
Job Site Radio
Job Site Speaker
18V Lithium-ion
Chain Saw
Blower
Grass Shear
Hedge Trimmer
Vacuum Cleaner
Trimmer
Grass Trimmer
Garden Sprayer
Cleaner
Robotic Cleaner
Drywall Saw
Planer
String Trimmer
Cut-out Tool
Cyclone Cleaner
Jig Saw
Plate Joiner

200+ TOOLS


WITH JUST 1 BATTERY PLATFORM

200+ ALAT DENGAN HANYA 1 PLATFORM BATERI

200+ 机型可通用一个电池平台

* Applicable for **18V Lithium-ion** series only
Untuk kegunaan siri **18V Litium-ion** sahaja 仅适用于**18V锂离子**系列

18V Lithium-ion

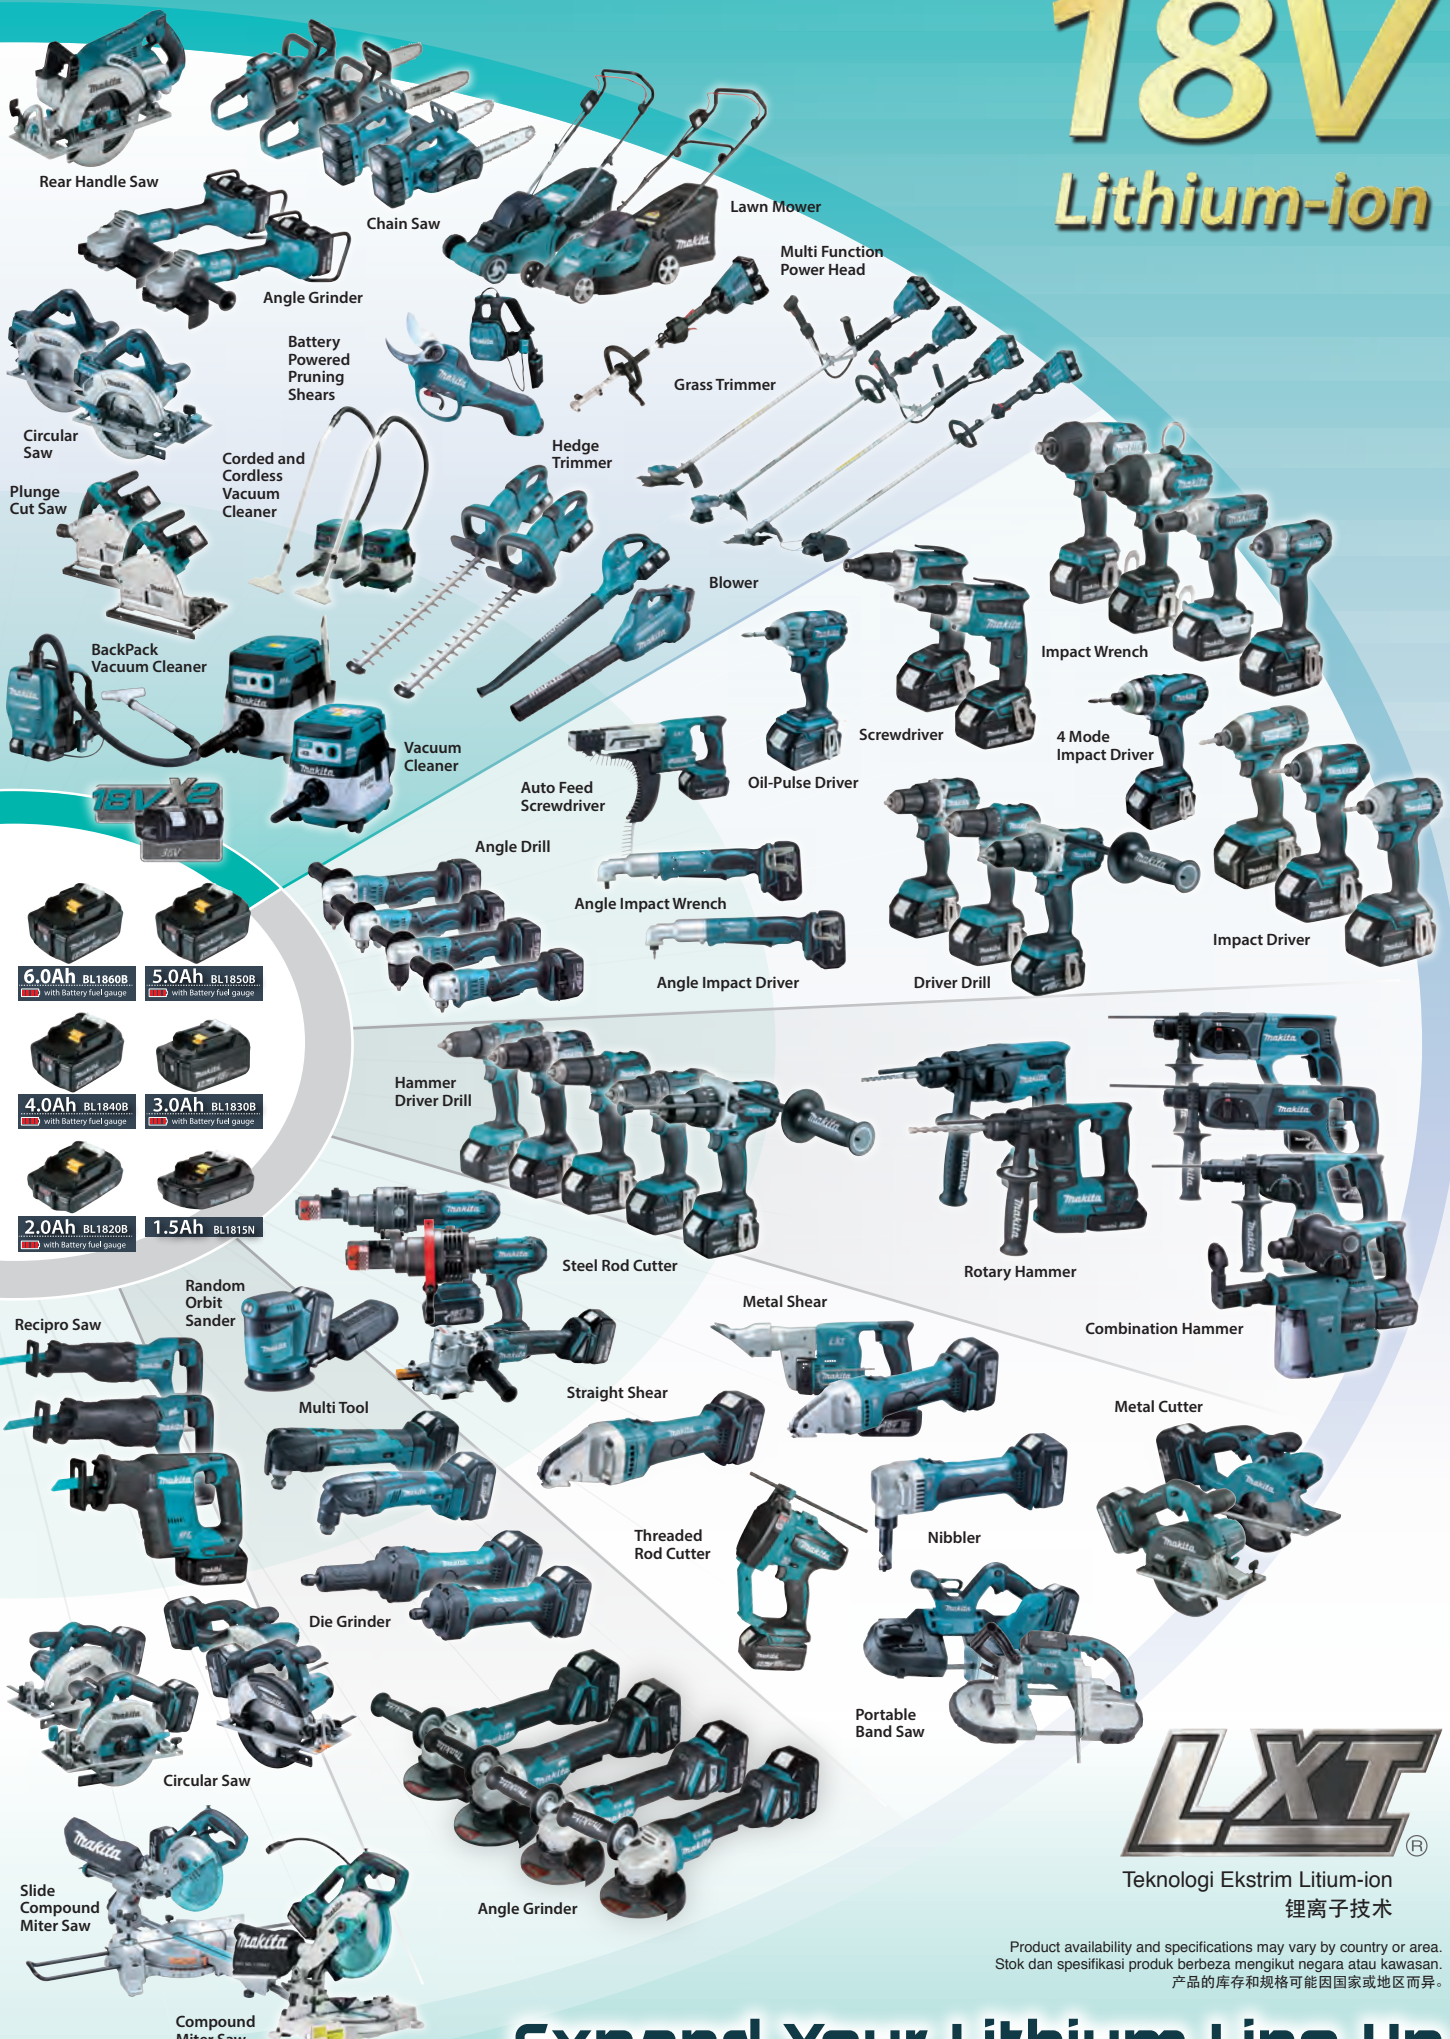

LXT®

Teknologi Ekstrim Litium-ion

锂离子技术

Product availability and specifications may vary by country or area.
Stok dan spesifikasi produk berbeza mengikut negara atau kawasan.
产品的库存和规格可能因国家或地区而异。

Expand Your Lithium Line Up

Best possible ergonomic handle for driver-drill applications

Pemegang ergonomik terbaik untuk aplikasi penggerudian | 最佳人体工学手柄

DDF481

Cordless Driver Drill

Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻

Torque setting ring
Cakera pelarasan tork
扭力调节盘

Wider torque range of 1-10 N.m in clutch mode allows for versatile applications.
untuk pelbagai keperluan
出色应对各类需求

Mechanical 2-speed gearing
Gear 2 kelajuan mekanikal
2档齿轮调速

Single sleeve keyless chuck
Chuck pengetatan diri
自锁夹头

allows for easy bit installation/ removal by one hand.
Chuck capacity: 1.5mm (1/16")-13mm (1/2")
Mudah untuk menukar pelbagai gerudi
轻松更换各种钻头

Mode selection ring
Cincin pemilihan mod
模式选择环

Long rigid side grip
Pemegang sampingan
侧手柄

helps to stabilize the bit for steady drilling/ screwdriving.
membantu menstabilkan bit untuk penggerudian/ skrup obor.
有助于稳定钻头/ 螺丝刀的钻头。



All metal gear constructionttery fuel gauge
Gear logam untuk meningkatkan ketahanan
更耐用的全金属齿轮

for extra-high transmission durability
untuk ketahanan penghantaran yang lebih tinggi
为超高的传输耐久性



Twin LED Job light
Lampu kerja LED berkembar
双颗LED工作灯

with after-glow function
Menyenangkan kerja dalam persekitaran yang kurang terang
昏暗环境工作自如



Battery fuel gauge
Penunjuk bateri
电量显示



In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened to perfectly fit the U-shape formed between user's thumb and index finger
Pemegang direka secara ergonomik mengurangkan keletihan tangan
符合人体工程学设计的手柄，减少因长时间使用而使手部产生疲劳和不适

Variable speed control by trigger
Pencetus kawalan kelajuan
触发控制变速

Ribbed soft grip
Pemegang lembut
软罗纹手柄 确保安全

Enables all finger tips to hold the handle securely against the strong rotational force of counter torque even in single-handed operation.
Membolehkan semua petua jari untuk memegang pemegang dengan selamat terhadap daya putaran tork yang teguh walaupun dalam operasi tunggal.
即使在单手操作中，也能使所有的指尖牢牢地握住手柄，抵抗反转扭矩的强大旋转力。

Belt clip
Klip tali pinggang
皮带夹

BL MOTOR
Motor tanpa berus
无碳刷马达

XPT
EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

DDF481RME / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **21 Clutch settings and drill mode for added fastening control**
  21 Pilihan klac dan mod gerudi
  21离合器设置和钻孔模式

*Side Handle, Belt Clip, (+)(-) Bit, Bit Holder

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 76mm (3")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 2,100/ 0 - 550**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 115/ 60N·m (1,020/ 530in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**125N·m (1,090in.lbs.)**
Max Output Keluaran Maksima 最大输出	**640W**
Dimensions (L x W x H) Dimensi 体积	**205x79x266mm (8-1/8"x3-1/8"x10-1/2")**
Net weight Berat Bersih 淨重	**2.7 - 3.0kg (5.9 - 6.6lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DDF458RME / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Mechanical 2-speed transmission covers a wide range of drilling and fastening applications**
  2-kelajuan mekanikal untuk pelbagai penggerudian dan aplikasi
  双速选择方便各种钻孔

*(+)(-) Bit, Side Grip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 440 | 18V



BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 76mm (3")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-2,000** **Low: 0-400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 91/ 58N·m**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**84N·m (750in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**225x79x259mm** **(8-7/8"x3-1/8"x10-1/4")**
Net weight Berat Bersih 淨重	**2.1 - 2.5kg (4.7 - 5.4lbs)**

DDF482RME / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **High speed model with compact and lightweight design**
  Model kelajuan tinggi dengan reka bentuk yang padat dan ringan
  高速型设计紧凑轻巧

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 440 | 18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 38mm (1-1/2")**
Chuck capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,900/ 0 - 600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **62/ 36N·m (550/ 320in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**54N·m (480in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**185x79x249mm** **(7-1/4"x3-1/8"x9-3/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 4.0lbs)**

DDF484RME / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Delivers 25% more drilling, driving and fastening speed**
  Kelajuan 25% lebih
  25%更快速度

*(+)(-) Bit, Belt Clip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 38mm (1-1/2")**
Chuck capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 2,000/ 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **54/ 30N·m (480 / 270 in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**172x79x261mm** **(6-3/4"x3-1/8"x10-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.3 - 4.0lbs)**

DDF459RME / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Brushless motor delivers up to 50% longer run time per charge**
  Penggunaan alat dengan motor tanpa berus dilanjutkan 50% lebih lama dengan setiap cas
  无碳刷马达工具每次充电可将使用时间延长达50%

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



GOOD
CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 38mm (1-1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,500/ 0 - 400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **45/ 25N·m (400/ 220in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**45N·m (400in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**179x78x256mm** **(7"x3-1/16"x10-1/8")**
Net Weight Berat Bersih 淨重	**1.4 - 1.7kg (3.1 - 3.8lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DDF453RME / RFE / SYE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **All metal gear construction ensures high transmission durability**
  Semua gear logam lebih tahan lama
  全金属齿轮更耐用

*(+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- SYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

DDF453SYE
WHILE STOCKS LAST
Sementara stok masih ada
售完即止



GOOD
CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,300** **Low: 0-400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 42/ 27N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**38N·m (340in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**222x79x244mm** **(8-3/4"x3-1/8"x9-5/8")**
Net Weight Berat Bersih 淨重	**1.7 - 2.0kg (3.7 - 4.4lbs)**

DDF483RME / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **BL motor delivers 40N·m of max torque**
  Motor BL menyampaikan 40N·m tork maksima
  无碳刷马达提供最大40N·m的扭力

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



GOOD
CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,700/ 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **40/ 23N·m (350/ 210in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**162x79x247mm** **(6-3/8"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 淨重	**1.2 - 1.6kg (2.7 - 3.4lbs)**

DDF083RTE / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Mechanical 2-speed transmission covers a wide range of drilling and fastening applications**
  2-kelajuan mekanikal untuk pelbagai penggerudian dan aplikasi
  双速选择方便各种钻孔

*Belt Clip, Phillips Bit

- RTE : 1 x Rapid Charger, 2 x 5.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



GOOD
CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,700/ 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **40/ 23N·m (350/ 210in.lbs.)**
Max Lock Worque Pemutaran Tenaga Maksimum 最大扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**124x79x247mm** **(4-7/8"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 淨重	**1.1 - 1.4kg (2.4 - 3.0lbs)**

Model No. 型号	No Load Speed 3rd / 2nd / 1st or Hi / Lo (rpm) Kelajuan Tanpa Beban 回转数	Mechanical 3-speed / 2-speed Mekanikal 3 Kelajuan / 2 Kelajuan 机械3速/ 2速	Torque Setting Tetapan Pemutaran 扭转设置	Max. Fastening Torque Hard / Soft (N.m) Maksimum Tenaga Pemutaran Pengancing 最快扭转	Overall Length (mm) Panjang Keseluruhan 总长度	Net Weight Berat Bersih 淨重	BL MOTOR
DDF481	0-2,100 / 0-550	2	21	115 / 60	205	2.7 - 3.0kg (5.9 - 6.6lbs)	●
DDF458	0-2,000 / 0-400	2	21	91 / 58	225	2.1 - 2.5kg (4.7 - 5.4lbs)	
DDF482	0 - 1,900 / 0 - 600	2	21	62 / 36	185	1.5 - 1.8kg (3.2 - 4.0lbs)	
DDF484	0-2,000 / 0-500	2	21	54 / 30	172	1.5 - 1.8kg (3.3 - 4.0lbs)	●
DDF459	0-1,500 / 0-400	2	16	45 / 25	179	1.4 - 1.7kg (3.1 - 3.8lbs)	●
DDF453	0-1,300 / 0-400	2	16	42 / 27	222	1.7 - 2.0kg (3.7 - 4.4lbs)	
DDF483	0-1,700 / 0-500	2	20	40 / 23	162	1.2 - 1.6kg (2.7 - 3.4lbs)	●
DDF083	0-1,700 / 0-500	2	20	40 / 23	124	1.1 - 1.4kg (2.4 - 3.0lbs)	●



*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Brushless Motor

Motor tanpa berus | 无碳刷马达

- **Maintenance-free due to no brush**
- **Life time work amount of a battery is increased**
- **Durable against long continuous operation**
- **More work amount on a single full battery charge**

penyelenggaraan mudah tanpa proses penggantian berus karbon
Alat yang menggunakan motor berus BL tidak mengalami geseran haba, dengan itu menjadikan bateri lebih tahan lama
免却更换碳刷的麻烦工序，保养轻松简单
采用BL无碳刷马达的工具没有因摩擦热导致的能量流失，所以每次充电后的连续工作时间更长



BL MOTOR

Motor tanpa berus
无碳刷马达

Brushed Motor

Motor dengan berus | 有刷马达

High power-to-weight ratio obtained by employing 4 -pole motor
Berkuasa tinggi dengan motor 4-pole
采用4极马达，高功率


4-pole motor | 2-pole motor



Max Fastening Torque — Soft Joint



Max Fastening Torque — Hard Joint

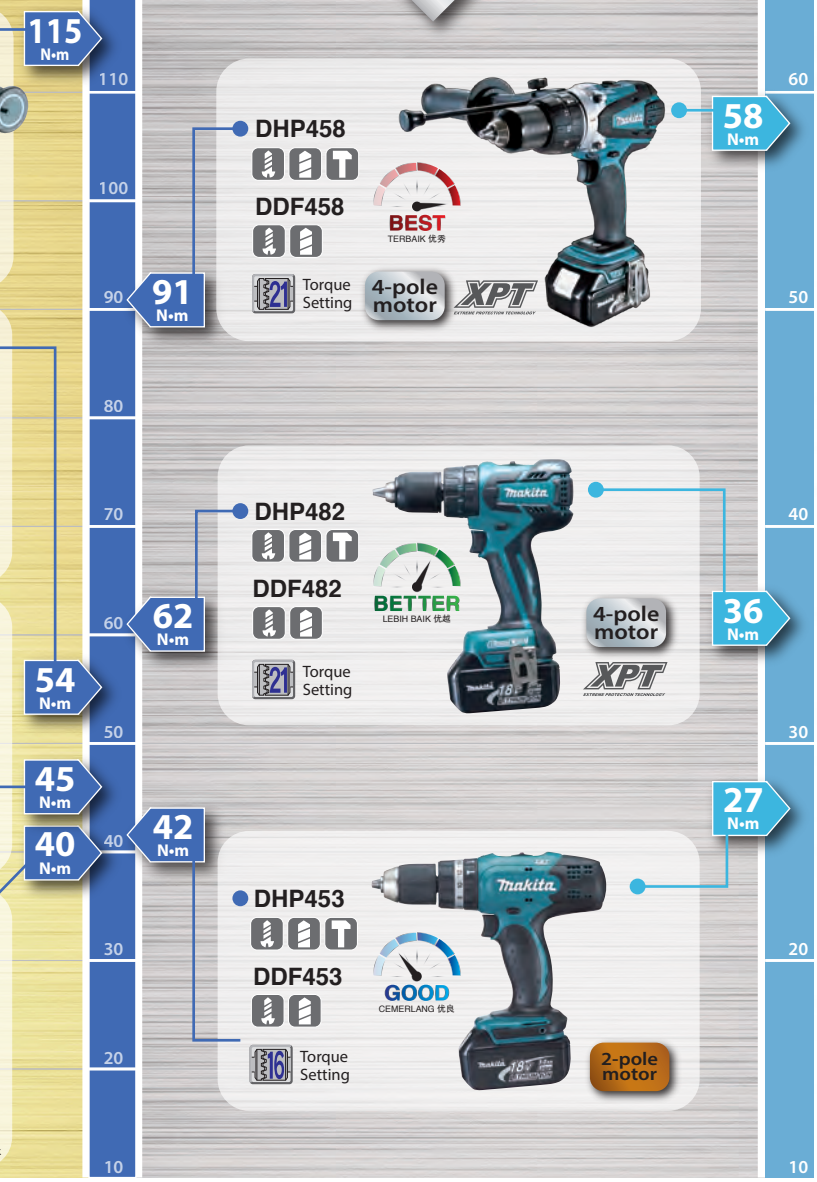

Max Fastening Torque — Soft Joint

Hammer Driver Drill / Driver Drill	DHP481 DDF481	DHP484 DDF484	DHP459 DDF459	DHP483 DDF483 / DDF083
Drilling Capacity Steel	13 mm (1/2")	13 mm (1/2")	13 mm (1/2")	13 mm (1/2")
Wood	76 mm (3")	38 mm (1-1/2")	38 mm (1-1/2")	36 mm (1-7/16")
Masonry (Hammer Driver Drill)	16 mm (5/8")	13 mm (1/2")	13 mm (1/2")	13 mm (1/2")
Impacts Per Minute (IPM)	High / Low:	High / Low:	High / Low:	High / Low:
(Hammer Driver Drill)	0 - 31,500 / 0 - 8,250	0 - 30,000 / 0 - 7,500	0 - 22,500 / 0 - 6,000	0 - 25,500 / 0 - 7,500
No Load Speed (RPM)	High / Low:	High / Low:	High / Low:	High / Low:
	0 - 2,100 / 0 - 550	0 - 2,000 / 0 - 500	0 - 1,500 / 0 - 400	0 - 1,700 / 0 - 500
Max lock torque	125 N·m (1,090 in·lbs)	60 N·m (530 in·lbs)	45 N·m (400 in·lbs)	40 N·m (350 in·lbs)
Overall length	205mm (8-1/8")	DHP484: 182mm (7-1/8")	DHP459: 192mm (7-9/16")	DHP483: 176mm (6-15/16")
		DDF484: 172mm (6-3/4")	DDF459: 179mm (7")	DDF483: 162mm (6-3/8")
				DDF083: 124mm (4-7/8")
Net weight	DHP481: 2.4 kg (5.4 lbs)	DHP484: 1.6 kg (3.5 lbs)	DHP459: 1.5 kg (3.3 lbs)	DHP483: 1.3 kg (2.9 lbs)
	DDF481: 2.4 kg (5.2 lbs)	DDF484: 1.6 kg (3.5 lbs)	DDF459: 1.4 kg (3.1 lbs)	DDF483: 1.3 kg (2.8 lbs)
				DDF083: 1.1 kg (2.4 lbs)

Max Fastening Torque — Hard Joint

Hammer Driver Drill / Driver Drill	DHP458 DDF458	DHP482 DDF482	DHP453 DDF453
Drilling Capacity Steel	13 mm (1/2")	13 mm (1/2")	13 mm (1/2")
Wood	76 mm (3")	38 mm (1-1/2")	36 mm (1-7/16")
Masonry (Hammer Driver Drill)	16 mm (5/8")	13 mm (1/2")	13 mm (1/2")
Impacts Per Minute (IPM)	High / Low:	High / Low:	High / Low:
(Hammer Driver Drill)	0 - 30,000 / 0 - 6,000	0 - 28,500 / 0 - 9,000	0 - 19,500 / 0 - 6,000
No Load Speed (RPM)	High / Low:	High / Low:	High / Low:
	0 - 2,000 / 0 - 400	0 - 1,900 / 0 - 600	0 - 1,300 / 0 - 400
Max lock torque	84 N·m (750 in·lbs)	54 N·m (480 in·lbs)	38 N·m (340 in·lbs)
Overall length	225mm (8-7/8")	DHP482: 198mm (7-3/4")	DHP453: 240mm (9-7/16")
		DDF482: 185mm (7-1/4")	DDF453: 222mm (8-3/4")
Net weight	DHP458: 2.0kg (4.5lbs)	DHP482: 1.5kg (3.4lbs)	DHP453: 1.7kg (3.7lbs)
	DDF458: 2.0kg (4.4lbs)	DDF482: 1.5kg (3.3lbs)	DDF453: 1.6kg (3.5lbs)

Extreme Protection Technology

Teknologi Perlindungan Ekstrim | 防尘防水滴技术

For use in outdoor applications or harsh environments, protection from dust and dripping water is enhanced compared with existing model.
Untuk kegunaan dalam aplikasi luaran atau persekitaran yang keras, perlindungan dari habuk dan air titisan dipertingkatkan berbanding model sedia ada.
用于户外应用或恶劣环境，与现有型号相比，防尘防滴水效果更佳。



* **Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DHP481RME / RFE / Z 13mm (1/2")

Cordless Hammer Driver Drill

Tukul Pemutar Skru Bergerudi
Tanpa Kord
充电式冲击螺丝起子电钻



- **0-31,500 IPM for fast hammer drilling in masonry materials**
  0-31,500 IPM untuk penggerudian tukul cepat dalam bahan batu
  0-31,500 IPM用于石材快速锤钻

*Depth Gauge, Side Handle, Belt Clip, (+)(-) Bit, Bit Holder

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 76mm (3")** **Masonry: 16mm (5/8")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High/ Low:** **0 - 31,500/ 0 - 8,250**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 2,100/ 0 - 550**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **115/ 60N·m (1,020/ 530in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**125N·m (1,090in.lbs.)**
Max Output Keluaran Maksima 最大输出	**640W**
Dimensions (L x W x H) Dimensi 体积	**205x79x249mm** **(8-1/8"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 净重	**2.7 - 3.0kg (6.0 - 6.7lbs)**

BL MOTOR XPT

DHP458RME / RFE / Z 13mm (1/2")

Cordless Hammer Driver Drill

Tukul Pemutar Skru Bergerudi
Tanpa Kord
充电式冲击螺丝起子电钻



- **All metal gears and aluminum gear housing for maximum jobsite durability**
  Gear logam dan aluminium untuk meningkatkan ketahanan
  金属齿轮和铝制齿轮组件结构增加耐久性

*(+)(-) Bit, Side Grip, Depth Rod

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

440



BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 76mm (3")** **Masonry: 16mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-2,000** **Low: 0-400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0-30,000** **Low: 0-6,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 91/ 58N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**84N·m (750in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**225x79x259mm** **(8-7/8"x3-1/8"x10-1/4")**
Net Weight Berat Bersih 净重	**2.2 - 2.6kg (4.9 - 5.7lbs)**

XPT

DHP482RME / RFE / RFX1 / Z 13mm (1/2")

Cordless Hammer Driver Drill

Tukul Pemutar Skru Bergerudi
Tanpa Kord
充电式冲击螺丝起子电钻



- **High speed model with compact and lightweight design**
  Model kelajuan tinggi dengan reka bentuk yang padat dan ringan
  高速型，设计紧凑轻巧

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- RFX1 : 1 x Rapid Charger, 1 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

440



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 38mm (1-1/2")** **Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 28,500** **Low: 0 - 9,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,900** **Low: 0 - 600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 62/ 36N·m (550/ 320in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**54N·m (480in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**198x79x249mm** **(7-3/4"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 净重	**1.5 - 1.8kg (3.4 - 4.1lbs)**

XPT

DHP484RME / RFE / Z 13mm (1/2")

Cordless Hammer Driver Drill

Tukul Pemutar Skru Bergerudi
Tanpa Kord
充电式冲击螺丝起子电钻



- **0-30,000 IPM for fast hammer drilling in masonry materials**
  0-30,000 IPM untuk penggerudian tukul cepat dalam bahan batu
  0-30,000 IPM用于石材快速锤钻

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 38mm (1-1/2")** **Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 30,000** **Low: 0 - 7,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,000** **Low: 0 - 2,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 54 / 30N·m (480/ 270in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**182x79x261mm** **(7-1/8"x3-1/8"x10-1/4")**
Net Weight Berat Bersih 净重	**1.6 - 1.9kg (3.5 - 4.2lbs)**

BL MOTOR XPT

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DHP459RME / RFE / Z 13mm (1/2")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Brushless motor delivers up to 50% longer run time per charge**
  Penggunaan alat dengan motor tanpa berus dilanjutkan 50% lebih lama dengan setiap cas
  无碳刷马达工具每次充电可将使用时间延长达50%

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

GOOD
CEMERLANG 优良



Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 38mm (1-1/2") Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 22,500 Low: 0 - 6,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,500 Low: 0 - 400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 45/ 25N·m (400/ 220in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**45N·m (400in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**192x78x256mm (7-9/16"x3-1/16"x10-1/8")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.3 - 4.0lbs)**

DHP453RME / RFE / SYE / Z 13mm (1/2")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **16 Adjustable torque settings plus drill mode**
  16 penyelarasan tork & mod gerudi
  16可调扭力设置及钻模式

*(+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- SYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

DHP453SYE
WHILE STOCKS LAST
Sementara stok masih ada
售完即止

GOOD
CEMERLANG 优良



Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 36mm (1-7/16") Masonry: 13mm (1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 19,500 Low: 0 - 6,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,300 Low: 0 - 400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 42/ 27N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**38N·m (340in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**240x79x244mm (9-7/16"x3-1/8"x9-5/8")**
Net Weight Berat Bersih 淨重	**1.7 - 2.0kg (3.6 - 4.4lbs)**

DHP483RME / RFE / Z 13mm (1/2")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **0-25,500 IPM for fast hammer drilling in masonry materials**
  0-25,500 IPM untuk penggerudian tukul cepat dalam bahan batu
  0-25,500 IPM用于石材快速锤钻

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

GOOD
CEMERLANG 优良



Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 36mm (1-7/16") Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 25,500 Low: 0 - 7,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,700 Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 40/ 23N·m (350/ 210in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**176x79x247mm (6-15/16"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.6lbs)**

Model No. 型号	No Load Speed 3rd / 2nd / 1st or Hi / Lo (rpm) Kelajuan Tanpa Beban 回转数	Mechanical 3-speed / 2-speed Mekanikal 3 Kelajuan / 2 Kelajuan 机械3速/ 2速	Torque Setting Tetapan Pemutaran 扭转设置	Max. Fastening Torque Hard / Soft (N.m) Maksimum Tenaga Pemutaran Pengancing 最快扭转	Overall Length (mm) Panjang Keseluruhan 总长度	Net Weight Berat Bersih 淨重	BL MOTOR
DHP481	0-2,100 / 0-550	2	21	115 / 60	205	2.7 - 3.0kg (6.0 - 6.7lbs)	●
DHP458	0-2,000 / 0-400	2	21	91 / 58	225	2.2 - 2.6kg (4.9 - 5.7lbs)	
DHP482	0 - 1,900 / 0 - 600	2	21	62 / 36	198	1.5 - 1.8kg (3.4 - 4.1lbs)	
DHP484	0-2,000 / 0-500	2	21	54 / 30	182	1.6 - 1.9kg (3.5 - 4.2lbs)	●
DHP459	0-1,500 / 0-400	2	16	45 / 25	192	1.5 - 1.8kg (3.3 - 4.0lbs)	●
DHP453	0-1,300 / 0-400	2	16	42 / 27	240	1.7 - 2.0kg (3.6 - 4.4lbs)	
DHP483	0-1,700 / 0-500	2	20	40 / 23	176	1.3 - 1.6kg (2.8 - 3.6lbs)	●



Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Brushless Motor

Motor tanpa berus | 无碳刷马达

- **Maintenance-free due to no brush**
- **Life time work amount of a battery is increased**
- **Durable against long continuous operation**
- **More work amount on a single full battery charge**

penyelenggaraan mudah tanpa proses penggantian berus karbon
Alat yang menggunakan motor berus BL tidak mengalami geseran haba, dengan itu menjadikan bateri lebih tahan lama
免却更换碳刷的麻烦工序，保养轻松简单
采用BL无碳刷马达的工具没有因摩擦热导致的能量流失，所以每次充电后的连续工作时间更长



BL MOTOR
Motor tanpa berus
无碳刷马达

Brushed Motor

Motor dengan berus | 有刷马达

High power-to-weight ratio obtained by employing 4 -pole motor
Berkuasa tinggi dengan motor 4-pole
采用4极马达，高功率

4-pole motor



Max Fastening Torque

DTD170

BL MOTOR XPT

4 stage power selection + Teks mode + A

BEST TERBAIK 优秀



175 N·m

DTD154

BL MOTOR XPT

3 stage power selection + Teks mode

BEST TERBAIK 优秀



170 N·m

DTD153

BL MOTOR XPT

Ideal for applications such as tightening of self-drilling screws

BETTER LEBIH BAIK 优越



165 N·m

DTD155

BL MOTOR XPT

2 stage power selection + A

GOOD CEMERLANG 优良




140 N·m

120

A mode [assist mode]

helps to eliminate "screw cam-out" and "cross threading" by driving at low speed until the start of tightening.

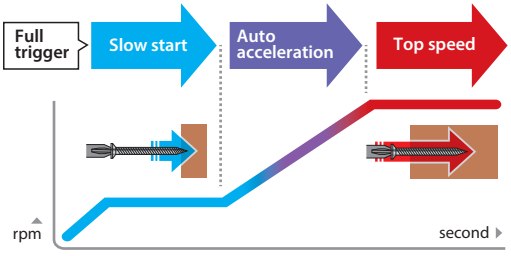

DTD149



BETTER LEBIH BAIK 优越

4-pole motor

XPT

DTD152



BETTER LEBIH BAIK 优越

4-pole motor

XPT

Ideal for applications such as tightening of self-drilling screws

Cordless Oil-Pulse Driver

DTS141

BL MOTOR XPT

40 N·m

Suitable for noise sensitive job site

BEST TERBAIK 优秀

3 stage power selection + Teks mode

SOFT IMPACT

Low Noise 77dB



Cordless 4 Mode Impact Driver

DTP141

BL MOTOR

150 N·m

BEST TERBAIK 优秀

4 Operation modes

Impact driver / Hammer drill / Drill / Screwdriver

3 stage power selection + Teks mode



	DTD170	DTD154	DTD147	DTD153	DTD145
Impacts Per Minute (IPM)	0 - 3,800 / 3,600 / 2,600 / 1,100	0 - 3,800 / 2,600 / 1,100	0 - 3,400 / 2,800 / 1,300	0 - 3,600	0 - 3,400 / 2,800 / 1,300
No Load Speed (RPM)	0 - 3,600 / 3,200 / 2,100 / 1,100	0 - 3,600 / 2,100 / 1,100	0 - 2,800 / 2,300 / 1,400	0 - 3,400	0 - 2,600 / 2,000 / 1,300
Overall length	117mm (4-5/8")	117mm (4-5/8")	129mm (5-1/8")	126mm (5")	139mm (5-1/2")
Net weight	1.2kg (2.7lbs)	1.2 kg (2.8 lbs)	1.3 kg (2.8 lbs)	1.3 kg (2.8 lbs)	1.2 kg (2.7 lbs)

	DTD155	DTS141	DTP141	DTD149	DTD152
Impacts Per Minute (IPM)	0 - 3,900 / 1,600	0-2,700 / 0-2,200 / 0-1,400	0-3,200 / 0-2,400 / 0-1,200	0 - 3,200	0 - 3,500
No Load Speed (RPM)	0 - 3,000 / 1,300	0-3,200 / 0-2,000 / 0-1,200	0-2,700 / 0-2,200 / 0-1,300	0 - 2,500	0 - 2,900
Overall length	129mm (5-1/8")	136mm (5-3/8")	171mm (6-3/4")	135mm	137mm (5-3/8")
Net weight	1.3 kg (2.8 lbs)	1.2kg (2.7lbs)	1.6kg (3.5lbs)	1.5 kg	1.3 kg (2.8 lbs)

"Teks" mode is a special mode optimum for fast tightening of self drilling screws without damaging the screw and the workpiece.
"Teks" mod adalah mod khas yang optimum untuk mengetatkan skru penggerudian sendiri tanpa cepat merosakkan skru dan bahan kerja.
"Teks"模式是一种特殊模式，可以在不损坏螺钉和工件的情况下快速拧紧自攻螺钉。

Teks mode



*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。


ULTRA-COMPACT with 6-Mode operation

Ultra padat dengan 6 mod operasi | 超紧凑的6模式操作

DTD170

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord | 充电式冲击螺丝起子机



Phosphorescent bumper
Bulatan Phosphorescent
磷光环



One-touch bit installation
Pemasangan satu klik
一键式安装

Twin LED job light with preglow and afterglow functions
Lampu kerja LED berkembar dengan fungsi preglow dan afterglow
双LED工作灯具有预亮和余辉功能

Variable speed control by trigger
Pencetus kawalan kelajuan
触发控制变速



175N.m
Max Torque
Pemutaran Tenaga Maksimum
最大扭力

Ergonomically designed handle with soft grip
Pemegang lembut
软罗纹手柄 确保安全


Belt clip
Klip tali pinggang
皮带夹

Battery Protector
Pelindung Bateri | 电池保护套


designed to protect the battery cartridge from dust and dripping water in outdoor applications or harsh environments.
Direka untuk melindungi kartrij bateri daripada habuk dan titisan air
保护电池防尘防水滴



4 Stage impact power selection
Pemilihan kuasa 4 peringkat | 4段式冲击力选择









6 MODES

6 jenis mod | 6种模式




BL MOTOR
Motor tanpa berus
无碳刷马达

XPT
EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水满技术

T-mode (for self drilling screws)



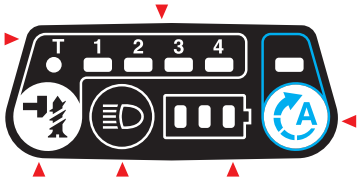

Selection switch
Suis pemilihan mode
模式选择


ON/OFF switching of job light
Suis lampu kerja
工作灯开关按钮

Battery fuel gauge
Penunjuk tahap bateri
电量显示

A-mode (assist mode)




A-mode (Assist mode)

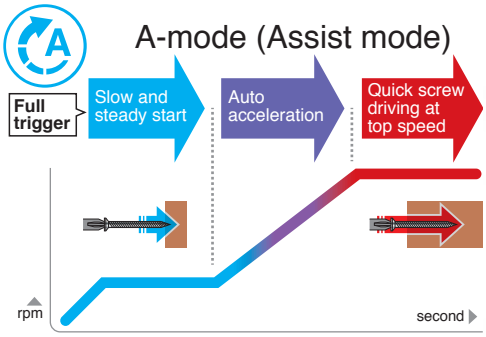

DTD170RME / RFE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **6-Mode operation for A-mode/ T-mode/ Max/ Hard/ Medium/ Soft impact mode for multiple applications**
  Operasi 6-mod
  6模式操作

*Belt Clip
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M16 (3/16" - 5/8")** **High Tensile Bolt: M5 - M14 (3/16" - 9/16")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max/ Hard/ Med/ Soft/ T mode:** **0 - 3,600/ 3,200/ 2,100/ 1,100/ 3,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max/ Hard/ Med/ Soft/ T mode:** **0 - 3,800/ 3,600/ 2,600/ 1,100/ 2,600**
Max Fastening Torque Maksimum Tenaga Pemutaran	**175 N·m (1,550 in.lbs.)** Pengancing 最快扭力
Dimensions (L x W x H) Dimensi 体积	**117x79x236mm** **(4-5/8"x3-1/8"x9-1/4")**
Net weight Berat Bersih 淨重	**1.2 - 1.5kg (2.7 - 3.4lbs)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

High Rotational Speed

Putaran Kelajuan Tinggi 高转速

3,600rpm

175N.m
Max Torque
Pemutaran Tenaga Maksimum
最大扭力

1.2kg
Lightweight
Ringan 轻便

BL MOTOR
Motor tanpa berus
无碳刷马达

XPT
EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水涌技术

Aluminum hammer case
Casing aluminium
铝制外壳

One-touch bit installation
Pemasangan bit satu klik
一键式安装



T-mode:
Tightening mode for self-drilling screw
Pengetatan skru penggerudian diri
自钻螺丝拧紧模式


T-mode is a special mode optimum for fast tightening of self drilling screws without damaging the screw and the workpiece
T-mod adalah mod khas yang optimum untuk mengetatkan skru penggerudian diri tanpa merosakkan skru dan bahan kerja
T型模式是一种特殊的模式，在不损坏螺钉和工件的情况下，快速紧固自钻螺钉

Electronic 3 stage impact power selection
Pemilihan kuasa impak elektronik 3 peringkat
三段冲击力选择

In order to reduce fault tightening, hard/medium/soft impact power can be selected to the material of workpiece or screw type simply by pushing a button.
Pemilihan kuasa tinggi/ serderhana/ rendah untuk bahan dan jenis kerja yang berlainan untuk mengurangkan kegagalan pengetatan
为了减少紧固时的故障发生，可根据加工工件的材质及紧固螺丝的规格，按动一个按钮调节高/中/底三种冲击动力。



Twin LED job light with preglow & afterglow functions
Lampu kerja LED berkembar dengan fungsi preglow dan afterglow
双LED工作灯具有预亮和余辉功能



Variable speed control by trigger
Pencetus kawalan kelajuan
触发控制变速

DTD154
Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机

Ergonomically designed handle with soft grip
Pemegang lembut
软罗纹手柄 确保安全

Belt clip
Klip tali pinggang
皮带夹

DTD154RME / RFE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Aluminum hammer case creates the impression of rigidity of the machine**
  Casing aluminium yang bertahan
  坚硬铝制外壳

*Belt Clip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M16 (3/16" - 5/8")** **High Tensile Bolt: M5 - M14 (3/16" - 9/16")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,600/ 0 - 2,100/ 0 - 1,100**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,800/ 0 - 2,600/ 0 - 1,100**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**175N·m (1,550in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**117x79x236mm** **(4-5/8"x3-1/8"x9-1/4")**
Net weight Berat Bersih 净重	**1.3 - 1.6kg (2.7 - 3.4lbs)**

DTD153RTE / RFE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Aluminum hammer case creates the impression of rigidity of the machine**
  Casing aluminium yang bertahan
  坚硬铝制外壳

*Belt Clip

- RTE : 1 x Rapid Charger, 2 x 5.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M16 (3/16" - 5/8")** **High Tensile Bolt: M5 - M14 (3/16" - 9/16")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**170N·m (1,500in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**126x79x238mm** **(5"x3-1/8"x9-3/8")**
Net weight Berat Bersih 净重	**1.3 - 1.6kg (2.8 - 3.5lbs)**

---

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DTD149RFE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机

- **Developed for main applications such as tightening of self-drilling screws or light duty machine screws**
  Khas untuk aplikasi seperti pengetatan skru penggerudian diri
  特别适用于紧固自钻式螺钉

*Belt Clip

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 448 mm | 18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**165N·m (1,460in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**135x79x238mm** **(5-5/16"x3-1/8"x9-3/8")**
Net weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.5lbs)**

DTD152RME / RFE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Aluminum hammer case creates the impression of rigidity of the machine**
  Casing aluminium yang bertahan
  坚硬铝制外壳

*Belt Clip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 448 mm | 18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M16 (3/16" - 5/8")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**165N·m (1,460 in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**137x79x238mm** **(5-3/8"x3-1/8"x9-3/8")**
Net weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.5lbs)**

DTD155RME / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **3-Mode operation for A-mode / Hard mode / Soft mode for multiple applications**
  Operasi 3-mod untuk pelbagai aplikasi
  3模式操作

*Belt Clip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 mm (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard/ Soft: 0 - 3,000/ 0 - 1,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard/ Soft: 0 - 3,900/ 0 - 1,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**140N·m (1,240in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**135x79x232mm** **(5-5/16"x3-1/8"x9-1/8")**
Net Weight Berat Bersih 淨重	**1.2 - 1.5kg (2.6 - 3.2lbs)**

DTP141

Cordless 4 Mode Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机

Motor tanpa berus
无碳刷马达

Impact driver (3-speed)
Pemutar Skru Impak
冲击螺丝起子机

High speed fastening of bolts and screws
Kelajuan tinggi bolt dan skru
高速紧固螺栓和螺丝



Hammer drill (2-speed)
Tukul Gerudi
冲击电钻

Drilling pilot holes in concrete
Penggerudian dalam konkrit
在混凝土钻孔



Drill (2-speed)
Gerudi
电钻

Drilling holes in wood and metal
Penggerudian dalam kayu dan logam
在木材和金属钻孔



Screwdriver (2-speed)
Pemutar Skru
螺丝起子机

Driving small diameter screws
Pemutar skru diameter kecil
驱动小直径螺丝



DTP141RFE / Z

Cordless 4 Mode Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **4 Operation Modes (Impact Driver, Hammer Drill, Drill, Screwdriver) and Teks Screw Mode selection**
  Operasi 4 Mod
  4种操作模式

*Belt Clip

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V



BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Steel: 10mm (3/8")/ Wood: 21mm (13/16")** **Masonry: 8mm (5/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Impact-driver mode** **(Hard/ Medium/ Soft) : 0-2,700/ 0-2,200/ 0-1,300** **Drill mode (Hi/ Lo): 0-2,700/ 0-700** **Hammer drill mode (Hi/ Lo): 0-2,700/ 0-700** **Screwdriver mode (Hi/ Lo):** **0-1,100/ 0-300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Impact-driver mode (Hard / Medium / Soft):** **0-3,200/ 0-2,400/ 0-1,200** **Hammer Drill Mode (Hi / Lo) : 0-32,400/ 0-8,400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Impact-driver mode:** **150N·m (1,330in.lbs.)** **Drill mode (Hard/ Soft):** **22/ 13N·m**
Dimensions (L x W x H) Dimensi 体积	**171x79x250mm** **(6-3/4"x3-1/8"x9-7/8")**
Net Weight Berat Bersih 淨重	**1.5 - 1.9kg (3.4 - 4.1lbs)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DTS141RFE / Z

Cordless Oil-Pulse Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击起子机



- **Low noise level of 77dB**
  Bunyi rendah
  低噪音

*Belt Clip
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M8 (3/16" - 5/16")** **High Tensile Bolt: M5 - M6 (3/16" - 1/4")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0-3,200/ Medium: 0-2,200** **Soft: 0-1,200**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0-2,700/ Medium: 0-2,200** **Soft: 0-1,400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**40N·m (355in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**136x79x240mm** **(5-3/8"x3-1/8"x9-1/2")**
Net Weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.5lbs)**

Model No. 型号	No Load Speed (rpm) Kelajuan Tanpa Beban 回转数	Electronic Speed Kelajuan Elektronik 电子速度	Max. Fastening Torque (N.m) Maksimum Tenaga Pemutaran Pengancing 最快扭转	Overall Length (mm) Panjang Keseluruhan 总长度	Net Weight Berat Bersih 淨重	BL MOTOR
Cordless Impact Driver						
DTD170	0 - 3,600/ 3,200/ 2,100/ 1,100/ 3,600	4	175	117	1.2 - 1.5kg (2.7 - 3.4lbs)	●
DTD154	0 - 3,600/ 0 - 2,100/ 0 - 1,100	3	175	117	1.3 - 1.6kg (2.7 - 3.4lbs)	●
DTD153	0 - 3,400		170	126	1.3 - 1.6kg (2.8 - 3.5lbs)	●
DTD149	0 - 2,500		165	135	1.3 - 1.6kg (2.8 - 3.5lbs)	
DTD152	0 - 2,900		165	137	1.3 - 1.6kg (2.8 - 3.5lbs)	
DTD155	0 - 3,000/ 0 - 1,300	2	140	135	1.2 - 1.5kg (2.6 - 3.2lbs)	●
Cordless 4 Mode Impact Driver (Impact-driver mode)						
DTP141	0-2,700/ 0-2,200/ 0-1,300	3	150	171	1.5 - 1.9 kg (3.4 - 4.1 lbs)	●
Cordless Oil-Pulse Drive						
DTS141	0-3,200/ 0-2,000/ 0-1,200	3	40	136	1.3 - 1.6 kg (2.8 - 3.5 lbs)	●

DTL061Z

Cordless Angle Impact Driver
Pemutar Skru Impak Sudut Tanpa Kord
充电式角向冲击螺丝起子机



- **360 degrees rotatable head enables operation from optimum angle**
  Kepala boleh diputar untuk memudahkan kerja yang berlainan
  可旋转头部方便不同角度工作

*Phillips Bit
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M4 - M12 (5/32" - 1/2")** **High Tensile Bolt: M4 - M8 (5/32" - 5/16")** **Coarse thread (in length): 22 - 75mm (7/8" - 2-31/32")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**387x78x116mm** **(15-1/4"x3-1/16"x4-9/16")**
Net Weight Berat Bersih 淨重	**1.4 - 2.0kg (3.1 - 4.3lbs)**

DDA351Z 10mm (3/8")

Cordless Angle Drill
Gerudi Sudut Tanpa Kord
充电式角向电钻



- **Original 4-pole motor for power, lightweight and compact size**
  Motor 4-pole asal berkuasa, ringan dan padat
  原装4极电机功率强劲，轻量，且体积小巧

*Side Grip
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

440 W

18V



Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,800**
Dimensions (L x W x H) Dimensi 体积	**326x79x115mm** **(12-7/8"x3-1/8"x4-1/2")**
Net weight Berat Bersih 淨重	**1.6 - 1.9kg (4.2 - 3.5lbs)**

DFS452Z

Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **Push Drive Technology for Quieter Operation; Minimizes Power Consumption**
  Teknologi pemacu tolak meminimumkan penggunaan kuasa
  推动技术降低功耗

*Phillips Bit, Magnetic Bit Holder, Belt Clip
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V




Capacity Kapasiti 能力	**Self-Drilling Screw: 6mm (1/4")** **Drywall Screw: 5mm (3/16")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 4,000**
Dimensions (L x W x H) Dimensi 体积	**251x79x259mm** **(10"x3-1/8"x11-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 3.9lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DFS250RTE / RFE / Z

Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **Ultra-high efficiency comparable to AC screwdrivers**
  Kecekapan ultra tinggi yang setanding dengan pemutar skru AC
  超高效率与AC螺丝刀相等

*Phillips Bit, Magnetic Bit Holder, Belt Clip

- RTE : 1 x Rapid Charger, 2 x 5.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Coarse Thread: 4.5 x 90mm (3/16" x 3-1/2")** **Self-Drilling Screw: 6mm (1/4")** **Drywall Screw: 5mm (3/16")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**259x79x259mm (10-1/4"x3-1/8"x10-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.9kg (3.4 - 4.1lbs)**

DFS251RTE / RFE / Z

Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **High torque ideal for fastening self-drilling screw**
  Tork tinggi sesuai untuk mengetatkan skru penggerudian diri
  高扭力紧固自钻螺丝

*Magnetic Socket Bit

- RTE : 1 x Rapid Charger, 2 x 5.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Self-Drilling Screw: 6mm (1/4")** **Drywall Screw: 5mm (3/16")** **Hex Socket Screw: 6mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**237x79x259mm (9-3/8"x3-1/8"x11-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 3.9lbs)**

DFR550Z

Cordless Auto Feed Screwdriver
Pemutar Skru Suapan Auto Tanpa Kord
充电式自动螺丝起子机



- **Ideal for drywall and subfloors**
  Sesuai untuk drywall dan lantai
  理想的干砌墙和地板

*Phillips Bit x3

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

440 mm

18V



Screw Strip Kapasiti 能力	**4 x 25 - 55mm (5/32" x 1" - 2-3/16")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,000**
Dimensions (L x W x H) Dimensi 体积	**424x80x238mm (16-3/4"x3-1/8"x9-3/8")**
Net weight Berat Bersih 淨重	**2.1 - 3.1kg (4.6 - 6.9lbs)**



***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Brushless Motor

Motor tanpa berus | 无碳刷马达

- **Maintenance-free due to no brush**
- **Life time work amount of a battery is increased**
- **Durable against long continuous operation**
- **More work amount on a single full battery charge**

penyelenggaraan mudah tanpa proses penggantian berus karbon
Alat yang menggunakan motor berus BL tidak mengalami geseran haba, dengan itu menjadikan bateri lebih tahan lama
免却更换碳刷的麻烦工序，保养轻松简单
采用BL无碳刷马达的工具没有因摩擦热导致的能量流失，所以每次充电后的连续工作时间更长



BL MOTOR

Motor tanpa berus
无碳刷马达

Brushed Motor

Motor dengan berus | 有刷马达

High power-to-weight ratio obtained by employing 4 -pole motor
Berkuasa tinggi dengan motor 4-pole
采用4极马达, 高功率

4-pole motor | 2-pole motor



Max Fastening Torque

1050 | 1000 | 800 | 400 | 300 | 200 | 100

DTW1001

BL MOTOR | Square drive size 3/4" (19mm)

Standard	M12 - 30
High strength	M10 - 24

1,050 N•m | 1,000 N•m

BEST TERBAIK 优秀



DTW1002

BL MOTOR | Square drive size 1/2" (12.7mm)

Standard	M12 - 30
High strength	M10 - 24

800 N•m

BEST TERBAIK 优秀



DTW800

BL MOTOR | Square drive size 7/16" (11.1mm)

Standard	M12 - 24
High strength	M10 - 22

280 N•m

BEST TERBAIK 优秀



DTW285

BL MOTOR | Square drive size 1/2" (12.7mm)

Standard	M10 - 20
High strength	M10 - 16

BETTER LEBIH BAIK 优越

Reverse Rotation Auto Stop Mode
Mod auto berhenti untuk putaran terbalik
反转自动停止模式



DTW450

4-pole motor | Square drive size 1/2" (12.7mm)

Standard	M12 - 22
High strength	M12 - 16

440 N•m

BEST TERBAIK 优秀



DTW251

4-pole motor | Square drive size 1/2" (12.7mm)

Standard	M10 - 16
High strength	M10 - 14

230 N•m

BETTER LEBIH BAIK 优越



DTW190

2-pole motor | Square drive size 1/2" (12.7mm)

Standard	M8 - 16
High strength	M8 - 12

190 N•m

GOOD CEMERLANG 优良



Tool does not come with socket.

	DTW1001	DTW1002	DTW800	DTW285	DTW450	DTW251	DTW190
Driving shank (Hex)	19mm (3/4")	12.7mm (1/2")	11.1 mm (7/16")	12.7mm (1/2")	12.7mm (1/2")	12.7mm (1/2")	12.7 mm (1/2")
Impacts Per Minute (IPM)	0-2,200 / 0-2,000 / 0-1,800	0-2,200 / 0-2,000 / 0-1,800	0-2,200 / 0-2,000 / 0-1,800	0-3,500 / 0-2,600 / 0-1,800	2,200	0-3,200	0 - 3,000
No Load Speed (RPM)	0-1,800 / 0-1,000 / 0-900	0-1,800 / 0-1,000 / 0-900	0-1,800 / 0-1,000 / 0-900	0-2,800 / 0-2,100 / 1,600	1,600	0-2,100	0 - 2,300
Overall length	229mm (9")	229mm (9")	229mm (9")	147mm (5-3/4")	266mm (10-1/2 ")	165mm (6-1/2")	176 mm (6-15/16")
Net weight	3.4kg (7.6lbs)	3.3kg (7.3lbs)	3.4kg (7.6lbs)	1.5kg (3.2lbs)	3.4kg (7.5lbs)	1.5kg (3.3lbs)	1.4 kg (3.2 lbs)

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

EXCELLENT PERFORMANCE
as POWERFUL as AC model

Prestasi cemerlang dan berkuasa seperti model berkod
性能优异像有线工具一样强大

BL MOTOR
Motor tanpa berus
无碳刷马达

Extra-high maximum tightening torque 1,050N·m

Tork pengetatan yang lebih tinggi, maksimum 1,050N.m
超高最大锁定扭力达1,050N.m

1,050N.m
Max Torque
Pemutaran Tenaga Maksimum
最大扭转

3.4kg
Lightweight
Ringan 轻便




Twin LED job light with preglow & afterglow functions
Lampu kerja LED berkembar dengan fungsi preglow dan after glow
双 LED 工作灯具有预亮和余辉功能


Electronic 3 stage impact power selection
Pemilihan kuasa impak elektronik 3 tahap
电子式 3 段冲击力选择

High power BL Motor and NEW impact mechanism

Motor BL berkuasa tinggi dan mekanisme impak baru
大功率BL马达及新型冲击机构



High power

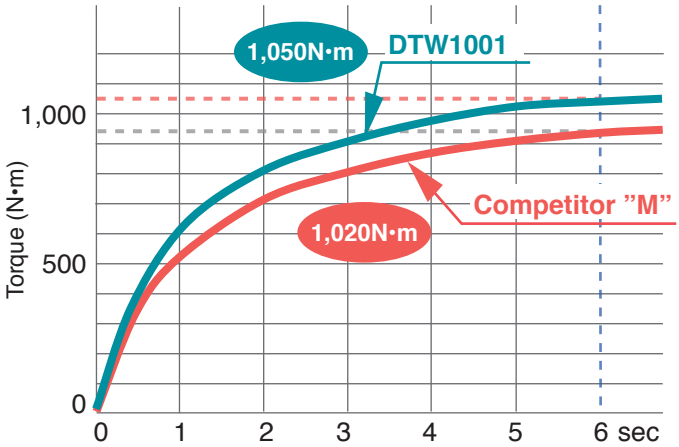

Compact & lightweight

DTW1001 1,050N·m



TW1000 1,000N·m



153mm shorter
4.7kg lighter

DTW1001RMJ / RFJ / Z 19mm (3/4")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Makita's Most Powerful Impact Wrench**
  Perengkuh impak tanpa kord yang paling kuat di Makita
  Makita最强的冲击扳手

*Hook

- RMJ : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RFJ : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Fastening Capacities Kapasiti 能力	**Standard Bolt: M12 - M30 (1/2" - 1-1/4")** **High Tensile Bolt: M10 - M24 (3/8" - 1")**
Square Drive Skru Persegi 方形螺杆	**19mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard/ Medium/ Soft:** **0 - 1,800 / 0 - 1,000 / 0 - 900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard/ Medium/ Soft:** **0 - 2,200 / 0 - 2,000 / 0 - 1,800**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**1,050N·m (780ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**229x91x289mm** **(9"x3-5/8"x11-3/8")**
Net weight Berat Bersih 淨重	**3.4 - 3.7kg (7.5 - 8.2lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DTW1002RMJ / RFJ / Z 12.7mm (1/2")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Efficient impact system (Max 2,200 IPM) with less vibration**
  Sistem impak yang cekap dan mengurangkan getaran
  高效的冲击系统并减少振动

*Hook

- RMJ : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RFJ : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Fastening Capacities Kapasiti 能力	**Standard Bolt: M12 - M30 (1/2" - 1-1/4")** **High Tensile Bolt: M10 - M24 (3/8" - 1")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard/ Medium/ Soft:** **0 - 1,800/ 0 - 1,000/ 0 - 900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard/ Medium/ Soft:** **0 - 2,200/ 0 - 2,000/ 0 - 1,800**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**1,000N·m (740ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**229x91x289mm** **(9"x3-5/8"x11-3/8")**
Net Weight Berat Bersih 净重	**3.3 - 3.6kg (7.3 - 8.0lbs)**

DTW800RMJ / RFJ / Z 11.2mm (7/16")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Extremely high power 800N·m (590ft.lbs.) way ahead of competitors**
  Kuasa tinggi sehingga 800N.m (590kaki.Lbs) mengalahkan jenama pesaing
  高功率达 800N.m(590ft.lbs) 领先竞争品牌

*Hook

- RMJ : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RFJ : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Fastening Capacities Kapasiti 能力	**Standard Bolt: M12 - M24 (1/2" - 1")** **High Tensile Bolt: M10 - M22 (3/8" - 7/8")**
Hex Shank Skru Persegi 方形螺杆	**11.1mm (7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard / Medium / Soft:** **0 - 1,800 / 0 - 1,000 / 0 - 900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard / Medium / Soft:** **0 - 2,200 / 0 - 2,000 / 0 - 1,800**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**800N·m (590ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**229x91x303mm** **(9"x3-5/8"x11-7/8")**
Net Weight Berat Bersih 净重	**3.4 - 3.7kg (8.2 - 7.5lbs)**

DTW450RME / RFE / Z 12.7mm (1/2")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Compact and lightweight design provide superior balance and control**
  Reka bentuk padat dan ringan untuk keseimbangan dan kawalan yang unggul
  小巧轻便的设计提供出色的平衡和控制

*Hook

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

441

18V



BEST
TERBAIK 优秀

Fastening Capacities Kapasiti 能力	**Standard Bolt: M12 - M22 (1/2" - 7/8")** **High Tensile Bolt: M12 - M16 (1/2" - 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,200**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**440N·m (325 ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**266x82x290mm** **(10-1/2 "x3-1/4"x11-3/8")**
Net Weight Berat Bersih 净重	**3.1 - 3.4kg (7.6 - 6.9lbs)**

DTW285RME / RFE / Z 12.7mm (1/2")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **BL motor delivers 280N·m of max torque**
  Motor BL menyampaikan 280N·m tork maksima
  无碳刷马达提供最大280N·m的扭力

*Belt Clip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

Reverse Rotation Auto Stop Mode
Mod auto berhenti untuk putaran terbalik
反转自动停止模式




BETTER
LEBIH BAIK 优越

Fastening Capacities Kapasiti 能力	**Standard Bolt: M10 - M20 (3/8" - 3/4")** **High Tensile Bolt: M10 - M16 (3/8" - 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard/ Medium/ Soft:** **0 - 2,800/ 0 - 2,100/ 0 - 1,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard/ Medium/ Soft:** **0 - 3,500/ 0 - 2,600/ 0 - 1,800**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**280 N·m (210 ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**147x79x249mm** **(5-3/4"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 净重	**1.5 - 1.8kg (3.2 - 3.9lbs)**

DTW251RME / RFE / Z 12.7mm (1/2")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **High power, compact and lightweight 4-pole motor**
  Motor berkuasa tinggi, padat dan ringan
  高功率，小巧轻便

*Belt Clip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

448

18V



BETTER
LEBIH BAIK 优越

Fastening Capacities Kapasiti 能力	**Standard Bolt: M10 - M16 (3/8" - 5/8")** **High Tensile Bolt: M10 - M14 (3/8" - 9/16")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,100**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**230N·m (170ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**165x79x234mm** **(6-1/2"x3-1/8"x9-1/4")**
Net Weight Berat Bersih 净重	**1.5 - 1.8kg (3.2 - 3.9lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DTW190RME / RFE / Z 12.7mm (1/2")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **190N·m (140ft.lbs.) of Max torque optimal for scaffold bulding**
  Paling sesuai untuk pemasangan perancah
  最适合搭建脚手架

*Shoulder Strap (country-specific), Tool Hanger (country-specific)

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Fastening Capacities Kapasiti 能力	**Standard Bolt: M8 - M16 (5/16" - 5/8")** **High Tensile Bolt: M8 - M12 (5/16" - 1/2")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**190N·m (140ft.lbs.)**
Overall Length Dimensi 体积	**176mm (6-15/16")**
Net Weight Berat Bersih 淨重	**1.4 - 1.8kg (3.2 - 3.9lbs)**

Model No. 型号	Square Drive Skru Pemacu Persegi 方形传动螺杆	Max. Tightening Torque (N.m) Pemutaran Ketat Tenaga Maksimum 最大拧紧扭转	No Load Speed (rpm) Kelajuan Tanpa Beban 回转数	Overall Length (mm) Panjang Keseluruhan 总长度	Net Weight Berat Bersih 淨重	BL MOTOR
DTW1001	3/4" (19mm)	1,050 (780)	0-1,800/ 0-1,000 / 0-900	229	3.4 - 3.7 kg (7.5 - 8.2 lbs)	●
DTW1002	1/2" (12.7mm)	1,000 (740)	0-1,800/ 0-1,000 / 0-900	229	3.3 - 3.6 kg (7.3 - 8.0 lbs)	●
DTW800	7/16" (11.2mm) Hex.	800 (590)	0-1,800/ 0-1,000 / 0-900	229	3.4 - 3.7 kg (8.2 - 7.5 lbs)	●
DTW450	1/2" (12.7mm)	440 (325)	1,600	266	3.1 - 3.4 kg (7.6 - 6.9 lbs)	
DTW285	7/16" (11.2mm) Hex.	280 (210)	0-2,800/ 0-2,100/ 1,600	147	1.5 - 1.8 kg (3.2 - 3.9 lbs)	●
DTW251	1/2" (12.7mm)	230 (170)	0-2,100	165	1.5 - 1.8 kg (3.2 - 3.9 lbs)	
DTW190	1/2" (12.7mm)	190 (140)	0-2,300	176	1.4 - 1.8 kg (3.2 - 3.9 lbs)	

DTL063Z 9.5mm (3/8")

Cordless Angle Impact Wrench
Perengkuh Impak Sudut Tanpa Kord
充电式角向冲击套筒扳手



- **Compact angle head for easy access to bolts in tight places**
  Kepala sudut padat sesuai digunakan di tempat yang sempit
  紧凑的转角头，适合在狭窄的空间使用

*Belt Clip

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Fastening Capacities Kapasiti 能力	**Standard Bolt: M4 - M12 (5/32" - 1/2")** **High Tensile Bolt: M4 - M8 (5/32" - 5/16")**
Square Drive Skru Persegi 方形螺杆	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**60 N·m (N/A ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**387x78x116mm** **(15-1/4"x3-1/16"x4-9/16")**
Net Weight Berat Bersih 淨重	**1.4 - 2.0kg (3.1 - 4.3lbs)**



* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DHR242RME / RFE / Z 24mm (15/16")

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



Li-ion 6.0 5.0 4.0 3.0 2.0 1.5 Ah | 18V | 3 modes



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Depth Gauge, Side Grip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

BL MOTOR XPT

Impact Energy Kekuatan Impak 单次最大锤击力	**2J**
Capacity Kapasiti 能力	**Concrete: 24mm (15/16")** **Steel: 13mm (1/2")/ Wood: 27mm (1-1/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,700**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 950**
Dimensions (L x W x H) Dimensi 体积	**328x85x213mm** **(12-7/8"x3-3/8"x8-3/8")**
Net Weight Berat Bersih 净重	**3.1 - 3.8kg (6.7 - 8.4lbs)**

DHR241RFE / Z 20mm (13/16")

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



Li-ion 6.0 5.0 4.0 3.0 2.0 1.5 Ah | 441 | 18V | 3 modes



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Depth Gauge, Side Grip

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Impact Energy Kekuatan Impak 单次最大锤击力	**1.9J**
Capacity Kapasiti 能力	**Concrete: 20mm (13/16")** **Steel: 13mm (1/2")/ Wood: 26mm (1")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Dimensions (L x W x H) Dimensi 体积	**417x84x219mm** **(16-3/8"x3-5/16"x8-5/8")**
Net Weight Berat Bersih 净重	**3.2 - 4.0kg (7.1 - 8.8lbs)**

DHR202RME / RFE / Z 20mm (13/16")

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



Li-ion 6.0 5.0 4.0 3.0 2.0 1.5 Ah | 441 | 18V | 3 modes



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击


*Depth Gauge, Side Grip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Capacity Kapasiti 能力	**Concrete: 20mm (13/16")** **Steel: 13mm (1/2")/ Wood: 26mm (1")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Dimensions (L x W x H) Dimensi 体积	**358x84x259mm** **(14-1/8"x3-5/16"x10-1/4")**
Net Weight Berat Bersih 净重	**3.2 - 4.0kg (7.1 - 8.8lbs)**

DHR171Z 17mm (11/16")

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电锤



Li-ion 6.0 5.0 4.0 3.0 2.0 1.5 Ah | 18V | 2 modes



- **2-Mode operation; rotation only, or hammering with rotation only**
  operasi 2 mod: hanya putaran, penukulan dengan putaran
  2档模式变换: 仅旋转，旋转并锤击

*Dust Cup (country-specific), Side Grip, Depth Gauge

- Z : Without Charger & Battery

BL MOTOR

Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.2J** **Our experimental conditions: 1.1J**
Capacity Kapasiti 能力	**Concrete: 17mm (11/16")** **Steel: 10mm (3/8")/ Wood: 13mm (1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,800**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 680**
Dimensions (L x W x H) Dimensi 体积	**BL1815N: 273x86x194mm** **(10-3/4"x3-3/8"x7-5/8")** **BL1850B: 273x86x211mm** **(10-3/4"x3-3/8"x8-5/16")**
Net Weight Berat Bersih 净重	**2.1 - 2.8kg (4.6 - 6.2lbs)**

DHR165RME / RFE / Z 16mm (5/8")

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电锤



Li-ion 6.0 5.0 4.0 3.0 2.0 1.5 Ah | 430 | 18V | 2 modes



- **2-Mode operation; rotation only, or hammering with rotation only**
  operasi 2 mod: hanya putaran, penukulan dengan putaran
  2档模式变换: 仅旋转，旋转并锤击

*Depth Gauge, Side Grip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

XPT

Impact Energy Kekuatan Impak 单次最大锤击力	**1.3J**
Capacity Kapasiti 能力	**Concrete: 16mm (5/8")** **Steel: 13mm (1/2")/ Wood: 24mm (15/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 5,300**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,600**
Dimensions (L x W x H) Dimensi 体积	**297x79x253mm** **(11-3/4"x3-1/8"x10")**
Net Weight Berat Bersih 净重	**2.3 - 3.0kg (5.0 - 6.6lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

EXCELLENT EDGE CUTTING

Pemotongan tepi yang sangat baik 优秀的侧面切割

DSC250

Cordless Steel Rod Cutter

Pemotong Keluli Tanpa Kord
充电式钢筋切割机

Cutting capacity range of 10 - 25mm standard rebar

Memotong rebar 10 - 25mm
切割能力范围10 - 25mm标准钢筋

NEW BARU | 新

BL MOTOR
Motor tanpa berus
无碳刷马达

ADT
Automatic Torque Drive Technology
Teknology Pemanduan Tayar Automatik
自动扭力驱动科技




Removable Dust Cover
Penutup debu boleh tanggal
可拆卸的防尘罩

Dust bag mounting part
Bahagian pemasangan beg habuk | 集尘袋安装部

Cuts the joint bar and the frame of rod from 3.5mm to the edge

Potongan kira-kira 3.5mm dari tepi
能从平面及侧面边缘约 3.5mm 切割

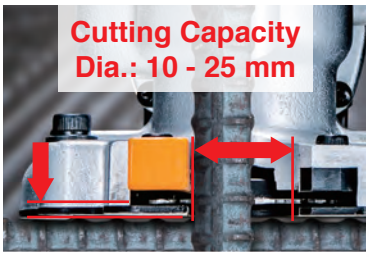

Highly visible heavy-duty fluorescent material guide

Panduan bahan pendarfluor tugas berat yang sangat jelas
荧光材料可见度高的重厚型导轨

DSC250ZK

Cordless Steel Rod Cutter
Pemotong Keluli Tanpa Kord
充电式钢筋切割机



- **Ideal for edge cutting of threaded rods and rebars**
  Sesuai untuk pemotongan tepi batang dan rebar
  非常适合螺纹杆和钢筋的边缘切割

*Tipped Saw, Dust Bag, Side Grip, Hex Wrench

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



NEW BARU | 新

Blade Diameter Diameter Bilah 锯片直径	**110mm (4-5/16")**
Cutting Capacity Kapasiti Pemotongan 切割能力	**Dia.: 10 - 25mm (3/8" - 1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,200**
Dimensions (L x W x H) Dimensi 体积	**471x137x139mm (18-1/2"x5-3/8"x5-1/2")**
Net Weight Berat Bersih 淨重	**3.9 - 4.0kg (8.7 - 8.8lbs)**

DSC162Z

Cordless Steel Rod Cutter
Pemotong Keluli Tanpa Kord
充电式钢筋切割机

- **4-Way rotatable cutting blade provides up to 4,000 cuts before needing to be replaced**
  Potongan sehingga 4000 kali dengan bilah pemotong berputar 4
  4段旋转切割刀片可提供高达4000个切割

*Wrench, Hex Wrench, Oil supply (country-specific)

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 440

18V



Cutting Capacity Kapasiti Pemotongan 切割能力	**Dia.: 3 - 16mm (1/8" - 5/8")**
Cutting Speed (sec) Kelajuan Memotong 切割速度	**4.0**
Dimensions (L x W x H) Dimensi 体积	**380x108x265mm (15"x4-1/4"x10-3/8")**
Net Weight Berat Bersih 淨重	**7.1 - 7.2kg (15.7 - 15.8lbs)**

DSC191Z

Cordless Steel Rod Cutter
Pemotong Keluli Tanpa Kord
充电式钢筋切割机



- **Ideal for cutting steel bars laid in concrete slab**
  Sesuai untuk memotong konkrit bertetulang
  适用于切割钢筋混凝土

*Wrench, Hex Wrench, Oil supply (country-specific)

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 440

18V



Cutting Capacity Kapasiti Pemotongan 切割能力	**Dia.: 3 - 20mm (1/8" - 3/4")**
Cutting Speed (sec) Kelajuan Memotong 切割速度	**6.5**
Dimensions (L x W x H) Dimensi 体积	**412x212x284mm (16-1/5"x8-3/8"x11-1/8")**
Net Weight Berat Bersih 淨重	**11.1 - 11.2kg (24.5 - 24.6lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DCS551RMJ / RFJ / Z 150mm (5-7/8")

Cordless Metal Cutter
Pemotong Logam Tanpa Kord
充电式金属切割机



- **Cuts 51mm (2") conduit in a single pass**
  Memotong konkrit 51mm (2") dalam satu potongan
  一次性切割51mm(2")导管

*TCT Saw Blade, Hex Wrench, Safety Goggles

- RMJ : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RFJ : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Blade Diameter Diameter Bilah 锯片直径	**150mm (5-7/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 57.5mm (2-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,900**
Dimensions (L x W x H) Dimensi 体积	**332x158x231mm (13-1/8"x6-1/4"x9-1/8")**
Net weight Berat Bersih 淨重	**2.5 - 2.8kg (5.5 - 6.2lbs)**

DCS550RFE / Z 136mm (5-3/8")

Cordless Metal Cutter
Pemotong Logam Tanpa Kord
充电式金属切割机



- **Carbide-tipped 30T blade for cutting a wide range of materials**
  Bilah carbide tip 30T untuk pemotongan pelbagai bahan
  硬质合金尖30T锯片用于切割各种材料

*TCT Saw Blade, Hex Wrench, Safety Goggles

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery


Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

440



Blade Diameter Diameter Bilah 锯片直径	**136mm (5-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 51mm (2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,600**
Dimensions (L x W x H) Dimensi 体积	**348x180x201mm (13-3/4"x7-1/8"x7-7/8")**
Net weight Berat Bersih 淨重	**2.2 - 2.6kg (4.9 - 5.7lbs)**

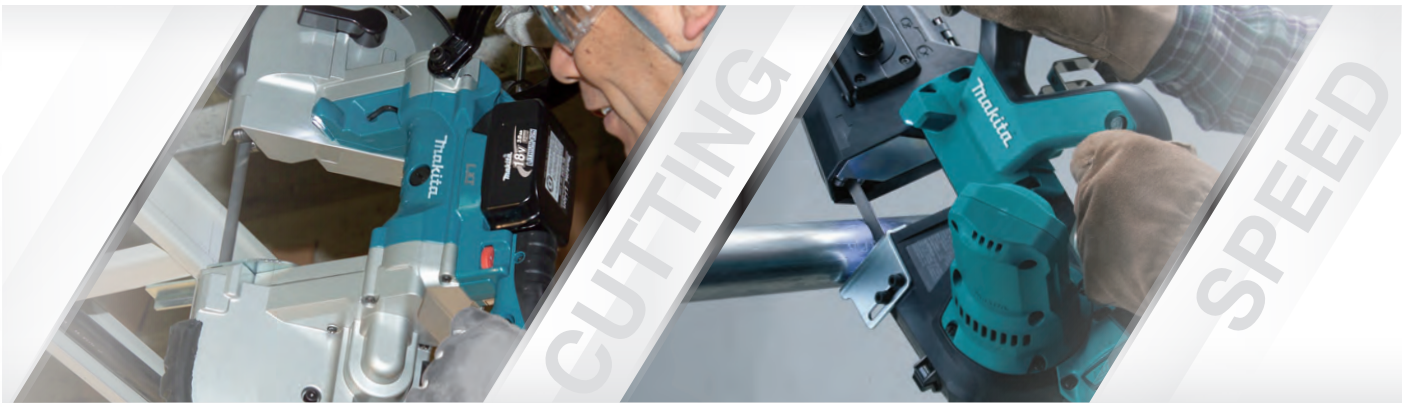

DPB180Z

Cordless Portable Band Saw
Gergaji Pita Tanpa Kord
充电式轻便带锯



- **6-Setting variable speed control dial enables user to match the speed to the application**
  Kawalan kelajuan 6 tahap untuk pelbagai aplikasi
  6速度控制适合多种用途

*Band Saw Blade, Hex Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

430



Capacity Kapasiti 能力	**Round: 120mm (4-3/4")** **Rectangular workpiece w/o stand: 120x120mm (4-3/4"x4-3/4")**
Blade Speed Kelajuan Bilah 刀片速度	**1.4-2.7m/s (275-530ft/min.)**
Dimensions (L x W x H) Dimensi 体积	**523x231x313mm (20-5/8"x9-1/8"x12-3/8")**
Net Weight Berat Bersih 淨重	**6.8 - 7.1kg (14.9 - 15.7lbs)**

DPB181Z

Cordless Portable Band Saw
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式轻便带锯



- **Lightweight design with excellent balance**
  Reka bentuk ringan dengan keseimbangan yang sangat baik
  轻巧且平衡性好

*Band Saw Blade, Hex Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Round: 64mm (2-1/2")** **Rectangular workpiece w/o stand: 64x64mm (2-1/2"x2-1/2")**
Blade Speed Kelajuan Bilah 刀片速度	**3.2m/s (630ft/min.)**
Dimensions (L x W x H) Dimensi 体积	**468x197x233mm (18-1/2"x7-3/4"x9-1/8")**
Net Weight Berat Bersih 淨重	**3.3 - 3.6kg (7.3 - 8.0lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DJS130RFE / Z 1.3mm

Cordless Metal Shear
Pemotong Logam Tanpa Kord
充电式电剪



- **360° swivel shear head for increased cutting convenience**
  Pusingan kepala pemotong 360° meningkatkan keselesaan pemotongan
  360° 旋转切割头 方便简易切割

*Hex Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 440 mm | 18V



Capacity Kapasiti 能力	**Steel up to 400 N/mm² : 1.3mm** **Steel up to 600 N/mm² : 1.0mm**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800**
Dimensions (L x W x H) Dimensi 体积	**350x80x193mm** **(13-3/4"x3-1/8"x7-5/8")**
Net weight Berat Bersih 淨重	**2.3 - 2.6kg (5.0 - 5.8lbs)**

DJS161Z 1.6mm

Cordless Straight Shear
Pemotong Logam Lurus
Tanpa Kord
充电式电剪压穿式



- **High cutting capacity: cuts up to 1.6mm thick mild steel sheet**
  Kapasiti pemotongan tinggi
  切割能力高

*Hex Wrench, Thickness Gauge

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 430 mm | 18V



Capacity Kapasiti 能力	**Steel up to 400 N/mm² : 1.6mm** **Steel up to 600 N/mm² : 1.2mm** **Aluminum up to 200 N/mm² : 2.5mm**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,300**
Dimensions (L x W x H) Dimensi 体积	**362x78x118mm** **(14-1/4"x3-1/16"x4-5/8")**
Net weight Berat Bersih 淨重	**1.8 - 2.2kg (4.1 - 4.8lbs)**

DJS101Z 1.0mm

Cordless Metal Shear
Pemotong Logam Tanpa Kord
充电式电剪



- **Easy curve cutting with a smooth edge**
  Memudahkan pemotongan lengkung
  简易切割曲线，切口边缘顺滑

*Hex Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 430 mm | 18V



Capacity Kapasiti 能力	**Steel up to 400 N/mm² : 1.0mm** **Steel up to 600 N/mm² : 0.7mm** **Aluminum up to 200 N/mm² : 2.5mm**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,300**
Dimensions (L x W x H) Dimensi 体积	**364x78x118mm** **(14-3/8"x3-1/16"x4-5/8")**
Net weight Berat Bersih 淨重	**1.8 - 2.2kg (4.0 - 4.7lbs)**

DJN161Z 1.6mm (16Ga)

Cordless Nibbler
Tukul Pemutar Skru Bergerudi
Tanpa Kord
充电式电冲剪



- **Ideal for cutting roofing sheet metal at thicknesses up to 16 gauge**
  Sesuai untuk memotong logam lembaran bumbung
  非常适合切割屋顶钣金

*Hex Wrench, Wrench, Punch, Die

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 430 mm | 18V



Capacity Kapasiti 能力	**Steel up to 400 N/mm² : 1.6mm** **Steel up to 600 N/mm² : 1.2mm** **Aluminum up to 200 N/mm² : 2.5mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**Inside edge : 45mm (1-3/4")** **Outside edge : 50mm (2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**1,900**
Dimensions (L x W x H) Dimensi 体积	**313x78x189mm** **(12-3/8"x3-1/16"x7-7/16")**
Net weight Berat Bersih 淨重	**1.9 - 2.3kg (4.3 - 5.0lbs)**


*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

ADT

Automatic Torque Drive Technology
Teknology Tork Automatik
自动扭力驱动科技

Automatically changes the cutting speed according to load conditions for an optimum operation:
Fungsi pertukaran kalajuan automatik: 自动变速功能：

- **On light duty: high-speed rotation mode**
- **On heavy duty: high torque mode**
- Pada tugas ringan: mod putaran berkelajuan tinggi
- Pada tugas berat: mod tork tinggi
- 轻载: 高速旋转模式
- 重载: 高扭矩模式






AFT

Active Feedback Sensing Technology
Teknologi Sensor Maklum Balas Automatik
自动回顾感应科技

Shuts down the tool to protect the user, if the rotation speed suddenly slows down
Jika kelajuan putaran tiba-tiba dikurangkan, alat akan dimatikan secara automatik untuk melindungi pengguna
若旋转速度突然降低，工具将自动关闭以保护保护使用者






BL MOTOR

Motor tanpa berus
无碳刷马达

Faster Cutting with High power and High torque brushless motor
Pemotongan yang lebih cepat dengan motor tanpa berus berkuasa tinggi
无碳刷马达使切割更快速

Better gravity balance
Imbangan graviti yang lebih baik 更好的重力平衡

High maneuverability in any angle since it is possible to grab the center of gravity
Ketangkasan tinggi di mana-mana sudut dengan pegangan pada pusat graviti
重心抓握，提高于任何角度使用的敏捷性

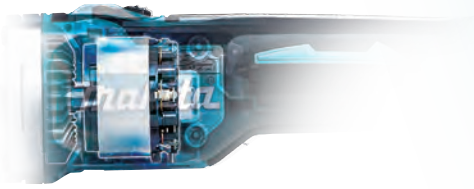



BRAKE

Electric Brake System
Sistem Brek Elektrik 电子自动刹车系统

Electric brake
Brek elektrik 电子自动刹车

Electric brake is activated after the tool is switched off
Brek elektrik diaktifkan selepas alat dimatikan
电子自动刹车在工具关闭后被启动

Large switch lever
Tuas suis yang besar 大开关杆

with lock-off function (without lock-on function)
Lock-off function prevents the switch lever from being accidentally pulled
dengan fungsi mengunci
menghalang tuas suis daripada ditarik secara tidak sengaja
锁定功能可防止开关杆被意外拉动

Anti-restart function
Fungsi anti-restart 防止意外重启功能

The motor does not start up if battery is inserted when the switch slid to "on".
Selepas memuatkan bateri, motor tidak bermula jika suis ditetapkan ke kedudukan "ON"
装入电池后，若开关设于「开启」位置时，马达不会启动

Model No. 型号			No Load Speed (rpm) Kelajuan Tanpa Beban 回转数	Switch Suis 开关	BL MOTOR	AFT	ADT	BRAKE	AWS	Anti-restart function Fungsi restart semula 防重启功能
100mm	115mm	125mm								
DGA414	-	DGA514	3,000 - 8,500	Slide	●	●	●	●	●	●
DGA411	-	DGA511	3,000 - 8,500	Slide	●	●	●			●
DGA406	DGA456	-	8,500	Slide	●	●	●	●		●
DGA404	-	-	8,500	Slide	●	●	●			●
DGA402	DGA452	-	11,000	Slide						●
DGA418	-	DGA518	3,000 - 8,500	Paddle	●	●	●	●	●	●
DGA408	DGA458	DGA508	8,500	Paddle	●	●	●	●		●
DGA405	-	DGA505	8,500	Paddle	●	●	●			●

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



AWS

Auto - start Wireless System

Switch on the tool, and Vacuum cleaner is activated

Sistem permulaan wayarles automatik
无线自动启动系统

It has been impossible, but now Vacuum cleaner can be automatically activated by Cordless tools with our newly developed wireless system.

hidupkan alat dan pembersih vakum akan diaktifkan pembersih vakum boleh diaktifkan secara automatik oleh alat tanpa kord dengan Sistem permulaan wayarles automatik baru

启动工具，吸尘器自动开启我们新研发的无线系统可以通过无线工具自动激活吸尘器

NEW BARU | 新



Bluetooth® AWS connects to power tool with Bluetooth

AWS menyambungkan alat melalui Bluetooth AWS通过蓝牙连接电动工具

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license. Other trademarks and trade names are those of their respective owners.

DGA411Z 100mm (4")

Cordless Angle Grinder

Pengisar Sudut Tanpa Kord
充电式角向磨光机

- **Spiral bevel gear for more efficient transfer of energy**
  Gear serong lingkaran untuk pemindahan tenaga yang lebih cekap
  螺旋锥齿轮高效输送能源

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关

Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x117x140mm (15"x4-5/8"x5-1/2")**
Net weight Berat Bersih 淨重	**2.2 - 2.8kg (4.8 - 6.1lbs.)**

DGA414ZU 100mm (4")

Cordless Angle Grinder

Pengisar Sudut Tanpa Kord
充电式角向磨光机

- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**
  Sistem Wayarles Automatik (AWS) menyambungkan pembersih vakum dengan Bluetooth
  自动启动无线系统（AWS）通过蓝牙连接吸尘器

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关

Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x117x147mm (15"x4-5/8"x5-3/4")**
Net weight Berat Bersih 淨重	**2.2 - 2.8kg (4.9 - 6.3lbs.)**

DGA418ZU 100mm (4")

Cordless Angle Grinder

Pengisar Sudut Tanpa Kord
充电式角向磨光机

- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**
  Sistem Wayarles Automatik (AWS) menyambungkan pembersih vakum dengan Bluetooth
  自动启动无线系统（AWS）通过蓝牙连接吸尘器

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V




Paddle Switch
Suis Pemicu | 扳机开关

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x117x146mm (15"x4-5/8"x5-3/4")**
Net weight Berat Bersih 淨重	**2.2 - 2.9kg (5.0 - 6.3lbs.)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DGA406RME / RFE / Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Electric brake for increased operator safety**
  Brek elektrik meningkatkan pelindungan keselamatan pengguna
  电子自动刹车提高保护使用者的安全

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关



Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x117x146mm (14-1/4"x4-5/8"x5-3/4")**
Net weight Berat Bersih 净重	**2.18 - 2.77kg (4.81 - 6.12lbs)**

DGA408RME / RFE / Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Efficiency for heavy-duty grinding applications**
  Kecekapan untuk aplikasi pengisaran berat
  高效率重型磨削

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

Paddle Switch
Suis Pemicu | 扳机开关



Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x117x146mm (14-1/4"x4-5/8"x5-3/4")**
Net weight Berat Bersih 净重	**2.18 - 2.80kg (4.81 - 6.17lbs)**

DGA404RME / RF2J / RFE / Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Efficient internal cooling for optimum performance**
  Penyejukan dalaman yang cekap untuk prestasi optimum
  高效的内部冷却以达最佳性能

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RF2J : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

DGA404RF2J
WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关



Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x117x140mm (14-1/4"x4-5/8"x5-1/2")**
Net weight Berat Bersih 净重	**2.10 - 2.71kg (4.63 - 5.98lbs)**

DGA405RFE / Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Efficient internal cooling for optimum performance**
  Penyejukan dalaman yang cekap untuk prestasi optimum
  高效的内部冷却以达最佳性能

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

Paddle Switch
Suis Pemicu | 扳机开关



Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x117x140mm (14-1/4"x4-5/8"x5-1/2")**
Net weight Berat Bersih 净重	**2.08 - 2.69kg (4.59 - 5.94lbs)**

DGA402RFE / Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Spiral bevel gear for more efficient transfer of energy**
  Gear serong lingkaran untuk pemindahan tenaga yang lebih cekap
  螺旋锥齿轮高效输送能源

*Grinding Wheel, Wheel Cover, Side Handle, Lock Nut Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

430 mm

18V

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关




Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**317x118x118mm (12-1/2"x4-5/8"x4-5/8")**
Net weight Berat Bersih 净重	**1.90 - 2.51kg (4.19 - 5.5 lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DGA456RFE / Z 115mm (4-1/2")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Efficiency for heavy-duty grinding applications**
  Kecekapan untuk aplikasi pengisaran berat
  高效率重型磨削

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关



Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x130x151mm (14-1/4"x5-1/8"x5-15/16")**
Net weight Berat Bersih 淨重	**2.34 - 3.03kg (5.17 - 6.67lbs)**

DGA458RFE / Z 115mm (4-1/2")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Electric brake for increased operator safety**
  Brek elektrik meningkatkan pelindungan keselamatan pengguna
  电子自动刹车提高保护使用者的安全

*Grinding Wheel, Toolless Wheel Cover, Side Handle, Lock Nut Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V


Paddle Switch
Suis Pemicu | 扳机开关



Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x130x151mm (14-1/4"x5-1/8"x5-15/16")**
Net weight Berat Bersih 淨重	**2.34 - 3.03kg (5.17 - 6.67lbs)**

DGA452RME / RFE / Z 115mm (4-1/2")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Compact barrel grip for easy handling**
  Pemegang yang kompak untuk keselesaan tangan
  易握紧凑把手

*Grinding Wheel, Wheel Cover, Side Handle, Lock Nut Wrench

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 430 mm

18V

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关



Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**317x129x126mm (12-1/2"x5-1/8"x5")**
Net weight Berat Bersih 淨重	**2.06 - 2.71kg (4.53 - 5.97lbs)**

DGA511Z 125mm (5")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机

- **Spiral bevel gear for more efficient transfer of energy**
  Gear serong lingkaran untuk pemindahan tenaga yang lebih cekap
  螺旋锥齿轮高效输送能源

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关

Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x140x145mm (15"x5-1/2"x5-3/4")**
Net weight Berat Bersih 淨重	**2.3 - 3.0kg (5.1 - 6.6lbs.)**

DGA514ZU 125mm (5")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机

- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**
  Sistem Wayarles Automatik (AWS) menyambungkan pembersih vakum dengan Bluetooth
  自动启动无线系统（AWS）通过蓝牙连接吸尘器

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关

Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x140x151mm (15"x5-1/2"x5-15/16")**
Net weight Berat Bersih 淨重	**2.4 - 3.0kg (5.2 - 6.7lbs.)**

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DGA518ZU 125mm (5")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**
  Sistem Wayarles Automatik (AWS) menyambungkan pembersih vakum dengan Bluetooth
  自动启动无线系统（AWS）通过蓝牙连接吸尘器

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Paddle Switch
Suis Pemicu | 扳机开关

Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x140x151mm (15"x5-1/2"x6")**
Net weight Berat Bersih 淨重	**2.4 - 3.1kg (5.3 - 6.8lbs.)**

DGA508RFE / Z 125mm (5")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Electric brake for increased operator safety**
  Brek elektrik meningkatkan pelindungan keselamatan pengguna
  电子自动刹车提高保护使用者的安全

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

Paddle Switch
Suis Pemicu | 扳机开关



Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x140x151mm (14-1/4"x5-1/2"x5-15/16")**
Net weight Berat Bersih 淨重	**2.35 - 3.83kg (5.18 - 8.45lbs)**

DGA505RFE / Z 125mm (5")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Efficient internal cooling for optimum performance**
  Penyejukan dalaman yang cekap untuk prestasi optimum
  高效的内部冷却以达最佳性能

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V


Paddle Switch
Suis Pemicu | 扳机开关



Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x140x145mm (14-1/4"x5-1/2"x5-3/4")**
Net weight Berat Bersih 淨重	**2.26 - 3.73kg (4.98 - 8.23lbs)**

DGD800Z

Cordless Die Grinder
Pengisar Tanpa Kord
充电式刻磨机



- **Slide switch with lock-on for operator convenience**
  Suis gelangsar untuk kemudahan pengguna
  滑动开关方便使用者

*Collet Cone, Wrench x2

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

430

18V



Capacity Kapasiti 能力	**Collet : 3mm - 8mm**
Wheel Diameter Diameter Roda 轮片直径	**38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**26,000**
Dimensions (L x W x H) Dimensi 体积	**402x82x118mm (15-3/4"x3-1/4"x4-5/8")**
Net Weight Berat Bersih 淨重	**1.7 - 2.2kg (3.8 - 4.9lbs)**

DGD801Z

Cordless Die Grinder
Pengisar Tanpa Kord
充电式刻磨机



- **Round collet nut reduces the risk of damages**
  Nut kolet bulat mengurangkan risiko kerosakan
  圆形的夹头螺母降低了损坏的风险

*Collet Cone, Wrench x2

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

430

18V



Capacity Kapasiti 能力	**Collet : 3mm - 8mm**
Wheel Diameter Diameter Roda 轮片直径	**38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**25,000**
Dimensions (L x W x H) Dimensi 体积	**307x82x118mm (12-1/8"x3-1/4"x4-5/8")**
Net Weight Berat Bersih 淨重	**1.5 - 2.0kg (3.3 - 4.3lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DBO180Z 125mm (5")

Cordless Random Orbit Sander

Pelicin Orbit Tanpa Kord
充电式砂光机



- **Three speed control switch fast, medium and low**
  Pemilihan tiga kelajuan, cepat, sederhana dan rendah
  三档速度控制高，中，低速

*Abrasive Disc, Dust Bag / Dust Box

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Pad Diameter Diameter Pad 垫片直径	**123mm (4-7/8")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**7,000/ 9,500/ 11,000**
Dimensions (L x W x H) Dimensi 体积	**175x123x153mm (6-7/8"x4-7/8"x6")**
Net Weight Berat Bersih 淨重	**1.4 - 1.7kg (3.0 - 3.7lbs)**

DTM51RFEX8 / Z

Cordless Multi Tool

Pemotong dan Pengisar Pelbagai Fungsi Tanpa Kord
充电式多功能切割打磨机



- **12 Angle settings at every 30° from 0° to 360°**
  12 tetapan sudut pada setiap 30˚
  每30˚ 12个角度设置

*Oscillating multi tool accessories, Dust Attachment (country-specific), Tool Box (country-specific)

- RFEX8 : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V




Oscillations Per Minute (OPM) Kelajuan Ayunan 摆动速度	**6,000 - 20,000**
Oscillation Angle Sudut Ayunan 摆动角度	**Left/ Right/ Total: 1.6°/ 1.6°/ 3.2°**
Dimensions (L x W x H) Dimensi 体积	**340x80x122mm (13-3/8"x3-1/8"x4-13/16")**
Net Weight Berat Bersih 淨重	**2.0 - 2.4kg (4.4 - 5.3lbs)**

DTM50Z

Cordless Multi Tool

Pemotong dan Pengisar Pelbagai Fungsi Tanpa Kord
充电式多功能切割打磨机



- **High operating efficiency**
  Kecekapan operasi yang tinggi
  高运行效率

*Oscillating multi tool accessories, Hex Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Oscillations Per Minute (OPM) Kelajuan Swing 摆动速度	**6,000-20,000**
Dimensions (L x W x H) Dimensi 体积	**307x80x122mm (12-1/4"x3-1/8"x4-13/16")**
Net Weight Berat Bersih 淨重	**1.8 - 2.2kg (3.9 - 4.8lbs)**

DLS600Z 165mm (6-1/2")

Cordless Compound Miter Saw

Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯



- **High accuracy & Lightweight**
  Ketepatan tinggi & ringan
  高精度且轻巧

*TCT Saw Blade, Dust Bag, Vertical Vise, Hex Wrench, Triangular Rule

- Z : Without Charger & Battery

BL MOTOR ADT DXT

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Miter Angle Sudut Miter 斜接角	**52°L/ 52°R**
Bevel Angle Sudut Bevel 斜角	**46°L/ 46°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90° Miter: 46 x 92mm (1-13/16" x 3-5/8") 45° Miter, L/R: 46 x 65mm (1-13/16" x 2-9/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,000**
Dimensions (L x W x H) Dimensi 体积	**340x400x440mm (13-3/8"x15-3/4"x17-1/4")**
Net weight Berat Bersih 淨重	**6.3 - 6.6kg (13.9 - 14.6lbs)**

DLS713RME / Z 190mm (7-1/2")

Cordless Slide Compound Miter Saw

Gergaji Gelongsor Kompaun Miter Tanpa Kord
充电式斜断锯 (滑动复合式)



- **Powerful Makita-built motor**
  Motor Makita yang berkuasa
  Mαkita强大马达

*TCT Saw Blade, Vertical Vise, Socket Wrench, Triangular Rule, Dust Bag, Holder Set

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

441

18V



Blade Diameter Diameter Bilah 锯片直径	**190mm (7-1/2")**
Miter Angle Sudut Miter 斜接角	**47°L / 57°R**
Bevel Angle Sudut Bevel 斜角	**45°L / 5°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 52 x 300mm (2-1/16" x 11-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,200**
Dimensions (L x W x H) Dimensi 体积	**655x430x454mm (25-3/4"x17"x17-7/8")**
Net weight Berat Bersih 淨重	**12.1kg (26.7lbs)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DHS680RMJ / RFJ / Z 165mm (6-1/2")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



- **High-efficiency BL motor provides higher power**
  Motor BL yang kecekapan tinggi memberikan kuasa yang lebih tinggi
  高效率的BL马达提供更高的功率

*TCT Saw Blade, Hex Wrench, Rip Fence (Guide Rule), Dust Nozzle

- RMJ : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RFJ : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 57mm (2-1/4")** **45°: 41mm (1-5/8")** **50°: 37mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,000**
Dimensions (L x W x H) Dimensi 体积	**350x170x238mm** **(13-3/4"x6-11/16"x9-3/8")**
Net weight Berat Bersih 淨重	**3.0 - 3.3kg (6.6 - 7.3lbs)**

DHS630RME / RFE / Z 165mm (6-1/2")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



- **Cut up to 66mm thick wood with a single stroke**
  Memotong ketebalan sehingga 66mm dengan satu strok
  单行程切割厚度达66mm

*TCT Saw Blade, Hex Wrench, Rip Fence (Guide Rule), Dust Nozzle (country-specific)

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 441

18V



Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 66mm (2-5/8")** **45°: 46mm (1-13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,100**
Dimensions (L x W x H) Dimensi 体积	**346x220x247mm** **(13-5/8"x8-5/8"x9-3/4")**
Net weight Berat Bersih 淨重	**3.0 - 3.4kg (6.6 - 7.5lbs)**

DSS610Z 165mm (6-1/2")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



- **Built-in dust blower directs sawdust away from cutting line**
  Blower terbina dalam mengarahkan habuk dari garis pemotongan
  内置除尘器将锯末导离切割线

*Carbide-Tipped Saw Blade, Rip Fence (Guide Rule), Hex Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 441

18V



Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 0-57mm (2-1/4")/** **45°: 0-40mm (1-9/16")** **50°: 0-36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,700**
Dimensions (L x W x H) Dimensi 体积	**347x202x228mm** **(13-5/8"x8"x9")**
Net weight Berat Bersih 淨重	**3.0 - 3.4kg (6.7 - 7.5lbs)**

DSS501Z 136mm (5-3/8")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



- **Compact and lightweight design**
  Reka bentuk padat dan ringan
  小巧轻便的设计

*Carbide-Tipped Saw Blade, Hex Wrench, Rip Fence (Guide Rule)

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 430

18V



Blade Diameter Diameter Bilah 锯片直径	**136mm (5-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 51mm (2")** **45°: 35mm (1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,600**
Dimensions (L x W x H) Dimensi 体积	**364x183x201mm** **(14-3/8"x7-1/4"x7-7/8")**
Net Weight Berat Bersih 淨重	**2.4 - 2.7kg (5.3 - 6.0lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DJR187RME / RFE / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **BL Brushless DC motor with high power**
  Motor BL tanpa berus berkuasa tinggi
  BL高功率无碳刷直流马达

*Recipro Saw Blades
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High/ Low: 0 - 3,000 / 0 - 2,300**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**439x83x231mm** **(17-1/4"x3-1/4"x9-1/8")**
Net Weight Berat Bersih 淨重	**3.4 - 3.8kg (7.6 - 8.3lbs)**

DJR188Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **High cutting speed (Max 3,000 SPM) provide higher cutting efficiency**
  Kelajuan pemotongan tinggi (Max 3,000 SPM) memberikan kecekapan pemotongan yang tinggi
  高切割速度（最大3,000 SPM）提供更高的切割效率

*Recipro Saw Blades
- Z : Without Charger & Battery


Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Length of Stroke Panjang Strok 冲程长度	**20mm (13/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,000**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**BL1815N: 316x81x203mm** **(12-1/2"x3-3/16"x8")**
	BL1850B: 316x81x220mm **(12-1/2"x3-3/16"x8-5/8")**
Net Weight Berat Bersih 淨重	**2.6 - 2.9kg (5.7 - 6.4lbs)**

DJR186RME / RFE / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Toolless blade change; redesign of blade clamp makes it easier to remove a blade**
  Penukaran bilah tanpa alat
  无需工具更换刀片

*Recipro Saw Blades
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 441
18V



Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,800**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**486x81x223mm** **(19-1/8"x3-3/16"x8-3/4")**
Net Weight Berat Bersih 淨重	**3.5 - 3.8kg (7.6 - 8.3lbs)**

DJR181RFE / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Toolless blade change system enables fast, one-handed blade changes**
  Penukaran bilah tanpa alat
  无需工具更换刀片

*Recipro Saw Blades
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 441
18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Length of Stroke Panjang Strok 冲程长度	**28mm (1-1/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,900**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**499x91x234mm** **(19-5/8"x3-5/8"x9-1/4")**
Net Weight Berat Bersih 淨重	**3.5kg (7.7lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DJR183Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **Dual-position on/off switch allows for either paddle or trigger switch operation**
  Suis dua pemilihan
  2开关选择

*Recipro Saw Blades

- Z : Without Charger & Battery

Capacity Panjang Strok 冲程长度	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Kelajuan Strok 冲程速度	**13mm (1/2")**
Strokes Per Minute (SPM) Kapasiti 能力	**0-3,000**
Dimensions (L x W x H) Dimensi 体积	**392x81x209mm** **(15-1/2"x3-3/16"x8-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.7kg (3.3 - 3.8lbs)**



DJV182RME / RFE / Z

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **Powerful Brushless DC motor**
  Motor DC tanpa berus yang berkuasa
  强大的无碳刷直流马达

*Jig saw blade set, Cover Plate, Dust Nozzle (country-specific), Anti-Splintering Device, Hex Wrench

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

BL MOTOR

Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,500**
Dimensions (L x W x H) Dimensi 体积	**266x77x208mm** **(10-1/2"x3"x8-3/16")**
Net Weight Berat Bersih 淨重	**2.4 - 2.7kg (5.2 - 5.9lbs)**

DJV181RFE / Z

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **Excellent performance provides higher productivity**
  Prestasi cemerlang memberikan produktiviti yang lebih tinggi
  出色的性能提高生产力

*Jig saw blade set, Cover Plate, Dust Nozzle (country-specific), Anti-Splintering Device, Hex Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

BL MOTOR

Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,500**
Dimensions (L x W x H) Dimensi 体积	**298x77x189mm** **(11-3/4"x3"x7-7/16")**
Net Weight Berat Bersih 淨重	**2.3 - 2.6kg (5.0 - 5.7lbs)**

DJV180RFE / Z

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

440

18V



- **Low vibration and low noise**
  Getaran rendah dan bunyi rendah
  低振动，低噪音

*Jig saw blade set (No. B-10, BR-13, B-22; 2each), Cover Plate, Anti-Splintering Device, Hex Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-2,600**
Dimensions (L x W x H) Dimensi 体积	**257x73x208mm** **(10-1/8"x2-7/8"x8-3/16")**
Net Weight Berat Bersih 淨重	**2.7 - 3.0kg (6.0 - 6.7lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DSD180Z

Cordless Drywall Saw
Gergaji Drywall Tanpa Kord
充电式石膏板切割机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **Ideal for cutting holes in drywalls when setting ceiling lights, air vents etc**
  Sesuai untuk memotong lubang untuk memasang lampu siling, ventilasi udara dan lain-lain
  适用于干墙，安装天花板灯，通风口等

*Blade, Blade Cover, Base Cover, Hex Wrench

- Z : Without Charger & Battery

Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 6,000**
Length of Stroke Panjang Strok 冲程长度	**6mm (1/4")**
Capacity Kapasiti 能力	**Drywall: 30mm (1-3/16")** **Wood: 15mm (9/16")**
Dimensions (L x W x H) Dimensi 体积	**263x79x291mm** **(10-3/8"x3-1/8"x11-3/8")**
Net weight Berat Bersih 淨重	**1.7 - 2.0kg (3.8 - 4.5lbs)**



DKP180RFE / Z 82mm (3-1/4")

Cordless Planer
Pengetam Tanpa Kord
充电式电刨



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

441

18V



- **Easy blade setting system for fast blade installation**
  Sistem penetapan bilah mudah untuk memasang bilah cepat
  简易刀片设置系统，可快速安装刀片

*Planer Blade, Blade Gauge, Guide Rule, Socket Wrench, Dust Nozzle

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削宽度	**2.0mm (5/64")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**14,000**
Dimensions (L x W x H) Dimensi 体积	**333x157x160mm** **(13-1/8"x6-3/16"x6-5/16")**
Net weight Berat Bersih 淨重	**3.2 - 3.5kg (7.1 - 7.9lbs)**

DPJ180Z

Cordless Plate Joiner
Mesin Kayu Tanpa Kord
充电式木工接合机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

430

18V



- **Easy blade setting system for fast blade installation**
  Sistem pemasangan bilah mudah
  刀片易安装系统

*Cutter Blade, Angle Guide, Lock Nut Wrench, Set Plate, Dust Bag

- Z : Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	**100mm (4")**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**20mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,500**
Dimensions (L x W x H) Dimensi 体积	**351x139x149mm** **(13-3/4"x5-1/2"x5-7/8")**
Net weight Berat Bersih 淨重	**2.8 - 3.1kg (6.2 - 6.8lbs)**

DCO180Z 6.35mm (1/4")

Cordless Cut-Out Tool
Mesin Pemotong Tanpa Kord
充电式石膏板开孔机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

430

18V



- **Accepts both 1/8" and 1/4" bits**
  Sesuai untuk bit 1/8" dan 1/4"
  适用钻头包括1/2" 和1/4"

*Diamond Wheel, Collet nut, Collet cone 6.35mm (1/4"), Collet Sleeve (for 3.18 mm bit), Wrench 17, Wrench holder

- Z : Without Charger & Battery

Capacity Kapasiti 能力	**Collet : 3.18mm (1/8")** **or 6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**30,000**
Dimensions (L x W x H) Dimensi 体积	**296x77x118mm** **(11-5/8"x3"x4-5/8")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.3 - 4.0lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DPT353Z

Cordless Pin Nailer
Mesin Pemaku Tanpa Kord
充电式打钉机



- **Shoots 6,400 nails on a single full BL1860B charge**
  Memaku 6,400 paku dengan satu BL1860B yang penuh caj
  使用一个完整充电的BL1860B电池可射击6,400枚钉子

*Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Capacity Staple 钉种	**Length: 15, 18, 25, 30, 35mm (5/8", 11/16", 1", 1-3/16", 1-3/8")** **Dia.: 0.6 mm (1/32")** **Gauge: 23 Ga**
Magazine Capacity Bilangan Staples 装钉个数	**120**
Dimensions (L x W x H) Dimensi 体积	**257x79x226mm (10-1/8"x3-1/8"x8-7/8")**
Net weight Berat Bersih 净重	**2.0 - 2.3kg (4.4 - 5.1lbs)**

DST221Z

Cordless Stapler
Stapler Tanpa Kord
充电式钉枪



- **Compact and powerful stapler can drive a wide range of 10mm staple lengths**
  Stapler yang padat dan berkuasa
  紧凑而强劲的钉枪

*Safety Goggles, Hook
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Staple Staple 钉种	**Width: 10mm (3/8")** **Length: 10, 13, 16, 19, 22mm (3/8", 1/2", 5/8", 3/4", 7/8")** **Gauge: 0.6 x 1.2mm (1/32" x 1/16")**
Magazine Capacity Bilangan Staples 装钉个数	**98**
Dimensions (L x W x H) Dimensi 体积	**251x91x212mm (9-7/8"x3-5/8"x8-3/8")**
Net weight Berat Bersih 净重	**2.1 - 2.4kg (4.7 - 5.3lbs)**

COMPACT AND LIGHTWEIGHT BODY FOR EASY CARRY

Padat dan ringan mudah untuk dibawa 小巧轻便的机身，方便携带



DVP180

Cordless Vacuum Pump
Pam Vakum Tanpa Kord
充电式真空泵

50min
Long run time with a fully charged BL1850B
Gunakan sehingga 50 minit
使用长达50分钟

3.5kg
Lightweight
Ringan 轻便

DVP180RT / Z

Cordless Vacuum Pump
Pam Vakum Tanpa Kord
充电式真空泵



- **For air purge during installation of room air conditioner**
  Untuk pembersihan udara semasa pemasangan penghawa dingin bilik
  在安装室内空调时进行空气净化

*Vacuum Pump Oil, Adapter
• RT : 1 x Rapid Charger, 1 x 5.0Ah Battery
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0
18V



Flow Rate Kadar Aliran 流量	**50L/min**
Ultimate Vacuum Tahap Maksimum Vakum 最大真空度	**20Pa (150 microns)**
Motor Speed Kelajuan Motor 马达速度	**3,840min^{-1}**
Oil Tank Capacity Kapasiti Tangki Minyak 润滑油箱	**115mL**
Inlet Port Pelabuhan Inlet 进气管直径	**5/16"**
Dimensions (L x W x H) Dimensi 体积	**265x93x175mm (10-3/8"x3-5/8"x6-7/8")**
Net Weight Berat Bersih 净重	**3.5kg**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。







Part No.
No. Bahagian
零件号码
196612-6



Part No.
No. Bahagian
零件号码
195561-4
(Optional)
Pilihan 选择性



Part No.
No. Bahagian
零件号码
195563-0
(Optional)
Pilihan 选择性



Part No.
No. Bahagian
零件号码
196922-1
(Optional)
Pilihan 选择性

Cordless for easy maneuverability and 4 different bases for added versatility

Tanpa kord memudahkan pergerakan, 4 dasar meningkatkan fleksibiliti

充电式简易操纵, 4 种组合增加多功能性

DRT50
Cordless Trimmer
Mesin Perapi Tanpa Kord | 充电式修边机


BL motor delivers the power and performance for corded demands
Motor BL memberi kuasa dan prestasi
无碳刷马达提供动力和性能需求

BL MOTOR
Motor tanpa berus
无碳刷马达



Push button switch
Butang suis
开关按钮

Lock/ unlock button
Butang kunci/ buka kunci
锁/ 解锁按钮



Variable speed control by dial
Dial kawalan kelajuan
转盘式变速控制

High durability and accuracy obtained by using aluminum for body housing
Ketahanan dan ketepatan yang tinggi dengan dasar aluminium
铝合金底座经久耐用和高准确性

Accepts 6mm & 8mm collets, 1/4" & 3/8" collets
Boleh bersambung dengan Collet 6mm & 8mm, 1/4" & 3/8"
可连接 6mm & 8mm, 1/4" & 3/8" 刀具



Shaft lock, flat-top design and horizontally installed power supply cord provides stability for easier bit change
Penguncian syaf, reka bentuk atas rata dan tetapan kord kuasa mendatar, menyediakan kestabilan dan memudahkan penukaran bilah
轴心锁定, 平顶设计与水平式电源线的设置, 提供稳定性且便捷更换刀具



Dual LED job lights illuminate cutting edge and increase visibility
Lampu kerja LED dual meningkatkan keterangan dan penglihatan
两颗 LED 工作灯提高亮度和可视性

DRT50Z 6mm (1/4"), 8mm (3/8")

Cordless Trimmer
Mesin Perapi Tanpa Kord
充电式修边机



- **Faster Trimming than Corded**
  Pemangkasan lebih cepat daripada mesin berkord
  修剪比有线机型更快速

*Collet Cone, Trimmer Base Assembly, Straight Guide Assembly, Templet Guide, Wrench x2, Trimmer Guide

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

NEW BARU 新



Collet Capacity Kapasiti Collet 夹头直径	**6mm, 8mm or 1/4", 3/8"**
No Load Speed (RPM) Kelajuan Strok 回转速	**10,000 - 30,000**
Plunge Capacity Kapasiti Plunge 能力	**Trimmer Base: 0 - 40mm (0" - 1-9/16")**
	Plunge Base: 0 - 35mm (0" - 1-3/8")
Dimensions (L x W x H) Dimensi 体积	**BL1815N: 134x89x208mm (5-1/4"x3-1/2"x8-1/8")**
	BL1850B: 134x89x226mm (5-1/4"x3-1/2"x8-7/8")
Net Weight Berat Bersih 淨重	**1.8 - 2.1kg (3.9 - 4.6lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Excellent Cooling Performance

Prestasi Pendingin Cemerlang 卓越的保持凉爽



Polyester For general work
Untuk kerja am | 用于一般工作



Cotton For welding/ grinding work
Untuk kerja kimpalan/ pengisaran | 用于焊接/ 打磨工作



Polyester + Titanium processing For outdoor work
Untuk kerja luaran | 用于户外工作

12hr
Longer Runtime
Masa lebih panjang
运行时间更长
(BL1850)



DFJ201ZM / ZL / ZXL 18V

Cordless Fan Jacket
Jaket Kipas Tanpa Kord
充电式风扇夹克



- **Stay cool in hot harsh job site environments**
  Untuk mendinginkan badan di persekitaran tempat kerja yang panas
  在恶劣的工作环境中保持凉爽

*Battery Holder
- Without Charger & Battery

Li-ion AR 6.0 5.0 4.0 3.0 2.0 1.5

18V



Run Time (hrs) Masa Operasi (jam) 使用时间 (小时)	**BL1850B** **Low/ Medium/ High: 29/ 21/ 12**
Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo/ High/ Medium/ Low**
Air Flow Aliran Udara 空气流量	**Turbo/ High/ Medium/ Low:** **1.4/ 1.2/ 1.0/ 0.8m³/min**
Size Saiz 尺寸	**M/ L/ XL**
Pockets Poket 口袋	**3**
Net weight Berat Bersih 淨重	**660g (1.5lbs)**

Polyester **For general work**
Untuk kerja am | 用于一般工作
- Superior moisture permeability and water repellent

DFJ202ZL / ZXL 18V / 12Vmax
FJ203DZM / DZL / DZLL 18V / 12Vmax

Cordless Fan Jacket
Jaket Kipas Tanpa Kord
充电式风扇夹克



- **Powerful fan provides air flow to keep you cool**
  Aliran udara dengan kipas yang kuat mendinginkan badan
  强大的风扇让空气流动，保持身体凉爽

*Fan Hook
- Without Charger & Battery

Li-ion AR 6.0 5.0 4.0 3.0 2.0 1.5

18V 12Vmax



Run Time (hrs) Masa Operasi (jam) 使用时间 (小时)	**BL1860B** **Low/ Medium/ High: 34/ 25/ 14**
Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo/ High/ Medium/ Low**
Air Flow Aliran Udara 空气流量	**Turbo/ High/ Medium/ Low:** **1.4/ 1.2/ 1.0/ 0.8m³/min**
Size Saiz 尺寸	**M/ L/ XL/ LL**
Pockets Poket 口袋	**5**
Net weight Berat Bersih 淨重	**1.5 - 1.9kg (3.3 - 4.1lbs)**

Polyester **For general work**
Untuk kerja am | 用于一般工作
- Superior moisture permeability and water repellent

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Stay cool in hot harsh job site environments

Untuk mendinginkan badan di tempat kerja yang panas
在恶劣的工作环境中保持凉爽




Comparison of body temperature rise during work

Perbandingan kenaikan suhu badan semasa kerja 于工作中体温升高的比较

Skin temperature after 10-minute work under temperature of 35°C and humidity of 60%
Suhu kulit selepas kerja selama 10 minit di bawah suhu 35°C dan kelembapan sebanyak 60%
在35℃的温度和60%的湿度下工作10分钟后的皮肤温度

Never use the fan jacket where temperature reaches more than 50°C (122°F). Otherwise it may cause burns on your skin. Also avoid using in high humidity.
Jangan gunakan jaket kipas di mana suhu mencapai lebih daripada 50° C (122°F).
Jika tidak, ia boleh menyebabkan luka bakar pada kulit anda. Juga elak menggunakan dalam kelembapan yang tinggi.
温度超过50°C(122°F)时切勿使用风扇护套。否则可能会导致皮肤灼伤。 也避免在高湿度下使用。

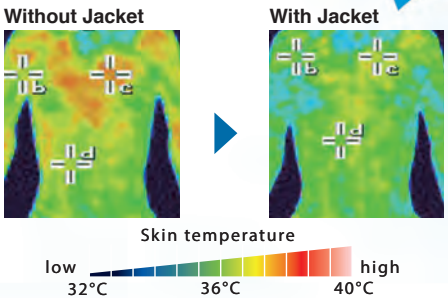

DFJ300ZL / ZXL 18V / 12Vmax
FJ301DZM / DZL / DZLL 18V / 12Vmax

Cordless Fan Jacket

Jaket Kipas Tanpa Kord
充电式风扇夹克



- **100% cotton - hardly-burned, suitable for welding/ grinding**
  100% kapas - sukar untuk dibakar, sesuai untuk kimpalan/ pengisaran
  100%纯棉 - 极难燃烧，适合焊接/研磨

*Fan Hook

- Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V 12Vmax



DFJ300 ZL / ZXL

FJ301 DZM / DZL / DZLL

Run Time (hrs) Masa Operasi (jam) 使用时间 (小时)	**BL1860B** **Low/ Medium/ High: 34/ 25/ 14**
Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo/ High/ Medium/ Low**
Air Flow Aliran Udara 空气流量	**Turbo/ High/ Medium/ Low:** **1.4/ 1.2/ 1.0/ 0.8m³/min**
Size Saiz 尺寸	**M/ L/ XL/ LL**
Pockets Poket 口袋	**5**
Net weight Berat Bersih 淨重	**1.5 - 1.9kg (3.3 - 4.1lbs)**

Cotton **For welding/ grinding work**
Untuk kerja kimpalan/ pengisaran | 用于焊接/ 打磨工作

- Strong in heat and sparks

DFJ400ZL / ZXL 18V / 12Vmax
FJ401DZL / DZLL / DZ3L 18V / 12Vmax

Cordless Fan Jacket

Jaket Kipas Tanpa Kord
充电式风扇夹克



- **Heavy-duty shoulder pad lightens the burden on a shoulder and prevents torn while carrying reinforcing bars**
  Apabila mengangkat rebar pad bantalan mengurangkan beban bahu
  重型肩垫可减轻肩部负担，并防止在搬运钢筋时发生撕裂

*Fan Hook

- Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V 12Vmax



DFJ400 ZL / ZXL

FJ401 DZL / DZLL / DZ3L

Run Time (hrs) Masa Operasi (jam) 使用时间 (小时)	**BL1860B** **Low/ Medium/ High: 34/ 25/ 14**
Air Flow Settings Tetapan Aliran Udara 空气流量设置	**Turbo/ High/ Medium/ Low**
Air Flow Aliran Udara 空气流量	**Turbo/ High/ Medium/ Low:** **1.4/ 1.2/ 1.0/ 0.8m³/min**
Size Saiz 尺寸	**L / XL / LL / 3L**
Pockets Poket 口袋	**5**
Net weight Berat Bersih 淨重	**1.5 - 1.9kg (3.3 - 4.1lbs)**

Polyester + Titanium processing **For outdoor work**
Untuk kerja luaran | 用于户外工作

- Reflective in ultraviolet rays and infrared rays

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。





Dust box with 2.5L capacity

Kotak habuk dengan kapasiti 2.5L
2.5L大容量集尘箱

Outstanding in its class, large dust box capacity
Cemerlang dalam kelasnya, kapasiti kotak debu yang besar
同类产品中，集尘箱容量大

Wireless remote controller

Kotak habuk dengan kapasiti 2.5L
无线遥控器



- **For finding the location of the cleaner after cleaning is finished**
- **For start/ stop control, etc.**
- **Communication range: 20m**
- Untuk mencari lokasi pembersih selepas pembersihan selesai
- Untuk memulakan/ menghentikan kawalan, dan sebagainya.
- Jarak komunikasi: 20m
- 清洁完成后，方便查找吸尘机
- 开/关机
- 通讯范围：20m

RoboPRO

DRC200

Robotic Cleaner

Pembersih Robotik
充电式智能吸尘机

BL MOTOR
Motor tanpa berus 无碳刷马达










AUTOMATIC CLEANING

Pembersihan Automatik 自动清洁

Selectable two dust collection modes

Pemilihan dua mod koleksi habuk 可选择两种集尘模式

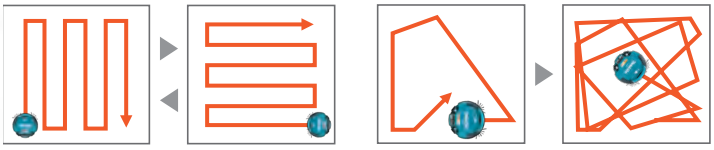

Pattern cleaning mode

Mod pembersihan corak 规则清理模式

For cleaning wide spaces with few obstacles. (Ex.) well-organized warehouses, long corridors, etc
Untuk membersihkan ruang yang luas dengan beberapa halangan. (contoh) gudang yang teratur, koridor panjang, dan sebagainya
适用于清洁较宽的空间和障碍物少的场所
(例如：摆放规则的仓库，太长的走廊等)


Random cleaning mode

Mod pembersihan secara rawak 随机清洗模式

For cleaning locations with many obstacles. (Ex.) offices, etc
Untuk membersihkan lokasi dengan banyak halangan. (contoh) Pejabat, dsb
适用于清洁障碍物较多的场所(例如：办公室等)

Able to clean surface area of 500m² with BL1850B x2

Boleh membersihkan kawasan permukaan Seluas 500m2 dengan BL1850B x2/
使用2粒BL1850B型电池的可清洁500m2的面积

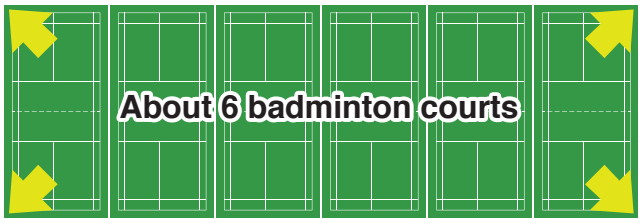

DRC200Z

Robotic Cleaner
Pembersih Robotik
充电式智能吸尘机



- **Able to clean an area of 300m² per 120 min with a coverage rate of 80%**
  Boleh membersihkan Kawasan seluas 300m² dalam 120min, meliputi 80% tempat pembersihan
  约120分钟可清洁300平方米的范围，覆盖率为80%

*Wireless remote controller (including two AAA alkaline batteries), Side Brush, Boundary Tape

- Z : Without Charger & Battery

BL MOTOR

Li-ion | 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5 Ah

18V




Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x 2: 200** **with BL1830B x 2: 120**
Max Cleaning Area Kawasan Pembersihan Maksimum 最大清洁面积	**with BL1850B x 2: 500m²** **with BL1830B x 2: 300m²**
Max Running Speed Kelajuan Operasi Maksimum 最大运行速度	**0.3m/ sec**
Dust Box Capacity Kapasiti 容量	**2.5L**
Dimensions (L x W x H) Dimensi 体积	**460x460x180mm** **(18-1/8"x18-1/8"x7-1/8")**
Net Weight Berat Bersih 净重	**7.3kg (16.1lbs)**

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DCL500Z

Cordless Cyclone Cleaner
Pembersih Vakum Cyclone Tanpa Kord
充电式旋风吸尘机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



- **HEPA Clean Filter offers maximum performance for residential and commercial applications**
  Penapis Bersih HEPA memberikan prestasi maksimum untuk aplikasi perumahan dan komersil
  HEPA过滤系统为住宅和商业应用提供最佳性能

*Shoulder Belt, Crevice Nozzle, Cleaning Brush, Floor Nozzle, Zoom Pipe, Hose, Hose Hook

- Z: Without Charger & Battery

Capacity Kapasiti 容量	**250mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1840B: High: 16** **with BL1840B: Low: 40**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**6.6kPa (660mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High: 75W** **Low: 25W**
Dimensions (L x W x H) Dimensi 体积	**352x189x252mm** **(13-7/8"x7-7/16"x9-7/8")**
Net Weight Berat Bersih 淨重	**3.6kg (7.9 lbs.)**

Long lasting powerful suction
Pelupusan debu yang cepat
耐久和强大的吸力



Cyclonic system separates large dust particles from fine dust particles so that only fine dust particles are captured on the filter to reduce clogging for longer powerful suction. HEPA filter* is used for clean environments.
Sistem siklonik memisahkan zarah-zarah debu yang besar dari zarah-zarah debu yang halus sehingga hanya zarah debu halus yang ditangkap pada penapis bagi mengelakkan ia tersumbat untuk sedutan yang lebih kuat. Penapis HEPA * digunakan untuk persekitaran yang bersih.
旋风系统将大的灰尘颗粒与细小的尘埃颗粒分离，使得只有细小的灰尘颗粒被捕获在过滤器上，以减少堵塞以实现更长时间的强力吸力。HEPA过滤器*排出清洁空气。

- **HEPA filter: 99.97% or more collection efficiency of airborne particle 0.3μm in diameter is defined by EN standard.**
- Penapis HEPA: 99.97% atau lebih kecekapan pengumpulan zarah udara berdiameter 0.3μm ditakrifkan oleh EN standard.
- HEPA过滤器：通过EN标准定义高效率吸集空气中99.97%以上，小至直径为0.3μm的颗粒。

HEPA filter

Long run time and lightweight cleaner design
Masa operasi panjang dan reka bentuk bersih dan ringan
长时间和轻便的清洁设计



High/ Low Power selection
Pemilihan Kuasa Tinggi/ Rendah
高/低吸力选择

Zoom Pipe
Paip Teleskopik
伸缩管

Can be extended to allow for grip height adjustment to suit user's height.
Boleh dipanjangkan untuk melaraskan panjang cengkaman untuk memenuhi ketinggian pengguna.
可调节把手的长度，以配合用户的身高。



HEPA filter

BL MOTOR
Motor tanpa berus 无碳刷马达

DCL501
Cordless Cyclone Cleaner
Pembersih Vakum Cyclone Tanpa Kord
充电式旋风吸尘机

DCL501Z

Cordless Cyclone Cleaner
Pembersih Vakum Cyclone Tanpa Kord
充电式旋风吸尘机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



HEPA filter

- **Quiet operation for operator comfort**
  Operasi senyap untuk keselesaan pengguna
  静音与舒适的操作


*Shoulder Belt, Crevice Nozzle, Cleaning Brush, Floor Nozzle, Zoom Pipe, Hose, Hose Hook

- Z: Without Charger & Battery

Capacity Kapasiti 容量	**250mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1060B: High: 35** **with BL1060B: Low: 77**
Max Air Flow Aliran Udara 最大空气流量	**1.2m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**10kPa (1,020mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High: 75W** **Low: 25W**
Dimensions (L x W x H) Dimensi 体积	**352x189x252mm** **(13-7/8"x7-7/16"x9-7/8")**
Net Weight Berat Bersih 淨重	**3.1kg (6.8 lbs.)**

DVC350Z

Cordless Vacuum Cleaner
Pembersih Vakum Tanpa Kord
充电式吸尘机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **Large 3L dust bag capacity**
  Kapasiti beg debu 3L membolehkan pembersihan berterusan
  3L大容量尘袋可延续清洁工作

*Nozzle assembly, Dust bag assembly, Hose, Shoulder Belt

- Z: Without Charger & Battery

Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1030B: High: 13/ Low: 26**
Max Peak Air Flow Aliran Udara 最大空气流量	**3.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.5kPa (560mmH_2O)**
Recoverable Capacity Kapasiti 容量	**Dust: 3.0L (0.8gal)**
Dimensions (L x W x H) Dimensi 体积	**273x195x226mm** **(10-3/4"x7-5/8"x8-7/8")**
Net Weight Berat Bersih 淨重	**2.2kg (4.8lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Quick dust disposal
Pembuangan Debu Yang Cepat
快速粉尘处理

Cloth filtration system enables to dispose of dust easily by removing capsule. Disposable paper bag is not necessary.
Sistem penapisan kain membolehkan habuk dibuang dengan mudah dengan mengeluarkan kapsul. Beg kertas pakai buang tidak perlu.
快速除尘系统，清理便捷。无需集尘袋。



Improved Pre-filter
Penapis Pra Yang Lebih Baik
优越过滤器

Two locking tabs prevents pre-filter from falling off from the machine even if user holds the machine with the pre-filter side down after removing front capsule for dust disposal.
Dua tab pengunci menghalang pra-penapis daripada jatuh dari mesin walaupun pengguna memegang mesin dengan sisi pra-penapis menghadap bawah selepas mengeluarkan kapsul depan untuk pembuangan habuk.
两个锁定片可防止过滤器从机器上脱落。

Sash Nozzle
Muncung Rata/ 扁型吸嘴



Ergonomic handle
Pemegang Ergonomik
人体工学手柄

with easy on/off trigger switch
dengan suis pemicu hidup/ mati mudah
扳机开关

Rubberized soft grip
Genggaman Lembut Getah
软胶握把手

reduces hand fatigue even in long continuous use
mengurangkan keletihan tangan walaupun dalam penggunaan berterusan yang panjang
即使长时间使用亦能减轻手部疲劳

Angled suction port
Muncung Sudut
扁型吸嘴


- **Allows for easy floor cleaning without T-nozzle.**
- **Prevents extension pipe from wobbling in use.**
- Membolehkan untuk pembersihan lantai mudah tanpa muncung-T.
- Menghalang paip sambungan dari bergerak ketika sedang digunakan.
- 清除死角缝隙中的灰尘。

DCL180
Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机

Suction Power
Kuasa Sedutan/ 吸力
30W

Large Capacity
Kapasiti Besar/ 大容量
650mL






T-nozzle with enhanced maneuverability
Muncung-T dengan pergerakan yang lebih baik
T型吸嘴具有强劲的机动性

- **Ingenious swivel joint always keeps the vacuum head as close to the floor surface as possible even when cleaning tight places such as beneath sofas.**
- Sendi pusing yang hebat memastikan kepala vakum sentiasa dekat dengan permukaan lantai walaupun membersihkan ruangan sempit seperti di bawah sofa.
- 灵活操作贴近地面，轻松吸集灰尘，如沙发底下。

DCL180FRFW / Z / RFB / ZB

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Strong suction power for fast cleaning with more run time**
  Kuasa sedutan yang kuat
  强大的吸力，快速清洁

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- FRFW: 1x Rapid Charger, 1x 3.0Ah Battery (White)
- Z: Without Charger & Battery (Blue)
- RFB: 1x Rapid Charger, 1x 3.0Ah Battery (Black)
- ZB: Without Charger & Battery (Black)

Only for DCL180FRFW


Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Capacity Kapasiti 容量	**650mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1030B: 20**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**4.2kPa (428mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**30W**
Dimensions (L x W x H) Dimensi 体积	**999x114x152mm (39-1/4"x4-1/2"x6")**
Net Weight Berat Bersih 淨重	**1.2kg (2.7 lbs)**

DCL182FRFW / FZW

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Improved front cover opens with push button for easier access**
  Penutup depan lebih senang dibuka dengan butang tekan
  前盖一按式开关

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag

- FRFW: 1x Rapid Charger, 1x 3.0Ah Battery (White)
- FZW: Without Charger & Battery (White)

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1050B: High: 33** **with BL1050B: Low: 66**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.4kPa (551mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**High: 30W** **Low: 11W**
Dimensions (L x W x H) Dimensi 体积	**1,004x115x151mm** **(39-1/2"x4-1/2"x5-15/16")**
Net Weight Berat Bersih 淨重	**1.3kg (2.8 lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DCU180

Battery Powered Wheelbarrow

Kereta Sorong Berkuasa Bateri
充电式搬运车

NEW BARU | 新

Longest running distance
Jarak perjalanan terpanjang
最长行走距离
6km
*When using BL1850B x2
*Semasa menggunakan BL1850B x2
*当使用 BL1850B x2

ZERO EMISSION
TANPA PERLEPASAN ASAP 无排气
BATTERY-POWERED, NO FUEL, EASY TO START, LOW NOISE
BERKUASA BATERI, TANPA MINYAK, MUDAH DIHIDUPKAN, BUNYI RENDAH
锂电充电式，无需燃料，容易启动，低噪音





8 units of metal string holder
8 unit pemegang tali logam
8个金属螺栓线架

Adjustable size (tool-less)
Saiz boleh dilaras tanpa menggunakan alat
尺寸可调整（免使用工具）

Maximum weight capacity
Kapasiti berat maksimum
最重载量
130kg



Flatbed Pipe Frame type
Jenis rak 货架型

Perfect for moving heavy loads in carton, basket and sack.
Sempurna untuk menggerakkan barang dalam kotak, bakul dan guni.
适用于装载纸箱，篮子和袋装物体。

Bucket type
Jenis baldi 货斗型

Ideal for carrying loose material, such as sand, soil, gravel and more.
Sesuai untuk membawa bahan seperti pasir, tanah, batu kerikil dan banyak lagi.
适用于装载松散物料，如沙土和碎石等。











2-speed control
Kawalan 2 kelajuan
2 速度控制



Brake level with locking mechanism
Tuas brek dengan sistem berkunci
煞车锁定系统



Pedal rear wheel braking syste
Pedal brek roda belakang
后轮煞车踏板



Dual LED job lights
Dua Lampu LED
两颗 LED 灯



Detachable rear wheel
Roda belakang boleh ditanggalkan
可拆卸泥地行走一轮脚架



Washable with tap water
Boleh dibasuh dengan air paip
自来水清洗

Two variations





Carrier set Jenis rak 货架型
Part No. 199116-7



Bucket set Jenis baldi 货斗型
Part No. 198494-2

BL MOTOR
Motor tanpa berus
无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

Able to climb a slope gradient of
Pergerakan atas kecerunan maksimum
最大爬坡能力
12°



* Performance may vary depending on weight of load and slope of terrain
Prestasi mungkin berbeza bergantung kepada berat barang dan kecerunan tanah 搬运车性能可能因装载量和地形坡度而異

DCU180Z

Battery Powered Wheelbarrow
Gergaji Rantai Tanpa Kord
充电式链锯



- **Ideal for use at urban construction sites and on farms**
  Sesuai digunakan di tapak pembinaan atau ladang
  适合在建筑工地或农场使用

*Lock Key, Support Legs, Wrenches
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



NEW BARU | 新

Max Run Time (min) Masa Operasi Maksimum 最长使用时间	**BL1860B: 120**
Max Load Capacity Kapasiti berat maksimum 最重载量	**130kg (290lbs.)**
Traveling Speed Kelajuan Perjalanan 行驶速度	**Forward, High/ Low: 0 - 3.5/ 0 - 1.5km/h** **Reverse: 0 - 1 km/h**
Max Climbing Capacity Pergerakan atas kecerunan maksimum 最大爬坡能力	**12°**
Dimensions (L x W x H) Dimensi 体积	**When carrier is installed/ During operation:** **1,315x1,060x900mm (51-3/4"x41-3/4"x35-1/2")**
	When carrier is installed/ When stored: **1,110x820x820mm (43-3/4"x32-1/4"x32-1/4")**
	When bucket is installed/ During operation: **1,310x820x900 mm (51-1/2"x32-1/4"x35-1/2")**
	When bucket is installed/ When stored: **1,110x820x820mm (43-3/4"x32-1/4"x32-1/4")**
Net weight Keberatan 净重	**39.3 - 44.8kg (86.5 - 98.7lbs)**

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DUC122RME / Z 115mm (4-1/2")

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯



- **Low noise & zero emissions for operator comfort**
  Bunyi rendah dan tanpa perlepasan asap untuk keselesaan pengguna
  低噪音，无排气，操作舒适

*Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), File

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery


Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 430 W | 18V



Guide Bar Length Panjang Batang Gergaji 切割长度	**115mm (4-1/2")**
Chain Pitch Kerapatan Rantai 链条齿距	**1/4"**
Chain Gauge Ketebalan Rantai 链条厚度	**1.3mm (0.05")**
Chain Speed Kelajuan Rantai 链条速度	**5.0m/s (300m/min) (980FPM)**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**80mL (2.7 US oz)**
Dimensions (L x W x H) Dimensi 体积	**422x195x215mm (16-5/8"x7-5/8"x8-1/2")**
Net weight Keberatan 净重	**2.6kg (5.7lbs)**

DUH523RME / RFE / Z 520mm (20-1/2")

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar tanpa Kord
充电式篱笆修剪机



- **Delivers 2,700 SPM for increased cutting speed**
  Menyampaikan 2,700 SPM untuk meningkatkan kelajuan pemotongan
  提供2,700 SPM提高切割速度

*Blade Cover

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V




Blade Length Panjang bilah 刀片长度	**520mm (20-1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,700**
Tooth Spacing Selang Gigi 牙齿间隔	**26mm (1")**
Dimensions (L x W x H) Dimensi 体积	**938x195x193mm (37"x7-5/8"x7-5/8")**
Max Output Keluaran Maksima 最大输出	**210W**
Net weight Berat Bersih 净重	**3.0 - 3.4kg (6.7 - 7.5lbs)**



DUR182LRF / Z

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機



- **BL motor for faster cutting**
  BL Motor untuk pemotongan lebih cepat
  无碳刷马达加快切割速度

*Safety Goggles, Band Assembly, Nylon Cutting Head, Accessory Bag, Hex Wrench

- RF : 1 x Rapid Charger, 1 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止




Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 300mm (11-3/4")** **Metal Blade: 230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,500 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25 LH**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**w/ BL1830B: 90**
Dimensions (L x W x H) Dimensi 体积	**1,843x287x253mm (72-1/2"x11-1/4"x10")**
Net Weight Berat Bersih 净重	**3.6kg (8.0lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DUR187LRFE / Z

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



- **4 Mode rotation selection: 3 stages + ADT mode**
  Pemilihan 4 mod putaran: 3 tahap + mod ADT
  4模式旋转选择：3阶段+ ADT模式

*Safety Goggles, Shoulder Harness, Nylon Cutting Head, Plastic Blade, Accessory Bag, Hex Wrench
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 300mm (11-3/4")** **Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Medium/ Low/ ADT Mode:** **6,000/ 5,000/ 4,000/ 4,000 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25LH**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**Nylon Cutting Head, BL1860B: 168** **Plastic Blade, BL1860B: 219**
Dimensions (L x W x H) Dimensi 体积	**1,791x258x232mm** **(70-1/2"x10-1/8"x9-1/8")**
Net Weight Berat Bersih 淨重	**3.4 - 3.7kg (7.5 - 8.2lbs)**

DUR188URFE

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

- **Plastic triple blade for heavy duty operation**
  Bilah plastik triple untuk operasi berat
  塑料三叶刀片以便重型操作

*Safety Goggles, Shoulder Harness, Nylon Cutting Head, Plastic Blade, Accessory Bag, Hex Wrench, Cap
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery

Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 300mm (11-3/4")** **Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Medium/ Low/ ADT Mode:** **6,000/ 5,000/ 4,000/ 4,000 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25LH**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**Nylon Cutting Head, BL1860B: 168** **Plastic Blade, BL1860B: 219**
Dimensions (L x W x H) Dimensi 体积	**1,791x600x472mm** **(70-1/2"x23-5/8"x18-5/8")**
Net Weight Berat Bersih 淨重	**3.5 - 3.8kg (7.7 - 8.3lbs)**

DUR188LRFE / Z

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



- **Plastic triple blade for heavy duty operation**
  Bilah plastik triple untuk operasi berat
  塑料三叶刀片以便重型操作

*Safety Goggles, Shoulder Harness, Nylon Cutting Head, Plastic Blade, Accessory Bag, Hex Wrench, Cap
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 300mm (11-3/4")** **Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Medium/ Low/ ADT Mode:** **6,000/ 5,000/ 4,000/ 4,000 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25 LH**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**Nylon Cutting Head, BL1860B: 168** **Plastic Blade, BL1860B: 219**
Dimensions (L x W x H) Dimensi 体积	**1,791x258x232mm** **(70-1/2"x10-1/8"x9-1/8")**
Net Weight Berat Bersih 淨重	**3.7 - 4.0kg (8.1 - 8.8lbs)**

DUR189Z

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



NEW
BARU | 新


- **Comfortable short telescopic pipe provides easy handling in tight spaces**
  Paip teleskopik pendek mudah diguna dalam ruang yang ketat
  舒适的短伸缩管可在狭小的空间内轻松使用

*Single harness, Nylon Cutting Head, Plastic Blade, Safety Goggles, Accessory Bag, Hex Wrench
- Z : Without Charger & Battery

Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 300mm (11-3/4")** **Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Medium/ Low/ ADT Mode:** **6,000/ 5,000/ 4,000/ 4,000 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25RH**
Dimensions (L x W x H) Dimensi 体积	**1,518-1,618x258x369mm** **(59-3/4" - 63-3/4"x10-1/8"x14-1/2")**
Net Weight Berat Bersih 淨重	**3.1 - 3.4kg (6.8 - 7.5lbs.)**

DUR184LZ

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

- **Low noise level for improved user comfort**
  Bunyi rendah untuk keselesaan pengguna
  低噪音

*Safety Goggles, Single harness, Nylon Cutting Head, Accessory Bag, Hex Wrench
- Z : Without Charger & Battery


No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 6,000/ 5,000**
Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 300mm (11-3/4")**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25RH**
Max Output Keluaran Maksima 最大输出	**250W**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**w/ BL1850B: 80**
Dimensions (L x W x H) Dimensi 体积	**1,534-1,634x258x417mm** **(60-1/2" - 64-1/2"x10-1/8"x16-3/8")**
Net weight Berat Bersih 淨重	**3.1 - 3.4kg (6.8 - 7.5lbs)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DUM604Z 160mm (6-5/16")

Cordless Grass Shear
Pemotong Rumput tanpa Kord
充电式割草機



- **2 in 1: trimmer and shear blade can be attached**
  2 dalam 1 untuk penukaran bilah
  2合1：可更换剪切刀片

*Grass Receiver, Blade Cover

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

2in1



NEW BARU | 新

Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**15, 20, 25mm (9/16", 13/16", 1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**BL1850B: 200**
Dimensions (L x W x H) Dimensi 体积	**337x177x131mm (13-1/4"x7"x5-1/8")**
Net Weight Berat Bersih 净重	**1.4 - 1.8kg (3.2 - 4.0 lbs)**

DUM168Z 160mm (6-5/16")

Cordless Grass Shear
Pemotong Rumput tanpa Kord
充电式割草機



- **2 in 1: trimmer and shear blade can be attached**
  2 dalam 1 untuk penukaran bilah
  2合1：可更换剪切刀片

*Base Frame, Blade Cover

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

2in1




WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**10, 20, 30mm (3/8", 13/16", 1-3/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**BL1850B: 200**
Dimensions (L x W x H) Dimensi 体积	**353x176x130mm (13-7/8"x6-15/16"x5-1/8")**
Net Weight Berat Bersih 净重	**1.4kg (3.0lbs.)**

DVF154Z 15L

Cordless Garden Sprayer
Penyembur Taman Tanpa Kord
充电式花园喷雾器



- **Reduced running cost with Li-ion battery**
  Mengurangkan kos operasi dengan bateri Li-ion
  使用锂电池达至降低运行成本

*Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Spray Pipe Holder, Shoulder Harness

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Max Pressure Tekanan Maksimum 最大水压	**0.3MPa (3 kgf/cm²)**
Chemical tank Tangki kimia 化学箱容量	**15L**
Dimensions (L x W x H) Dimensi 体积	**345x235x525mm (13-5/8"x9-1/4"x20-3/4")**
Net weight Berat Bersih 净重	**4.1 - 4.4kg (9.1 - 9.7lbs)**

DVF104Z 10L

Cordless Garden Sprayer
Penyembur Taman Tanpa Kord
充电式花园喷雾器



- **Environment-friendly with no emission and extremely low noise**
  Mesra alam tanpa pelepasan asap dan bunyi rendah
  环保，无排气，低噪音

*Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Spray Pipe Holder, Shoulder Harness

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Max Pressure Tekanan Maksimum 最大水压	**0.3MPa (3 kgf/cm²)**
Chemical Tank Tangki kimia 化学箱容量	**10L**
Dimensions (L x W x H) Dimensi 体积	**315x225x415mm (12-3/8"x8-7/8"x16-3/8")**
Net weight Berat Bersih 净重	**3.8 - 4.1kg (8.4 - 9.1lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DUB183Z

Cordless Blower
Mesin Penghembus Tanpa Kord
充电式吹风机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **Long blowing nozzle with curved tip for optimal blowing performance**
  Muncung peniup panjang dengan hujung lengkung untuk prestasi tiupan optima
  弯尖喷咀，卓越吹风性能

*Garden Nozzle

• Z: Without Charger & Battery

Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1830B: 11**
Air Volume Isipadu Angin 风量	**2.6 m³/min**
Air Speed Kelajuan Angin 风速	**52 m/s**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-18,000**
Dimensions (L x W x H) Dimensi 体积	**845x155x212mm (33-1/4"x6-1/8"x8-3/8")**
Net Weight Berat Bersih 淨重	**1.7kg (3.8lbs)**

DUB182Z

Cordless Blower
Mesin Penghembus Tanpa Kord
充电式吹风机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **Compact and ergonomic design at only 525mm (20-3/4") long**
  Rekaan kompak dan ergonomik, hanya 525mm (20-3/4") panjang
  轻巧便携设计

*Nozzle assembly

• Z: Without Charger & Battery

Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1830B: 12**
Air Volume Isipadu Angin 风量	**2.6m³/min**
Air Speed Kelajuan Angin 风速	**80m/s**
Air Pressure Udara Tekanan 气压	**5.4kPa (550mmH_2O)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-18,000**
Dimensions (L x W x H) Dimensi 体积	**525x155x212mm (20-3/4"x6-1/8"x8-3/8")**
Net Weight Berat Bersih 淨重	**1.7kg (3.7lbs)**

DVR450Z 1,200mm (4.0ft)

Cordless Concrete Vibrator
Penggetar Konkrit Tanpa Kord
充电式混凝土振动器



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **Makita-built motor delivers 13,000VPM to help increase strength of concrete**
  Motor buatan Makita menyampaikan 13,000VPM untuk meningkatkan kekuatan konkrit
  Makita制造的马达提供13,000VPM，有效提高混凝土的强度


*Carrying case for battery and charger

• Z : Without Charger & Battery

Diameter of Vibrator Diameter Penggetar 振动器的直径	**25mm (1")**
Flexible Shaft Assembly Length Panjang Pemasangan Fleksibel 柔性轴组件长度	**1,200mm (4.0 ft)**
Vibrations Per Minute (VPM) Getaran Setiap Minit 每分钟振动	**13,000**
Dimensions (L x W x H) Dimensi 体积	**1,483x93x250mm (58-1/2"x3-5/8"x9-7/8")**
Net Weight Berat Bersih 淨重	**3.3 - 3.8kg (7.3 - 8.3lbs)**

DCG180RFE / Z / RFEB / ZB

Cordless Caulking Gun
Pistol Caulking Tanpa Kord
充电式填缝枪



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **5 Speed dial optimizes flow rate 0 - 28mm/sec**
  5 kelajuan mengoptimumkan kadar aliran 0 - 28mm / saat
  5速度转盘流速0 - 28毫米/秒

*Holder, Holder Joint, Piston, Rubber Ring, Nozzle

• RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
• Z : Without Charger & Battery
• RFEB : 1 x Rapid Charger, 2 x 3.0Ah Battery, Holder Set B
• Z : Without Charger & Battery, Holder Set B

Max Dispersing Force Tujahan Maksimum 最大推力	**5,000N (1,100lbs)**
No Load Speed Kelajuan Tanpa Beban 回转数	**0 - 28mm/sec. (0 - 66in/min.)**
Holder Size Kapasiti 容量	**300, 600, 800mL**
Dimensions (L x W x H) Dimensi 体积	**404x108x281mm (15-7/8"x4-1/4"x11-1/8")**
Net Weight Berat Bersih 淨重	**2.1 - 3.0kg (4.7 - 6.6lbs)**

ADP05 (AUBADP05)

Adapter for USB
Penyesuai untuk USB
USB适配器



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **As a charger for smart phones**
  Pengecas untuk telefon pintar
  智能手机的充电器


• Without Charger & Battery

USB Port Soket USB USB插口位置	**2 (A type)**
Dimensions (L x W x H) Dimensi 体积	**102x72x43mm (4"x2-13/16"x1-11/16")**
Net Weight Berat Bersih 淨重	**0.46 - 0.71kg (1.0 - 1.6lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DML808 (AUAML808)

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED照明灯



- **Multifaceted Reflector Illuminates Evenly for Increased Visibility**
  Pencahayaan berbilang muka menerangi sama rata untuk meningkatkan penglihatan
  多面反射器照明均匀，以提高可见度

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V




- Without Charger & Battery

Run Time (hrs) Masa Operasi (Jam) 使用时间 (小时)	**Up to: 32**
Luminous Flux Cahaya Fluks 发光通量	**190lm**
illuminance Pencahayaan 照度	**at 1m from the light source 170 - 4,500lx**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 297x79x119mm (11-3/4"x3-1/8"x4-11/16")**
Net Weight Berat Bersih 淨重	**0.73 - 1.09kg (1.6 - 2.4lbs)**

DML801 (DEADML801)

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED照明灯



- **Metal hang hook swivels 360° and folds away for extra convenience**
  Cangkuk penyangkut logam berputar 360° dan boleh dilipat untuk keselesaan tambahan
  金属吊钩可 360°旋转及折叠，方便使用

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V




- Without Charger & Battery

Run Time (hrs) Masa Operasi (Jam) 使用时间 (小时)	**Up to: 48 (BL1860B)**
Dimensions (L x W x H) Dimensi 体积	**380x79x116mm (15"x9-11/16"x4-9/16")**
Net Weight Berat Bersih 淨重	**0.68kg (1.5lbs)**

DML802 (DEADML802)

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED照明灯



- **12 position pivoting flashlight head with positive stops from -60° - 110°**
  Kepala lampu berputar 12 kedudukan sudut dari -60° - 110°
  12位置光头调节，角度从-60° - 110°

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- Without Charger & Battery

Run Time (hrs) Masa Operasi (Jam) 使用时间 (小时)	**Up to: 27 (BL1860B)**
Dimensions (L x W x H) Dimensi 体积	**272x79x116mm (10-3/4"x3-1/8"x4-9/16")**
Net Weight Berat Bersih 淨重	**0.65kg (1.5lbs)**

DML186 (DEADML186)

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED工作灯



- **Hand strap for extra convenience**
  Tali pelapik tangan untuk lebih kemudahan
  手腕带更方便使用

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V




- Without Charger & Battery

Run Time (hrs) Masa Operasi (Jam) 使用时间 (小时)	**Up to: 25 (BL1815)**
Dimensions (L x W x H) Dimensi 体积	**151x81x61mm (5-7/8"x3-3/16"x2-3/8")**
Net Weight Berat Bersih 淨重	**0.54kg (1.18lbs)**

DML805 (GBBDML805)

Corded and Cordless LED Worklight
Lampu Kerja LED Kuasa Elektrik dan Tanpa Kord
电源及充电式LED工作灯



- **2-mode operation: delivers 750 lumens on high mode or 450 lumens on low mode**
  Operasi 2-mod: menyampaikan 750 lumen pada mod tinggi atau 450 lumen pada mod rendah
  双模式操作：低模式提供750光量，高模式提供450光量

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

AC ALTERNATING CURRENT



- Without Charger & Battery

Run Time (hrs) Masa Operasi (Jam) 使用时间 (小时)	**Up to: 17 (BL1850B)**
Luminous Flux Cahaya Fluks 发光通量	**Hi: 750lm, Lo: 450lm**
illuminance Pencahayaan 照度	**at 0.5m from the light source Hi: 1,150lx, Lo: 750lx** **at 1m from the light source Hi: 300lx, Lo: 200lx**
Dimensions (L x W x H) Dimensi 体积	**214x261x328mm (8-3/8"x10-1/4"x12-7/8")**
Net Weight Berat Bersih 淨重	**2.3 - 2.7kg (5.1 - 5.9lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

FAST CHARGING
Pengecasan Cepat 快速充电

22 MINUTES

to fully charge a 1.5Ah slide Li-ion battery

* **Charge time may vary depending on battery model or conditions of use**
Masa pengecasan mungkin berbeza bergantung kepada model bateri atau syarat penggunaan
充电时间可能因电池型号或使用条件而异



Li-ion Battery

Sistem Pengecasan Terbaik 最佳充电系统

Multi-Contact Slide-type Terminal

Terminal slaid dengan pelbagai sambungan 多触点滑动式终端

- **Ensures stable contact with tool even under extreme vibration**
- **Allows tools to be equipped with an ergonomic handle design**
- Memastikan sambungan yang stabil dengan alat walaupun di bawah getaran yang melampau
- Membolehkan alat dilengkapi dengan reka bentuk pemegang ergonomik
- 即使在极端的振动下也能确保与工具的稳定连接
- 允许工具配备符合人体工程学的手柄设计



Battery fuel gauge

Penunjuk Tahap Bateri 电量显示

The power remaining in the battery can be indicated in 4 stages simply by pushing a button.

Menekan butang untuk penunjuk tahap bateri
只需按一下按钮，电池中剩余的电量就可以分四个阶段显示出来



Charges LXT and CXT battery alternatively

Pengecas untuk LXT dan CXT
LXT和CXT的充电系统

Compatible batteries are:
18V LXT batteries & 12Vmax CXT batteries
Bateri yang serah
兼容电池



12Vmax LITHIUM-ION
12V Litium-ion | 12V锂离子

CXT®
Teknologi Ekstrim Kompak
紧凑极限技术



VIDEO CLIP

This movie was filmed in Japan.
Models and specs may vary by country.



DF332DSME / SAE / Z 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **BL motor with high power**
  BL Motor berkuasa tinggi
  大功率BL马达

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- SAE : 1 x Speed Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12V max



Capacity Kapasiti 能力	**Steel/ Wood: 10/ 28mm (3/8"/ 1-1/8")**
Chuck capacity Kapasiti Chuck 夹头能力	**0.8 - 10mm (1/32 - 3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,500/ 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 35/ 21N·m (310/ 190in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**32N·m (280in.lbs.)**
Max Output Keluaran Maksima 最大输出	**250W**
Dimensions (L x W x H) Dimensi 体积	**154x66x217mm** **(6-1/16"x2-5/8"x8-1/2")**
Net Weight Berat Bersih 淨重	**1.0 - 1.2kg (2.3 - 2.6lbs)**

DF331DSME / WAE / WYE / Z 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Increased motor power for higher speed**
  Kuasa motor dipertingkatkan untuk kelajuan yang lebih tinggi
  提高马达功率以增快速度

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12V max



Capacity Kapasiti 能力	**Steel/ Wood: 10 / 21mm (3/8"/ 13/16")**
Chuck capacity Kapasiti Chuck 夹头能力	**0.8 - 10mm (1/32 - 3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,700/ 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 30/ 14N·m (270/ 130in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**28N·m (250in.lbs.)**
Max Output Keluaran Maksima 最大输出	**170W**
Dimensions (L x W x H) Dimensi 体积	**189x66x209mm** **(7-7/16"x2-5/8"x8-1/4")**
Net Weight Berat Bersih 淨重	**1.1 - 1.3kg (2.4 - 2.8lbs)**

DF032DSME / SAE / Z 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **BL motor with high power**
  BL Motor berkuasa tinggi
  大功率BL马达

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- SAE : 1 x Speed Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12V max



Capacity Kapasiti 能力	**Steel/ Wood: 10/ 28mm (3/8" / 1-1/8")**
Chuck capacity Kapasiti Chuck 夹头能力	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,500/ 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 35/ 21N·m (310 / 190 in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**32N·m (280in.lbs.)**
Max Output Keluaran Maksima 最大输出	**250W**
Dimensions (L x W x H) Dimensi 体积	**124x66x217mm** **(4-7/8"x2-5/8"x8-1/2")**
Net Weight Berat Bersih 淨重	**0.88 - 1kg (1.9 - 2.3lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DF031DSME / WAE / WYE / Z 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Ideal for work in tight spaces**
  Sesuai untuk bekerja di kawasan yang sempit
  适用在狭小的空间工作

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5 | 12V max



Capacity Kapasiti 能力	**Steel/ Wood: 10 / 21mm (3/8"/ 13/16")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,700/ 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 30/ 14N·m (270/ 130in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**28N·m (250in.lbs.)**
Max Output Keluaran Maksima 最大输出	**170W**
Dimensions (L x W x H) Dimensi 体积	**157x66x209mm (6-3/16"x2-5/8"x8-1/4")**
Net Weight Berat Bersih 淨重	**0.94 - 1.1kg (2.1 - 2.5lbs)**

HP332DSME / SAE / Z 10mm (3/8")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Fast hammer drilling in masonry materials**
  Penggerudian tukul cepat untuk bahan batu
  于石工快速锤钻

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- SAE : 1 x Speed Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5 | 12V max



Capacity Kapasiti 能力	**Steel/ Wood/ Masonry: 10/ 28/ 8mm (3/8" / 1-1/8" / 5/16")**
Chuck capacity Kapasiti Chuck 夹头能力	**0.8 - 10mm (1/32 - 3/8")**
Impacts Per Minute (IPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 22,500/ 0 - 6,750**
No Load Speed (RPM) Maksimum Tenaga Pemutaran Pengancing 最快扭力	**High/ Low: 0 - 1,500/ 0 - 450**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**Hard/ Soft: 35/ 21N·m (310/ 190in.lbs.)**
Max Lock Torque Keluaran Maksima 最大输出	**32N·m (280in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**168x66x217mm (6-5/8"x2-5/8"x8-1/2")**
Net Weight Berat Bersih 淨重	**1.1 - 1.3kg (2.4 - 2.8lbs)**

HP331DSME / WAX1 / WAE / WYE / Z 10mm (3/8")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **High speed mode for speedy drilling**
  Mod kelajuan tinggi untuk penggerudian cepat
  高速模式快速钻孔

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAX1 : 1 x Standard Charger, 2 x 2.0Ah Battery, Accessories Bit Set
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5 | 12V max



HP331DWAX1
WHILE STOCKS LAST
Sementara stok masih ada
售完即止




For **HP331DWAX1** only

Capacity Kapasiti 能力	**Steel/ Wood/ Masonry: 10/ 21/ 8mm (3/8" / 13/16" / 5/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High/ Low: 0 - 25,500 / 0 - 6,750**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,700/ 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 30/ 14N·m (270/ 130in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**28N·m (250in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**201x66x209mm (7-7/8"x2-5/8"x8-1/4")**
Net Weight Berat Bersih 淨重	**1.1 - 1.3kg (2.5 - 2.9lbs)**

TD111DSME / WAE / WYE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **3-Mode operation: A-mode/ Hard mode/ Soft mode**
  Operasi 3-Mod: mod-a/ mod keras/ mod lembut
  3模式操作：A模式/硬模式/软模式

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery


Li-ion Ah 4.0 2.0 1.5 | 12V max



Capacity Kapasiti 能力	**Machine Screw: M4 - M8mm (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard/ Soft: 0 - 3,000/ 0 - 1,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard/ Soft: 0 - 3,900/ 0 - 1,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**135N·m (1,200in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**135x66x210mm (5-5/16"x2-5/8"x8-1/4")**
Net Weight Berat Bersih 淨重	**0.97 - 1.1kg (2.1 - 2.5lbs)**

TD110DSME / WAE / WYE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Compact and Lightweight**
  Padat dan ringan
  紧凑和轻量

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5 | 12V max



Capacity Kapasiti 能力	**Machine Screw: M4 - M8mm (5/32" - 5/16")** **Standard Bolt: M5 - M12 (3/16" - 1/2")** **High Tensile Bolt: M5 - M10 (3/16" - 3/8")** **Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**110N·m (970in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**153x66x204mm (6"x2-5/8"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.0 - 1.2kg (2.3 - 2.6lbs)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HR166D

Cordless Rotary Hammer

Tukul Putar Tanpa Kord 充电式电锤

One-hand Rotary Hammer

Tukul Putar Dengan Satu Tangan 单手操作充电式电钻

VIDEO CLIP

This movie was filmed in Japan.
Models and specs may vary by country.



Applicable for
Concrete
Wood & Steel
Boleh digunakan di
konkrit, kayu dan besi keluli
适用于混凝土, 木材及钢材

BL MOTOR
Motor tanpa berus
无碳刷马达

CXT®
Teknologi Ekstrim Kompak
紧凑极限技术

12Vmax LITHIUM-ION
12V Litium-ion I 12V锂离子

Optional Accessories Aksesori Pilihan 可选配件
Available in Makita

SDS-Plus Brad Point Wood Drill Bit
Available diameter 4mm to 10mm & various length
Mata Gerudi Kayu Hujung Brad Terdapat pelbagai ukuran panjang berdiameter 4mm hingga 10mm
木材用角钉点钻头
各种长度, 直径尺寸从 4mm 至 10mm
NEW BARU 新



SDS-Plus HSS-TiN Metal Drill Bit
Available diameter 3mm to 6.5mm & various length
Mata Gerudi Logam HSS-TiN Terdapat pelbagai ukuran panjang berdiameter 3mm hingga 6.5mm
HSS-TiN金属钻头
各种长度, 直径尺寸从 3mm 至 6.5mm
NEW BARU 新

SDS Plus wood drilling & steel drilling bit

SDS-Plus Concrete/ Masonry Drill Bit

2 mode
Hammering with rotation
Rotation
Operasi 2-mod: Penukulan dengan putaran / hanya putaran
2 档模式变换: 旋转并锤击 / 仅旋转

HR166DSMJ / WAE1 / WAJ / Z 16mm (5/8")

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电钻



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Dust Cup (country-specific), Side Grip, Depth Gauge
- SMJ : 1 x Speed Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- WAE1 : 1 x Standard Charger, 2 x 2.0Ah Battery, Accessories
- WAJ : 1 x Standard Charger, 2 x 2.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax 2modes



For **HR166DWAE1** only

Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.1J** **Our experimental conditions: 1.0J**
Capacity Kapasiti 能力	**Concrete: 16mm (5/8")** **Steel: 10mm (3/8")/ Wood: 13mm (1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,800**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 680**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 250x74x187mm** **(9-7/8"x2-15/16"x7-3/8")**
Net Weight Berat Bersih 淨重	**1.8 - 2.4kg (4.1 - 5.4lbs)**

HR140DSMJ / WAJ / Z 14mm (9/16")

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电钻



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Side Grip, Depth Gauge, Dust Cup (country-specific)
- SMJ : 1 x Speed Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- WAJ : 1 x Standard Charger, 2 x 2.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax 2modes



NEW BARU 新

Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.0J** **Our experimental conditions: 0.9J**
Capacity Kapasiti 能力	**Concrete: 14mm (9/16")** **Steel: 10mm (3/8")/ Wood: 13mm (1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,900**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 850**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 246x74x179mm** **(9-11/16"x2-15/16"x7")** **BL1041B: 246x74x198mm** **(9-11/16"x2-15/16"x7-3/4")**
Net Weight Berat Bersih 淨重	**1.9 - 2.6kg (4.3 - 5.6lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

JR105DWAE / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Cuts PVC, ABS pipe, EMT, drywall, wood & more**
  Memotong PVC, paip ABS, EMT, drywall, kayu dll
  切割PVC，ABS管，EMT，石膏板，木材及更多

*Recipro Saw Blades, Hex Wrench

- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5 | 12Vmax



Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,300**
Capacity Kapasiti 能力	**Pipe/ Wood: 50/ 50mm (2" / 2")**
Dimensions (L x W x H) Dimensi 体积	**376x66x186mm (14-3/4"x2-5/8"x7-3/8")**
Net Weight Berat Bersih 淨重	**1.3 - 1.5kg (2.9 - 3.2lbs)**

12Vmax LITHIUM-ION
12V Litium-ion I 12V锂离子

CXT® Teknologi Ekstrim Kompak 紧凑极限技术



V-notch in base plate helps easy tracing of cutting line

V-notch di plat asas untuk pengesanan garis pemotongan
底板上的 V 形槽口有助于简易切割线



Cutting Depth Adjustment

Pelarasan mendalam pemotongan 切割深度调整

Drywall



- **Cutting depth can be adjusted to drywall thickness.**
- **Prevent accidental breakage of wires**
- Kedalaman pemotongan boleh ditetapkan dengan ketebalan drywall
- Mencegah kerosakan wayar secara tidak sengaja
- 切割深度可依壁厚度调整
- 防止电线意外断裂

Blade Cover

Penutup bilah 刀片盖

protects drywall surfaces from damage/ scratches
melindungi permukaan drywall dari kerosakan / calar
保护干砌墙面受损 / 划伤







SD100D

Cordless Drywall Saw

Gergaji Drywall Tanpa Kord
充电式石膏板切割机

SD100DWAJ / Z

Cordless Drywall Saw
Gergaji Drywall Tanpa Kord
充电式石膏板切割机



- **Ideal for cutting holes in drywalls when setting ceiling lights, air vents etc**
  Sesuai untuk memotong lubang untuk memasang lampu siling, ventilasi udara dan lain-lain
  适用于干墙，安装天花板灯，通风口等

*Blade, Blade Cover, Base Cover, Hex Wrench

- WAJ : 1 x Standard Charger, 2 x 2.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5 | 12Vmax



Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 6,000**
Length of Stroke Panjang Strok 冲程长度	**6mm (1/4")**
Capacity Kapasiti 能力	**Drywall: 30mm (1-3/16")** **Wood: 15mm (9/16")**
Dimensions (L x W x H) Dimensi 体积	**239x79x266mm (9-3/8"x3-1/8"x10-1/2")**
Net Weight Berat Bersih 淨重	**1.4 - 1.6kg (3.2 - 3.5lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

JV101DWAE / Z

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



- **Aluminum die-cast base adjusts from 0°-45° right to left**
  Pangkalan aluminium die-cast dilaraskan dari 0° - 45° kanan ke kiri
  铝压铸底座从0° - 45° 从右向左调整

*Jig Saw Blade, Hex Wrench, Guide Rule (country-specific)

- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax



Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood/ Aluminum/ Mild Steel:** **65/ 4/ 2mm (2-9/16" / 5/32" / 1/16")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-2,900**
Dimensions (L x W x H) Dimensi 体积	**232x76x196mm** **(9-1/8"x3"x7-3/4")**
Net Weight Berat Bersih 淨重	**1.8 - 1.9kg (3.9 - 4.3lbs)**



JV103DSMJ / WAJ / Z

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



- **Up to 2.2X Faster Cutting & 2.2X Longer Runtime*1**
  Pemotongan cepat sehingga 2.2X & Lebih tahan lama 2.2X*1
  切割速度快2.2倍，运行时间延长2.2倍*1

*Jig Saw Blade, Hex Wrench, Cover Plate (country-specific), Dust Nozzle (country-specific), Dust Cover (country-specific)

- SMJ : 1 x Speed Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- WAJ : 1 x Standard Charger, 2 x 2.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax



Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood/ Aluminum/ Mild Steel:** **90/ 20/ 10mm (3-1/2"/ 13/16"/ 3/8")**
Length of Stroke Panjang Strok 冲程长度	**23mm (7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**237x76x206mm** **(9-3/8"x3"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.9 - 2.0kg (4.1 - 4.4lbs)**

JV102DZ

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机

- **Up to 2.2X Faster Cutting & 2.2X Longer Runtime*1**
  Pemotongan cepat sehingga 2.2X & Lebih tahan lama 2.2X*1
  切割速度快2.2倍，运行时间延长2.2倍*1

*Jig Saw Blade, Hex Wrench, Cover Plate (country-specific), Dust Nozzle (country-specific), Dust Cover (country-specific)

- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax



Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood/ Aluminum/ Mild Steel:** **90/ 20/ 10mm (3-1/2"/ 13/16"/ 3/8")**
Length of Stroke Panjang Strok 冲程长度	**23mm (7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**237x76x186mm** **(9-3/8"x3"x7-3/8")**
Net Weight Berat Bersih 淨重	**1.8 - 1.9kg (3.9 - 4.2lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Ideal for fastening in tight spots

Sesuai untuk digunakan di tempat yang sempit 适合在狭窄的空间使用

NEW BARU | 新

12Vmax LITHIUM-ION
12V Litium-ion I 12V锂离子

CXT
Teknologi Ekstrim Kompak
紧凑极限技术

1.3kg Lightweight
Ringan 轻量

60 N.m Max Torque
Pemutaran Tenaga Maksimum
最大扭转



TL064D
Cordless Angle Impact Driver
Pemutar Skru Sudut Impak tanpa Kord
充电式角向冲击螺丝起子机

Hex Shank:
Batang Hex 六角柄
6.35mm (1/4")
TL064D only

Square Drive
Kepala Segi Empat 方形头
9.5mm (3/8")
TL065D only

TL065D
Cordless Angle Impact Wrench
Perengkuh Sudut Impak tanpa Kord
充电式角向冲击扳手

TL064DSME / WAE / Z

Cordless Angle Impact Driver
Pemutar Skru Impak Sudut Tanpa Kord
充电式角向冲击螺丝起子机



- **Compact & lightweight for fastening and loosening in tight spaces**
  Kompak & ringan untuk kerja di tempat yang sempit
  紧凑轻量适合在狭窄空间使用

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax

NEW BARU | 新



Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M4 - M12 (5/32" - 1/2")** **High Tensile Bolt: M4 - M8 (5/32" - 5/16")**
	Coarse thread (in length): 22 - 75mm (7/8" - 2-31/32")
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**361x66x86mm (14-1/4"x2-5/8"x3-3/8")**
Net Weight Berat Bersih 淨重	**1.2 - 1.6kg (2.7 - 3.6lbs)**

TL065DSME / WAE / Z

Cordless Angle Impact Wrench
Perengkuh Impak Sudut Tanpa Kord
充电式角向冲击套筒扳手



- **Compact & lightweight for fastening and loosening in tight spaces**
  Kompak & ringan untuk kerja di tempat yang sempit
  紧凑轻量适合在狭窄空间使用

*Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax

NEW BARU | 新



Capacity Kapasiti 能力	**Standard Bolt: M4 - M12 (5/32" - 1/2")** **High Tensile Bolt: M4 - M8 (5/32" - 5/16")**
Square Drive Batang Segi Empat 四方头	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**361x66x86mm (14-1/4"x2-5/8"x3-3/8")**
Net Weight Berat Bersih 淨重	**1.2 - 1.6kg (2.7 - 3.6lbs)**

DA332DWAE / Z 10mm (3/8")

Cordless Angle Drill
Gerudi Sudut Tanpa Kord
充电式角向电钻



- **Up to 40% faster drilling and 380% longer runtime*1**
  40% lebih cepat & 380% lebih tahan lama
  钻孔40%更快，运行时间380%更久

*Chuck Key, Chuck Key Holder, Bit, Belt Clip

- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax

NEW BARU | 新



Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 12mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Head Height Ketinggian Kepala 高度	**63mm (2-1/2")**
Center Height Pusat Tinggi 中心高度	**23.5mm (15/16")**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 313x68x86mm (12-3/8"x2-11/16"x3-3/8")** **BL1041B: 332x68x86mm (13-1/8"x2-11/16"x3-3/8")**
Net Weight Berat Bersih 淨重	**1.2 - 1.3kg (2.6 - 2.9lbs)**

---

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。






Delivers an industry-leading 5,000N (1,100lbs) of dispensing force to work

Memberi tenaga 5,000N (1,100paun)
提供行业领先的 5,000N(1,100 磅) 分配力

CG100DZA

Cordless Caulking Gun
Alat Tembak Silikon Tanpa Kord
充电式填缝枪



- **5 Speed dial optimizes flow rate 0 - 28mm/sec**
  5 kelajuan mengoptimumkan kadar aliran 0 - 28mm / saat
  5速度转盘流速0 - 28毫米/秒

*Holder, Holder Joint, Piston, Rubber Ring, Nozzle

- ZA : Without Charger & Battery, Holder Set A

Li-ion 4.0 2.0 1.5

12V max



Max Dispersing Force Tujahan Maksimum 最大推力	**5,000N (1,100lbs)**
No Load Speed Kelajuan Tanpa Beban 回转数	**0 - 28mm/sec. (0 - 66in/min.)**
Holder Size Kapasiti 容量	**300, 600, 800mL**
Dimensions (L x W x H) Dimensi 体积	**404x108x259mm (15-7/8"x4-1/4"x10-1/4")**
Net Weight Berat Bersih 淨重	**1.9 - 2.6kg (4.2 - 5.8lbs)**

HIGH POWER, LIGHTWEIGHT & COMPACT for easy maneuverability

Kuasa Tinggi, Ringan & Padat untuk mudah dibawa 高功率, 轻巧紧凑, 操作简单

CP100D

Cordless Multi Cutter
Pemotong Pelbagai Fungsi Tanpa Kord
充电式多功能电剪



0.72kg
Lightweight
Ringan 轻量

High Work Amount
Potongan Cardboard 纸板切割
1200 Cuts
Cardboard
Carton (t=5mm, L=500mm)

Cutting Capacity
Kapasiti Pemotongan
切割能力
6mm


12V max LITHIUM-ION
12V Litium-ion I 12V锂离子

CXT
Teknologi Ekstrim Kompak
紧凑极限技术



CP100DSM / WA / Z

Cordless Multi Cutter
Pemotong Pelbagai Fungsi
Tanpa Kord
充电式多功能电剪



- **Cuts thin and thick material up to 6mm such as cardboard, carpet, fabrics, leather, CD, DVD & Blu-ray**
  Memotong bahan setebal 6mm seperti kadbod, karpet, kain, kulit, CD, DVD dan Blu-ray
  切割厚达6mm的厚薄材料，如纸板，地毯，织物，皮革，CD，DVD 等

*Blade

- SM : 1 x Speed Charger, 1 x 4.0Ah Battery
- WA : 1 x Standard Charger, 1 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion 4.0 2.0 1.5

12V max



Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**6mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**300**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 272x66x120mm (10-3/4"x2-5/8"x4-3/4")** **BL1041B: 291x66x121mm (11-1/2"x2-5/8"x4-3/4")**
Net Weight Berat Bersih 淨重	**0.72 - 0.88kg (1.6 - 1.9lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

(BL1021B)
Work volume on a single full battery charge
Jumlah kerja pada bateripenuh caj
工作量于单颗完整充电的电池
1,000
Staple


1.8kg
Lightweight
Ringan 轻便

NEW
BARU | 新



Newly designed driver shape balances beautiful finish and durability.
Bentuk pemacu yang baru direka mengimbangi untuk kemasan yang indah dan ketahanan.
新设计的驱动器形状平衡美丽外观和耐用性。

Reduced damage to work surface. Straight tip shape. **0.6mm**

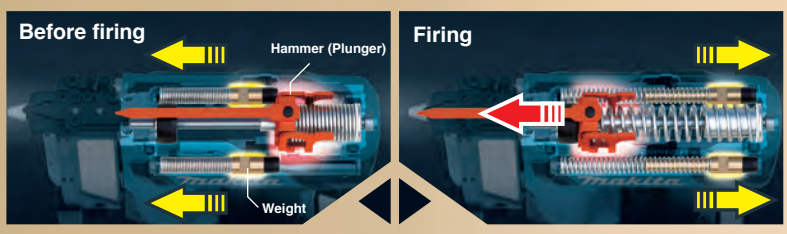

While hammer is pulled backward, weight moves forward=

Hammer drives a pin nail into workpiece at a stroke and simultaneously weight moves backward. This unique mechanism reduces reaction at firing

PT354D
Cordless Pin Nailer
Mesin Pemaku Tanpa Kord
充电式打钉机

12Vmax LITHIUM-ION
12V Litium-ion | 12V锂离子

CXT®
Teknologi Ekstrim Kompak
紧凑极限技术

PT354DZ
Cordless Pin Nailer
Mesin Pemaku Tanpa Kord
充电式打钉机



- **Ergonomically designed handle with soft grip provides increased comfort**
  Pemegang yang direka secara ergonomik untuk keselesaan yang lebih tinggi
  最理想人体工学把手

*Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench

- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax

NEW BARU | 新



Capacity Kapasiti 能力	**Length: 15, 18, 25, 30, 35mm (5/8", 11/16", 1", 1-3/16", 1-3/8")** **Dia.: 0.6mm (1/32")** **Gauge: 23Ga**
Magazine Capacity Bilangan Staples 装钉个数	**120**
Dimensions (L x W x H) Dimensi 体积	**231x66x226mm (9-1/8"x2-5/8"x8-7/8")**
Net Weight Berat Bersih 淨重	**1.8 - 2.0kg (4.0 - 4.4lbs)**

ST113DWAJ / Z
Cordless Stapler
Stapler Tanpa Kord
充电式钉枪



- **Compact and lightweight for reduced operator fatigue**
  Kompak dan ringan untuk mengurangkan keletihan pengguna
  小巧轻便，减少疲劳

*Safety Goggles, Belt Clip

- WAJ : 1 x Standard Charger, 2 x 2.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax

NEW BARU | 新



Staple Staple 钉种	**Width: 10mm (3/8")** **Length: 7 - 10mm(9/32" - 3/8")** **Gauge: 0.5 x 0.7mm**
Magazine Capacity Bilangan Staples 装钉个数	**150 (max 160)**
Dimensions (L x W x H) Dimensi 体积	**211x81x159mm (8-5/16"x3-3/16"x6-1/4")**
Net Weight Berat Bersih 淨重	**1.3kg (2.9lbs.)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

TM30DWAE / WAEX1 / Z

Cordless Multi Tool
Mesin Pemotong Berbilang Fungsi Tanpa Kord
充电式多功能切割打磨机



- **12 Angle settings at every 30° from 0° to 360°**
  12 tetapan sudut pada setiap 30˚
  每30˚ 12个角度设置

*Oscillating multi tool accessories, Dust Attachment (country-specific), Tool Box (country-specific), Hex Wrench

- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WAEX1 : 1 x Standard Charger, 2 x 2.0Ah Battery, Accessories
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5 | 12Vmax



Oscillations Per Minute (OPM) Kelajuan Ayunan 摆动速度	**6,000 - 20,000**
Oscillation Angle Sudut Ayunan 摆动角度	**Left/ Right/ Total: 1.6° / 1.6° / 3.2°**
Max Output Keluaran Maksima 最大输出	**170W**
Dimensions (L x W x H) Dimensi 体积	**277x65x98mm** **(10-7/8"x2-9/16"x3-7/8")**
Net Weight Berat Bersih 净重	**1.1 - 1.3kg (2.3 - 2.9lbs)**

CC301DWME / WAE / Z 85mm (3-3/8")

Cordless Cutter
Pemotong Tanpa Kord
充电式切割机



- **Designed for cutting glass and ceramic tile**
  Direka untuk memotong kaca dan jubin seramik
  为切割玻璃和瓷砖而设

*Diamond Wheel, Water Supply Tank Assembly, Hex Wrench

- WME : 1 x Standard Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery

Li-ion Ah 4.0 2.0 1.5 | 12Vmax



Blade Diameter Diameter Bilah 锯片直径	**85mm (3-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 25.5mm (1")** **45°: 16.5mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,600**
Tank Capacity Kapasiti Tangki 水箱容量	**Water : 0.5L**
Dimensions (L x W x H) Dimensi 体积	**313x170x125mm** **(12-3/8"x6-11/16"x4-7/8")**
Net Weight Berat Bersih 净重	**1.9kg (4.1lbs)**

HS301DSME / WAE / Z 85mm (3-3/8")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



- **Fast cutting of plywood, MDF, pegboard, particleboard, melamine, drywall and more**
  Pemotongan cepat untuk papan lapis, MDF, pegboard, papan partikel, melamin, drywall dan banyak lagi
  快速切割胶合板，密度板，钉板，刨花板，三聚氰胺，石膏板等

*Dust Nozzle (country-specific), TCT Saw Blade, Hex Wrench

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery


Li-ion Ah 4.0 2.0 1.5 | 12Vmax



Blade Diameter Diameter Bilah 锯片直径	**85mm (3-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 25.5mm (1")** **45°: 16.5mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,500**
Max Output Keluaran Maksima 最大输出	**160W**
Dimensions (L x W x H) Dimensi 体积	**313x170x155mm** **(12-3/8"x6-11/16"x6-1/8")**
Net Weight Berat Bersih 净重	**1.6 - 1.7kg (3.5 - 3.8lbs)**

CL106FDWYW/ Z

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Stronger suction power for faster cleaning with more run time**
  Kuasa sedutan yang lebih kuat untuk pembersihan yang lebih cepat dan masa operasi lebih lama
  更强的吸力，更快的清洗，运行时间更持久

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- WYW: 1 x Standard Charger, 1 x 1.5Ah Battery (White)
- Z: Without Charger & Battery (Blue)

Li-ion Ah 4.0 2.0 1.5 | 12Vmax



Capacity Kapasiti 容量	**600mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1041B: 42**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.1kPa (316mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**19W**
Dimensions (L x W x H) Dimensi 体积	**958x100x150mm** **(37-3/4"x3-15/16"x5-7/8")**
Net Weight Berat Bersih 净重	**1.0kg (2.2 lbs.)**

CL107FDWYW/ Z

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **3 mode suction power settings**
  Tetapan kuasa sedutan 3 mod
  3档吸力操作

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag

- WYW: 1 x Standard Charger, 1 x 1.5Ah Battery (White)
- Z: Without Charger & Battery (Blue)

Li-ion Ah 4.0 2.0 1.5 | 12Vmax



Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1041B: Max: 20/ High: 24/ Normal: 50**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.0kPa (510mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Max: 32W/ High: 20W/ Normal: 5W**
Dimensions (L x W x H) Dimensi 体积	**960x112x150mm** **(37-3/4"x4-3/8"x5-7/8")**
Net Weight Berat Bersih 净重	**1.1kg (2.5lbs.)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

UH201DWAX / Z 200mm (7-7/8")

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆修剪机



- **Dual blade action cuts quickly with a shearing effect**
  Pemotongan cepat dengan dua bilah
  双刀片迅速切割

*Blade Cover, Chip Receiver

- WAX : 1 x Standard Charger, 1 x 2.0Ah Battery, 1x Grass Shear Blade
- Z : Without Charger & Battery

CXT XPT

Li-ion Ah 4.0 2.0 1.5
12Vmax
2in1
NEW BARU | 新




*Only for UH201DWAX



Blade Length Panjang Bilah 刀片长度	**200mm (7-7/8")**
Tooth Spacing Selang Gigi 牙齿间隔	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**BL1041B: 90/ BL1021B: 45/ BL1016: 35 min**
Dimensions (L x W x H) Dimensi 体积	**504x120x131mm (19-7/8"x4-3/4"x5-1/8")**
Net Weight Berat Bersih 淨重	**1.3 - 1.5kg (2.8 - 3.3lbs)**

UM600DWA / Z 160mm (6-5/16")

Cordless Grass Shear
Pemotong Rumput Tanpa Kord
充电式割草机



- **2 in 1: Both trimmer blade and shear blade can be attached**
  Penukaran bilah 2 dalam 1
  2合1可更换剪切刀片

*Grass Receiver, Blade Cover

- WA : 1 x Standard Charger, 1 x 2.0Ah Battery
- Z : Without Charger & Battery

CXT XPT

Li-ion Ah 4.0 2.0 1.5
12Vmax
2in1



Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**15, 20, 25mm (9/16", 13/16", 1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**BL1041B: 90/ BL1021B: 45/ BL1016: 35 min**
Dimensions (L x W x H) Dimensi 体积	**329x177x131mm (13"x7"x5-1/8")**
Net Weight Berat Bersih 淨重	**1.3 - 1.5kg (2.8 - 3.3lbs)**

UR100DSME 160mm (6-5/16")

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机



- **Well balanced design with fully adjustable features to suit any operator**
  Reka bentuk yang seimbang dengan ciri pelarasan memudahkan pengguna
  良好平衡设计且具有调整功能易于使用

*Safety Goggles (country-specific), Shoulder Belt, Nylon Cutting Head, Nylon Cord, Plastic Blade, Accessory Bag, Hex Wrench

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery

CXT XPT

Li-ion Ah 4.0 2.0 1.5
12Vmax
NEW BARU | 新



Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 260mm (10")** **Plastic Blade: 230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Nylon Cutting Head: 9,000** **Plastic Blade: 10,000**
Spindle Size Saiz Spindel 主轴尺寸	**M8 x 1.25RH**
Dimensions (L x W x H) Dimensi 体积	**835 - 1,185x267x210 - 315mm (32-7/8 - 46-2/3"x10-1/2"x8-1/4 - 12-1/3")**
Net Weight Berat Bersih 淨重	**2.1 - 2.3kg (4.4 - 4.9lbs.)**

MR052Z

Job Site Radio
Tukul Pemutar Skru Bergerudi Tanpa Kord
充電式收音机



- **AUX-IN jack allows for connection to personal audio players**
  AUX-IN untuk sambungan ke pemain audio peribadi
  AUX-IN插孔允许连接到个人音频播放器

- Z : Without Charger & Battery

CXT

Li-ion Ah 4.0 2.0 1.5
12Vmax



Frequency Band Julat Kekerapan 频率范围	**FM: 87.5 - 108MHz** **AM: 522 - 1,710kHz**
Continuous use (hours) Penggunaan Berterusan 连续使用时间(分钟)	**BL1041B: 30/ BL1021B: 15** **BL1016: 11**
Dimensions (L x W x H) Dimensi 体积	**169x73x74mm (6-5/8"x2-7/8"x2-15/16")**
Net Weight Berat Bersih 淨重	**0.56 - 0.72kg (1.2 - 1.6lbs)**

CF100DZ 12Vmax / AC

Cordless Fan
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式风扇



- **Compact Size Allows Installation Even in Small Spaces**
  Saiz kompak dan ringan, sesuai untuk ruang kecil
  机身轻巧，方便易用于小空间

*AC Adaptor

- Z : Without Charger & Battery

CXT

Li-ion Ah 4.0 2.0 1.5
12Vmax
AC ALTERNATING CURRENT



Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**BL1041B Low / Medium / High: 630 / 380 / 275**
	BL1021B Low / Medium / High: 315 / 190 / 135
	BL1016 Low / Medium / High: 240 / 145 / 105
Dimensions (L x W x H) Dimensi 体积	**148x260x252mm (5-7/8x10-1/4x9-7/8")**
Net Weight Berat Bersih 淨重	**1.2 - 1.4kg (2.7 - 3.1lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

ML103Z (AUAML103)

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED手电筒



- **1.5W white single diffusion LED provides bright and wide illumination**
  Cahaya putih 1.5W memberikan pencahayaan yang terang dan luas
  1.5W LED 白光提供明亮且宽阔的照明

- Z : Without Charger & Battery


Li-ion 4.0 2.0 1.5 | 12Vmax



Run Time (hrs) Masa Operasi (jam) 使用时间 (小时)	**Up to: 28**
Dimensions (L x W x H) Dimensi 体积	**77x54x28mm** **(3x2-1/8x1-1/8")**
Net Weight Berat Bersih 淨重	**0.27 - 0.43kg (0.6 - 1.0lbs)**

ML106 (AUAML106)

Cordless LED Flashlight
Lampu Suluh LED Tanpa Kord
充电式LED手电筒



- **Multifaceted Reflector Illuminates Evenly for Increased Visibility**
  Refleksi cahaya yang rata meningkatkan keterangan
  均匀的多层面灯光反射提高可见度

*Strap Hook
- Without Charger & Battery

Li-ion 4.0 2.0 1.5 | 12Vmax



Run Time (hrs) Masa Operasi (Jam) 使用时间 (小时)	**Up to: 12**
Luminous Flux Cahaya Fluks 发光通量	**190 lm**
Illuminance Pencahayaan 照度	**at 1m from the light source 170 - 4,500 lx**
Dimensions (L x W x H) Dimensi 体积	**271x66x93mm** **(10-5/8"x2-5/8"x3-5/8")**
Net Weight Berat Bersih 淨重	**0.61 - 0.78kg (1.3 - 1.7lbs)**

ADP06 (AUAADP06)

Adapter for USB
Penyesuai untuk USB
USB适配器



- **As a charger for smart phones**
  Pengecas untuk telefon pintar
  智能手机的充电器

- Without Charger & Battery

Li-ion 4.0 2.0 1.5 | 12Vmax



USB Port Soket USB USB插口位置	**1 (A type)**
Dimensions (L x W x H) Dimensi 体积	**80x53x38mm** **(3-1/8"x2-1/16"x1-1/2")**
Net Weight Berat Bersih 淨重	**0.44kg (1.0lbs)**

ADP08

Adapter for USB
Penyesuai untuk USB USB适配器

12Vmax LITHIUM-ION
12V Litium-ion I 12V锂离子





Strap hole
Lubang tali 带孔



Teknologi Ekstrim Kompak
紧凑极限技术

ON-OFF switch
Suis ON-OFF 开/关



USB output port
Soket USB USB插口位置



ADP08 (AUAADP08)

Adapter for USB
Penyesuai untuk USB
USB适配器



- **As a charger for smart phones**
  Pengecas untuk telefon pintar
  智能手机的充电器

- Without Charger & Battery

Li-ion 4.0 2.0 1.5 | 12Vmax



Battery Bateri 电池	**12Vmax 1.5Ah, 2.0Ah, 3.0Ah**
Devices Peralatan 设备	**iOS & Android**
Dimensions (L x W x H) Dimensi 体积	**80x53x28mm** **(3-1/8"x2-1/16"x1-1/8")**
Net Weight Berat Bersih 淨重	**0.27 - 0.44kg (0.6 - 1.0lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



High brightness green laser for increased visibility at bright site

Laser hijau kecerahan tinggi
高亮度绿色激光

BL1041B
28hrs
Long continuous operation
Operasi berterusan yang panjang
可长时间使用
SK312GD

12Vmax LITHIUM-ION
12V Litium-ion | 12V锂离子

CXT
Teknologi Ekstrim Kompak
紧凑极限技术

SK209GD
SK312GD

Rechargeable Green Multi Line Laser


Laser Berbilang Talian Hijau Tanpa Kord
充电式绿光墨水雷仪器

SK312GD
3-vertical line

SK209GD
Horizontal / Vertical line

SK209GDZ

Rechargeable Green Multi Line Laser
Mesin Garis Laser Tanpa Kord
充电式激光水平仪



- **Horizontal line - 2-Vertical line - 2-Vertical line/ horizontal line**
  Garisan mendatar, 2 garisan menegak, 2 garisan menegak/ mendatar
  水平线，2垂直线，2垂直线/水平线

*Laser Viewing Glass, Shoulder Strap, Storage Case

- Z : Without Charger & Battery

CXT XPT

Li-ion Ah 4.0 2.0 1.5
12Vmax



Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**±1mm / 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**±2°**
Laser Fan Angle Sudut Peminat Laser 激光扇角	**Horizontal: 110°** **Vertical: 130°**
Number of Laser Lines Bilangan Garisan Laser 激光线数量	**3**
Laser Type Jenis Laser 激光类型	**Laser class 2: 515nm**
Tripod Thread Tripod 脚架	**5/8"**
Protection Class Tahap Perlindungan 保护等级	**IP54**
Operating Time (Approx. Hours) Masa Operasi 操作时间	**15-40**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 122x110x225mm**
Net Weight Berat Bersih 淨重	**1.5 - 1.6kg (3.3 - 3.5lbs)**

SK312GDZ

Rechargeable Green Multi Line Laser
Mesin Garis Laser Tanpa Kord
充电式激光水平仪

- **Horizontal line - Horizontal/ vertical line - 3-Vertical line/ horizontal line**
  Garisan mendatar - Garisan mendatar / menegak - Garisan 3-menegak / garis mendatar
  水平线 - 水平/垂直线 - 3-垂直线/水平线

*Laser Viewing Glass, Shoulder Strap, Storage Case

- Z : Without Charger & Battery


CXT XPT

Li-ion Ah 4.0 2.0 1.5
12Vmax



Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**±1mm/ 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**±2°**
Laser Fan Angle Sudut Peminat Laser 激光扇角	**Horizontal: 110°** **Vertical: 130°**
Number of Laser Lines Bilangan Garisan Laser 激光线数量	**3**
Laser Type Jenis Laser 激光类型	**Laser class 2: 515nm**
Tripod Thread Tripod 脚架	**5/8"**
Protection Class Tahap Perlindungan 保护等级	**IP54**
Operating Time (Approx. Hours) Masa Operasi 操作时间	**10-28**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 122x110x225mm**
Net Weight Berat Bersih 淨重	**1.5 - 1.6kg (3.3 - 3.5lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DRILLING
Penggerudian 钻孔



FASTENING
Pengetat 紧固



HAMMER DRILLING
Tukul Bergerudi 冲击电钻



10.8V LITHIUM-ION
10.8V Litium-ion I 10.8V锂离子

HP330DWE / X100 10mm (3/8")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Hammer drill mode**
  Mod gerudi tukul
  锤钻模式

*Phillips Bit, Holster

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery
- X100 : 1 x Standard Charger, 2 x 1.3Ah Battery, Accessories

Li-ion Ah 1.3
10.8V



Capacity Kapasiti 能力	**Steel: 10mm (3/8")/ Wood: 21mm (13/16") Masonry: 8mm (5/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0-22,500 Low: 0-6,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,500 Low: 0-400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 24/ 12N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**22N·m (200in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**201x53x183mm (7-7/8"x2-1/16"x7-1/4")**
Net Weight Berat Bersih 净重	**1.1kg (2.3lbs)**

DF330DWE 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **2-Speed design driver drill**
  Pemilihan 2 kelajuan
  2速选择

*Phillips Bit, Holster

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Li-ion Ah 1.3
10.8V



Capacity Kapasiti 能力	**Steel: 10mm (3/8") Wood: 21mm (13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,300 Low: 0-350**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 24/ 14N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**22N·m (200in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**189x53x183mm (7-7/16"x2-1/16"x7-1/4")**
Net Weight Berat Bersih 净重	**1kg (2.2lbs)**

DF030DWE 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **18 clutch settings and drill mode for added fastening control**
  18 pemilihan tetapan clutch dan mod gerudi untuk kawalan pengetatan
  18离合器设置及钻孔模式选择增加紧固控制

*Phillips Bit, Holster

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Li-ion Ah 1.3
10.8V



Capacity Kapasiti 能力	**Steel: 10mm (3/8") Wood: 21mm (13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,300 Low: 0-350**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard / Soft: 24 / 14N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**22N·m (200 in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**157x53x183mm (6-3/16"x2-1/16"x7-1/4")**
Net Weight Berat Bersih 净重	**0.89kg (2.0lbs)**

TD090DWE

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Compact bit sleeve 1/4" drive**
  Lengan bit 1/4"
  紧凑型钻头套筒1/4"驱动器

*Holster

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Li-ion Ah 1.3
10.8V



Capacity Kapasiti 能力	**Machine Screw: M4 - M8mm (5/32" - 5/16")**
	Standard Bolt: M5 - M12 (3/16" - 1/2")
	High Tensile Bolt: M5 - M10 (3/16" - 3/8")
	Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-2,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0-3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**90N·m (800in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**155x54x178mm (6-1/8"x2-1/8"x7")**
Net Weight Berat Bersih 净重	**0.92kg (2.0lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

TD091DWE

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



Li-ion Ah 1.3 | 10.8V | 440 rpm



- **Battery power reduction warning lamp**
  Lampu amaran pengurangan kuasa bateri
  电量警告灯

• WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Capacity Kapasiti 能力	**Machine Screw:** **M4 - M8 (5/32" - 5/16")** **Standard Bolt:** **M5 - M12 (3/16" - 1/2")** **High Tensile Bolt:** **M5 - M10 (3/16" - 3/8")** **Coarse thread (in length):** **22 - 90mm (7/8" - 3-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**90N·m (800in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**134x54x200mm** **(5-1/4"x2-1/8"x7-7/8")**
Net Weight Berat Bersih 淨重	**0.86kg (1.9lbs)**

TW100DWE 9.5mm (3/8")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



Li-ion Ah 1.3 | 10.8V



- **9.5mm (3/8") square drive fits most common automotive sockets**
  Kepala segi empat 9.5mm (3/8") sesuai untuk kebanyakan soket automotif
  一般汽车插座通用的 9.5mm (3/8") 方形头

• WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Fastening Capacities Kapasiti 能力	**Standard Bolt:** **M8 - M12 (5/16" - 1/2")** **High Tensile Bolt:** **M6 - M10 (1/4" - 3/8")**
Square Drive Batang Segi Empat 四方头	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**110N·m (1,000in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**163x54x178mm** **(6-3/8"x2-1/8"x7")**
Net Weight Berat Bersih 淨重	**0.95kg (2.1lbs)**

CC300DW / Z 85mm (3-3/8")

Cordless Cutter
Pemotong Tanpa Wayar
充电式切割机



Li-ion Ah 1.3 | 10.8V



- **Adjustable cutting depth up to 25.5mm at 90° and 16.5mm at 45°**
  Kedalaman pemotongan boleh laras sehingga 25.5mm pada 90° dan 16.5mm pada 45°
  可调节的切割深度于90° 达25.5mm，45° 达16.5mm

*Diamond Wheel, Water Supply Tank Assembly, Hex Wrench

• W : 1 x Standard Charger, 1 x 1.3Ah Battery
• Z : Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	**85mm (3-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 25.5mm (1")** **45°: 16.5mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,400**
Tank capacity Kapasiti Tangki 水箱容量	**Water : 0.5L**
Dimensions (L x W x H) Dimensi 体积	**300x170x154mm** **(11-3/4"x6-11/16"x6-1/16")**
Net weight Berat Bersih 淨重	**16kg (3.6lbs)**

HS300DW 85mm (3-3/8")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



Li-ion Ah 1.3 | 10.8V



- **Fast cutting of plywood, MDF, pegboard, particleboard, melamine, drywall and more**
  Pemotongan cepat untuk papan lapis, MDF, pegboard, papan partikel, melamin, drywall dan banyak lagi
  快速切割胶合板，密度板，钉板，刨花板，三聚氰胺，石膏板等

*Dust Nozzle (country-specific), TCT Saw Blade, Hex Wrench

• W : 1 x Standard Charger, 1 x 1.3Ah Battery

Blade Diameter Diameter Bilah 锯片直径	**85mm (3-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 25.5mm (1")** **45°: 16.5mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,400**
Dimensions (L x W x H) Dimensi 体积	**300x170x154mm** **(11-3/4"x6-11/16"x6-1/16")**
Net Weight Berat Bersih 淨重	**1.5kg (3.4lbs)**

JV100DWE

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



Li-ion Ah 1.3 | 10.8V



- **Aluminum die-cast base adjusts from 0°-45° right to left**
  Pangkalan aluminium die-cast dilaraskan dari 0° -45° kanan ke kiri
  铝压铸底座从0° -45° 从右向左调整

*Jig Saw Blade, Hex Wrench, Guide Rule (country-specific)


• WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood/ Aluminum/ Mild Steel:** **65/ 4/ 2mm (2-9/16" / 5/32" / 1/16")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,400**
Dimensions (L x W x H) Dimensi 体积	**231x76x196mm** **(9-1/8"x3"x7-3/4")**
Net Weight Berat Bersih 淨重	**1.7kg (3.7lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

JR100DWE

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Dual-position on/off switch design allows for either paddle or trigger switch operation**
  Suis dua pemilihan
  2开关选择

*Recipro Saw Blades

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Li-ion 1.3Ah | 10.8V



Capacity Kapasiti 能力	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-3,300**
Dimensions (L x W x H) Dimensi 体积	**355x63x146mm** **(14"x2-1/2"x5-3/4")**
Net Weight Berat Bersih 净重	**1.2kg (2.6lbs)**

JR102DWE

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Accepts both Recipro and Jig saw blades**
  Boleh memasang bilah gergaji recipro dan bilah gergaji jig
  可配置线锯片或往复锯片

*Recipro Saw Blades, Hex Wrench

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Li-ion 1.3Ah | 10.8V



Capacity Kapasiti 能力	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-3,300**
Dimensions (L x W x H) Dimensi 体积	**355x63x146mm** **(14"x2-1/2"x5-3/4")**
Net Weight Berat Bersih 净重	**1.2kg (2.6lbs)**

UH200DW 200mm (7-7/8")

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆修剪机



- **2 in 1: Both trimmer blade and shear blade can be attached**
  Penukaran bilah 2 dalam 1
  2合1可更换剪切刀片

*Blade Cover, Chip Receiver

- W : 1 x Standard Charger, 1 x 1.3Ah Battery

Li-ion 1.3Ah | 10.8V | 2in1



Blade Length Panjang Bilah 刀片长度	**200mm (7-7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Dimensions (L x W x H) Dimensi 体积	**460x120x130mm** **(18-1/8"x4-3/4"x5-1/8")**
Net Weight Berat Bersih 净重	**1.1 - 1.2kg (2.5 - 2.6lbs)**

UM164DW 160mm (6-5/16")

Cordless Grass Shear
Pemotong Rumput Tanpa Kord
充电式割草機



- **Dual blade action cuts quickly with a shearing effect**
  Pemotongan cepat dengan dua bilah
  双刀片迅速切割

*Base Frame, Blade Cover

- W : 1 x Standard Charger, 1 x 1.3Ah Battery

Li-ion 1.3Ah | 10.8V | 2in1



Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**10, 15, 25mm (3/8", 9/16", 1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Dimensions (L x W x H) Dimensi 体积	**292x178x130mm** **(11-1/2"x7"x5-1/8")**
Net weight Berat Bersih 净重	**1.1 - 1.2kg (2.5 - 2.6lbs)**

CL100DW / Z

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Increased storage capacity for longer time between waste disposal**
  Kapasiti pengumpulan habuk yang lebih besar
  更大集尘容量

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- W: 1 x Standard Charger, 1 x 1.3Ah Battery (White)
- Z: Without Charger & Battery (White)

Li-ion 1.3Ah | 10.8V



Capacity Kapasiti 容量	**600mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**12**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**2.3kPa (235mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**14W**
Dimensions (L x W x H) Dimensi 体积	**966x103x150mm** **(38-1/32"x4-1/16"x5-7/8")**
Net Weight Berat Bersih 净重	**0.88kg (1.94lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

CL102DW/ Z

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Quick clean-ups with strong suction power**
  Pembersihan cepat dengan kuasa sedutan yang kuat
  强大吸力快速清理

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag

- DW: 1 x Standard Charger, 1 x 1.3Ah Battery (White)
- Z: Without Charger & Battery (White)

Li-ion Ah 1.3
10.8V



Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**High: 13** **Low: 21**
Max Air Flow Aliran Udara 最大空气流量	**1.1m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**2.7kPa (275mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High: 14W** **Low: 6W**
Dimensions (L x W x H) Dimensi 体积	**984x113x150mm** **(38-3/4"x4-7/16"x5-7/8")**
Net Weight Berat Bersih 淨重	**1.1kg (2.4lbs)**

CL111DWI/ WR

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **LED light indicates when to charge battery**
  Lampu amaran pengecasan LED
  LED充电指示灯

*Nozzle for Flooring & Carpet, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- WI: 1 x Standard Charger, build in 1.5Ah Battery (Ivory)
- WR: 1 x Standard Charger, build in 1.5Ah Battery (Red)


Li-ion Ah 1.5
10.8V
With Built-in Battery
Dengan Bateri Terbina Dalam
内置電池



Capacity Kapasiti 容量	**560mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**12**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.4kPa (350mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**21W**
Dimensions (L x W x H) Dimensi 体积	**906x102x109mm** **(35-3/4"x4"x4-1/4")**
Net Weight Berat Bersih 淨重	**0.94kg (2.1lbs.)**

CL104DWYX/ WY

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Increased storage capacity for longer time between waste disposal**
  Kapasiti pengumpulan habuk yang lebih besar
  更大集尘容量

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag

- WYX: 1 x Standard Charger, build in 1.5Ah Battery (Blue)
- WY: 1 x Standard Charger, build in 1.5Ah Battery (White)

Li-ion Ah 1.5
10.8V
With Built-in Battery
Dengan Bateri Terbina Dalam
内置電池



Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**Turbo/ High/ Low: 10/ 15/ 30**
Max Air Flow Aliran Udara 最大空气流量	**1.1m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.3kPa (340mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**Turbo/ High/ Low: 20/ 14/ 5W**
Dimensions (L x W x H) Dimensi 体积	**983x113x136mm** **(38-3/4"x4-7/16"x5-3/8")**
Net Weight Berat Bersih 淨重	**1.1kg (2.3lbs)**

CL105DW/ WX

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Strong suction power of 20W**
  Kuasa menyedut 20W
  20W强劲吸力

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag

- W: 1 x Standard Charger, build in 1.3Ah Battery (White)
- WX: 1 x Standard Charger, build in 1.3Ah Battery (Blue)

Li-ion Ah 1.3
10.8V
With Built-in Battery
Dengan Bateri Terbina Dalam
内置電池




Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**Turbo/ High/ Low: 7/ 10/ 20**
Max Air Flow Aliran Udara 最大空气流量	**1.1m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.3kPa (340mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**Turbo/ High/ Low: 20/ 14/ 5W**
Dimensions (L x W x H) Dimensi 体积	**983x113x136mm** **(38-3/4"x4-7/16"x5-3/8")**
Net Weight Berat Bersih 淨重	**1.1kg (2.3lbs)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 規格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

TD022DSE

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Compact and lightweight design**
  Padat dan ringan
  小巧轻便

*Holster, Bit set

- SE : 1 x Standard Charger, 2 x 1.5Ah Battery

Li-ion Ah 1.5 | 7.2V



Capacity Kapasiti 能力	**Machine Screw: M3 - M8 (1/8" - 5/16")** **Standard Bolt: M3 - M8 (1/8" - 5/16")**
	High Tensile Bolt: **M3 - M6 (1/8" - 1/4")**
	Coarse thread (in length): **22 - 45mm (7/8" - 1-3/4")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,450**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**25N·m (220in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**Straight Style: 282x42x52mm** **(11-1/8"x1-5/8"x2-1/16")**
	Pistol Style: 227x42x142mm **(8-15/16"x1-5/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**0.55 - 0.56kg (1.2lbs)**

TD020DSW

Cordless Impact Driver

Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Compact and lightweight design**
  Padat dan ringan
  小巧轻便

*Holster, Bit set

- SW : 1 x Standard Charger, 1 x 1.0Ah Battery (White)

Li-ion Ah 1.0 | 7.2V



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Capacity Kapasiti 能力	**Machine Screw: M3 - M8 (1/8" - 5/16")** **Standard Bolt: M3 - M8 (1/8" - 5/16")**
	High Tensile Bolt: **M3 - M6 (1/8" - 1/4")**
	Coarse thread (in length): **22 - 45mm (7/8" - 1-3/4")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**20N·m (177in.lbs.)**
Dimensions (L x W) Dimensi 体积	**Straight Style: 276x40mm** **(10-7/8"x1-9/16")**
Dimensions (L x W x H) Dimensi 体积	**Pistol Style: 213x40x131mm** **(8-3/8"x1-9/16"x5-1/8")**
Net Weight Berat Bersih 淨重	**0.53 - 0.54kg (1.2lbs)**

DF012DSE

Cordless Driver Drill

Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **2-Speed design for high or low torque applications**
  Pemilihan 2-kelajuan untuk aplikasi tork tinggi atau rendah
  2速选择适用于高或低扭力应用

*Phillips Bit

- SE : 1 x Standard Charger, 2 x 1.5Ah Battery

Li-ion Ah 1.5 | 7.2V



Capacity Kapasiti 能力	**Steel: 5mm (3/16")** **Wood: 6mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 650** **Low: 200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 5.6/ 3.6N·m (50/ 32in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**8.0N·m (71in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**Pistol Style: 218x44x142mm** **(8-5/8"x1-3/4"x5-5/8")**
Dimensions (L x W) Dimensi 体积	**Straight Style: 273x44mm** **(10-3/4"x1-3/4")**
Net Weight Berat Bersih 淨重	**0.53kg (1.2lbs.)**

DF010DSE

Cordless Driver Drill

Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **21 Clutch settings and drill mode for added fastening control**
  21 pemilihan tetapan clutch dan mod gerudi untuk kawalan pengetatan
  21离合器设置及钻孔模式选择增加紧固控制

*Bit set

- SE : 1 x Standard Charger, 2 x 1.5Ah Battery

Li-ion Ah 1.5 | 7.2V



Capacity Kapasiti 能力	**Steel: 5mm (3/16")** **Wood: 6mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 650** **Low: 200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 5.6/ 3.6N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**5.0N·m (44in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**Pistol Style: 224x43x141mm** **(8-7/8"x1-11/16"x5-9/16")**
Dimensions (L x W) Dimensi 体积	**Straight Style: 279x43mm** **(11"x1-11/16")**
Net Weight Berat Bersih 淨重	**0.56kg (1.23lbs)**

CL070DZ

Cordless Cleaner

Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Increased storage capacity for longer time between waste disposal**
  Kapasiti pengumpulan habuk yang lebih besar
  更大集尘容量

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- Z: Without Charger & Battery (White)

Li-ion Ah 1.5 | 7.2V



Capacity Kapasiti 容量	**600mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**8**
Max Air Flow Aliran Udara 最大空气流量	**1.2m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**1.8kPa (180mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**14W**
Dimensions (L x W x H) Dimensi 体积	**966x103x142mm** **(38-1/32"x4-1/16"x5-5/8")**
Net Weight Berat Bersih 淨重	**0.81kg (1.8lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DF001DW Li-ion 3.6V
In-Line Cordless Screwdriver

Pemutar Skru Tanpa Kord Yang Tahan Lasak
充电式螺丝起子机


Comes with 81pcs assortment and charger
Termasuk 81 bit dan pengecas 81支配件与充电器套装

Straight style
Dalam keadaan melurus 直式

Can be used as both of straight style and pistol style
Boleh digunakan dalam keadaan melurus atau pistol/ 可以用作直式和手枪式两种方式


Pistol style
Dalam keadaan pistol 手枪式

LED job light
Lampu LED 尾部LED灯



ON/ OFF swtich with reverse/ forward control
Suis ON/ OFF dengan kawalan mengundur dan ke hadapan
开关，带正反转控制





USB connector with rubber cover
Penyambung USB dengan penutup getah 带橡胶盖的USB充电器





Convenient to used even in narrow space
Sesuai digunakan di tempat yang sempit
方便在狭窄的空间使用

Comes with 81pcs assortment and Charger
Termasuk 81 bit dan pengecas | 81支配件与充电器套装

Drive type

Phillips (PH)	PZ	Hex (H)
T	Slotted (SL)	

Charger (ADP07)
Pengecas/ 充电器
Charging time: 3 to 5 hours
(DC5V/ 1A USB output)



C-form 25mm Screw bit
Mata Skru 螺丝批头
PZ : 0, 1, 2, 3 (3pc each)
Hex : 2, 2.5, 3, 4, 5, 6 (2pc each)
T : 10, 15, 20, 25, 27, 30, 40 (3pc each)
SL : 0.5x3, 0.5x4, 0.6x4.5, 0.8x5.5, 1.0x5.5, 1.2x6.5 (2pc each)
PH : 0, 1, 2 (3pc each), 3 (2pc each)

E-form 50mm Screw bit
Mata Skru 螺丝批头
T : 20, 25, 30 (1pc each)
PH : 1, 2, 3 (1pc each)

E-form Socket Wrench
Sepana Soket 套筒扳手
5, 6, 7, 8, 9, 10mm (1pc each)

E-form magnetic bit holder
Pemegang mata magnetik 磁性锥头套筒
60mm (1pc each)



DF001DW

In-Line Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **Convenient to used even in narrow space**
  Sesuai digunakan di tempat yang sempit
  方便在狭窄的空间使用

*Bit set (81 pcs), AC Adaptor, USB Cable

Li-ion Ah 1.5
3.6V




Fastening Capacities Kapasiti Pengancing 最大紧固能力	**Wood Screw: ø3.8 x 32mm (1/8"x1-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 无负荷转速	**220**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭转	**Hard/ Soft: 4.0/ 3.0 N·m (35/ 27 in.lbs.)**
Max Lock Torque Maksimum Pengunci Tenaga Pemutaran 最大扭转	**6.0N·m (53 in.lbs.)**
Charging Time (hours) Masa Pengecasan 充电时间	**3 - 5**
Dimensions (L x W x H) Dimensi 体积	**Straight Style: 287x47x51mm (11-1/4"x1-7/8"x2")**
	Pistol Style: 205x47x51mm (8-1/8"x1-7/8"x2")
Net Weight Keberatan 净重	**0.36kg (0.8 lbs.)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



Drilling | Fastening

Gerudi | Pengetat 钻孔 | 紧固

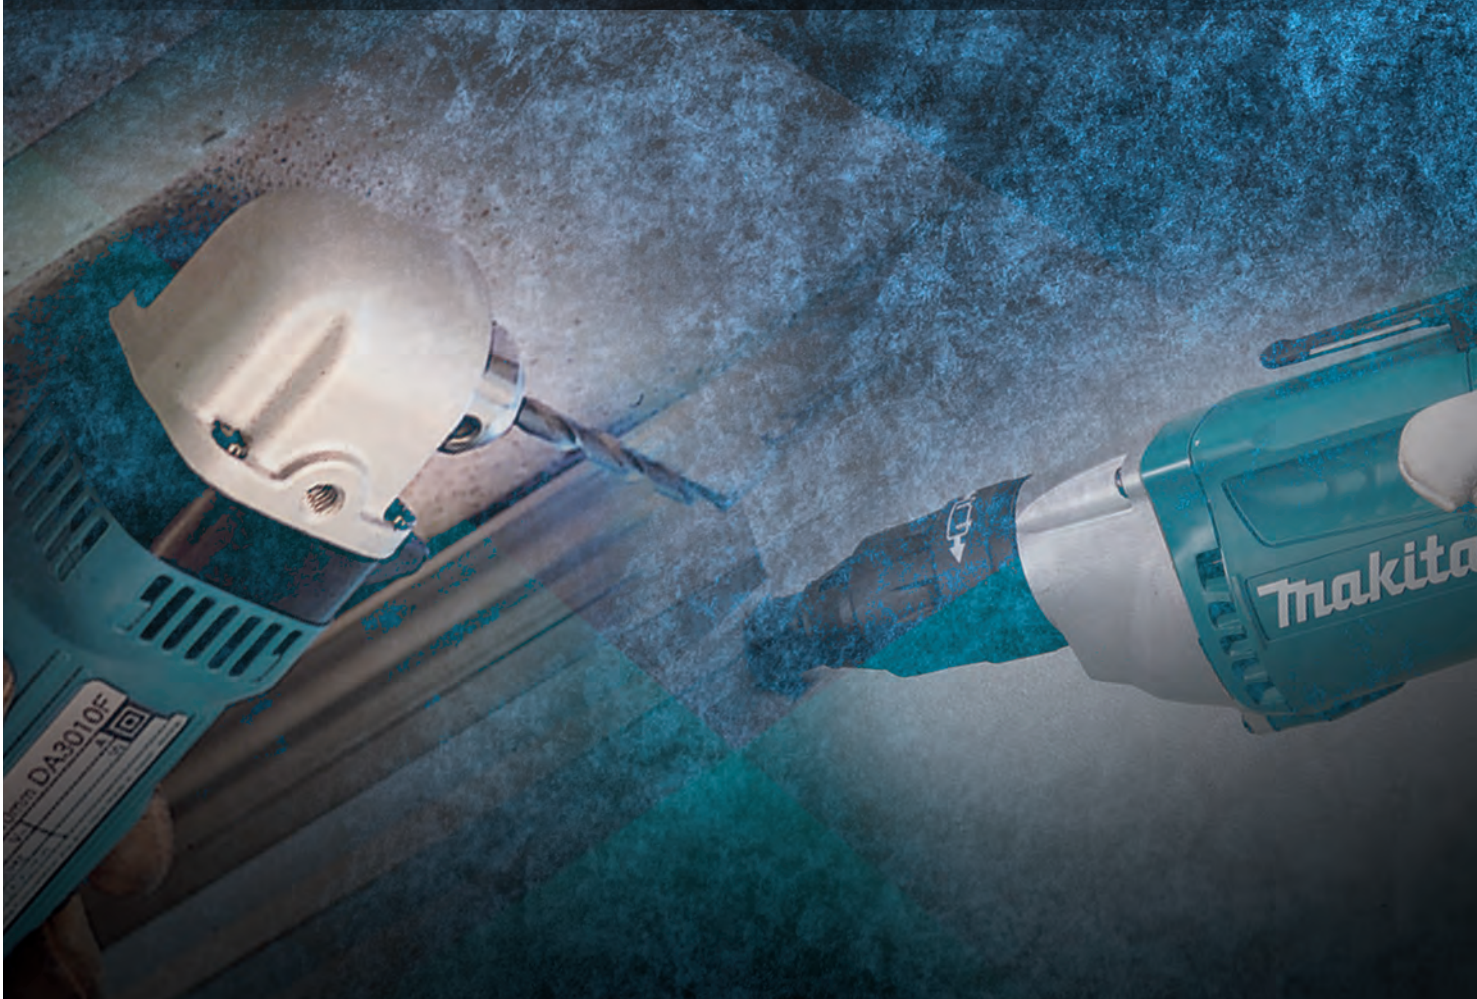

DDF481RME / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **21 Clutch settings and drill mode for added fastening control**
  21 Pilihan klac dan mod gerudi
  21离合器设置和钻孔模式

*Side Handle, Belt Clip, (+)(-) Bit, Bit Holder

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Refer Pg. 27
for more information

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 76mm (3")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 2,100/ 0 - 550**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 115/ 60N·m (1,020/ 530in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**125N·m (1,090in.lbs.)**
Max Output Keluaran Maksima 最大输出	**640W**
Dimensions (L x W x H) Dimensi 体积	**205x79x266mm (8-1/8"x3-1/8"x10-1/2")**
Net weight Berat Bersih 淨重	**2.7 - 3.0kg (5.9 - 6.6lbs)**

DDF458RME / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Mechanical 2-speed transmission covers a wide range of drilling and fastening applications**
  2-kelajuan mekanikal untuk pelbagai penggerudian dan aplikasi
  双速选择方便各种钻孔

*(+)(-) Bit, Side Grip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

440 mm

18V



BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 76mm (3")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-2,000** **Low: 0-400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 91/ 58N·m**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**84N·m (750in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**225x79x259mm (8-7/8"x3-1/8"x10-1/4")**
Net weight Berat Bersih 淨重	**2.1 - 2.5kg (4.7 - 5.4lbs)**

DDF482RME / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **High speed model with compact and lightweight design**
  Model kelajuan tinggi dengan reka bentuk yang padat dan ringan
  高速型设计紧凑轻巧

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

440 mm

18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 38mm (1-1/2")**
Chuck capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,900/ 0 - 600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **62/ 36N·m (550/ 320in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**54N·m (480in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**185x79x249mm (7-1/4"x3-1/8"x9-3/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 4.0lbs)**

DDF484RME / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Delivers 25% more drilling, driving and fastening speed**
  Kelajuan 25% lebih
  25%更快速度

*(+)(-) Bit, Belt Clip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 38mm (1-1/2")**
Chuck capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 2,000/ 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **54/ 30N·m (480 / 270 in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**172x79x261mm (6-3/4"x3-1/8"x10-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.3 - 4.0lbs)**

DDF459RME / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Brushless motor delivers up to 50% longer run time per charge**
  Penggunaan alat dengan motor tanpa berus dilanjutkan 50% lebih lama dengan setiap cas
  无碳刷马达工具每次充电可将使用时间延长达50%

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



GOOD
CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 38mm (1-1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,500/ 0 - 400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **45/ 25N·m (400/ 220in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**45N·m (400in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**179x78x256mm (7"x3-1/16"x10-1/8")**
Net Weight Berat Bersih 淨重	**1.4 - 1.7kg (3.1 - 3.8lbs)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DDF453RME / RFE / SYE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **All metal gear construction ensures high transmission durability**
  Semua gear logam lebih tahan lama
  全金属齿轮更耐用

*(+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- SYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

18V

DDF453SYE
WHILE STOCKS LAST
Sementara stok masih ada
售完即止



GOOD
CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,300** **Low: 0-400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 42/ 27N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**38N·m (340in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**222x79x244mm** **(8-3/4"x3-1/8"x9-5/8")**
Net Weight Berat Bersih 净重	**1.7 - 2.0kg (3.7 - 4.4lbs)**

DDF483RME / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **BL motor delivers 40N·m of max torque**
  Motor BL menyampaikan 40N·m tork maksima
  无碳刷马达提供最大40N·m的扭力

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

18V



GOOD
CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,700/ 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **40/ 23N·m (350/ 210in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**162x79x247mm** **(6-3/8"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 净重	**1.2 - 1.6kg (2.7 - 3.4lbs)**

DDF083RTE / RFE / Z 13mm (1/2")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Mechanical 2-speed transmission covers a wide range of drilling and fastening applications**
  2-kelajuan mekanikal untuk pelbagai penggerudian dan aplikasi
  双速选择方便各种钻孔

*Belt Clip, Phillips Bit

- RTE : 1 x Rapid Charger, 2 x 5.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5

18V



GOOD
CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
Chuck Capacity Kapasiti Chuck 夹头能力	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,700/ 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **40/ 23N·m (350/ 210in.lbs.)**
Max Lock Worque Pemutaran Tenaga Maksimum 最大扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**124x79x247mm** **(4-7/8"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 净重	**1.1 - 1.4kg (2.4 - 3.0lbs)**

DF332DSME / SAE / Z 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **BL motor with high power**
  BL Motor berkuasa tinggi
  大功率BL马达

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- SAE : 1 x Speed Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 | 2.0 | 1.5

12V max



Capacity Kapasiti 能力	**Steel/ Wood: 10/ 28mm (3/8"/ 1-1/8")**
Chuck capacity Kapasiti Chuck 夹头能力	**0.8 - 10mm (1/32 - 3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,500/ 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 35/ 21N·m (310/ 190in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**32N·m (280in.lbs.)**
Max Output Keluaran Maksima 最大输出	**250W**
Dimensions (L x W x H) Dimensi 体积	**154x66x217mm** **(6-1/16"x2-5/8"x8-1/2")**
Net Weight Berat Bersih 净重	**1.0 - 1.2kg (2.3 - 2.6lbs)**

DF331DSME / WAE / WYE / Z 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **Increased motor power for higher speed**
  Kuasa motor dipertingkatkan untuk kelajuan yang lebih tinggi
  提高马达功率以增快速度

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 | 2.0 | 1.5

12V max



Capacity Kapasiti 能力	**Steel/ Wood: 10 / 21mm (3/8"/ 13/16")**
Chuck capacity Kapasiti Chuck 夹头能力	**0.8 - 10mm (1/32 - 3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,700/ 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 30/ 14N·m (270/ 130in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**28N·m (250in.lbs.)**
Max Output Keluaran Maksima 最大输出	**170W**
Dimensions (L x W x H) Dimensi 体积	**189x66x209mm** **(7-7/16"x2-5/8"x8-1/4")**
Net Weight Berat Bersih 净重	**1.1 - 1.3kg (2.4 - 2.8lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DF032DSME / SAE / Z 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



Li-ion Ah 4.0 2.0 1.5
12V max



- **BL motor with high power**
  BL Motor berkuasa tinggi
  大功率BL马达

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- SAE : 1 x Speed Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Capacity Kapasiti 能力	**Steel/ Wood: 10/ 28mm (3/8" / 1-1/8")**
Chuck capacity Kapasiti Chuck 夹头能力	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,500/ 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 35/ 21N·m (310 / 190 in.lbs.)**
Max lock torque Pemutaran Tenaga Maksimum 最大扭力	**32N·m (280in.lbs.)**
Max Output Keluaran Maksima 最大输出	**250W**
Dimensions (L x W x H) Dimensi 体积	**124x66x217mm (4-7/8"x2-5/8"x8-1/2")**
Net Weight Berat Bersih 淨重	**0.88 - 1kg (1.9 - 2.3lbs)**

DF031DSME / WAE / WYE / Z 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



Li-ion Ah 4.0 2.0 1.5
12V max



- **Ideal for work in tight spaces**
  Sesuai untuk bekerja di kawasan yang sempit
  适用在狭小的空间工作


*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Capacity Kapasiti 能力	**Steel/ Wood: 10 / 21mm (3/8"/ 13/16")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,700/ 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 30/ 14N·m (270/ 130in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**28N·m (250in.lbs.)**
Max Output Keluaran Maksima 最大输出	**170W**
Dimensions (L x W x H) Dimensi 体积	**157x66x209mm (6-3/16"x2-5/8"x8-1/4")**
Net Weight Berat Bersih 淨重	**0.94 - 1.1kg (2.1 - 2.5lbs)**

DF330DWE 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



Li-ion Ah 1.3
10.8V



- **2-Speed design driver drill**
  Pemilihan 2 kelajuan
  2速选择

*Phillips Bit, Holster

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 21mm (13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,300** **Low: 0-350**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 24/ 14N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**22N·m (200in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**189x53x183mm (7-7/16"x2-1/16"x7-1/4")**
Net Weight Berat Bersih 淨重	**1kg (2.2lbs)**

DF030DWE 10mm (3/8")

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



Li-ion Ah 1.3
10.8V



- **18 clutch settings and drill mode for added fastening control**
  18 pemilihan tetapan clutch dan mod gerudi untuk kawalan pengetatan
  18离合器设置及钻孔模式选择增加紧固控制

*Phillips Bit, Holster

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 21mm (13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,300** **Low: 0-350**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard / Soft: 24 / 14N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**22N·m (200 in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**157x53x183mm (6-3/16"x2-1/16"x7-1/4")**
Net Weight Berat Bersih 淨重	**0.89kg (2.0lbs)**

DF012DSE

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



Li-ion Ah 1.5
7.2V



- **2-Speed design for high or low torque applications**
  Pemilihan 2-kelajuan untuk aplikasi tork tinggi atau rendah
  2速选择适用于高或低扭力应用

*Phillips Bit

- SE : 1 x Standard Charger, 2 x 1.5Ah Battery

Capacity Kapasiti 能力	**Steel: 5mm (3/16")** **Wood: 6mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 650** **Low: 200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 5.6/ 3.6N·m (50/ 32in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**8.0N·m (71in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**Pistol Style: 218x44x142mm (8-5/8"x1-3/4"x5-5/8")**
Dimensions (L x W) Dimensi 体积	**Straight Style: 273x44mm (10-3/4"x1-3/4")**
Net Weight Berat Bersih 淨重	**0.53kg (1.2lbs.)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DF010DSE

Cordless Driver Drill
Gerudi Pemutar Skru Tanpa Kord
充电式螺丝起子电钻



- **21 Clutch settings and drill mode for added fastening control**
  21 pemilihan tetapan clutch dan mod gerudi untuk kawalan pengetatan
  21离合器设置及钻孔模式选择增加紧固控制

*Bit set

• SE : 1 x Standard Charger, 2 x 1.5Ah Battery


Li-ion Ah 1.5
7.2V



Capacity Kapasiti 能力	**Steel: 5mm (3/16")** **Wood: 6mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 650** **Low: 200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 5.6/ 3.6N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**5.0N·m (44in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**Pistol Style: 224x43x141mm (8-7/8"x1-11/16"x5-9/16")**
Dimensions (L x W) Dimensi 体积	**Straight Style: 279x43mm (11"x1-11/16")**
Net Weight Berat Bersih 净重	**0.56kg (1.23lbs)**

6413 10mm (3/8")

Drill
Gerudi
电钻



- **General Purpose Drill Featuring Compact And Lightweight Design**
  Reka Bentuk Kompak Dan Ringan untuk penggerudian tujuan umum
  紧凑轻巧机身适合一般用途

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-3,400**
Dimensions (L x W x H) Dimensi 体积	**234x64x183mm (9-1/4"x2-1/2"x7-1/4")**
Net Weight Berat Bersih 净重	**1.3kg (2.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

DS5000 16mm (5/8")

Drill
Gerudi
电钻



- **Powerful 750W motor for improved mixing and drilling performance**
  Motor berkuasa 750W untuk prestasi pencampuran dan penggerudian yang lebih baik
  强劲的750W马达提高混合和钻孔性能

*Chuck Key, Top Grip

411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Capacity Kapasiti 能力	**Steel: 16mm (5/8")** **Wood: 36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**600**
Dimensions (L x W x H) Dimensi 体积	**348x83x401mm (13-3/4"x3-1/4"x15-3/4")**
Net Weight Berat Bersih 净重	**3.0kg (6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DS4012 13mm (1/2")

Drill
Gerudi
电钻



- **All-ball bearing construction for durability and longer tool life**
  Struktur galas bola untuk memanjangkan hayat alat
  滚珠轴承结构延长工具寿命

*Chuck Key, Top Grip


411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-600**
Dimensions (L x W x H) Dimensi 体积	**340x83x390mm (13-3/8"x3-1/4"x15-3/8")**
Net Weight Berat Bersih 净重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

6016 16mm (5/8")

Drill
Gerudi
电钻



- **D-handle rotates 360 degrees for multi-position operation**
  Pemegang-D berputar 360˚ memudahkan operasi
  360° 旋转D型手柄方便操作

*Chuck Key, Depth Gauge, Top Grip

51



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Continuous rating input Input Kuasa Berterusan 额定输入功率	**480W**
Capacity Kapasiti 能力	**Steel: 16mm (5/8")** **Wood: 36mm (1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**700**
Overall Length Panjang Keseluruhan 总长度	**365mm (14-3/8")**
Net weight Berat Bersih 净重	**4.4kg (9.7lbs)**
Power supply cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DDA351Z 10mm (3/8")

Cordless Angle Drill
Gerudi Sudut Tanpa Kord
充电式角向电钻



- **Original 4-pole motor for power, lightweight and compact size**
  Motor 4-pole asal berkuasa, ringan dan padat
  原装4极电机功率强劲，轻量，且体积小巧

*Side Grip
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V | 440 W



Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,800**
Dimensions (L x W x H) Dimensi 体积	**326x79x115mm** **(12-7/8"x3-1/8"x4-1/2")**
Net weight Berat Bersih 淨重	**1.6 - 1.9kg (4.2 - 3.5lbs)**

DA3010F 10mm (3/8")

Angle Drill
Gerudi Sudut
角向电钻



- **Powerful 450W motor with less weight**
  Motor berkuasa 450W dan ringan
  轻量且强劲的450W马达

*Chuck Key, Side grip 36 complete


419 W



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-2,400**
Overall Length Panjang Keseluruhan 总长度	**270mm (10-5/8")**
Net Weight Berat Bersih 淨重	**1.6kg (3.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DTD170RME / RFE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **6-Mode operation for A-mode/ T-mode/ Max/ Hard/ Medium/ Soft impact mode for multiple applications**
  Operasi 6-mod
  6模式操作

*Belt Clip
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V



BEST
TERBAIK 优秀

Refer Pg. 34
for more information

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M16 (3/16" - 5/8")** **High Tensile Bolt: M5 - M14 (3/16" - 9/16")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Max/ Hard/ Med/ Soft/ T mode:** **0 - 3,600/ 3,200/ 2,100/ 1,100/ 3,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Max/ Hard/ Med/ Soft/ T mode:** **0 - 3,800/ 3,600/ 2,600/ 1,100/ 2,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**175 N·m (1,550 in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**117x79x236mm** **(4-5/8"x3-1/8"x9-1/4")**
Net weight Berat Bersih 淨重	**1.2 - 1.5kg (2.7 - 3.4lbs)**

DTD154RME / RFE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Aluminum hammer case creates the impression of rigidity of the machine**
  Casing aluminium yang bertahan
  坚硬铝制外壳

*Belt Clip
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V



BEST
TERBAIK 优秀

Refer Pg. 35
for more information

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M16 (3/16" - 5/8")** **High Tensile Bolt: M5 - M14 (3/16" - 9/16")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,600/ 0 - 2,100/ 0 - 1,100**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,800/ 0 - 2,600/ 0 - 1,100**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**175N·m (1,550in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**117x79x236mm** **(4-5/8"x3-1/8"x9-1/4")**
Net weight Berat Bersih 淨重	**1.3 - 1.6kg (2.7 - 3.4lbs)**

DTD153RTE / RFE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Aluminum hammer case creates the impression of rigidity of the machine**
  Casing aluminium yang bertahan
  坚硬铝制外壳

*Belt Clip
- RTE : 1 x Rapid Charger, 2 x 5.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M16 (3/16" - 5/8")** **High Tensile Bolt: M5 - M14 (3/16" - 9/16")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**170N·m (1,500in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**126x79x238mm** **(5"x3-1/8"x9-3/8")**
Net weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.5lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DTD149RFE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机

- **Developed for main applications such as tightening of self-drilling screws or light duty machine screws**
  Khas untuk aplikasi seperti pengetatan skru penggerudian diri
  特别适用于紧固自钻式螺钉

*Belt Clip
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 448 | 18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**165N·m (1,460in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**135x79x238mm** **(5-5/16"x3-1/8"x9-3/8")**
Net weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.5lbs)**

DTD152RME / RFE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Aluminum hammer case creates the impression of rigidity of the machine**
  Casing aluminium yang bertahan
  坚硬铝制外壳

*Belt Clip
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 448 | 18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M16 (3/16" - 5/8")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**165N·m (1,460 in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**137x79x238mm** **(5-3/8"x3-1/8"x9-3/8")**
Net weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.5lbs)**

DTD155RME / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **3-Mode operation for A-mode / Hard mode / Soft mode for multiple applications**
  Operasi 3-mod untuk pelbagai aplikasi
  3模式操作

*Belt Clip
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 mm (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")** **High Tensile Bolt: M5 - M12 (3/16" - 1/2")** **Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard/ Soft: 0 - 3,000/ 0 - 1,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard/ Soft: 0 - 3,900/ 0 - 1,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**140N·m (1,240in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**135x79x232mm** **(5-5/16"x3-1/8"x9-1/8")**
Net Weight Berat Bersih 淨重	**1.2 - 1.5kg (2.6 - 3.2lbs)**

DTP141RFE / Z

Cordless 4 Mode Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **4 Operation Modes (Impact Driver, Hammer Drill, Drill, Screwdriver) and Teks Screw Mode selection**
  Operasi 4 Mod
  4种操作模式

*Belt Clip
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V



BEST
TERBAIK 优秀

Refer Pg. 36
for more information

Capacity Kapasiti 能力	**Steel: 10mm (3/8")/ Wood: 21mm (13/16")** **Masonry: 8mm (5/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Impact-driver mode** **(Hard/ Medium/ Soft) : 0-2,700/ 0-2,200/ 0-1,300** **Drill mode (Hi/ Lo): 0-2,700/ 0-700** **Hammer drill mode (Hi/ Lo): 0-2,700/ 0-700** **Screwdriver mode (Hi/ Lo):** **0-1,100/ 0-300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Impact-driver mode (Hard / Medium / Soft):** **0-3,200/ 0-2,400/ 0-1,200** **Hammer Drill Mode (Hi / Lo) : 0-32,400/ 0-8,400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Impact-driver mode:** **150N·m (1,330in.lbs.)** **Drill mode (Hard/ Soft):** **22/ 13N·m**
Dimensions (L x W x H) Dimensi 体积	**171x79x250mm** **(6-3/4"x3-1/8"x9-7/8")**
Net Weight Berat Bersih 淨重	**1.5 - 1.9kg (3.4 - 4.1lbs)**

DTS141RFE / Z

Cordless Oil-Pulse Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击起子机



- **Low noise level of 77dB**
  Bunyi rendah
  低噪音

*Belt Clip
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V




BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M8 (3/16" - 5/16")** **High Tensile Bolt: M5 - M6 (3/16" - 1/4")** **Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard: 0-3,200/ Medium: 0-2,000** **Soft: 0-1,200**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard: 0-2,700/ Medium: 0-2,200** **Soft: 0-1,400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**40N·m (355in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**136x79x240mm** **(5-3/8"x3-1/8"x9-1/2")**
Net Weight Berat Bersih 淨重	**1.3 - 1.6kg (2.8 - 3.5lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

TD111DSME / WAE / WYE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **3-Mode operation: A-mode/ Hard mode/ Soft mode**
  Operasi 3-Mod: mod-a/ mod keras/ mod lembut
  3模式操作：A模式/硬模式/软模式

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5 | 12V max



Capacity Kapasiti 能力	**Machine Screw:** **M4 - M8mm (5/32" - 5/16")**
	Standard Bolt: **M5 - M14 (3/16" - 9/16")**
	High Tensile Bolt: **M5 - M12 (3/16" - 1/2")**
	Coarse thread (in length): **22 - 90mm (7/8" - 3-1/2")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard/ Soft: 0 - 3,000/ 0 - 1,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard/ Soft: 0 - 3,900/ 0 - 1,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**135N·m (1,200in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**135x66x210mm** **(5-5/16"x2-5/8"x8-1/4")**
Net Weight Berat Bersih 淨重	**0.97 - 1.1kg (2.1 - 2.5lbs)**

TD110DSME / WAE / WYE / Z

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Compact and Lightweight**
  Padat dan ringan
  紧凑和轻量

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5 | 12V max



Capacity Kapasiti 能力	**Machine Screw:** **M4 - M8mm (5/32" - 5/16")**
	Standard Bolt: **M5 - M12 (3/16" - 1/2")**
	High Tensile Bolt: **M5 - M10 (3/16" - 3/8")**
	Coarse thread (in length): **22 - 90mm (7/8" - 3-1/2")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**110N·m (970in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**153x66x204mm** **(6"x2-5/8"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.0 - 1.2kg (2.3 - 2.6lbs)**

TD090DWE

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Compact bit sleeve 1/4" drive**
  Lengan bit 1/4"
  紧凑型钻头套筒1/4"驱动器

*Holster

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Li-ion Ah 1.3 | 10.8V



Capacity Kapasiti 能力	**Machine Screw:** **M4 - M8mm (5/32" - 5/16")**
	Standard Bolt: **M5 - M12 (3/16" - 1/2")**
	High Tensile Bolt: **M5 - M10 (3/16" - 3/8")**
	Coarse thread (in length): **22 - 90mm (7/8" - 3-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-2,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0-3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**90N·m (800in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**155x54x178mm** **(6-1/8"x2-1/8"x7")**
Net Weight Berat Bersih 淨重	**0.92kg (2.0lbs)**

TD091DWE

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Battery power reduction warning lamp**
  Lampu amaran pengurangan kuasa bateri
  电量警告灯

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery


Li-ion Ah 1.3 | 10.8V | 440 W



Capacity Kapasiti 能力	**Machine Screw:** **M4 - M8 (5/32" - 5/16")**
	Standard Bolt: **M5 - M12 (3/16" - 1/2")**
	High Tensile Bolt: **M5 - M10 (3/16" - 3/8")**
	Coarse thread (in length): **22 - 90mm (7/8" - 3-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**90N·m (800in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**134x54x200mm** **(5-1/4"x2-1/8"x7-7/8")**
Net Weight Berat Bersih 淨重	**0.86kg (1.9lbs)**

TD022DSE

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Compact and lightweight design**
  Padat dan ringan
  小巧轻便

*Holster, Bit set

- SE : 1 x Standard Charger, 2 x 1.5Ah Battery

Li-ion Ah 1.5 | 7.2V



Capacity Kapasiti 能力	**Machine Screw: M3 - M8 (1/8" - 5/16")** **Standard Bolt: M3 - M8 (1/8" - 5/16")**
	High Tensile Bolt: **M3 - M6 (1/8" - 1/4")**
	Coarse thread (in length): **22 - 45mm (7/8" - 1-3/4")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,450**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**25N·m (220in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**Straight Style: 282x42x52mm** **(11-1/8"x1-5/8"x2-1/16")**
	Pistol Style: 227x42x142mm **(8-15/16"x1-5/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**0.55 - 0.56kg (1.2lbs)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

TD020DSW

Cordless Impact Driver
Pemutar Skru Impak Tanpa Kord
充电式冲击螺丝起子机



- **Compact and lightweight design**
  Padat dan ringan
  小巧轻便

*Holster, Bit set

- SW : 1 x Standard Charger, 1 x 1.0Ah Battery (White)

Li-ion Ah 1.0
7.2V



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Capacity Kapasiti 能力	**Machine Screw: M3 - M8 (1/8" - 5/16")** **Standard Bolt: M3 - M8 (1/8" - 5/16")** **High Tensile Bolt: M3 - M6 (1/8" - 1/4")** **Coarse thread (in length): 22 - 45mm (7/8" - 1-3/4")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**20N·m (177in.lbs.)**
Dimensions (L x W) Dimensi 体积	**Straight Style: 276x40mm (10-7/8"x1-9/16")**
Dimensions (L x W x H) Dimensi 体积	**Pistol Style: 213x40x131mm (8-3/8"x1-9/16"x5-1/8")**
Net Weight Berat Bersih 净重	**0.53 - 0.54kg (1.2lbs)**

DTL061Z

Cordless Angle Impact Driver
Pemutar Skru Impak Sudut Tanpa Kord
充电式角向冲击螺丝起子机



- **360 degrees rotatable head enables operation from optimum angle**
  Kepala boleh diputar untuk memudahkan kerja yang berlainan
  可旋转头部方便不同角度工作

*Phillips Bit

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M4 - M12 (5/32" - 1/2")** **High Tensile Bolt: M4 - M8 (5/32" - 5/16")** **Coarse thread (in length): 22 - 75mm (7/8" - 2-31/32")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**387x78x116mm (15-1/4"x3-1/16"x4-9/16")**
Net Weight Berat Bersih 净重	**1.4 - 2.0kg (3.1 - 4.3lbs)**

TL064DSME / WAE / Z

Cordless Angle Impact Driver
Pemutar Skru Impak Sudut Tanpa Kord
充电式角向冲击螺丝起子机



- **Compact & lightweight for fastening and loosening in tight spaces**
  Kompak & ringan untuk kerja di tempat yang sempit
  紧凑轻量适合在狭窄空间使用

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax



Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M4 - M12 (5/32" - 1/2")** **High Tensile Bolt: M4 - M8 (5/32" - 5/16")** **Coarse thread (in length): 22 - 75mm (7/8" - 2-31/32")**
Hex Shank Batang Heksagon 六角柄	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**361x66x86mm (14-1/4"x2-5/8"x3-3/8")**
Net Weight Berat Bersih 净重	**1.2 - 1.6kg (2.7 - 3.6lbs)**

Refer Pg. 76
for more information

TL065DSME / WAE / Z

Cordless Angle Impact Wrench
Perengkuh Impak Sudut Tanpa Kord
充电式角向冲击套筒扳手



- **Compact & lightweight for fastening and loosening in tight spaces**
  Kompak & ringan untuk kerja di tempat yang sempit
  紧凑轻量适合在狭窄空间使用

*Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax



Capacity Kapasiti 能力	**Standard Bolt: M4 - M12 (5/32" - 1/2")** **High Tensile Bolt: M4 - M8 (5/32" - 5/16")**
Square Drive Batang Segi Empat 四方头	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**361x66x86mm (14-1/4"x2-5/8"x3-3/8")**
Net Weight Berat Bersih 净重	**1.2 - 1.6kg (2.7 - 3.6lbs)**

Refer Pg. 76
for more information



*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

TD0100

Impact Driver
Pemutar Skru Impak
冲击螺丝起子机



- **Impacting mechanism for secure fastening**
  Mekanisme impak untuk pengetatan yang kukuh
  冲击机构确保紧固

*Phillips Bit



419



Continuous rating input Input Kuasa Berterusan 额定输入功率	**230W**
Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")**
	High Tensile Bolt: M5 - M10 (3/16" - 3/8") **Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**100N·m (74ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**218x60x180mm** **(8-5/8"x2-3/8"x7-1/8")**
Net weight Berat Bersih 淨重	**0.96kg (2.1lbs)**
Power supply cord Kabel Wayar 电源线	**2.5m (8.2ft)**

TD0101F

Impact Driver
Pemutar Skru Impak
冲击螺丝起子机



- **Enables to drive screws even without pre-drilling pilot holes**
  Skru boleh digerudi walaupun tanpa lubang pra-penggerudian
  即使没有预钻导孔也可以驱动螺钉

*Phillips Bit



411



Continuous rating input Input Kuasa Berterusan 额定输入功率	**230W**
Capacity Kapasiti 能力	**Machine Screw: M4 - M8 (5/32" - 5/16")** **Standard Bolt: M5 - M14 (3/16" - 9/16")**
	High Tensile Bolt: M5 - M10 (3/16" - 3/8") **Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**100N·m (74ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**184x67x192mm (7-1/4"x2-5/8"x7-9/16")**
Net weight Berat Bersih 淨重	**0.99kg (2.2lbs)**
Power supply cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DFS250RTE / RFE / Z

Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **Ultra-high efficiency comparable to AC screwdrivers**
  Kecekapan ultra tinggi yang setanding dengan pemutar skru AC
  超高效率与AC螺丝刀相等

*Phillips Bit, Magnetic Bit Holder, Belt Clip

- RTE : 1 x Rapid Charger, 2 x 5.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Coarse Thread: 4.5 x 90mm** **(3/16" x 3-1/2")** **Self-Drilling Screw: 6mm (1/4")** **Drywall Screw: 5mm (3/16")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**259x79x259mm** **(10-1/4"x3-1/8"x10-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.9kg (3.4 - 4.1lbs)**

DFS251RTE / RFE / Z

Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **High torque ideal for fastening self-drilling screw**
  Tork tinggi sesuai untuk mengetatkan skru penggerudian diri
  高扭力紧固自钻螺丝

*Magnetic Socket Bit

- RTE : 1 x Rapid Charger, 2 x 5.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Self-Drilling Screw:** **6mm (1/4")** **Drywall Screw: 5mm (3/16")** **Hex Socket Screw: 6mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**237x79x259mm** **(9-3/8"x3-1/8"x11-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 3.9lbs)**

DFS452Z

Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **Push Drive Technology for Quieter Operation; Minimizes Power Consumption**
  Teknologi pemacu tolak meminimumkan penggunaan kuasa
  推动技术降低功耗

*Phillips Bit, Magnetic Bit Holder, Belt Clip

- Z : Without Charger & Battery




Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Self-Drilling Screw: 6mm (1/4")** **Drywall Screw: 5mm (3/16")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 4,000**
Dimensions (L x W x H) Dimensi 体积	**251x79x259mm** **(10"x3-1/8"x11-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 3.9lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

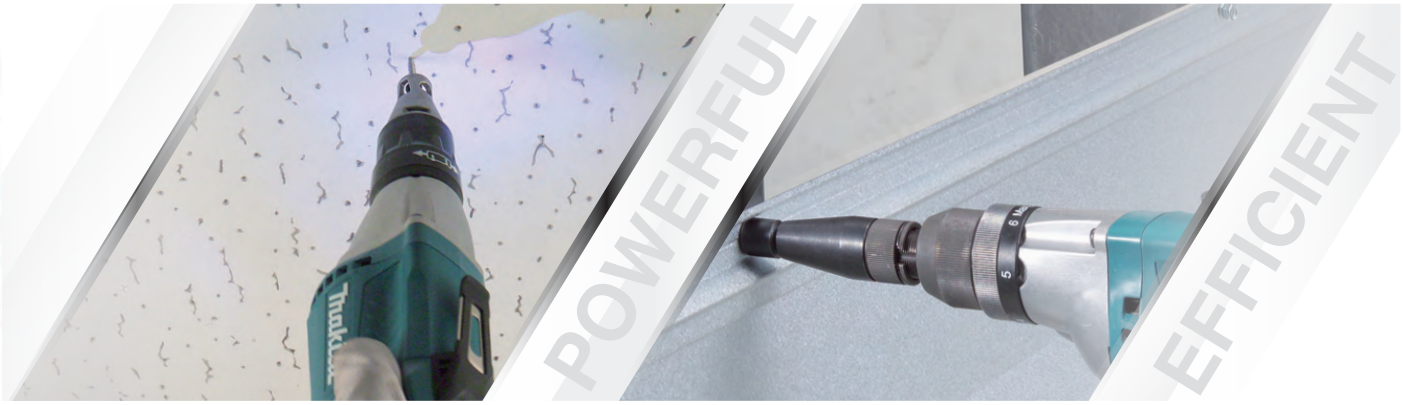

FS2300

Drywall Screwdriver
Pemutar Skru Drywall
石膏板螺丝起子机



- **Large trigger with lock-on button for operator convenience**
  Butang pencetus dengan fungsi mengunci untuk memudahkan pengguna
  备有锁定功能的触发按钮方便操作

*Phillips Insert Bit x2, Magnetic Bit Holder



419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Drywall Screw: 5mm (3/16")** **Self-Drilling Screw: 6mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**290x70x207mm** **(11-3/8"x2-3/4"x8-1/8")**
Net Weight Berat Bersih 净重	**1.6kg (3.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

FS2500

Screwdriver
Pemutar Skru
螺丝起子机



- **Aluminum gear housing for less weight and increased durability**
  Lebih tahan lama dan ringan dengan gear aluminium
  铝合金齿轮更轻更耐用

*Magnetic Socket Bit



419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Drywall Screw: 5mm (3/16")** **Self-Drilling Screw: 6mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**280x70x207mm** **(11"x2-3/4"x8-1/8")**
Net Weight Berat Bersih 净重	**1.5kg (3.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

FS2700

Screwdriver
Pemutar Skru
螺丝起子机



- **6 stage adjustable torque adjustment for a wide range of applications**
  6 tahap pelarasan tork untuk pelbagai aplikasi
  6级扭力调节适合各种应用



419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Self-Drilling Screw: 6mm (1/4")** **Machine Screw: 8mm (5/16")** **Wood Screw: 6.2mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,500**
Dimensions (L x W x H) Dimensi 体积	**301x70x207mm** **(11-7/8"x2-3/4"x8-1/8")**
Net Weight Berat Bersih 净重	**1.8kg (4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

FS4200

Drywall Screwdriver
Pemutar Skru Papan Gipsum
石膏板螺丝起子机



- **Powerful 570W motor**
  Motor berkuasa 570W
  570W强力马达

*Phillips Insert Bit x2, Magnetic Bit Holder



419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Drywall Screw: 5mm (3/16")** **Self-Drilling Screw: 6mm (1/4")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 4,000**
Dimensions (L x W x H) Dimensi 体积	**269x65x207mm** **(10-5/8"x2-9/16"x8-1/8")**
Net Weight Berat Bersih 净重	**1.4kg (3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

FS6300

Drywall Screwdriver
Pemutar Skru Papan Gipsum
石膏板螺丝起子机



- **Silent clutch for improved performance and durability**
  Klac senyap untuk prestasi dan ketahanan yang lebih baik
  静音离合器提高性能和耐用性

*Phillips Insert Bit x2, Magnetic Bit Holder

419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Drywall Screw: 4mm (5/32")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 6,000**
Dimensions (L x W x H) Dimensi 体积	**279x65x207mm (11"x2-9/16"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.4kg (3.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

DFR550Z

Cordless Auto Feed Screwdriver
Pemutar Skru Suapan Auto Tanpa Kord
充电式自动螺丝起子机



- **Ideal for drywall and subfloors**
  Sesuai untuk drywall dan lantai
  理想的干砌墙和地板

*Phillips Bit x3
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V

440



Screw Strip Kapasiti 能力	**4 x 25 - 55mm (5/32" x 1" - 2-3/16")**
Driving Shank (Hex) Hex Memandu Aci 六角驱动轴	**6.35mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,000**
Dimensions (L x W x H) Dimensi 体积	**424x80x238mm (16-3/4"x3-1/8"x9-3/8")**
Net weight Berat Bersih 淨重	**2.1 - 3.1kg (4.6 - 6.9lbs)**

DF001DW

In-Line Cordless Screwdriver
Pemutar Skru Tanpa Kord
充电式螺丝起子机



- **Convenient to used even in narrow space**
  Sesuai digunakan di tempat yang sempit
  方便在狭窄的空间使用

*Bit set (81 pcs), AC Adaptor, USB Cable

Li-ion Ah 1.5
3.6V




Refer Pg. 88
for more information

Fastening Capacities Kapasiti Pengancing 最大紧固能力	**Wood Screw: ø3.8 x 32mm (1/8"x1-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 无负荷转速	**220**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭转	**Hard/ Soft: 4.0/ 3.0 N·m (35/ 27 in.lbs.)**
Max Lock Torque Maksimum Pengunci Tenaga Pemutaran 最大扭转	**6.0N·m (53 in.lbs.)**
Charging Time (hours) Masa Pengecasan 充电时间	**3 - 5**
Dimensions (L x W x H) Dimensi 体积	**Straight Style: 287x47x51mm (11-1/4"x1-7/8"x2")**
	Pistol Style: 205x47x51mm (8-1/8"x1-7/8"x2")
Net Weight Keberatan 净重	**0.36kg (0.8 lbs.)**

UT1305

Mixer
Pengadun
搅拌机



- **Heavy duty and high speed mixer**
  Tahan lasak dan kelajuan tinggi
  耐用和高速

*Wrenches, Side Grip

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,300**
Shank Size of Tool Holder Portion Batang Saiz 柄部尺寸	**M12**
Dimensions (L x W x H) Dimensi 体积	**942x87x152mm (37"x3-7/16"x6")**
Net Weight Berat Bersih 淨重	**2.6kg (5.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

UT2204

Mixer
Pengadun
搅拌机



- **Heavy duty and high speed mixer**
  Tahan lasak dan kelajuan tinggi
  耐用和高速

*Wrenches, Side Grip

303



Continuous rating input Input Kuasa Berterusan 额定输入功率	**850W**
Blade Diameter Diameter Bilah 锯片直径	**220mm (8-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**550**
Shank Size of Tool Holder Portion Batang Saiz 柄部尺寸	**M12 or M14**
Dimensions (L x W x H) Dimensi 体积	**929x89x152mm (36-1/2"x3-1/2"x6")**
Net weight Berat Bersih 淨重	**2.7kg (5.9lbs)**
Power supply cord Kabel Wayar 电源线	**2.5m (8.2ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DTW1001RMJ / RFJ / Z 19mm (3/4")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Makita's Most Powerful Impact Wrench**
  Perengkuh impak tanpa kord yang paling kuat di Makita
  Makita最强的冲击扳手

*Hook
- RMJ : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RFJ : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Refer Pg. 40
for more information

Fastening Capacities Kapasiti 能力	**Standard Bolt: M12 - M30 (1/2" - 1-1/4")** **High Tensile Bolt: M10 - M24 (3/8" - 1")**
Square Drive Skru Persegi 方形螺杆	**19mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard/ Medium/ Soft:** **0 - 1,800 / 0 - 1,000 / 0 - 900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard/ Medium/ Soft:** **0 - 2,200 / 0 - 2,000 / 0 - 1,800**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**1,050N·m (780ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**229x91x289mm** **(9"x3-5/8"x11-3/8")**
Net weight Berat Bersih 净重	**3.4 - 3.7kg (7.5 - 8.2lbs)**

DTW1002RMJ / RFJ / Z 12.7mm (1/2")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Efficient impact system (Max 2,200 IPM) with less vibration**
  Sistem impak yang cekap dan mengurangkan getaran
  高效的冲击系统并减少振动

*Hook
- RMJ : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RFJ : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Fastening Capacities Kapasiti 能力	**Standard Bolt: M12 - M30 (1/2" - 1-1/4")** **High Tensile Bolt: M10 - M24 (3/8" - 1")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard/ Medium/ Soft:** **0 - 1,800/ 0 - 1,000/ 0 - 900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard/ Medium/ Soft:** **0 - 2,200/ 0 - 2,000/ 0 - 1,800**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**1,000N·m (740ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**229x91x289mm** **(9"x3-5/8"x11-3/8")**
Net Weight Berat Bersih 净重	**3.3 - 3.6kg (7.3 - 8.0lbs)**

DTW800RMJ / RFJ / Z 11.2mm (7/16")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Extremely high power 800N·m (590ft.lbs.) way ahead of competitors**
  Kuasa tinggi sehingga 800N.m (590kaki.Lbs) mengalahkan jenama pesaing
  高功率达 800N.m(590ft.lbs) 领先竞争品牌

*Hook
- RMJ : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RFJ : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Fastening Capacities Kapasiti 能力	**Standard Bolt: M12 - M24 (1/2" - 1")** **High Tensile Bolt: M10 - M22 (3/8" - 7/8")**
Hex Shank Skru Persegi 方形螺杆	**11.1mm (7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard / Medium / Soft:** **0 - 1,800 / 0 - 1,000 / 0 - 900**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard / Medium / Soft:** **0 - 2,200 / 0 - 2,000 / 0 - 1,800**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**800N·m (590ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**229x91x303mm** **(9"x3-5/8"x11-7/8")**
Net Weight Berat Bersih 净重	**3.4 - 3.7kg (8.2 - 7.5lbs)**

DTW450RME / RFE / Z 12.7mm (1/2")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **Compact and lightweight design provide superior balance and control**
  Reka bentuk padat dan ringan untuk keseimbangan dan kawalan yang unggul
  小巧轻便的设计提供出色的平衡和控制

*Hook
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

441

18V



BEST
TERBAIK 优秀

Fastening Capacities Kapasiti 能力	**Standard Bolt: M12 - M22 (1/2" - 7/8")** **High Tensile Bolt: M12 - M16 (1/2" - 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,200**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**440N·m (325 ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**266x82x290mm** **(10-1/2 "x3-1/4"x11-3/8")**
Net Weight Berat Bersih 净重	**3.1 - 3.4kg (7.6 - 6.9lbs)**

DTW285RME / RFE / Z 12.7mm (1/2")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **BL motor delivers 280N·m of max torque**
  Motor BL menyampaikan 280N·m tork maksima
  无碳刷马达提供最大280N·m的扭力

*Belt Clip
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

Reverse Rotation Auto Stop Mode
Mod auto berhenti untuk putaran terbalik
反转自动停止模式




BETTER
LEBIH BAIK 优越

Fastening Capacities Kapasiti 能力	**Standard Bolt: M10 - M20 (3/8" - 3/4")** **High Tensile Bolt: M10 - M16 (3/8" - 5/8")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Hard/ Medium/ Soft:** **0 - 2,800/ 0 - 2,100/ 0 - 1,600**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**Hard/ Medium/ Soft:** **0 - 3,500/ 0 - 2,600/ 0 - 1,800**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**280 N·m (210 ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**147x79x249mm** **(5-3/4"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 净重	**1.5 - 1.8kg (3.2 - 3.9lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DTW251RME / RFE / Z 12.7mm (1/2")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **High power, compact and lightweight 4-pole motor**
  Motor berkuasa tinggi, padat dan ringan
  高功率，小巧轻便

*Belt Clip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 448

18V



BETTER
LEBIH BAIK 优越

Fastening Capacities Kapasiti 能力	**Standard Bolt: M10 - M16 (3/8" - 5/8")** **High Tensile Bolt: M10 - M14 (3/8" - 9/16")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,100**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**230N·m (170ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**165x79x234mm** **(6-1/2"x3-1/8"x9-1/4")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 3.9lbs)**

DTW190RME / RFE / Z 12.7mm (1/2")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **190N·m (140ft.lbs.) of Max torque optimal for scaffold bulding**
  Paling sesuai untuk pemasangan perancah
  最适合搭建脚手架

*Shoulder Strap (country-specific), Tool Hanger (country-specific)

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



GOOD
CEMERLANG 优良

Fastening Capacities Kapasiti 能力	**Standard Bolt: M8 - M16 (5/16" - 5/8")** **High Tensile Bolt: M8 - M12 (5/16" - 1/2")**
Square Drive Skru Persegi 方形螺杆	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**190N·m (140ft.lbs.)**
Overall Length Dimensi 体积	**176mm (6-15/16")**
Net Weight Berat Bersih 淨重	**1.4 - 1.8kg (3.2 - 3.9lbs)**

TW100DWE 9.5mm (3/8")

Cordless Impact Wrench
Perengkuh Impak Tanpa Kord
充电式冲击套筒扳手



- **9.5mm (3/8") square drive fits most common automotive sockets**
  Kepala segi empat 9.5mm (3/8") sesuai untuk kebanyakan soket automotif
  一般汽车插座通用的 9.5mm (3/8") 方形头

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Li-ion Ah 1.3

10.8V



Fastening Capacities Kapasiti 能力	**Standard Bolt:** **M8 - M12 (5/16" - 1/2")** **High Tensile Bolt:** **M6 - M10 (1/4" - 3/8")**
Square Drive Batang Segi Empat 四方头	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,300**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**110N·m (1,000in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**163x54x178mm** **(6-3/8"x2-1/8"x7")**
Net Weight Berat Bersih 淨重	**0.95kg (2.1lbs)**

TW1000 25.4mm (1")

Impact Wrench
Perengkuh Impak
套筒扳手



- **Huge 1,000N·m (738 ft.lbs.) of Power for Industrial Applications**
  Kuasa 1,000N·m (738 ft.lbs.) untuk aplikasi perindustrian
  巨大的 1,000N · m (738 ft.lbs.)功率适合工业应用

*Side Grip, Socket

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Fastening Capacities Kapasiti 能力	**Standard Bolt:** **M24 - M30 (15/16" - 1-3/16")**
	High Tensile Bolt: **M22 - M24 (7/8" - 15/16")**
Square Drive Batang Segi Empat 四方头	**25.4mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**1,000N·m (738ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**382x110x290mm** **(15"x4-5/16"x11-3/8")**
Net Weight Berat Bersih 淨重	**8.8kg (19.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

6906 19mm (3/4")

Impact Wrench
Perengkuh Impak
套筒扳手



- **Powerful 850W motor**
  Motor berkuasa 850W
  强大的850W马达

*Side Grip, Socket

100



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Capacity Kapasiti 能力	**Standard Bolt:** **M16 - M22 (5/8" - 7/8")**
	High Tensile Bolt: **M16 - M20 (5/8" - 3/4")**
Square Drive Batang Segi Empat 四方头	**19mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,700**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**588 N·m (441ft.lbs.)**
Overall Length Dimensi 体积	**327mm (12-7/8")**
Net Weight Berat Bersih 淨重	**5.6kg (12.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

6905B 12.7mm (1/2")

Impact Wrench
Perengkuh Impak
套筒扳手



- **Aluminum hammer case with high durability**
  Casing aluminium yang bertahan
  铝制外壳更耐用

*Socket x3

65

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**440W**
Fastening Capacities Kapasiti 能力	**Standard Bolt:** **M12 - M20 (1/2" - 3/4")**
	High Tensile Bolt: **M12 - M16 (1/2" - 5/8")**
Square Drive Batang Segi Empat 四方头	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,700**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**294N·m (217ft.lbs.)**
Overall Length Dimensi 体积	**270mm (10-5/8")**
Net Weight Berat Bersih 淨重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

TW0350 12.7mm (1/2")

Impact Wrench
Perengkuh Impak
套筒扳手



- **Large, efficient hammer creates more impacts for greater power**
  Penukul kecekapan tinggi untuk hentaman yang lebih kuat
  高效率锤子给予更强的锤击力

*Socket

411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**400W**
Fastening Capacities Kapasiti 能力	**Standard Bolt:** **M12 - M22 (1/2" - 7/8")**
	High Tensile Bolt: **M12 - M16 (1/2" - 5/8")**
Square Drive Batang Segi Empat 四方头	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**350N·m (260ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**283x87x233mm** **(11-1/8"x3-7/16"x9-1/8")**
Net Weight Berat Bersih 淨重	**3kg (6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

TW0200 12.7mm (1/2")

Impact Wrench
Perengkuh Impak
套筒扳手



- **Compact and lightweight design for use in tight spaces**
  Sesuai untuk digunakan di ruang kecil
  方便易用于小空间

*Socket x3, Hook

411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**380W**
Fastening Capacities Kapasiti 能力	**Standard Bolt:** **M10 - M16 (3/8" - 5/8")**
	High Tensile Bolt: **M10 - M12 (3/8" - 1/2")**
Square Drive Batang Segi Empat 四方头	**12.7mm (1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,200**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 2,200**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**200N·m (150ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**251x72x220mm** **(9-7/8"x2-13/16"x8-5/8")**
Net Weight Berat Bersih 淨重	**2.1kg (4.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

6910 25.4mm (1")

Impact Wrench
Perengkuh Impak
套筒扳手



- **360degrees adjustable side handle for convenience**
  Pemegang berputar 360˚ memudahkan operasi
  360˚ 旋转侧手柄方便操作

*Side Grip, Socket

153

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Capacity Kapasiti 能力	**Standard Bolt:** **M22 - M24 (7/8" - 15/16")**
	High Tensile Bolt: M22 - M24 (7/8" - 15/16") **Square drive : 25.4mm (1")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**980N·m (735ft.lbs.)**
Overall Length Panjang Keseluruhan 总长度	**389mm (15-1/4")**
Net Weight Berat Bersih 淨重	**9.0kg (19.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DTL063Z 9.5mm (3/8")

Cordless Angle Impact Wrench
Perengkuh Impak Sudut Tanpa Kord
充电式角向冲击套筒扳手



- **Compact angle head for easy access to bolts in tight places**
  Kepala sudut padat sesuai digunakan di tempat yang sempit
  紧凑的转角头，适合在狭窄的空间使用

*Belt Clip

• Z : Without Charger & Battery

Li-ion BL 6.0 5.0 4.0 3.0 2.0 1.5

18V



Fastening Capacities Kapasiti 能力	**Standard Bolt: M4 - M12 (5/32" - 1/2")** **High Tensile Bolt: M4 - M8 (5/32" - 5/16")**
Square Drive Skru Persegi 方形螺杆	**9.5mm (3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,000**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,000**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**60 N·m (N/A ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**387x78x116mm** **(15-1/4"x3-1/16"x4-9/16")**
Net Weight Berat Bersih 淨重	**1.4 - 2.0kg (3.1 - 4.3lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

6922NB M16 (5/8"), M20 (3/4"), M22 (7/8")

Shear Wrench
Perengkuh Ricih
扭断式套筒扳手



- **Compact and Lightweight Yet Powerful**
  Kompak dan ringan namun berkuasa
  小巧轻便功能强大

*Screwdriver

411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,330W**
Capacity Kapasiti 能力	**Bolt : M16, M20, M22** **(5/8", 3/4", 7/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**18**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**804N·m (593ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**249x84x252mm** **(9-13/16"x3-5/16"x9-15/16")**
Net Weight Berat Bersih 淨重	**4.9kg (10.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

6924N M22(7/8"), M24(1"), SHTB22

Shear Wrench
Perengkuh Ricih
扭断式套筒扳手



- **High rotational speed for more efficient operation**
  Kelajuan putaran tinggi untuk operasi yang lebih cekap
  高转速提高操作效率

*Screwdriver

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Capacity Kapasiti 能力	**Bolt : M22, M24, 7/8", 1"** **Super high tensile bolt : M22**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**19**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**1,100N·m (810ft.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**330x104x257mm** **(13"x4-1/8"x10-1/8")**
Net Weight Berat Bersih 淨重	**7.5kg (16.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HB500 50mm (2")

Magnetic Drill
Gerudi Magnet
磁力钻孔机



- **Magnetic base, drill stand, and drill machine all in one package system**
  Dasar bermagnet, mesin dan penegak gerudi dalam satu sistem
  磁性底座，钻架和钻机集在同一系统

*Quick release arbor, Small oil cup assembly and clip, Safety guard, Polyester safety strap, Integral oil feed steady allen keys




Capacity Kapasiti 能力	**Steel: 50mm (2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**16mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**350 / 650**
Magnetic Clamping Force Kekuatan Penjepit Magnetik 磁力夹紧力	**Minimum 9,300N (950kg)**
Dimensions (L x W x H) Dimensi 体积	**290x150x450mm** **(11-3/8"x5-7/8"x17-3/4")**
Net Weight Berat Bersih 淨重	**18.5kg (40.8lbs)**



***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Impact Drilling | Demolition

Gerudi I Pemecah 石工鑽孔 | 鑿鏨加工

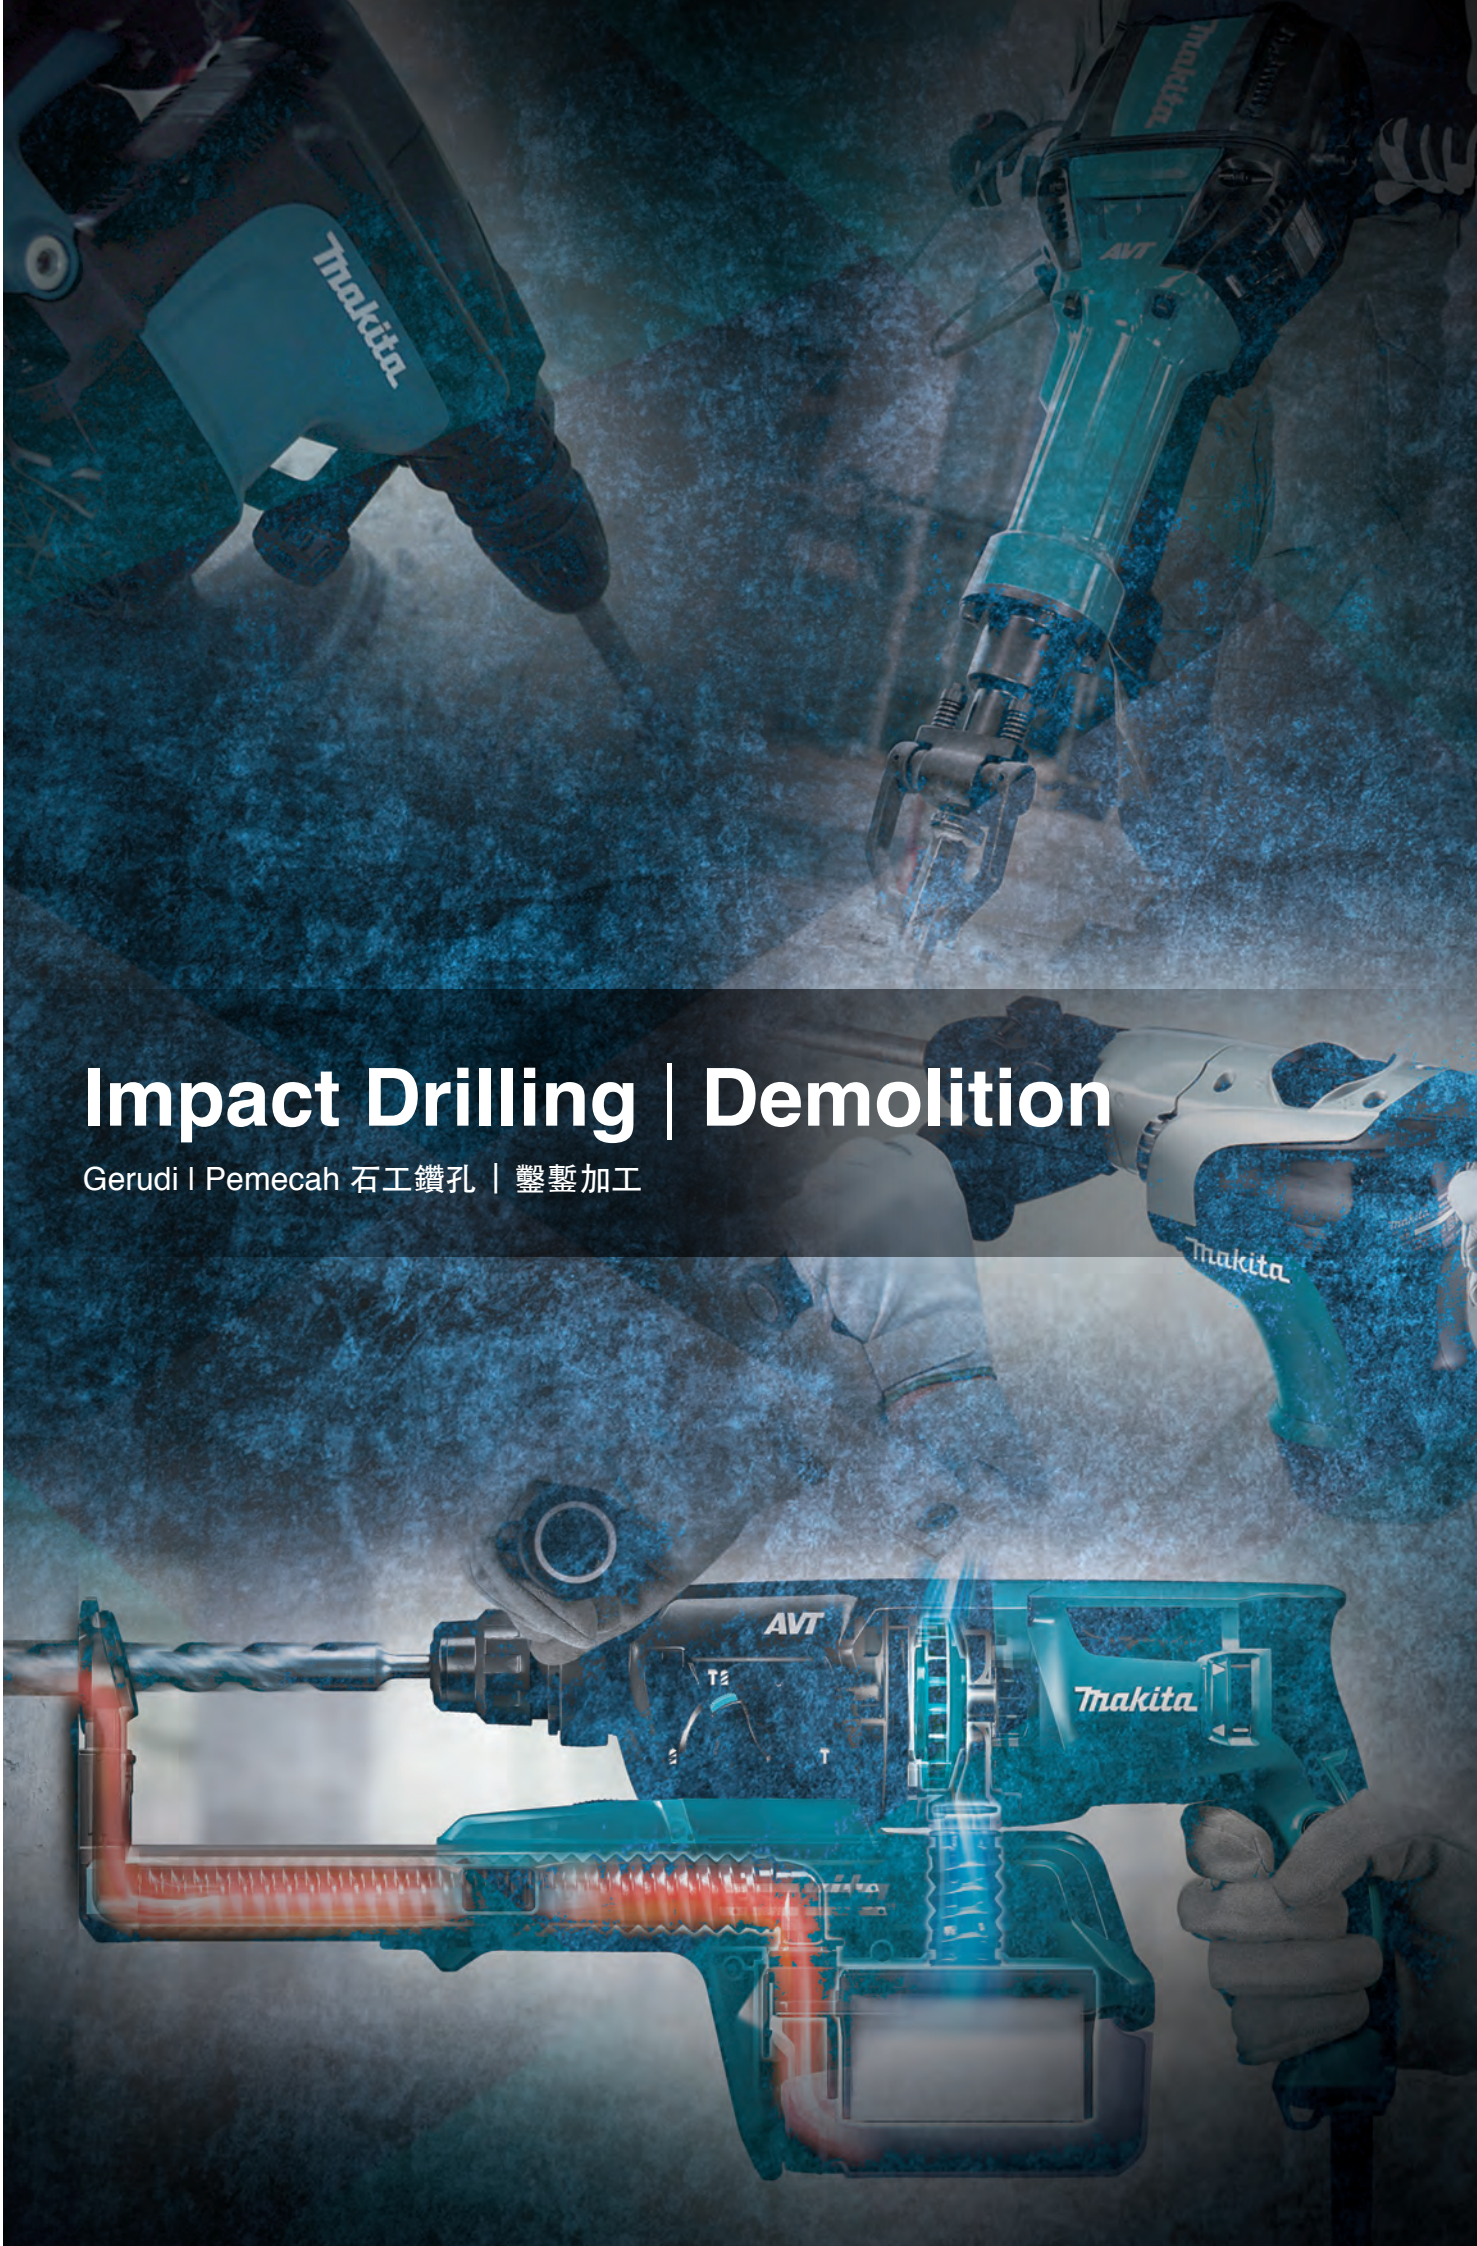

DHP481RME / RFE / Z 13mm (1/2")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **0-31,500 IPM for fast hammer drilling in masonry materials**
  0-31,500 IPM untuk penggerudian tukul cepat dalam bahan batu
  0-31,500 IPM用于石材快速锤钻

*Depth Gauge, Side Handle, Belt Clip, (+)(-) Bit, Bit Holder

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 76mm (3")** **Masonry: 16mm (5/8")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High/ Low:** **0 - 31,500/ 0 - 8,250**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 2,100/ 0 - 550**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft:** **115/ 60N·m (1,020/ 530in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**125N·m (1,090in.lbs.)**
Max Output Keluaran Maksima 最大输出	**640W**
Dimensions (L x W x H) Dimensi 体积	**205x79x249mm** **(8-1/8"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 净重	**2.7 - 3.0kg (6.0 - 6.7lbs)**

DHP458RME / RFE / Z 13mm (1/2")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **All metal gears and aluminum gear housing for maximum jobsite durability**
  Gear logam dan aluminium untuk meningkatkan ketahanan
  金属齿轮和铝制齿轮组件结构增加耐久性

*(+)(-) Bit, Side Grip, Depth Rod

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

440 m/min

18V



BEST
TERBAIK 优秀

Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 76mm (3")** **Masonry: 16mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-2,000** **Low: 0-400**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0-30,000** **Low: 0-6,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 91/ 58N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**84N·m (750in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**225x79x259mm** **(8-7/8"x3-1/8"x10-1/4")**
Net Weight Berat Bersih 净重	**2.2 - 2.6kg (4.9 - 5.7lbs)**

DHP482RME / RFE / RFX1 / Z 13mm (1/2")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **High speed model with compact and lightweight design**
  Model kelajuan tinggi dengan reka bentuk yang padat dan ringan
  高速型，设计紧凑轻巧

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- RFX1 : 1 x Rapid Charger, 1 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

440 m/min

18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 38mm (1-1/2")** **Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 28,500** **Low: 0 - 9,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,900** **Low: 0 - 600**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 62/ 36N·m (550/ 320in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**54N·m (480in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**198x79x249mm** **(7-3/4"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 净重	**1.5 - 1.8kg (3.4 - 4.1lbs)**

DHP484RME / RFE / Z 13mm (1/2")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **0-30,000 IPM for fast hammer drilling in masonry materials**
  0-30,000 IPM untuk penggerudian tukul cepat dalam bahan batu
  0-30,000 IPM用于石材快速锤钻

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



BETTER
LEBIH BAIK 优越

Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 38mm (1-1/2")** **Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 30,000** **Low: 0 - 7,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 2,000** **Low: 0 - 2,000**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 54 / 30N·m (480/ 270in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**60N·m (530in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**182x79x261mm** **(7-1/8"x3-1/8"x10-1/4")**
Net Weight Berat Bersih 净重	**1.6 - 1.9kg (3.5 - 4.2lbs)**

DHP459RME / RFE / Z 13mm (1/2")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Brushless motor delivers up to 50% longer run time per charge**
  Penggunaan alat dengan motor tanpa berus dilanjutkan 50% lebih lama dengan setiap cas
  无碳刷马达工具每次充电可将使用时间延长达50%

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



GOOD
CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 38mm (1-1/2")** **Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 22,500** **Low: 0 - 6,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,500** **Low: 0 - 400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 45/ 25N·m (400/ 220in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**45N·m (400in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**192x78x256mm** **(7-9/16"x3-1/16"x10-1/8")**
Net Weight Berat Bersih 净重	**1.5 - 1.8kg (3.3 - 4.0lbs)**

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DHP453RME / RFE / SYE / Z 13mm (1/2")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **16 Adjustable torque settings plus drill mode**
  16 penyelarasan tork & mod gerudi
  16可调扭力设置及钻模式

*(+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- SYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



DHP453SYE
WHILE STOCKS LAST
Sementara stok masih ada
售完即止



CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 36mm (1-7/16") Masonry: 13mm (1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 19,500 Low: 0 - 6,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,300 Low: 0 - 400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 42/ 27N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**38N·m (340in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**240x79x244mm (9-7/16"x3-1/8"x9-5/8")**
Net Weight Berat Bersih 净重	**1.7 - 2.0kg (3.6 - 4.4lbs)**

DHP483RME / RFE / Z 13mm (1/2")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **0-25,500 IPM for fast hammer drilling in masonry materials**
  0-25,500 IPM untuk penggerudian tukul cepat dalam bahan batu
  0-25,500 IPM用于石材快速锤钻

*Belt Clip, (+)(-) Bit

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V





CEMERLANG 优良

Capacity Kapasiti 能力	**Steel: 13mm (1/2")/ Wood: 36mm (1-7/16") Masonry: 13mm (1/2")**
Chuck Capacity Kapasiti Chuck 夹头能力	**1.5 - 13mm (1/16 - 1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0 - 25,500 Low: 0 - 7,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0 - 1,700 Low: 0 - 500**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 40/ 23N·m (350/ 210in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**40N·m (350in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**176x79x247mm (6-15/16"x3-1/8"x9-3/4")**
Net Weight Berat Bersih 净重	**1.3 - 1.6kg (2.8 - 3.6lbs)**

HP332DSME / SAE / Z 10mm (3/8")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Fast hammer drilling in masonry materials**
  Penggerudian tukul cepat untuk bahan batu
  于石工快速锤钻

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- SAE : 1 x Speed Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5

12V max



Capacity Kapasiti 能力	**Steel/ Wood/ Masonry: 10/ 28/ 8mm (3/8" / 1-1/8" / 5/16")**
Chuck capacity Kapasiti Chuck 夹头能力	**0.8 - 10mm (1/32 - 3/8")**
Impacts Per Minute (IPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 22,500/ 0 - 6,750**
No Load Speed (RPM) Maksimum Tenaga Pemutaran Pengancing 最快扭力	**High/ Low: 0 - 1,500/ 0 - 450**
Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭力	**Hard/ Soft: 35/ 21N·m (310/ 190in.lbs.)**
Max Lock Torque Keluaran Maksima 最大输出	**32N·m (280in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**168x66x217mm (6-5/8"x2-5/8"x8-1/2")**
Net Weight Berat Bersih 净重	**1.1 - 1.3kg (2.4 - 2.8lbs)**

HP331DSME / WAX1 / WAE / WYE / Z 10mm (3/8")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **High speed mode for speedy drilling**
  Mod kelajuan tinggi untuk penggerudian cepat
  高速模式快速钻孔

*Phillips Bit, Belt Clip

- SME : 1 x Speed Charger, 2 x 4.0Ah Battery
- WAX1 : 1 x Standard Charger, 2 x 2.0Ah Battery, Accessories Bit Set
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WYE : 1 x Standard Charger, 2 x 1.5Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5

12V max



HP331DWAX1
WHILE STOCKS LAST
Sementara stok masih ada
售完即止



For **HP331DWAX1** only

Capacity Kapasiti 能力	**Steel/ Wood/ Masonry: 10/ 21/ 8mm (3/8" / 13/16" / 5/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High/ Low: 0 - 25,500 / 0 - 6,750**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 0 - 1,700/ 0 - 450**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 30/ 14N·m (270/ 130in.lbs.)**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**28N·m (250in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**201x66x209mm (7-7/8"x2-5/8"x8-1/4")**
Net Weight Berat Bersih 净重	**1.1 - 1.3kg (2.5 - 2.9lbs)**

HP330DWE / X100 10mm (3/8")

Cordless Hammer Driver Drill
Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式冲击螺丝起子电钻



- **Hammer drill mode**
  Mod gerudi tukul
  锤钻模式

*Phillips Bit, Holster

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery
- X100 : 1 x Standard Charger, 2 x 1.3Ah Battery, Accessories

Li-ion Ah 1.3

10.8V



HP330DWE

HP330DX100

Capacity Kapasiti 能力	**Steel: 10mm (3/8")/ Wood: 21mm (13/16") Masonry: 8mm (5/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**High: 0-22,500 Low: 0-6,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 0-1,500 Low: 0-400**
Max Fastening Torque Maksimum Tenaga Pemutaran Pengancing 最快扭力	**Hard/ Soft: 24/ 12N·m**
Max Lock Torque Pemutaran Tenaga Maksimum 最大扭力	**22N·m (200in.lbs.)**
Dimensions (L x W x H) Dimensi 体积	**201x53x183mm (7-7/8"x2-1/16"x7-1/4")**
Net Weight Berat Bersih 净重	**1.1kg (2.3lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HP1630 16mm (5/8")

Hammer Drill
Gerudi Tukul
冲击电钻



- **Lightweight with large drilling capacity up to 16mm in concrete**
  Ringan dengan kapasiti penggerudian yang besar sehingga 16mm dalam konkrit
  轻量，高能力，混凝土钻孔达16mm

*Side Handle, Chuck Key, Chuck Key Holder, Depth Gauge (country-specific)

85



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Capacity Kapasiti 能力	**Concrete: 16mm (5/8")** **Steel: 13mm (1/2")/ Wood: 30mm (1-3/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,200**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 48,000**
Dimensions (L x W x H) Dimensi 体积	**296x75x204mm** **(11-5/8"x2-15/16"x8")**
Net Weight Berat Bersih 净重	**2.1kg (4.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

HP2050 / X1 20mm (3/4")

2-Speed Hammer Drill
Gerudi Tukul
冲击电钻



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Chuck Key, Side Grip, Depth Rod

- HP2050X1 : with 70pcs Accessories Set

419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Capacity Kapasiti 能力	**Concrete:** **20mm (3/4")**
	Steel Hi : 8mm (5/16") **Steel Lo : 13mm (1/2")**
	Wood Hi : 25mm (1") **Wood Lo : 40mm (1-9/16")**
Impacts Per Minute (IPM) Kelajuan Tanpa Beban 回转数	**High: 0-58,000** **Low: 0-24,000**
No Load Speed (RPM) Impak Per Minit 冲击数	**High: 0-2,900** **Low: 0-1,200**
Overall Length Panjang Keseluruhan 总长度	**362mm (14-1/4")**
Net Weight Berat Bersih 净重	**2.5kg (5.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HR140DSMJ / WAJ / Z 14mm (9/16")

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电钻



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Side Grip, Depth Gauge, Dust Cup (country-specific)

- SMJ : 1 x Speed Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- WAJ : 1 x Standard Charger, 2 x 2.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery


Li-ion Ah 4.0 2.0 1.5
12Vmax 2modes



Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.0J** **Our experimental conditions: 0.9J**
Capacity Kapasiti 能力	**Concrete: 14mm (9/16")** **Steel: 10mm (3/8")/ Wood: 13mm (1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,900**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 850**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 246x74x179mm** **(9-11/16"x2-15/16"x7")**
	BL1041B: 246x74x198mm **(9-11/16"x2-15/16"x7-3/4")**
Net Weight Berat Bersih 净重	**1.9 - 2.6kg (4.3 - 5.6lbs)**

DHR165RME / RFE / Z 16mm (5/8")

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电锤



- **2-Mode operation; rotation only, or hammering with rotation only**
  operasi 2 mod: hanya putaran, penukulan dengan putaran
  2档模式变换: 仅旋转，旋转并锤击

*Depth Gauge, Side Grip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V 2modes

430



Impact Energy Kekuatan Impak 单次最大锤击力	**1.3J**
Capacity Kapasiti 能力	**Concrete: 16mm (5/8")** **Steel: 13mm (1/2")/ Wood: 24mm (15/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 5,300**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,600**
Dimensions (L x W x H) Dimensi 体积	**297x79x253mm** **(11-3/4"x3-1/8"x10")**
Net Weight Berat Bersih 净重	**2.3 - 3.0kg (5.0 - 6.6lbs)**

HR166DSMJ / WAE1 / WAJ / Z 16mm (5/8")

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电钻



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Dust Cup (country-specific), Side Grip, Depth Gauge

- SMJ : 1 x Speed Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- WAE1 : 1 x Standard Charger, 2 x 2.0Ah Battery, Accessories
- WAJ : 1 x Standard Charger, 2 x 2.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax 2modes



For **HR166DWAE1** only


Refer Pg. 73
for more information

Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.1J** **Our experimental conditions: 1.0J**
Capacity Kapasiti 能力	**Concrete: 16mm (5/8")** **Steel: 10mm (3/8")/ Wood: 13mm (1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,800**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 680**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 250x74x187mm** **(9-7/8"x2-15/16"x7-3/8")**
Net Weight Berat Bersih 净重	**1.8 - 2.4kg (4.1 - 5.4lbs)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DHR171Z 17mm (11/16")

Cordless Rotary Hammer
Tukul Putar Tanpa Kord
充电式电锤



- **2-Mode operation; rotation only, or hammering with rotation only**
  operasi 2 mod: hanya putaran, penukulan dengan putaran
  2档模式变换: 仅旋转，旋转并锤击

*Dust Cup (country-specific), Side Grip, Depth Gauge

- Z : Without Charger & Battery

Li-ion | 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5 Ah
18V | 2 modes




Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.2J** **Our experimental conditions: 1.1J**
Capacity Kapasiti 能力	**Concrete: 17mm (11/16")** **Steel: 10mm (3/8")/ Wood: 13mm (1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,800**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 680**
Dimensions (L x W x H) Dimensi 体积	**BL1815N: 273x86x194mm** **(10-3/4"x3-3/8"x7-5/8")** **BL1850B: 273x86x211mm** **(10-3/4"x3-3/8"x8-5/16")**
Net Weight Berat Bersih 净重	**2.1 - 2.8kg (4.6 - 6.2lbs)**

BL MOTOR

HR1830 18mm (11/16")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Side Grip, Depth Gauge

2 modes | 419 W




WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**440W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.2J** **Our experimental conditions: 1.2J**
Capacity Kapasiti 能力	**Concrete: 18mm (11/16")** **Concrete (Diamond core bit) : 65mm (2-9/16")** **Steel: 13mm (1/2")** **Wood: 24mm (15/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0-5,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,500**
Dimensions (L x W x H) Dimensi 体积	**279x66x208mm** **(10-7/8"x2-5/8"x8-3/16")**
Net Weight Berat Bersih 净重	**1.9kg (4.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HR1840 18mm (11/16")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Dust Cup (country-specific), Side Grip, Depth Gauge

2 modes | 459 W



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**470W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.4J** **Our experimental conditions: 1.4J**
Capacity Kapasiti 能力	**Concrete: 18mm (11/16")** **Core Bit: 35mm (1-3/8")** **Diamond Core Bit (Dry Type): 65mm (2-9/16")** **Steel: 13mm (1/2")/ Wood: 24mm (15/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,800**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,100**
Dimensions (L x W x H) Dimensi 体积	**285x75x208mm** **(11-1/4"x3"x8-3/16")**
Net Weight Berat Bersih 净重	**2.0 - 2.4kg (4.3 - 5.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

HR1841F 18mm (11/16")

Rotary Hammer
Tukul Putar
电锤



- **2 operation modes - "Hammering with Rotation" and "Rotation" only**
  2 mod operasi - "Mengetuk dengan Putaran" dan "Putaran" sahaja
  2种操作模式 - “旋转锤击”和“旋转”

*Dust Cup (country-specific), Side Grip, Depth Gauge

AVT ANTI VIBRATION TECHNOLOGY

2 modes | 459 W



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**470W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.4J** **Our experimental conditions: 1.4J**
Capacity Kapasiti 能力	**Concrete: 18mm (11/16")** **Core Bit: 35mm (1-3/8")** **Diamond Core Bit (Dry Type): 65mm (2-9/16")** **Steel: 13mm (1/2")/ Wood: 24mm (15/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,800**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 2,100**
Dimensions (L x W x H) Dimensi 体积	**285x75x208mm** **(11-1/4"x3"x8-3/16")**
Net Weight Berat Bersih 净重	**2.0 - 2.5kg (4.5 - 5.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

DHR241RFE / Z 20mm (13/16")

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Depth Gauge, Side Grip

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion | 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5 Ah
18V | 3 modes | 441 W




Impact Energy Kekuatan Impak 单次最大锤击力	**1.9J**
Capacity Kapasiti 能力	**Concrete: 20mm (13/16")** **Steel: 13mm (1/2")/ Wood: 26mm (1")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Dimensions (L x W x H) Dimensi 体积	**417x84x219mm** **(16-3/8"x3-5/16"x8-5/8")**
Net Weight Berat Bersih 净重	**3.2 - 4.0kg (7.1 - 8.8lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DHR202RME / RFE / Z 20mm (13/16")

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Depth Gauge, Side Grip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V | 3 modes | 441



Capacity Kapasiti 能力	**Concrete: 20mm (13/16")** **Steel: 13mm (1/2")/ Wood: 26mm (1")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Dimensions (L x W x H) Dimensi 体积	**358x84x259mm** **(14-1/8"x3-5/16"x10-1/4")**
Net Weight Berat Bersih 淨重	**3.2 - 4.0kg (7.1 - 8.8lbs)**

HR2020 20mm (3/4")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Side Grip, Depth Gauge

2 modes | 419



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Capacity Kapasiti 能力	**Concrete: 20mm (3/4")** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,050**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,050**
Overall Length Panjang Keseluruhan 总长度	**352mm (13-7/8")**
Net Weight Berat Bersih 淨重	**2.3kg (5.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

HR2230 22mm (7/8")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Side Grip, Depth Gauge

2 modes | 325



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Impact Energy Kapasiti 能力	**EPTA-Procedure 05/2009: 2.2J** **Our experimental conditions: 2.3J**
Capacity Kapasiti 能力	**Concrete: 22mm (7/8")** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,050**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,050**
Dimensions (L x W x H) Panjang Keseluruhan 总长度	**357x84x214mm (14"x3-5/16"x8-3/8")**
Net Weight Berat Bersih 淨重	**2.6 - 3.1kg (5.8 - 6.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HR2320T / X2 23mm (7/8")

Combination Hammer
Tukul Kombinasi
电冲击钻锤



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Side Handle, Depth Gauge, Quick Change Drill Chuck, SDS-Plus Drill & Chisel Set

- HR2320TX2 : with Quick Change Drill Chuck, SDS-Plus Drill & Chisel Set


3 modes | HR2320T **WHILE STOCKS LAST** Sementara stok masih ada 售完即止 | 325



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.3J** **Our experimental conditions: 2.6J**
Capacity Kapasiti 能力	**Concrete: 23mm (7/8")** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,200**
Dimensions (L x W x H) Dimensi 体积	**380x77x209mm** **(15"x3"x8-1/4")**
Net Weight Berat Bersih 淨重	**2.9 - 3.2kg (6.4 - 7.0 lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2 ft)**

DHR242RME / RFE / Z 24mm (15/16")

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击电钻电锤



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Depth Gauge, Side Grip

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V | 3 modes



Impact Energy Kekuatan Impak 单次最大锤击力	**2J**
Capacity Kapasiti 能力	**Concrete: 24mm (15/16")** **Steel: 13mm (1/2")/ Wood: 27mm (1-1/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,700**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 950**
Dimensions (L x W x H) Dimensi 体积	**328x85x213mm** **(12-7/8"x3-3/8"x8-3/8")**
Net Weight Berat Bersih 淨重	**3.1 - 3.8kg (6.7 - 8.4lbs)**

BL MOTOR XPT

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HR2470X5 24mm (15/16")

Combination Hammer
Tukul Kombinasi
电冲击钻锤



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Side Handle, Depth Gauge, Drill Chuck, SDS-Plus Bit Set, Bull Point

3 modes | 325 W



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**780W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.4J** **Our experimental conditions: 2.7J**
Capacity Kapasiti 能力	**Concrete: 24mm (15/16")** **Core Bit: 54mm (2-1/8")** **Steel: 13mm (1/2")** **Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Dimensions (L x W x H) Dimensi 体积	**370x84x214mm** **(14-1/2"x3-5/16"x8-3/8")**
Net Weight Berat Bersih 净重	**2.9 - 3.3kg (6.4 - 7.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

DHR263PM4 / RF4 / Z 26mm (1")

Cordless Combination Hammer
Tukul Kombinasi Tanpa Kord
充电式冲击钻锤



- **3-Mode operation for Rotation Only, Hammering with Rotation or Hammering Only**
  Menggerudi, Menukul sambil Menggerudi, Menukul
  仅钻，仅锤钻，仅锤

*Side Handle, Depth Gauge, Dust Cup (country-specific), Cleaning cloth (country-specific), Bit Grease (country-specific)

- PM4 : 1 x Two Port Multi Rapid Charger, 4 x 4.0Ah Battery
- RF4 : 1 x Rapid Charger, 4 x 3.0Ah Battery
- ZX : Without Charger & Battery

Li-ion Ah 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5 | 442 W

3 modes



Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.5J** **Our experimental conditions: 3.0J**
Capacity Kapasiti 能力	**Concrete/ Steel/ Wood:** **26/ 13/ 32mm (1"/ 1/2"/ 1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 5,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,250**
Dimensions (L x W x H) Dimensi 体积	**350x116x232mm** **(13-3/4"x4-9/16"x9-1/8")**
Net Weight Berat Bersih 净重	**4.1 - 5.1kg (9.0 - 11.3lbs)**

HR2631FT / X2 26mm (1")

Combination Hammer
Tukul Kombinasi
电冲击钻锤



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Side Handle, Depth Gauge, Quick Change Drill Chuck, SDS-Plus Drill & Chisel Set

- HR2631FTX2 : with Quick Change Drill Chuck, SDS-Plus Drill & Chisel Set

3 modes

HR2631FT
WHILE STOCKS LAST
Sementara stok masih ada
售完即止

325 W



Quick Change Drill Chuck

For **HR2631FTX2** only

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.4J** **Our experimental conditions: 2.9J**
Capacity Kapasiti 能力	**Concrete: 26mm (1")** **Core Bit: 68mm (2-11/16")** **Diamond Core Bit (Dry Type): 80mm (3-1/8")** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,200**
Dimensions (L x W x H) Dimensi 体积	**385x77x209mm** **(15-1/8"x3"x8-1/4")**
Net Weight Berat Bersih 净重	**3.1 - 3.6kg (6.8 - 7.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HR2611FT 26mm (1")

Combination Hammer
Tukul Kombinasi
电冲击钻锤



- **Extremely low vibration achieved by Anti-Vibration Technology**
  Getaran rendah dengan Teknologi anti-getaran AVT
  AVT防振技术降低振动

*Side Grip, Depth Gauge, Quick Change Drill Chuck

3 modes | 325 W

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Quick Change Drill Chuck

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**2.4J**
Capacity Kapasiti 能力	**Concrete: 26mm (1")** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0-4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,200**
Dimensions (L x W x H) Dimensi 体积	**385x77x209mm** **(15-1/8"x3"x8-1/4")**
Net Weight Berat Bersih 净重	**3.0kg (6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HR2630X3 26mm (1")

Combination Hammer
Tukul Kombinasi
电冲击钻锤



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Side Handle, Depth Gauge, Drill Chuck, SDS-Plus Drill & Chisel Set

3 modes | 325 W



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.4J** **Our experimental conditions: 2.9J**
Capacity Kapasiti 能力	**Concrete: 26mm (1")** **Core Bit: 68mm (2-11/16")** **Diamond Core Bit (Dry Type): 80mm (3-1/8")** **Steel: 13mm (1/2")** **Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,200**
Dimensions (L x W x H) Dimensi 体积	**385x77x209mm** **(15-1/8"x3"x8-1/4")**
Net Weight Berat Bersih 净重	**2.8 - 3.3kg (6.3 - 7.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



Equipped with HEPA Filter

Dilengkapi dengan Penapis HEPA 配备 HEPA 过滤器

which removes particles with an efficiency rating of 99.75% from the air passing through

yang menghilangkan zarah dengan penarafan kecekapan 99.75% dari udara yang melalui
从通过的空气中去除效率等级为99.75%的颗粒

Large Fan Provides Incredibly High Dust Extraction Power

Kipas besar untuk kuasa ekstraksi habuk yang sangat tinggi
大风扇提供令人难以置信的高除尘能力

High Rotation Speed


Kelajuan Putaran Tinggi
高旋转速度

20,900 min^{-1}

HR2651 26mm (1")

Combination Hammer with Self Dust Collection

Tukul Kombinasi dengan Sistem Pengumpulan Habuk
电冲击钻锤与集尘系统



- **See-through dust case for easy checking of collected dust amount**
  Tahap pengumpulan habuk mudah dilihat dengan kotak habuk lutsinar
  透视集尘盒方便检查集尘量

*Side Grip, Depth Gauge, Sealing Cap

3 modes

325



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.2J** **Our experimental conditions: 2.9J**
Capacity Kapasiti 能力	**Concrete: 26mm (1")** **Core Bit: 68mm (2-11/16")** **Diamond Core Bit: 80mm (3-1/8")** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,200**
Dimensions (L x W x H) Dimensi 体积	**604x89x228mm** **(23-3/4"x3-1/2"x9")**
Net Weight Berat Bersih 净重	**3.1 - 4.2kg (6.9 - 9.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

HR2650 26mm (1")

Combination Hammer with Self Dust Collection

Tukul Kombinasi dengan Sistem Pengumpulan Habuk
电冲击钻锤与集尘系统



- **See-through dust case for easy checking of collected dust amount**
  Tahap pengumpulan habuk mudah dilihat dengan kotak habuk lutsinar
  透视集尘盒方便检查集尘量

*Side Grip, Depth Gauge, Sealing Cap

3 modes

325




Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.2J** **Our experimental conditions: 2.9J**
Capacity Kapasiti 能力	**Concrete: 26mm (1")** **Core Bit: 68mm (2-11/16")** **Diamond Core Bit: 80mm (3-1/8")** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,200**
Dimensions (L x W x H) Dimensi 体积	**604x89x228mm** **(23-3/4"x3-1/2"x9")**
Net Weight Berat Bersih 净重	**3.0 - 4.1kg (6.7 - 9.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

HR2810 28mm (1-1/8")

Combination Hammer

Tukul Kombinasi
电冲击钻锤



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Depth Gauge, Side Grip

3 modes

325




Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 2.8J** **Our experimental conditions: 2.9J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 28mm (1-1/8")** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Dimensions (L x W x H) Dimensi 体积	**314x89x225mm** **(12-3/8"x3-1/2"x8-7/8")**
Net Weight Berat Bersih 净重	**3.4 - 3.8kg (7.5 - 8.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HR3210C 32mm (1-1/4")

Combination Hammer
Tukul Kombinasi
电冲击钻锤



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Depth Gauge, Side Grip, Grease vessel

3 modes | 350W



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 5J** **Our experimental conditions: 5.5J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 32mm (1-1/4")** **Steel: 13mm (1/2")** **Wood: 32mm (1-1/4")** **Concrete (Core bit) : 90mm (3-1/2")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,650 - 3,300**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**315 - 630**
Dimensions (L x W x H) Dimensi 体积	**398x114x239mm** **(15-5/8"x4-1/2"x9-3/8")**
Net Weight Berat Bersih 净重	**5.2 - 5.6kg (11.4 - 12.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR3200C 32mm (1-1/4")

Combination Hammer
Tukul Kombinasi
冲击电钻电锤



- **3-Mode operation; rotation only, hammering with rotation and hammering only**
  operasi 3 mod: hanya putaran, penukulan dengan putaran , penukulan sahaja
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Depth Gauge, Side Grip, Grease vessel

3 modes | 350W



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 5.1J** **Our experimental conditions: 5.5J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 32mm (1-1/4")** **Steel: 13mm (1/2")/ Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,650 - 3,300**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**315 - 630**
Dimensions (L x W x H) Dimensi 体积	**398x108x239mm** **(15-5/8"x4-1/4"x9-3/8")**
Net Weight Berat Bersih 净重	**4.8 - 5.2kg (10.5 - 11.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR3530 35mm (1-3/8")

Rotary Hammer
Tukul Putar
电锤



- **Compact and lightweight design**
  Kompak dan ringan
  小巧轻便

*Side Grip, Depth Gauge

350W



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Impact Energy Kekuatan Impak 单次最大锤击力	**Our experimental conditions: 6.2J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 35mm (1-3/8")** **Concrete (Core bit) : 105mm (4-1/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**3,100**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**760**
Dimensions (L x W x H) Dimensi 体积	**374x100x243mm** **(14-3/4"x3-15/16"x9-9/16")**
Net Weight Berat Bersih 净重	**5.8kg (12.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR4001C 40mm (1-9/16")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Depth Gauge, Side Grip, Grease vessel

2 modes | 350W



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Continuous RatingInput Input Kuasa Berterusan 额定输入功率	**1,100W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 6.8J** **Our experimental conditions: 9.5J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit): 40mm (1-9/16")** **Concrete (Core bit): 105mm (4-1/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,350-2,750**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**235-480**
Dimensions (L x W x H) Dimensi 体积	**468x106x261mm** **(18-1/2"x4-3/16"x10-1/4")**
Net Weight Berat Bersih 净重	**5.9kg (13.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR4002 40mm (1-9/16")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Side Grip, Bit Grease, Depth Gauge

2 modes | 350W



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 6.1J** **Our experimental conditions: 6.2J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 40mm (1-9/16")** **Concrete (Core bit) : 105mm (4-1/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**680**
Dimensions (L x W x H) Dimensi 体积	**458x114x256mm** **(18"x4-1/2 "x10-1/8")**
Net Weight Berat Bersih 净重	**6.6 - 6.8kg (14.6 - 15.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HR4003C 40mm (1-9/16")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作


*Depth Gauge, Side Handle, Bit Grease

2 modes

350



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 8.3J** **Our experimental conditions: 11.4J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 40mm (1-9/16")** **Concrete (Core bit) : 105mm (4-1/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,450 - 2,900**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**250 - 500**
Dimensions (L x W x H) Dimensi 体积	**479x106x263mm** **(18-11/16"x4-3/16"x10-3/8")**
Net Weight Berat Bersih 净重	**6.2 - 6.4kg (13.7 - 14.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

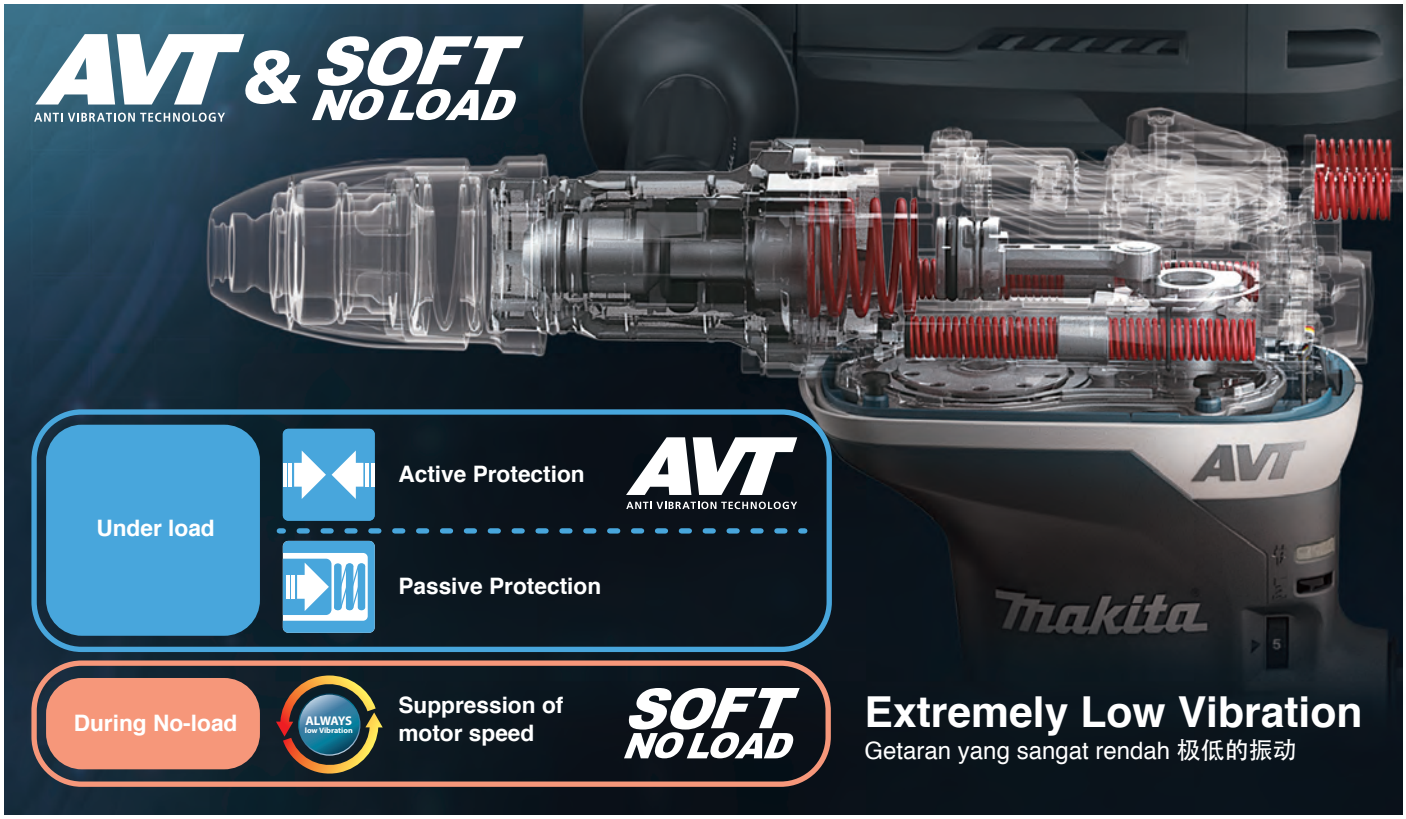

HR4013C 40mm (1-9/16")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Depth Gauge, Side Handle, Bit Grease

2 modes

350



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 8J** **Our experimental conditions: 11.4J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 40mm (1-9/16")** **Concrete (Core bit) : 105mm (4-1/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,450 - 2,900**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**250 - 500**
Dimensions (L x W x H) Dimensi 体积	**479x112x263mm** **(18-11/16"x4-3/8"x10-3/8")**
Net Weight Berat Bersih 净重	**6.8 - 6.9kg (14.9 - 15.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR4030C 40mm (1-9/16")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Depth Gauge, Side Grip

2 modes

350



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Impact Energy Kekuatan Impak 单次最大锤击力	**Our experimental conditions: 9.2J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 40mm (1-9/16")** **Concrete (Core bit) : 118mm (4-5/8")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,300 - 2,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**230 - 460**
Dimensions (L x W x H) Dimensi 体积	**413x107x247mm** **(16-1/4"x4-1/4"x9-3/4")**
Net Weight Berat Bersih 净重	**6.9kg (15.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HR4501C 45mm (1-3/4")

Rotary Hammer
Tukul Putar
电锤



- **High performance and durability**
  Prestasi dan ketahanan tinggi
  高性能兼耐用

*Side handle (D), Side Grip, Depth Gauge, Grease vessel

2 modes | 175



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,350W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 10.1J** **Our experimental conditions: 12.5J**
Capacity Kapasiti 能力	**Concrete (w/ T.C.T. bit) : 45mm (1-3/4")** **Concrete (w/ Core bit) : 125mm (5")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,250 - 2,750**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**130 - 280**
Dimensions (L x W x H) Dimensi 体积	**458x121x288mm** **(18"x4-3/4"x11-3/8")**
Net Weight Berat Bersih 净重	**8.2 - 8.4kg (18.1 - 18.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR4511C 45mm (1-3/4")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Side handle (D), Side Grip, Depth Gauge, Grease vessel

AVT


2 modes | 175



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,350W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 9.4J** **Our experimental conditions: 12.5J**
Capacity Kapasiti 能力	**Concrete (w/ T.C.T. bit) : 45mm (1-3/4")** **Concrete (w/ Core bit) : 125mm (5")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,250 - 2,750**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**130 - 280**
Dimensions (L x W x H) Dimensi 体积	**458x136x288mm** **(18"x5-3/8"x11-3/8")**
Net Weight Berat Bersih 净重	**9.0 - 9.1kg (19.8 - 20.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR5202C 52mm (2-1/16")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Side handle (D), Side Grip, Depth Gauge, Grease vessel

2 modes | 175



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 19.1J** **Our experimental conditions: 21J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 52mm (2")** **Concrete (Core bit) : 160mm (6-5/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,100 - 2,250**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**150 - 310**
Dimensions (L x W x H) Dimensi 体积	**599x134x287mm** **(23-1/2"x5-1/4"x11-1/4")**
Net Weight Berat Bersih 净重	**10.9 - 11.1kg (24.1 - 24.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR5211C 52mm (2-1/16")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Side handle (D), Side Grip, Depth Gauge, Grease vessel

AVT

2 modes | 175



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,500W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 18.9J** **Our experimental conditions: 20J**
Capacity Kapasiti 能力	**Concrete (w/ T.C.T. bit) : 52mm (2")** **Concrete (w/ Core bit) : 160mm (6-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,075 - 2,150**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**130 - 260**
Dimensions (L x W x H) Dimensi 体积	**599x149x287mm** **(23-1/2"x5-7/8"x11-1/4")**
Net Weight Berat Bersih 净重	**12.2kg (26.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HR5212C 52mm (2-1/16")

Rotary Hammer
Tukul Putar
电锤



- **2-Mode operation for Rotation Only or Hammering with Rotation**
  Operasi 2-Mod untuk Putaran Hanya atau Hammering with Rotation
  仅旋转或旋转锤击的双模式操作

*Side Handle, Side Grip, Depth Gauge, Grease vessel

AVT SOFT NO LOAD

2 modes | 175




Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 20J** **Our experimental conditions: 21J**
Capacity Kapasiti 能力	**Concrete (T.C.T. bit) : 52mm (2")** **Concrete (Core bit) : 160mm (6-5/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,100 - 2,250**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**150 - 310**
Dimensions (L x W x H) Dimensi 体积	**599x140x287mm** **(23-1/2"x5-1/2"x11-1/4")**
Net Weight Berat Bersih 净重	**11.9 - 12.0kg (26.2 - 26.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HM0810TA 17mm (11/16") Hex Shank

Demolition Hammer
Pemahat Tukul Elektrik
电动槌



- **Ideal for light chiseling, chipping and scaling operations**
  Sesuai untuk operasi ringan untuk pahatan, penyerpihan dan perskalaan
  适用于轻凿击，碎击和铲除原有表面等操作

*Bull Point, Hex Wrench, Side Grip

105



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 7.2J** **Our experimental conditions: 7.6J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,900**
Overall Length Panjang Keseluruhan 总长度	**428mm (16-7/8")**
Net Weight Berat Bersih 净重	**6.3kg (13.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM0870C

Demolition Hammer
Pemahat Tukul Elektrik
电动槌



- **Compact Power with Less Weight**
  Kompak dan ringan
  紧凑更量

*Grease for bit, Side Handle

350



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 7.6J** **Our experimental conditions: 11.4J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,100 - 2,650**
Dimensions (L x W x H) Dimensi 体积	**449x109x230mm** **(17-3/4"x4-1/4"x9")**
Net Weight Berat Bersih 净重	**5.1 - 5.3kg (11.1 - 11.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM0871C

Demolition Hammer
Pemahat Tukul Elektrik
电动槌



- **High durability and excellent demolition performance**
  Ketahanan dan prestasi yang tinggi
  高耐用性

*Grease for bit, Side Handle

AVT ANTI-VIBRATION TECHNOLOGY SOFT NO LOAD

350



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 8.1J** **Our experimental conditions: 11.6J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,100 - 2,650**
Dimensions (L x W x H) Dimensi 体积	**466x116x230mm** **(18-3/8"x4-9/16"x9")**
Net Weight Berat Bersih 净重	**5.6 - 5.8kg (12.4 - 12.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1201 21mm (13/16") Hex Shank

Demolition Hammer
Pemahat Tukul Elektrik
电动槌



- **Powerful impact from durable aluminum body**
  Tahan lama dan berkuasa
  耐用铝合金机身提供强大的冲击力

*Bull Point, Hex Wrench, Side Grip

155



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,130W**
Impact Energy Kekuatan Impak 单次最大锤击力	**Our experimental conditions: 13J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,000**
Overall Length Panjang Keseluruhan 总长度	**480mm (18-7/8")**
Net Weight Berat Bersih 净重	**9.1kg (20.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1213C

Demolition Hammer
Pemahat Tukul Elektrik
电动槌



- **Vibration absorbing handle provides comfortable operation**
  Pemegang menyerap getaran untuk operasi yang selesa
  吸振手柄提供舒适的操作

*Bull Point, Bit Grease, Side Handle

AVT ANTI-VIBRATION TECHNOLOGY SOFT NO LOAD

175



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 18.6J** **Our experimental conditions: 25.5J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**950 - 1,900**
Dimensions (L x W x H) Dimensi 体积	**576x149x265mm** **(22-3/4"x5-7/8"x10-3/8")**
Net Weight Berat Bersih 净重	**10.8kg (23.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HM1203C

Demolition Hammer
Pemahat Tukul Elektrik
电动槌



- **Increasing energy transfer for more power**
  Meningkatkan pemindahan tenaga untuk lebih banyak kuasa
  增加能量传递以获得更多电力

*Bull Point, Bit Grease, Side Handle

175



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 19.1J** **Our experimental conditions: 25.5J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**950 - 1,900**
Dimensions (L x W x H) Dimensi 体积	**576x128x265mm** **(22-3/4"x5"x10-3/8")**
Net Weight Berat Bersih 淨重	**9.7kg (21.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1214C

Demolition Hammer
Pemahat Tukul Elektrik
电动槌



- **Powerful 1,510W motor**
  Motor berkuasa 1,510W
  强大马达1,510W

*Bull Point, Bit Grease, Side Handle

AVT ANTI-VIBRATION TECHNOLOGY SOFT NO LOAD


175



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 19.9J** **Our experimental conditions: 26J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**950 - 1,900**
Dimensions (L x W x H) Dimensi 体积	**700x129x265mm** **(27-1/2"x5-1/8"x10-3/8")**
Net Weight Berat Bersih 淨重	**12.3kg (27.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1306 30mm (1-3/16") Hex Shank

Demolition Hammer
Pemahat Tukul Elektrik
电动槌



- **Powerful 1,510W motor**
  Motor berkuasa 1,510W
  强大马达1,510W

*Bull Point, Wrench, Side Handle, Oil supply 100ml

204



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 21.7J** **Our experimental conditions: 28.8J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,450**
Dimensions (L x W x H) Dimensi 体积	**652x121x231mm** **(25-3/4"x4-3/4"x9-1/8")**
Net Weight Berat Bersih 淨重	**15.1kg (33.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1317C 30mm (1-3/16") Hex Shank

Electric Breaker
Tukul Elektrik
电动鎚



- **High durability and excellent demolition performance**
  Ketahanan dan berprestasi tinggi
  高耐用性

*Side Handle

AVT ANTI-VIBRATION TECHNOLOGY SOFT NO LOAD

175



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009:** **25 (100-127 V: 21) J** **Our experimental conditions:** **33.8 J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**730 - 1,450**
Dimensions (L x W x H) Dimensi 体积	**715x129x266mm** **(28-1/8"x5-1/8"x10-1/2")**
Net Weight Berat Bersih 淨重	**17kg (37.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1307C 30mm (1-3/16") Hex Shank

Electric Breaker
Tukul Elektrik
电动鎚



- **Electronic Controller for Operator Convenience**
  Kawalan Elektronik memudahkan pengguna
  电子控制方便使用

*Side Handle

175



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 25.5J** **Our experimental conditions: 33.8J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**730 - 1,450**
Dimensions (L x W x H) Dimensi 体积	**715x129x266mm** **(28-1/8"x5-1/8"x10-1/2")**
Net Weight Berat Bersih 淨重	**15.3kg (33.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HM1810 28.6mm (1-1/8") Hex Shank

Electric Breaker
Tukul Elektrik
电动鎚



- **Powerful 2,000W motor**
  Motor berkuasa 2,000W
  强大马达2,000W

*Hex Wrench

AVT



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 44.9J** **Our experimental conditions: 63J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**1,100**
Dimensions (L x W x H) Dimensi 体积	**824x146x633mm** **(32-1/2"x5-3/4"x25")**
Net Weight Berat Bersih 淨重	**32.0kg (70.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HM1812 28.6mm (1-1/8") Hex Shank

Electric Breaker
Tukul Elektrik
电动鎚



- **Hits like air without the vibration**
  Tukulan mudah
  轻易槌击

*Bull Point, Hex Wrench

AVT SOFT NO LOAD



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 72.8J** **Our experimental conditions: 62J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**870**
Dimensions (L x W x H) Dimensi 体积	**843x210x608mm** **(33-1/4"x8-1/4"x24")**
Net Weight Berat Bersih 淨重	**31.3kg (69lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

HK1820

Power Scraper
Pengikis Elektrik
电动刮剥机



- **Large trigger switch with variable speed control function**
  Suis pencetus yang besar dengan fungsi kawalan kelajuan
  备用变速控制功能的大型触发开关

*Bull Point, Scaling Chisel, Scaling chisel (for tile), Hook complete



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**550W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 3.1J** **Our experimental conditions: 3.9J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 3,200**
Dimensions (L x W x H) Dimensi 体积	**351x102x203mm** **(13-3/4"x4"x8")**
Net Weight Berat Bersih 淨重	**3.4kg (7.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**



* **Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Combination / Rotary Hammer Drill Capability Chart

Jadual keupayaan gerudi 钻孔能力表

Tungsten Carbide-tipped usable range | Recommended range | Core bits | ✓✓✓ Optimal | ✓ Possible

			EPTA Weight (kg)	0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
14mm series	**HR140D** SDS-plus		1.9 - 2.6	3.2-14 3.2-10	✓	✓✓✓	✓	
16mm series	**DHR165** SDS-plus		2.3 - 3.0	3.2-16 3.2-10 35 Diamond core 32 (dry type)	✓	✓✓✓	✓	
16mm series	**HR166D** SDS-plus		1.8 - 2.4	3.2-16 3.2-10	✓	✓✓✓	✓	
17mm series	**DHR171** SDS-plus		2.1 - 2.8	3.2-17 3.2-10	✓	✓✓✓	✓	
18mm series	**HR1841F** SDS-plus		2.0 - 2.5	3.2-18 3.2-10 35 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
18mm series	**HR1840** SDS-plus		2.0 - 2.5	3.2-18 3.2-10 35 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
18mm series	**HR1830** SDS-plus		1.9	3.2-18 3.2-10 35 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
20mm series	**DHR202** SDS-plus		3.2 - 4.0	3.2-20 4-12 35-54 Diamond core 32 (dry type)	✓	✓✓✓	✓	
20mm series	**DHR241** SDS-plus		3.2 - 4.0	3.2-20 4-12 35-54 Diamond core 32 (dry type)	✓	✓✓✓	✓	
20mm series	**HR2020** SDS-plus		2.6	3.2-20 4-12 35-54 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
22mm series	**HR2230** SDS-plus		2.6 - 3.1	3.2-22 4-14 35-54 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
23mm series	**HR2320T** SDS-plus		2.9 - 3.2	3.2-23 4-15 35-68 Diamond core 32 ~ 70 (dry type)	✓	✓✓✓	✓	
24mm series	**DHR242** SDS-plus		3.1 - 3.8	3.2-24 4-16 35-54 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
24mm series	**HR2470** SDS-plus		2.9 - 3.3	3.2-24 4-16 35-54 Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	

			EPTA Weight (kg)	0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
26mm series	**DHR263** SDS-plus		4.1 - 5.1	3.2-26 4-18 / 35-54 / Diamond core 32 ~ 65 (dry type)	✓	✓✓✓	✓	
26mm series	**HR2651** SDS-plus		3.0 - 3.2	3.2-26 4-18 / 35-68 / Diamond core 32 ~ 80 (dry type)	✓	✓✓✓	✓	
26mm series	**HR2650** SDS-plus		3.0 - 3.2	3.2-26 4-18 / 35-68 / Diamond core 32 ~ 80 (dry type)	✓	✓✓✓	✓	
26mm series	**HR2631FT** SDS-plus		2.8 - 3.5	3.2-26 4-18 / 35-68 / Diamond core 32 ~ 80 (dry type)	✓	✓✓✓	✓	
26mm series	**HR2630** SDS-plus		2.8 - 3.5	3.2-26 4-18 / 35-68 / Diamond core 32 ~ 80 (dry type)	✓	✓✓✓	✓	
26mm series	**HR2611FT** SDS-plus		2.8 - 3.0	3.2-26 4-18 / 35-68 / Diamond core 32 ~ 80 (dry type)	✓	✓✓✓	✓	

			EPTA Weight (kg)	0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
28mm series	**HR2810** SDS-plus		3.4 - 3.9	3.2-28 6-20 / 35-80 / Diamond core 32 ~ 80 (dry type)	✓	✓✓✓	✓	

			EPTA Weight (kg)	0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
32mm series	**HR3210C** SDS-plus		4.8 - 5.6	4-32 10-22 / 35-90 / Diamond core 32 ~ 90 (dry type)	✓	✓✓✓	✓	
32mm series	**HR3200C** SDS-plus		4.8 - 5.6	4-32 10-22 / 35-90 / Diamond core 32 ~ 90 (dry type)	✓	✓✓✓	✓	

			EPTA Weight (kg)	0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
35mm series	**HR3530** 17mm Hex		5.8	10-35 12-25 / 25-105	✓✓✓	✓✓✓		

			EPTA Weight (kg)	0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
40mm series	**HR4013C** SDS-max		6.2 - 6.9	10-40 16-35 / 20-105	✓✓✓	✓✓✓		
40mm series	**HR4003C** SDS-max		6.2 - 6.9	10-40 16-35 / 20-105	✓✓✓	✓✓✓		
40mm series	**HR4001C** SDS-max		6.3 - 6.7	10-40 16-35 / 20-105	✓✓✓	✓✓✓		
40mm series	**HR4002** SDS-max		6.6 - 6.8	10-40 16-32 / 20-105	✓✓✓	✓✓✓		
40mm series	**HR4030C** 17mm Hex		6.9	10-40 22-35 / 25-118	✓✓✓	✓✓✓		

			EPTA Weight (kg)	0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
45mm series	**HR4511C** SDS-max		8.9 - 9.1	10-45 22-40 / 20-125	✓✓✓	✓✓✓		
45mm series	**HR4501C** SDS-max		8.9 - 9.1	10-45 22-40 / 20-125	✓✓✓	✓✓✓		

			EPTA Weight (kg)	0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160	MATERIAL FOR DRILLING: Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood	Working direction
52mm series	**HR5212C** SDS-max		11 - 12	19-52 25-45 / 20-160	✓✓✓	✓✓✓		
52mm series	**HR5202C** SDS-max		11 - 12	19-52 25-45 / 20-160	✓✓✓	✓✓✓		
52mm series	**HR5211C** SDS-max		11.3 - 12.2	19-52 25-45 / 20-160	✓✓✓	✓✓✓		

Cutting

Pemotong 切割

CC301DWME / WAE / Z 85mm (3-3/8")

Cordless Cutter
Pemotong Tanpa Kord
充电式切割机



- **Designed for cutting glass and ceramic tile**
  Direka untuk memotong kaca dan jubin seramik
  为切割玻璃和瓷砖而设

*Diamond Wheel, Water Supply Tank Assembly, Hex Wrench

- WME : 1 x Standard Charger, 2 x 4.0Ah Battery
- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery

Li-ion Ah 4.0 2.0 1.5
12V max



Blade Diameter Diameter Bilah 锯片直径	**85mm (3-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 25.5mm (1")** **45°: 16.5mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,600**
Tank Capacity Kapasiti Tangki 水箱容量	**Water : 0.5L**
Dimensions (L x W x H) Dimensi 体积	**313x170x125mm** **(12-3/8"x6-11/16"x4-7/8")**
Net Weight Berat Bersih 净重	**1.9kg (4.1lbs)**

CC300DW / Z 85mm (3-3/8")

Cordless Cutter
Pemotong Tanpa Wayar
充电式切割机



- **Adjustable cutting depth up to 25.5mm at 90° and 16.5mm at 45°**
  Kedalaman pemotongan boleh laras sehingga 25.5mm pada 90° dan 16.5mm pada 45°
  可调节的切割深度于90° 达25.5mm，45° 达16.5mm

*Diamond Wheel, Water Supply Tank Assembly, Hex Wrench

- W : 1 x Standard Charger, 1 x 1.3Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 1.3
10.8V



Blade Diameter Diameter Bilah 锯片直径	**85mm (3-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 25.5mm (1")** **45°: 16.5mm (5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,400**
Tank capacity Kapasiti Tangki 水箱容量	**Water : 0.5L**
Dimensions (L x W x H) Dimensi 体积	**300x170x154mm** **(11-3/4"x6-11/16"x6-1/16")**
Net weight Berat Bersih 净重	**16kg (3.6lbs)**

4100NH 110mm (4-3/8")

Cutter
Mesin Pemotong
切割机



- **Powerful cutting in stone, masonry, tile & concrete**
  Berkuasa untuk memotong batu, masonri, jubin & konkrit
  有力的切割石材，砖石，瓷砖和混凝土

*Water Supply Plug (country-specific), Vinyl Tube (country-specific), Wrench, Socket Wrench

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Blade Diameter Diameter Bilah 锯片直径	**110mm (4-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 34mm (1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**14,500**
Dimensions (L x W x H) Dimensi 体积	**234x210x165mm** **(9-1/4"x8-1/4"x6-1/2")**
Net Weight Berat Bersih 净重	**2.9kg (6.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

4100NH2Z 110mm (4-3/8")

Cutter
Mesin Pemotong
切割机



- **Bevel-cuts up to 45 degrees**
  Potongan serong hingga 45°
  45° 斜角切割

*Water Supply Plug (country-specific), Vinyl Tube (country-specific), Wrench, Hex Wrench

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Blade Diameter Diameter Bilah 锯片直径	**Max 125mm (Max 5")**
Max Cutting Capacity w/ 110mm (4-3/8") wheel Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 32.5mm (1-1/4")** **45°: 21.5mm (7/8")**
Max Cutting Capacity w/ 125mm (5") wheel Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 40.0mm (1-9/16")** **45°: 27.0mm (1-1/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,200**
Dimensions (L x W x H) Dimensi 体积	**238x214x169mm** **(9-3/8"x8-3/8"x6-5/8")**
Net Weight Berat Bersih 净重	**3kg (6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

4100NH3Z 110mm (4-3/8")

Cutter
Mesin Pemotong
切割机



- **Specialized for right angle cutting only**
  Khusus untuk pemotongan sudut kanan sahaja
  专为右斜角切割而设

*Water Supply Pipe Set (country-specific), Wrench, Hex Wrench

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Blade Diameter Diameter Bilah 锯片直径	**110mm (4-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 32mm (1-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**13,800**
Dimensions (L x W x H) Dimensi 体积	**227x209x166mm** **(8-15/16"x8-1/4"x6-1/2")**
Net Weight Berat Bersih 净重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

4105KB 125mm (5")

Dustless Cutter
Mesin Pemotong
切割机



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

100



- **Popular, dust-free performer for faster and cleaner dry-cutting**
  pemotongan kering bebas habuk yang lebih cepat dan bersih
  更快更干净的无尘干式切割

*Wrench, Hex Wrench, Dust bag assembly

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Capacity Diameter Bilah 锯片直径	**Max cutting : 40mm (1-5/8")**
Blade Diameter Kapasiti Pemotongan Maksimum 最大切割能力	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**7,500**
Overall Length Panjang Keseluruhan 总长度	**230mm (9")**
Net Weight Berat Bersih 净重	**3.1kg (6.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**



4100KB 125mm (5")

Dustless Cutter
Mesin Pemotong
切割机



303

NEW
BARU | 新



- **Powerful 1,400W motor, cutting in stone, masonry, tile, concrete & more**
  Motor berkuasa 1,400W, untuk memotong batu, masonri, jubin, konkrit dll
  强力1,400W马达适合切割石材，砖石，瓷砖，混凝土等

*Diamond Wheel, Dust Bag, Wrench, Hex Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Blade Diameter Diameter Bilah 锯片直径	**125mm (5")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**40.0mm (1-9/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,200**
Dimensions (L x W x H) Dimensi 体积	**231x220x179mm (9-1/8"x8-5/8"x7")**
Net Weight Berat Bersih 净重	**3.0kg (6.6lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

4107R 180mm (7-1/8")

Cutter
Mesin Pemotong
切割机



153



- **Ideal for stone materials (such as granite and marble), concrete and asphalt**
  Sesuai untuk bahan batu seperti granit, marma,konkrit dan asfalt bahan
  适用于石材如花岗岩，大理石，混凝土和沥青

*Socket Wrench, Offset Wrench, Water plug & tube

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Capacity Kapasiti 能力	**Max cutting : 60mm (2-3/8")**
Blade Diameter Diameter Bilah 锯片直径	**180mm (7-1/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,000**
Overall Length Panjang Keseluruhan 总长度	**370mm (14-9/16")**
Net Weight Berat Bersih 净重	**6.3kg (14.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

4112HS 305mm (12")

Angle Cutter
Mesin Pemotong
切割机



204



- **Smooth and comfortable cutting**
  Pemotongan lancar dan selesa
  平滑切割

*Socket Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,400W**
Capacity Kapasiti 能力	**Max cutting : 100mm (4")**
Blade Diameter Diameter Bilah 锯片直径	**305mm (12")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,000**
Overall Length Panjang Keseluruhan 总长度	**648mm (25-1/2")**
Net Weight Berat Bersih 净重	**10.4kg (22.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

4114S 355mm (14")

Angle Cutter
Mesin Pemotong
切割机



- **Faster cutting for increased productivity**
  Pemotongan cepat meningkatkan produktiviti
  更快的切割提高生产力

*Wrench

204



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,400W**
Capacity Kapasiti 能力	**Max cutting : 125mm (5")**
Wheel Diameter Diameter Bilah 锯片直径	**355mm (14")**
Hole Diameter Diameter Lubang 孔直径	**25.4mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,500**
Dimensions (L x W x H) Dimensi 体积	**673x240x329mm (26-1/2"x9-1/2"x13")**
Net Weight Berat Bersih 净重	**10.8kg (23.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

SG1251J 125mm (5")

Wall Chaser
Mesin Pemotong Dinding
石材开槽切割机



- **Clean, compact and comfortable**
  Bersih, padat dan selesa
  干净，紧凑，舒适

*Hex Wrench, Lock Nut Wrench

318



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Capacity Kapasiti 能力	**Depth : 0-30mm (0 - 1-3/16")** **Width: 6-30mm (1/4 - 1-3/16")**
Blade Diameter Diameter Bilah 锯片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**10,000**
Dimensions (L x W x H) Dimensi 体积	**350x151x178mm (13-3/4"x5-15/16"x7")**
Net Weight Berat Bersih 净重	**4.3kg (9.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

DCS551RMJ / RFJ / Z 150mm (5-7/8")

Cordless Metal Cutter
Pemotong Logam Tanpa Kord
充电式金属切割机



- **Cuts 51mm (2") conduit in a single pass**
  Memotong konkrit 51mm (2") dalam satu potongan
  一次性切割51mm(2")导管

*TCT Saw Blade, Hex Wrench, Safety Goggles

- RMJ : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RFJ : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Blade Diameter Diameter Bilah 锯片直径	**150mm (5-7/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 57.5mm (2-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,900**
Dimensions (L x W x H) Dimensi 体积	**332x158x231mm (13-1/8"x6-1/4"x9-1/8")**
Net weight Berat Bersih 净重	**2.5 - 2.8kg (5.5 - 6.2lbs)**

DCS550RFE / Z 136mm (5-3/8")

Cordless Metal Cutter
Pemotong Logam Tanpa Kord
充电式金属切割机



- **Carbide-tipped 30T blade for cutting a wide range of materials**
  Bilah carbide tip 30T untuk pemotongan pelbagai bahan
  硬质合金尖30T锯片用于切割各种材料

*TCT Saw Blade, Hex Wrench, Safety Goggles

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

440



Blade Diameter Diameter Bilah 锯片直径	**136mm (5-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 51mm (2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,600**
Dimensions (L x W x H) Dimensi 体积	**348x180x201mm (13-3/4"x7-1/8"x7-7/8")**
Net weight Berat Bersih 净重	**2.2 - 2.6kg (4.9 - 5.7lbs)**

4131 185mm (7-1/4")

Metal Cutter
Mesin Memotong Logam
金属切割机



- **Powerful 1,100W motor cuts through various types of metal**
  Motor berkuasa 1,100W sesuai untuk memotong pelbagai jenis logam
  强力1,100W马达可切割多种金属

*Carbide-Tipped Saw Blade, Hex Wrench, Safety Goggles

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Blade Diameter Diameter Bilah 锯片直径	**185mm (7-1/4")**
Capacity Kapasiti 能力	**Max cutting : 63mm (2-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,500**
Overall Length Panjang Keseluruhan 总长度	**358mm (14-1/8")**
Net Weight Berat Bersih 净重	**4.8kg (11.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DPB180Z

Cordless Portable Band Saw

Gergaji Pita Tanpa Kord
充电式轻便带锯



- **6-Setting variable speed control dial enables user to match the speed to the application**
  Kawalan kelajuan 6 tahap untuk pelbagai aplikasi
  6速度控制适合多种用途

*Band Saw Blade, Hex Wrench

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V | 430




Capacity Kapasiti 能力	**Round:** **120mm (4-3/4")** **Rectangular workpiece w/o stand:** **120x120mm (4-3/4"x4-3/4")**
Blade Speed Kelajuan Bilah 刀片速度	**1.4-2.7m/s (275-530ft/min.)**
Dimensions (L x W x H) Dimensi 体积	**523x231x313mm** **(20-5/8"x9-1/8"x12-3/8")**
Net Weight Berat Bersih 淨重	**6.8 - 7.1kg (14.9 - 15.7lbs)**

DPB181Z

Cordless Portable Band Saw

Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式轻便带锯



- **Lightweight design with excellent balance**
  Reka bentuk ringan dengan keseimbangan yang sangat baik
  轻巧且平衡性好

*Band Saw Blade, Hex Wrench

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V



Capacity Kapasiti 能力	**Round:** **64mm (2-1/2")** **Rectangular workpiece w/o stand:** **64x64mm (2-1/2"x2-1/2")**
Blade Speed Kelajuan Bilah 刀片速度	**3.2m/s (630ft/min.)**
Dimensions (L x W x H) Dimensi 体积	**468x197x233mm** **(18-1/2"x7-3/4"x9-1/8")**
Net Weight Berat Bersih 淨重	**3.3 - 3.6kg (7.3 - 8.0lbs)**



2107F

Portable Band Saw

Pemotong Ringan
轻便带锯



- **Built-in fluorescent job light for clear view**
  Lampu kerja fluoresen terbina dalam untuk penglihatan jelas
  内置荧光工作灯，确保清晰视野

*Band Saw Blade, Hex Wrench

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Capacity Kapasiti 能力	**Round:** **120mm (4-3/4")** **Rectangular workpiece w/o stand:** **120x120mm (4-3/4"x4-3/4")**
Blade Speed Kelajuan Bilah 刀片速度	**60m (200ft) - 105m (350ft)/ min**
Dimensions (L x W x H) Dimensi 体积	**508x188x256mm** **(20"x7-3/8"x10-1/8")**
Net Weight Berat Bersih 淨重	**6.3kg (13.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DJN161Z 1.6mm (16Ga)

Cordless Nibbler

Tukul Pemutar Skru Bergerudi Tanpa Kord
充电式电冲剪



- **Ideal for cutting roofing sheet metal at thicknesses up to 16 gauge**
  Sesuai untuk memotong logam lembaran bumbung
  非常适合切割屋顶钣金

*Hex Wrench, Wrench, Punch, Die

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 | 18V | 430



Capacity Kapasiti 能力	**Steel up to 400 N/mm² : 1.6mm** **Steel up to 600 N/mm² : 1.2mm** **Aluminum up to 200 N/mm² : 2.5mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**Inside edge : 45mm (1-3/4")** **Outside edge : 50mm (2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**1,900**
Dimensions (L x W x H) Dimensi 体积	**313x78x189mm** **(12-3/8"x3-1/16"x7-7/16")**
Net weight Berat Bersih 淨重	**1.9 - 2.3kg (4.3 - 5.0lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

JN1601 1.6mm (16Ga)

Nibbler
Pemotong Elektrik
电冲剪



411



- **2,200 SPM for faster and smooth cutting**
  2,200 SPM untuk pemotongan cepat dan lancar
  2200 SPM更快更顺畅地切割

*Hex Wrench, Wrench, Punch, Die

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**550W**
Capacity Kapasiti 能力	**Steel up to 400 N/mm² : 1.6mm** **Steel up to 600 N/mm² : 1.2mm** **Steel up to 800 N/mm² : 0.8mm** **Aluminum up to 200 N/mm² : 2.5mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**Outside edge : 50mm (2")** **Inside edge : 45mm (1-3/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,200**
Overall Length Panjang Keseluruhan 总长度	**261mm (10-1/4")**
Net Weight Berat Bersih 淨重	**1.6kg (3.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

JN3201 3.2mm (10Ga)

Nibbler
Pemotong Elektrik
电冲剪



303



- **Built-in thickness gauge for operator convenience**
  Penyukat ketebalan terbina dalam memudahkan pengguna
  内置测厚仪方便使用

*Punch, Die, Wrench 50, Hex Wrench, Washer

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Capacity Kapasiti 能力	**Steel up to 400 N/mm² : 3.2mm** **Steel up to 600 N/mm² : 2.5mm** **Steel up to 800 N/mm² : 1.0mm** **Aluminum up to 200 N/mm² : 3.5mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**Outside edge : 128mm (5-1/16")** **Inside edge : 120mm (4-3/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**1,300**
Dimensions (L x W x H) Dimensi 体积	**225x90x254mm** **(8-7/8"x-1/2"x10")**
Net Weight Berat Bersih 淨重	**3.4kg (7.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**



DJS161Z 1.6mm

Cordless Straight Shear
Pemotong Logam Lurus
Tanpa Kord
充电式电剪压穿式



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

430



- **High cutting capacity: cuts up to 1.6mm thick mild steel sheet**
  Kapasiti pemotongan tinggi
  切割能力高

*Hex Wrench, Thickness Gauge
• Z : Without Charger & Battery

Capacity Kapasiti 能力	**Steel up to 400 N/mm² : 1.6mm** **Steel up to 600 N/mm² : 1.2mm** **Aluminum up to 200 N/mm² : 2.5mm**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,300**
Dimensions (L x W x H) Dimensi 体积	**362x78x118mm** **(14-1/4"x3-1/16"x4-5/8")**
Net weight Berat Bersih 淨重	**1.8 - 2.2kg (4.1 - 4.8lbs)**

JS1601 1.6mm (16Ga)

Straight Metal Shear
Pemotong Elektrik
电剪刀



459



- **Fast Cutting Action in Steel and Aluminum**
  Pemotongan Cepat untuk Keluli dan Aluminium
  快速切割钢和铝

*Hex Wrench, Thickness Gauge

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**380W**
Capacity Kapasiti 能力	**Steel up to 400N/mm² : 1.6mm** **Steel up to 600N/mm² : 1.2mm** **Steel up to 800N/mm² : 0.8mm** **Aluminum up to 200N/mm² : 2.5mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**250mm (9-7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,500**
Dimensions (L x W x H) Dimensi 体积	**320x70x78mm** **(12-5/8"x2-3/4"x3-1/16")**
Net Weight Berat Bersih 淨重	**1.4kg (3.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

JS1300 1.3mm

Straight Shear
Pemotong Elektrik
电剪刀



- **Shear head attachment rotates 360°**
  Kepala pemotong boleh berputar 360 °
  剪切头附件可旋转360°

*Hex Wrench

419



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Capacity Kapasiti 能力	**Steel up to 400N/mm² : 1.3mm** **Steel up to 600N/mm² : 1.0mm** **Steel up to 800N/mm² : 0.5mm** **Aluminum up to 200N/mm² : 2.5mm**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-2,500**
Overall Length Panjang Keseluruhan 总长度	**302mm (11-7/8")**
Net Weight Berat Bersih 淨重	**1.8kg (3.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DJS130RFE / Z 1.3mm

Cordless Metal Shear
Pemotong Logam Tanpa Kord
充电式电剪



- **360° swivel shear head for increased cutting convenience**
  Pusingan kepala pemotong 360° meningkatkan keselesaan pemotongan
  360° 旋转切割头 方便简易切割

*Hex Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

440



Capacity Kapasiti 能力	**Steel up to 400 N/mm² : 1.3mm** **Steel up to 600 N/mm² : 1.0mm**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800**
Dimensions (L x W x H) Dimensi 体积	**350x80x193mm** **(13-3/4"x3-1/8"x7-5/8")**
Net weight Berat Bersih 淨重	**2.3 - 2.6kg (5.0 - 5.8lbs)**



DJS101Z 1.0mm

Cordless Metal Shear
Pemotong Logam Tanpa Kord
充电式电剪



- **Easy curve cutting with a smooth edge**
  Memudahkan pemotongan lengkung
  简易切割曲线，切口边缘顺滑

*Hex Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

430



Capacity Kapasiti 能力	**Steel up to 400 N/mm² : 1.0mm** **Steel up to 600 N/mm² : 0.7mm** **Aluminum up to 200 N/mm² : 2.5mm**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,300**
Dimensions (L x W x H) Dimensi 体积	**364x78x118mm** **(14-3/8"x3-1/16"x4-5/8")**
Net weight Berat Bersih 淨重	**1.8 - 2.2kg (4.0 - 4.7lbs)**

JS1602 1.6mm (16Ga)

Metal Shear
Pemotong Elektrik
电剪刀



- **Fast and efficient cutting**
  Pemotongan cepat dan cekap
  快速高效的切割

*Hex Wrench

459



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**380W**
Capacity Kapasiti 能力	**Steel up to 400N/mm² : 1.6mm** **Steel up to 600N/mm² : 1.2mm** **Steel up to 800N/mm² : 0.8mm** **Aluminum up to 200N/mm² : 2.5mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**30mm (1-3/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,000**
Dimensions (L x W x H) Dimensi 体积	**255x74x146mm** **(10"x2-15/16"x5-3/4")**
Net Weight Berat Bersih 淨重	**1.6kg (3.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

JS3201 3.2mm (10Ga)

Metal Shear
Pemotong Elektrik
电剪刀



- **Powerful 710W Motor**
  Motor berkuasa 710W
  强力710W马达

*Shear blades set, Hex Wrench, Thickness Gauge


303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Capacity Kapasiti 能力	**Steel up to 400N/mm² : 3.2mm** **Steel up to 600N/mm² : 2.5mm** **Steel up to 800N/mm² : 1.5mm** **Aluminum up to 200N/mm² : 4.0mm**
Min. Cutting Radius Radius Pemotongan Minimum 最小切割半径	**50mm (2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**1,600**
Dimensions (L x W x H) Dimensi 体积	**213x90x239mm** **(8-3/8"x3-1/2"x9-3/8")**
Net Weight Berat Bersih 淨重	**3.4kg (7.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**



Enables you to cut grooves in aluminium composite materials such as exterior wall panels
Membolehkan anda memotong alur dalam bahan komposit aluminium seperti panel dinding luar 使您能够在铝合金材料(如外墙板)上切割凹槽

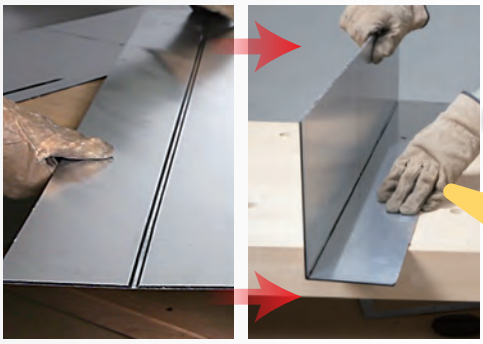



CA5000X 118mm (4-5/8")

Aluminum Groove Cutter
Mesin Memotong Aluminium
铝板开槽切割机



- **Cutter blade for 135 degrees V shaped groove as an option**
  Bilah pemotong alur 135° berbentuk V pemilihan
  可选135° V形槽的锯片

*Cutter Blade, Plate, Hex Wrench


303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Blade Bilah 锯片	**Type : Cutter blade/ TCT saw blade**
Max Cutting Capacity w/ Cutter blade Kapasiti Pemotongan Maksimum 最大切割能力	**w/ Guide rail: 11mm (7/16")**
Max Cutting Capacity w/ TCT Saw blade Kapasiti Pemotongan Maksimum 最大切割能力	**w/ Guide rail: 36mm (1-7/16")** **w/o Guide rail: 41mm (1-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,200-6,400**
Dimensions (L x W x H) Dimensi 体积	**346x250x250mm** **(13-5/8"x9-7/8"x9-7/8")**
Net Weight Berat Bersih 淨重	**4.7kg (10.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

CP100DSM / WA / Z

Cordless Multi Cutter
Pemotong Pelbagai Fungsi Tanpa Kord
充电式多功能电剪



- **Cuts thin and thick material up to 6mm such as cardboard, carpet, fabrics, leather, CD, DVD & Blu-ray**
  Memotong bahan setebal 6mm seperti kadbod, karpet, kain, kulit, CD, DVD dan Blu-ray
  切割厚达6mm的厚薄材料，如纸板，地毯，织物，皮革，CD，DVD 等

*Blade
- SM : 1 x Speed Charger, 1 x 4.0Ah Battery
- WA : 1 x Standard Charger, 1 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12V max



Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**6mm (1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**300**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 272x66x120mm** **(10-3/4"x2-5/8"x4-3/4")** **BL1041B: 291x66x121mm** **(11-1/2"x2-5/8"x4-3/4")**
Net Weight Berat Bersih 淨重	**0.72 - 0.88kg (1.6 - 1.9lbs)**

Refer Pg.77
for more information

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

LC1230 305mm (12")

Metal Cutting Saw
Mesin Memotong Logam
金属型材切割机



- **For Cutting in Pipe, Angle Iron, Conduit and More**
  Untuk pemotongan paip, sesiku besi, konduit dan banyak lagi
  用于切割管道，角铁，导管等

*Carbide-Tipped Saw Blade, Socket Wrench, Safety Goggles



203

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,750W**
Blade Diameter Diameter Bilah 锯片直径	**305mm (12")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 115mm (4-1/2")** **90°: 75 x 150mm (2-15/16" x 5-7/8")** **45°: 90mm (3-1/2")** **45°: 85 x 85mm (3-5/16" x 3-5/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,300**
Dimensions (L x W x H) Dimensi 体积	**516x306x603mm** **(20-1/4"x12"x23-3/4")**
Net Weight Berat Bersih 净重	**19.3kg (42.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LW1400 355mm (14")

Portable Cut-off
Mesin Pemotong
型材切割机



- **Large spark guard prevents backward scattering of spark**
  Pengawal pencucuh menghalang hamburan mundur dari percikan api
  大的火花防护装置可防止火花向后散射

*Abrasive Cut-Off Wheel



203

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Bilah 锯片直径	**355mm (14")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Capacity at 45° Kapasiti 能力	**Round: 127mm (5")** **Rectangular: 115x103mm (4-1/2"x4-1/16")** **Square: 106x106 mm (4-3/16"x4-3/16")** **Triangular: 100x100x10mm (4"x4"x3/8")**
Dimensions (L x W x H) Dimensi 体积	**530x295x640mm** **(20-7/8"x11-5/8"x25-1/4")**
Net Weight Berat Bersih 净重	**18.7kg (41.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LW1401 355mm (14")

Portable Cut-off
Mesin Pemotong
型材切割机



- **Powerful 2,200W motor**
  Motor berkuasa 2,200W
  强力2200W马达

*Abrasive Cut-Off Wheel, Socket Wrench



203

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Bilah 锯片直径	**355mm (14")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Capacity at 45° Kapasiti 能力	**Round: 127mm (5")** **Rectangular: 115x103mm (4-1/2"x4-1/16")** **Square: 106x106mm (4-3/16"x4-3/16")** **Triangular: 100x100x10mm (4"x4"x3/8")**
Dimensions (L x W x H) Dimensi 体积	**500x295x640mm** **(19-3/4"x11-5/8"x25-1/4")**
Net Weight Berat Bersih 净重	**18.3kg (40.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

2416S 405mm (16")

Portable Cut-off
Mesin Pemotong
型材切割机






- **Mitres 45° Left And Right**
  Potongan miter 45° kiri dan kanan
  左右45° 斜切割

*Abrasive Cut-Off Wheel, Socket Wrench



153

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,430W**
Wheel Diameter Diameter Bilah 锯片直径	**405mm (16")**
Hole Diameter Diameter Lubang 孔直径	**25.4mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,300**
Dimensions (L x W x H) Dimensi 体积	**610x265x535mm** **(24"x10-3/8"x21")**
Net Weight Berat Bersih 净重	**19.2kg (42.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

					
Model No. 型号	**Cutting Angle** Sudut Pemotongan 切割角度	**Round Pipe** Tiub Bulat 圆管	**Rectangular Metal** Logam Segi Empat Tepat 长方形金属	**Square Metal** Logam Segi Empat 方形金属	**Angle Bar** Besi Sudut 角铁
LC1230	**90°**	**115mm**	**150 x 75mm**	**100mm**	**100mm**
	45°	**90mm**	**85 x 85mm**	**85mm**	**85mm**
LW1400	**90°**	**127mm**	**233 x 70mm**	**119mm**	**137mm**
	45°	**127mm**	**115 x 103mm**	**106mm**	**100mm**
LW1401	**90°**	**127mm**	**233 x 70mm**	**119mm**	**137mm**
	45°	**127mm**	**115 x 103mm**	**106mm**	**100mm**
2416S	**90°**	**115mm**	**230 x 80mm**	**120mm**	**150mm**
	45°	**115mm**	**110 x 110mm**	**110mm**	**110mm**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DSC250ZK

Cordless Steel Rod Cutter
Pemotong Keluli Tanpa Kord
充电式钢筋切割机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **Ideal for edge cutting of threaded rods and rebars**
  Sesuai untuk pemotongan tepi batang dan rebar
  非常适合螺纹杆和钢筋的边缘切割

*Tipped Saw, Dust Bag, Side Grip, Hex Wrench

• Z : Without Charger & Battery

BL MOTOR ADT

Blade Diameter Diameter Bilah 锯片直径	**110mm (4-5/16")**
Cutting Capacity Kapasiti Pemotongan 切割能力	**Dia.: 10 - 25mm (3/8" - 1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,200**
Dimensions (L x W x H) Dimensi 体积	**471x137x139mm (18-1/2"x5-3/8"x5-1/2")**
Net Weight Berat Bersih 淨重	**3.9 - 4.0kg (8.7 - 8.8lbs)**

Refer Pg. 44
for more information

DSC191Z

Cordless Steel Rod Cutter
Pemotong Keluli Tanpa Kord
充电式钢筋切割机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

440 mm

18V



- **Ideal for cutting steel bars laid in concrete slab**
  Sesuai untuk memotong konkrit bertetulang
  适用于切割钢筋混凝土

*Wrench, Hex Wrench, Oil supply (country-specific)

• Z : Without Charger & Battery

Cutting Capacity Kapasiti Pemotongan 切割能力	**Dia.: 3 - 20mm (1/8" - 3/4")**
Cutting Speed (sec) Kelajuan Memotong 切割速度	**6.5**
Dimensions (L x W x H) Dimensi 体积	**412x212x284mm (16-1/5"x8-3/8"x11-1/8")**
Net Weight Berat Bersih 淨重	**11.1 - 11.2kg (24.5 - 24.6lbs)**

DSC162Z

Cordless Steel Rod Cutter
Pemotong Keluli Tanpa Kord
充电式钢筋切割机

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

440 mm

18V



- **4-Way rotatable cutting blade provides up to 4,000 cuts before needing to be replaced**
  Potongan sehingga 4000 kali dengan bilah pemotong berputar 4
  4段旋转切割刀片可提供高达4000个切割

*Wrench, Hex Wrench, Oil supply (country-specific)

• Z : Without Charger & Battery

Cutting Capacity Kapasiti Pemotongan 切割能力	**Dia.: 3 - 16mm (1/8" - 5/8")**
Cutting Speed (sec) Kelajuan Memotong 切割速度	**4.0**
Dimensions (L x W x H) Dimensi 体积	**380x108x265mm (15"x4-1/4"x10-3/8")**
Net Weight Berat Bersih 淨重	**7.1 - 7.2kg (15.7 - 15.8lbs)**



*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



Grinding | Sanding


Pengisar I Pelicin 研削 | 研磨




SJS II
SUPER JOINT SYSTEM

To suppress vibration to operator

Menahan getaran 在操作时能抑止震动

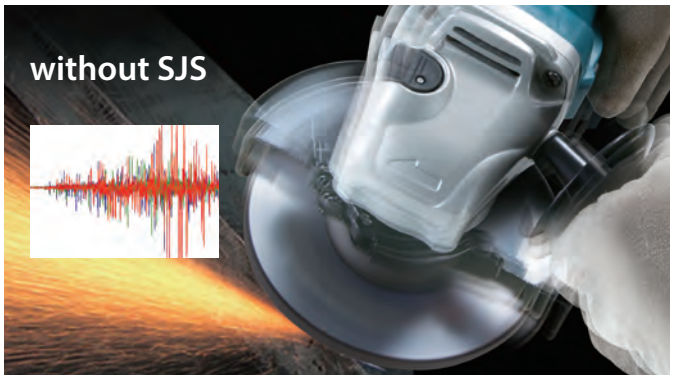

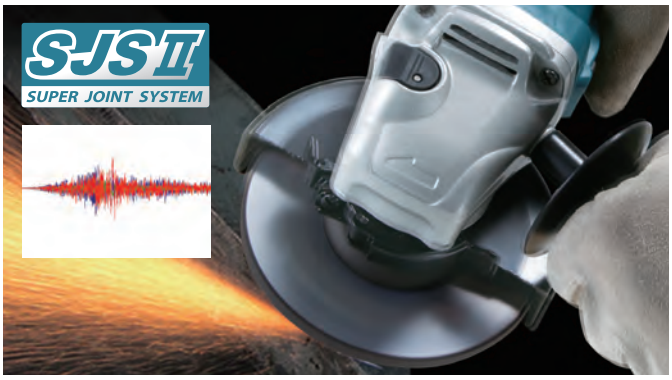


Structure of Super Joint System II

Struktur SJS generasi kedua 第二代 SJS 的结构


Leaf spring absorbs vibration and relieves shock during operation.

Leaf spring menyerap getaran dan mengurangkan kesan hentaman semasa operasi 在运行过程中，弹簧片吸收振动并减轻冲击

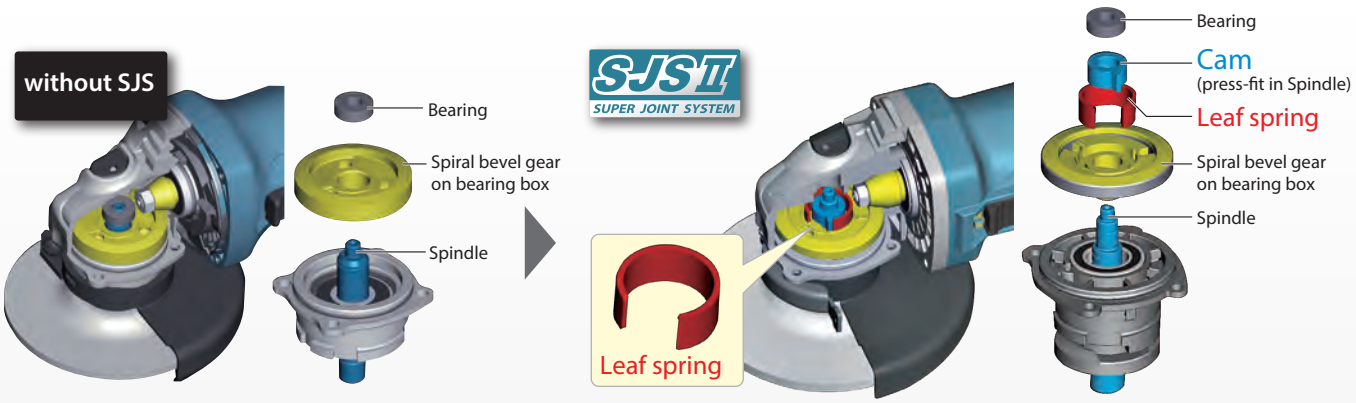

Absorption mechanism of vibration

Mekanisme penyerapan getaran 振动的吸收机能

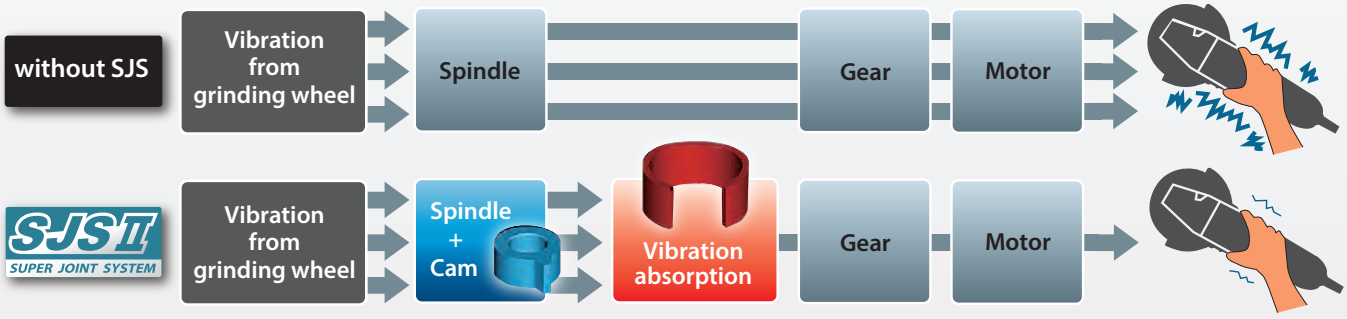

ADVANCED USER PROTECTION

with Electric Brake and Active Feedback sensing Technology

Perlindungan pengguna dengan brek elektrik dan teknologi sensor maklum balas automatik

先进的使用者保护功能设置电子自动刹车与自动回馈感应科技

Smart function to minimize the danger of kick-back


Fungsi pintar untuk mengurangkan risiko kick-back

智慧型功能可减少反冲之危

AFT

Active Feedback Sensing Technology
Teknologi sensor maklum balas automatik
自动回馈感应科技

Shuts down the tool to protect the user, if the rotation speed suddenly slows down (e.g., kick-back).

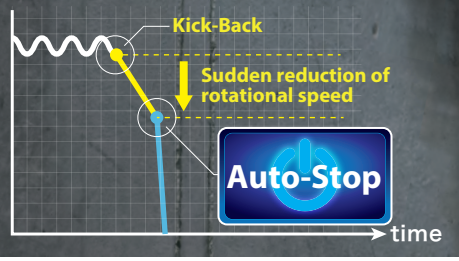

Note: The function of AFT is not to prevent the occurrance of kickback.

Equipped with automatic speed control


Dilengkapi dengan kawalan laju automatik

设置自动速度控制功能

ADT

Automatic Torque Drive Technology
Teknologi pengetatan tork automatik
自动扭力驱动科技

Automatically changes the cutting speed according to load condition for an optimum operation

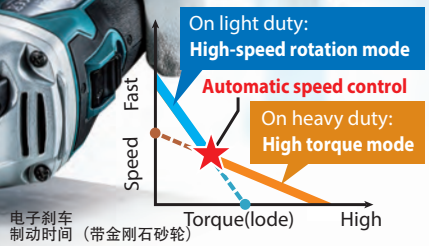


电子刹车
制动时间（带金刚石砂轮）



Electronic brake braking time (With diamond wheel)

Depressed center wheel, Diamond wheel

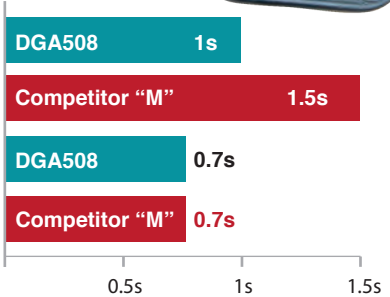

Abrasive cut-off wheel



DGA508 0.7s
Competitor "M" 0.7s

Anti-restart function

Fungsi anti-restart 防重启功能

The motor does not start up if battery is inserted with the switch slide to "on".

Sekiranya suis ditetapkan kepada "ON" apabila bateri dimasukkan, motor tidak dihidupkan

若装入电池时开关设于「开启」的位置，马达不会启动

WHEEL DIAMETER
Diameter Roda | 轮片直径
4"
(100mm)



DGA414ZU 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机

- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**
  Sistem Wayarles Automatik (AWS) menyambungkan pembersih vakum dengan Bluetooth
  自动启动无线系统（AWS）通过蓝牙连接吸尘器

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V

Refer Pg. 48
for more information



Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关

Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右搬子

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x117x147mm (15"x4-5/8"x5-3/4")**
Net weight Berat Bersih 淨重	**2.2 - 2.8kg (4.9 - 6.3lbs.)**

DGA418ZU 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机

- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**
  Sistem Wayarles Automatik (AWS) menyambungkan pembersih vakum dengan Bluetooth
  自动启动无线系统（AWS）通过蓝牙连接吸尘器

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V

Refer Pg. 48
for more information



Paddle Switch
Suis Pemicu | 扳机开关

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x117x146mm (15"x4-5/8"x5-3/4")**
Net weight Berat Bersih 淨重	**2.2 - 2.9kg (5.0 - 6.3lbs.)**

DGA411Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机

- **Spiral bevel gear for more efficient transfer of energy**
  Gear serong lingkaran untuk pemindahan tenaga yang lebih cekap
  螺旋锥齿轮高效输送能源

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关

Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右搬子

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x117x140mm (15"x4-5/8"x5-1/2")**
Net weight Berat Bersih 淨重	**2.2 - 2.8kg (4.8 - 6.1lbs.)**

DGA406RME / RFE / Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Electric brake for increased operator safety**
  Brek elektrik meningkatkan pelindungan keselamatan pengguna
  电子自动刹车提高保护使用者的安全

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench
• RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
• RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关



Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右搬子

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x117x146mm (14-1/4"x4-5/8"x5-3/4")**
Net weight Berat Bersih 淨重	**2.18 - 2.77kg (4.81 - 6.12lbs)**

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DGA408RME / RFE / Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Efficiency for heavy-duty grinding applications**
  Kecekapan untuk aplikasi pengisaran berat
  高效率重型磨削

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V


Paddle Switch
Suis Pemicu | 扳机开关



Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x117x146mm (14-1/4"x4-5/8"x5-3/4")**
Net weight Berat Bersih 淨重	**2.18 - 2.80kg (4.81 - 6.17lbs)**

DGA404RME / RF2J / RFE / Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Efficient internal cooling for optimum performance**
  Penyejukan dalaman yang cekap untuk prestasi optimum
  高效的内部冷却以达最佳性能

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RF2J : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

DGA404RF2J
WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关



Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x117x140mm (14-1/4"x4-5/8"x5-1/2")**
Net weight Berat Bersih 淨重	**2.10 - 2.71kg (4.63 - 5.98lbs)**

DGA405RFE / Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Efficient internal cooling for optimum performance**
  Penyejukan dalaman yang cekap untuk prestasi optimum
  高效的内部冷却以达最佳性能

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

Paddle Switch
Suis Pemicu | 扳机开关



Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x117x140mm (14-1/4"x4-5/8"x5-1/2")**
Net weight Berat Bersih 淨重	**2.08 - 2.69kg (4.59 - 5.94lbs)**

DGA402RFE / Z 100mm (4")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Spiral bevel gear for more efficient transfer of energy**
  Gear serong lingkaran untuk pemindahan tenaga yang lebih cekap
  螺旋锥齿轮高效输送能源

*Grinding Wheel, Wheel Cover, Side Handle, Lock Nut Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

430 mm

18V

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关



Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**317x118x118mm (12-1/2"x4-5/8"x4-5/8")**
Net weight Berat Bersih 淨重	**1.90 - 2.51kg (4.19 - 5.5 lbs)**

GA4041C 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

318 mm

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800-11,000**
Dimensions (L x W x H) Dimensi 体积	**325x117x117mm (12-3/4"x4-5/8"x4-5/8")**
Net Weight Berat Bersih 淨重	**2.5 - 2.8kg (5.6 - 6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

GA4040C 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

318 mm

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800-11,000**
Dimensions (L x W x H) Dimensi 体积	**303x117x111mm (11-7/8"x4-5/8"x4-3/8")**
Net Weight Berat Bersih 淨重	**2.3 - 2.6kg (5.1 - 5.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4040 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Spiral bevel gears for smoother rotations and a more efficient transfer of energy**
  gear serong lingkaran untuk pemindahan tenaga yang lebih cekap
  螺旋锥齿轮高效输送能源

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

325 mm

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**303x117x111mm (11-7/8"x4-5/8"x4-3/8")**
Net Weight Berat Bersih 淨重	**2.2 - 2.5kg (4.9 - 5.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9563C 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **High power anti-dust motor**
  Motor tahan debu tinggi
  大功率防尘马达

*Depressed Center Wheel, Lock Nut Wrench, Side Grip

318 mm

Slide Switch
Suis Gelangsar | 滑动开关



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Overall Length Dimensi 体积	**299mm (11-3/4")**
Net Weight Berat Bersih 淨重	**2.1kg (4.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9556HNG / HN / NB 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Powerful 840W motor**
  Motor berkuasa 840W
  强力840W马达

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

325 mm

Slide Switch
Suis Gelangsar | 滑动开关



9556HN / NB
WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**271x118x97mm (10-5/8"x4-5/8"x3-13/16")**
Net Weight Berat Bersih 淨重	**1.6 - 2.0kg (3.6 - 4.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

9556HPG / PB 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Powerful 840W motor**
  Motor berkuasa 840W
  强力840W马达

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

325 mm

Paddle Switch
Suis Pemicu | 扳机开关



9556PB
WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**273x118x97mm (10-3/4"x4-5/8"x3-13/16")**
Net Weight Berat Bersih 淨重	**1.6 - 2.0kg (3.6 - 4.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

9556HB 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机

- **Powerful 840W motor**
  Motor berkuasa 840W
  强力840W马达

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

325

Toggle Switch
Suis Togol | 后置式开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**271x118x97mm (10-5/8"x4-5/8"x3-13/16")**
Net Weight Berat Bersih 淨重	**1.6 - 2.0kg (3.6 - 4.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

GA4030R 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Machined bevel gears provide up to 2x longer service life**
  Gear bevel machined memanjangkan hayat penggunaan 2x lebih lama
  加工锥齿轮延长了长达 2x 的使用寿命

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

459

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x118x102mm (10-1/2"x4-5/8"x4")**
Net Weight Berat Bersih 淨重	**1.72 - 2.01kg (3.79 - 4.43lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4030 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **All ball bearing construction for durability and longer tool life**
  Struktur galas bola untuk memanjangkan hayat alat
  滚珠轴承结构延长工具寿命

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

459

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x117x95mm (10-1/2"x4-5/8"x3-3/4")**
Net Weight Berat Bersih 淨重	**1.73 - 2.02kg (3.81 - 4.45lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4031 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Toggle switch for easy operation**
  Suis togol untuk operasi lebih mudah
  后置式开关方便操作

*Depressed Center Wheel, Wheel Cover, Lock Nut Wrench

459

Toggle Switch
Suis Togol | 后置式开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**259x118x104mm (10-1/4"x4-5/8"x4-1/8")**
Net Weight Berat Bersih 淨重	**1.71 - 2.00kg (3.77 - 4.41lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4034 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Machined bevel gears provide up to 2x longer service life**
  Gear bevel machined memanjangkan hayat penggunaan 2x lebih lama
  加工锥齿轮延长了长达 2x 的使用寿命

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

459

Paddle Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**265x118x95mm (10-3/8"x4-5/8"x3-3/4")**
Net Weight Berat Bersih 淨重	**1.77 - 2.06kg (3.90 - 4.54lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

9553HNG 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Spiral bevel gears for smoother rotations**
  Gear serong lingkaran untuk putaran yang licin
  螺旋锥齿轮更平滑的旋转

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

325

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**258x118x97mm (10-1/8"x4-5/8"x3-13/16")**
Net Weight Berat Bersih 淨重	**1.5 - 1.8kg (3.2 - 4.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

9553HBG 100mm (4")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Compact design and lightweight**
  Reka bentuk padat dan ringan
  设计紧凑，轻量

*Depressed Center Wheel, Wheel Cover, Lock Nut Wrench

325

Toggle Switch
Suis Togol | 后置式开关




Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**258x118x97mm (10-1/8"x4-5/8"x3-13/16")**
Net Weight Berat Bersih 淨重	**1.5 - 1.9kg (3.3 - 4.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

WHEEL DIAMETER
Diameter Roda | 轮片直径
4-1/2"
(115mm)



DGA456RFE / Z 115mm (4-1/2")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Efficiency for heavy-duty grinding applications**
  Kecekapan untuk aplikasi pengisaran berat
  高效率重型磨削

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关



Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x130x151mm (14-1/4"x5-1/8"x5-15/16")**
Net weight Berat Bersih 淨重	**2.34 - 3.03kg (5.17 - 6.67lbs)**

BL MOTOR XPT ADT AFT BRAKE

DGA458RFE / Z 115mm (4-1/2")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Electric brake for increased operator safety**
  Brek elektrik meningkatkan pelindungan keselamatan pengguna
  电子自动刹车提高保护使用者的安全

*Grinding Wheel, Toolless Wheel Cover, Side Handle, Lock Nut Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

Paddle Switch
Suis Pemicu | 扳机开关




Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**362x130x151mm (14-1/4"x5-1/8"x5-15/16")**
Net weight Berat Bersih 淨重	**2.34 - 3.03kg (5.17 - 6.67lbs)**

BL MOTOR XPT ADT AFT BRAKE

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DGA452RME / RFE / Z 115mm (4-1/2")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

430

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关



Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

- **Compact barrel grip for easy handling**
  Pemegang yang kompak untuk keselesaan tangan
  易握紧凑把手

*Grinding Wheel, Wheel Cover, Side Handle, Lock Nut Wrench

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**317x129x126mm (12-1/2"x5-1/8"x5")**
Net weight Berat Bersih 净重	**2.06 - 2.71kg (4.53 - 5.97lbs)**

GA4541C 115mm (4-1/2")

Angle Grinder
Pengisar Sudut
角向磨光机



318

Slide Switch
Suis Gelangsar | 滑动开关




- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800-11,000**
Dimensions (L x W x H) Dimensi 体积	**325x130x121mm (12-3/4"x5-1/8"x4-3/4")**
Net Weight Berat Bersih 净重	**2.7 - 3.0kg (5.9 - 6.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4540R 115mm (4-1/2")

Angle Grinder
Pengisar Sudut
角向磨光机



325

Slide Switch
Suis Gelangsar | 滑动开关



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**303x130x116mm (11-7/8"x5-1/8"x4-9/16")**
Net Weight Berat Bersih 净重	**2.4 - 2.8kg (5.4 - 6.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4540 115mm (4-1/2")

Angle Grinder
Pengisar Sudut
角向磨光机



325

Slide Switch
Suis Gelangsar | 滑动开关



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**303x130x116mm (11-7/8"x5-1/8"x4-9/16")**
Net Weight Berat Bersih 净重	**2.3 - 2.7kg (5.2 - 5.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9557HNG / NBG 115mm (4-1/2")

Angle Grinder
Pengisar Sudut
角向磨光机



325

Slide Switch
Suis Gelangsar | 滑动开关



- **Powerful 840W motor**
  Motor berkuasa 840W
  强力840W马达

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**271x129x106mm (10-5/8"x5-1/8"x4-3/16")**
Net Weight Berat Bersih 净重	**1.7 - 2.2kg (3.8 - 4.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

9557PB 115mm (4-1/2")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Large Flush-Mount Paddle Switch for Comfortable Operation**
  Suis Flush-mount mudah digunakan
  大型平装式扳钮开关易于操作

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

325


Paddle Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**273x129x106mm (10-3/4"x5-1/8"x4-3/16")**
Net Weight Berat Bersih 淨重	**1.8 - 2.2kg (3.9 - 4.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4530 115mm (4-1/2")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Small diameter barrel grip for added comfort**
  Genggaman barel diameter kecil meningkatkan keselesaan
  小直径桶形手柄，增加手握舒适度

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

459

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x128x103mm (10-1/2"x5"x4-1/16")**
Net Weight Berat Bersih 淨重	**1.89 - 2.23kg (4.17 - 4.91lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA4530R 115mm (4-1/2")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Anti-restart function prevents accidental start-up**
  Fungsi anti-restart menghalang penghidupan yang tidak disengajakan
  防重启功能可防止意外启动

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

459

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x130x108mm (10-1/2"x5-1/2"x4-1/4")**
Net Weight Berat Bersih 淨重	**1.88 - 2.22kg (4.14 - 4.89lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

WHEEL DIAMETER
Diameter Roda | 轮片直径
5"
(125mm)



DGA514ZU 125mm (5")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机

- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**
  Sistem Wayarles Automatik (AWS) menyambungkan pembersih vakum dengan Bluetooth
  自动启动无线系统（AWS）通过蓝牙连接吸尘器

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V
Refer Pg. 48
for more information



Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关

Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,000 - 8,500**
Dimensions (L x W x H) Dimensi 体积	**BL1850B: 382x140x151mm (15"x5-1/2"x5-15/16")**
Net weight Berat Bersih 淨重	**2.4 - 3.0kg (5.2 - 6.7lbs.)**

BL MOTOR ADT AFT BRAKE AWS

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DGA518ZU 125mm (5")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth**
  Sistem Wayarles Automatik (AWS) menyambungkan pembersih vakum dengan Bluetooth
  自动启动无线系统（AWS）通过蓝牙连接吸尘器

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V

Refer Pg. 48
for more information



Paddle Switch
Suis Pemicu | 扳机开关

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,000 - 8,500
Dimensions (L x W x H) Dimensi 体积	BL1850B: 382x140x151mm (15"x5-1/2"x6")
Net weight Berat Bersih 淨重	2.4 - 3.1kg (5.3 - 6.8lbs.)

DGA511Z 125mm (5")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机

- **Spiral bevel gear for more efficient transfer of energy**
  Gear serong lingkaran untuk pemindahan tenaga yang lebih cekap
  螺旋锥齿轮高效输送能源

*Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关

Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	3,000 - 8,500
Dimensions (L x W x H) Dimensi 体积	BL1850B: 382x140x145mm (15"x5-1/2"x5-3/4")
Net weight Berat Bersih 淨重	2.3 - 3.0kg (5.1 - 6.6lbs.)

DGA508RFE / Z 125mm (5")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Electric brake for increased operator safety**
  Brek elektrik meningkatkan pelindungan keselamatan pengguna
  电子自动刹车提高保护使用者的安全

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Paddle Switch
Suis Pemicu | 扳机开关

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	362x140x151mm (14-1/4"x5-1/2"x5-15/16")
Net weight Berat Bersih 淨重	2.35 - 3.83kg (5.18 - 8.45lbs)

DGA505RFE / Z 125mm (5")

Cordless Angle Grinder
Pengisar Sudut Tanpa Kord
充电式角向磨光机



- **Efficient internal cooling for optimum performance**
  Penyejukan dalaman yang cekap untuk prestasi optimum
  高效的内部冷却以达最佳性能

*Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



Paddle Switch
Suis Pemicu | 扳机开关

Wheel Diameter Diameter Roda 轮片直径	125mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	8,500
Dimensions (L x W x H) Dimensi 体积	362x140x145mm (14-1/4"x5-1/2"x5-3/4")
Net weight Berat Bersih 淨重	2.26 - 3.73kg (4.98 - 8.23lbs)

GA5041C 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

318 W

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	1,400W
Wheel Diameter Diameter Roda 轮片直径	125mm (5")
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	2,800-11,000
Dimensions (L x W x H) Dimensi 体积	325x140x121mm (12-3/4"x5-1/2"x4-3/4")
Net Weight Berat Bersih 淨重	2.7 - 3.8kg (5.9 - 8.4lbs)
Power Supply Cord Kabel Wayar 电源线	2.5m (8.2ft)

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

GA5040 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Connectable to Makita vacuum cleaner with optional dust collecting wheel guard**
  Boleh bersambung dengan pembersih vakum Makita dengan alat pilihan pengumpul debu
  可选附件轮状集尘护罩以连接 Makita 吸尘器

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

325 mm


Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**303x140x116mm (11-7/8"x5-1/2"x4-9/16")**
Net Weight Berat Bersih 淨重	**2.4 - 3.5kg (5.2 - 7.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9565CR / PC 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机



- **SJS Mechanical Clutch System Helps Prevent Motor and Gear Damage**
  Sistem SJS mencegah kerosakan pada motor dan gear
  SJS 系统有助于防止马达和齿轮损坏

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

318 mm



9565CR
Slide Switch
Suis Gelangsar | 滑动开关



Heavy Industries

9565PC
Paddle Switch
Suis Pemicu | 扳机开关

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**9565CR - 299x139x103mm (11-3/4"x5-1/2"x4-1/16")** **9565PC - 307x139x103mm (12-1/8"x5-1/2"x4")**
Net Weight Berat Bersih 淨重	**2.4 - 3.5kg (5.2 - 7.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA5020 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机



- **SJS Mechanical Clutch System Helps Prevent Motor and Gear Damage**
  Sistem SJS mencegah kerosakan pada motor dan gear
  SJS 系统有助于防止马达和齿轮损坏

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

303 mm

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**356x139x120mm (14"x5-1/2"x4-3/4")**
Net Weight Berat Bersih 淨重	**2.7 - 3.9kg (6.0 - 8.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA5010 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Powerful 1,050W motor**
  Motor berkuasa 1,050W
  强力1,050W马达

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

303 mm

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**356x139x112mm (14"x5-1/2"x4-3/8")**
Net Weight Berat Bersih 淨重	**2.6 - 3.8kg (5.8 - 8.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9558HNG / NBG 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Slide switch with lock-on for continuous use**
  Suis gelangsar dengan fungsi mengunci untuk kegunaan berterusan
  备有锁定功能的滑动按钮可连续无间断的使用

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

325 mm

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**271x139x106mm (10-5/8"x5-1/2"x4-3/16")**
Net Weight Berat Bersih 淨重	**1.7 - 3.2kg (3.8 - 6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

9558PB 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Large Flush-Mount Paddle Switch for Comfortable Operation**
  Suis Flush-mount mudah digunakan
  大型平装式扳钮开关易于操作

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

325 W

Paddle Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**273x139x106mm (10-3/4"x5-1/2"x4-3/16")**
Net Weight Berat Bersih 淨重	**1.8 - 3.0kg (3.9 - 6.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA5030 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Machined bevel gears provide up to 2x longer service life**
  Gear bevel machined memanjangkan hayat penggunaan 2x lebih lama
  加工锥齿轮延长了长达 2x 的使用寿命

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

459 W

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x138x103mm (10-1/2"x5-7/16"x4-1/16")**
Net Weight Berat Bersih 淨重	**1.92 - 3.07kg (4.23 - 6.77lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA5030R 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Anti-restart function prevents accidental start-up**
  Fungsi anti-restart menghalang penghidupan yang tidak disengajakan
  防重启功能可防止意外启动

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

459 W

Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**266x140x108mm (10-1/2"x5-1/2"x4-1/4")**
Net Weight Berat Bersih 淨重	**1.91 - 3.06kg (4.21 - 6.75lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA5034 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Small Diameter Barrel Grip**
  Genggaman Barel Diameter Kecil
  小直径桶握

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

459 W

Paddle Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**265x139x103mm (10-3/8"x5-1/2"x4-1/16")**
Net Weight Berat Bersih 淨重	**2.00 - 3.15kg (4.41 - 6.94lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

WHEEL DIAMETER
Diameter Roda | 轮片直径
6"
(150mm)



*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

GA6040 150mm (6")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Super Joint System II developed for effective vibration absorption**
  SJS generasi kedua berkesan untuk menyerap getaran
  第二代 SJS 有效抑止震动

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

325


Slide Switch
Suis Gelangsar | 滑动开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Wheel Diameter Diameter Roda 轮片直径	**150mm (6")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**9,000**
Dimensions (L x W x H) Dimensi 体积	**303x171x116mm (11-7/8"x6-3/4"x4-9/16")**
Net Weight Berat Bersih 淨重	**2.4 - 2.8kg (5.3 - 6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA6020C 150mm (6")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Electric current limiter protects motor from overload**
  Pembatasan arus elektrik melindungi motor dari kelebihan beban
  电流限制器保护马达免超负荷

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

253

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,450W**
Wheel Diameter Diameter Roda 轮片直径	**150mm (6")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**9,000**
Dimensions (L x W x H) Dimensi 体积	**390x169x120mm (15-3/8"x6-5/8"x4-3/4")**
Net Weight Berat Bersih 淨重	**3.0 - 3.5kg (6.7 - 7.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA6010 150mm (6")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Powerful 1,050W motor**
  Motor berkuasa 1,050W
  强力1,050W马达

*Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

303

Trigger Switch
Suis Pemicu | 扳机开关




Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Wheel Diameter Diameter Roda 轮片直径	**150mm (6")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**10,000**
Dimensions (L x W x H) Dimensi 体积	**356x169x112mm (14"x6-5/8"x4-3/8")**
Net Weight Berat Bersih 淨重	**2.7 - 3.1kg (5.9 - 6.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

WHEEL DIAMETER
Diameter Roda | 轮片直径
7"
(180mm)



DGA700Z 180mm (7")

Cordless Angle Grinder
Pensidar Sudut Tanpa Kord
充电式角向磨光机



- **Electric brake stops the grinding wheel in 4.5 seconds or less for increased operator safety**
  Brek elektrik menghentikan roda dalam 4.5 saat atau masa lebih pendek, untuk meningkatkan perlindungan keselamatan pengguna
  电子自动刹车器在4.5秒或更短的时间内停止磨轮，以提高保护使用者的安全

*Toolless Wheel Cover / Wheel Cover, Side Grip, Lock Nut Wrench
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Wheel Diameter Diameter Mata Canai 砂轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**7,800**
Dimensions (L x W x H) Dimensi 体积	**499x200x158mm (19-5/8"x7-7/8"x6-1/4")**
Net Weight Berat Bersih 淨重	**5.0 - 6.0kg (11.02 - 13.23lbs)**

Refer Pg. 18
for more information

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

GA7063R 180mm (7")

Angle Grinder
Pengisar Sudut
角向磨光机

- **D-Handle protects operator's hand from materials**
  Pemegang D melindungi tangan pengguna dari bahan
  D型把手保护使用者的手远离物料

*Abrasive Disc, Side Grip, Wheel Cover, Lock Nut Wrench

218

Trigger Switch
Suis Pemicu | 扳机开关



Continuous rating input Panjang Strok 冲程长度	**2,200W**
Wheel Diameter Kelajuan Strok 冲程速度	**180mm (7")**
No Load Speed (RPM) Kapasiti 能力	**8,500**
Dimensions (L x W x H) Dimensi 体积	**450x200x145mm (17-3/4"x7-7/8"x5-3/4")**
Net weight Berat Bersih 淨重	**5.70 - 6.21kg (12.6 - 13.7lbs)**
Power supply cord	**2.5m (8.2ft.)**

GA7062 180mm (7")

Angle Grinder
Pengisar Sudut
角向磨光机

- **Developed for heavy duty applications such as foundry grinding**
  Sesuai untuk aplikasi tugas berat
  适合重型应用，如铸造磨削加工

*Abrasive Disc, Side Grip, Wheel Cover, Lock Nut Wrench

218

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**450x200x144mm (17-3/4"x7-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**5.51 - 6.02kg (12.2 - 13.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

GA7061R 180mm (7")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Developed for heavy duty applications such as foundry grinding**
  Ringan untuk mengurangkan keletihan, meningkatkan produksi dengan berkesan
  轻量不易引起疲劳，有效的增加工作量

*Side Grip, Wheel Cover, Lock Nut Wrench

218

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**450x200x145mm (17-3/4"x7-7/8"x5-3/4")**
Net Weight Berat Bersih 淨重	**5.57 - 6.08kg (12.3 - 13.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA7060R 180mm (7")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Developed for heavy duty applications such as foundry grinding**
  Sesuai untuk aplikasi tugas berat
  适合重型应用，如铸造磨削加工

*Side Grip, Wheel Cover, Lock Nut Wrench

218

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**450x200x144mm (17-3/4"x7-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**5.42 - 5.93kg (12 - 13.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA7060 180mm (7")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Motor more durable for heavy duty applications**
  Motor lebih tahan lama untuk aplikasi tugas berat
  马达更耐用

*Side Grip, Wheel Cover, Lock Nut Wrench

218

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**450x200x144mm (17-3/4"x7-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**5.38 - 5.89kg (11.9 - 13lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

GA7050 180mm (7")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Most compact in its class**
  Paling padat dalam kelasnya
  在同类中最紧凑

*Side Grip, Wheel Cover, Lock Nut Wrench

204

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**432x200x132mm (17"x7-7/8"x5-3/16")**
Net Weight Berat Bersih 淨重	**3.98 - 5.00kg (8.8 - 11.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA7040R 180mm (7")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Superior heavy duty motor with outstanding durability**
  Motor tugas berat unggul dengan ketahanan yang luar biasa
  耐用性卓越的马达

*Side Grip, Wheel Cover, Lock Nut Wrench

204

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,600W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**503x200x140mm (19-3/4"x7-7/8"x5-1/2")**
Net Weight Berat Bersih 淨重	**6.48 - 6.98kg (14.3 - 15.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA7020 180mm (7")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Powerful 2,200W Motor for Faster Material Removal**
  Motor berkuasa 2,200W untuk pengisaran yang lebih cepat
  功率强大的 2,200W 马达提供更快的研磨

*Side Grip, Wheel Cover, Lock Nut Wrench

204

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**473x200x140mm (18-5/8"x7-7/8"x5-1/2")**
Net Weight Berat Bersih 淨重	**5.56 - 6.06kg (12.26 - 13.36lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

WHEEL DIAMETER
Diameter Roda | 轮片直径
9"
(230mm)



DGA900Z 230mm (9")

Cordless Angle Grinder
Pensidar Sudut Tanpa Kord
充电式角向磨光机



- **Electric brake stops the grinding wheel in 4.5 seconds or less for increased operator safety**
  Brek elektrik menghentikan roda dalam 4.5 saat atau masa lebih pendek, untuk meningkatkan perlindungan keselamatan pengguna
  电子自动刹车器在4.5秒或更短的时间内停止磨轮，以提高保护使用者的安全

*Toolless Wheel Cover / Wheel Cover, Side Grip, Lock Nut Wrench
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Wheel Diameter Diameter Mata Canai 砂轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,000**
Dimensions (L x W x H) Dimensi 体积	**499x250x158mm (19-5/8"x9-7/8"x6-1/4")**
Net Weight Berat Bersih 淨重	**5.2 - 8.0kg (11.46 - 17.64lbs)**

Refer Pg. 18
for more information

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

GA9061R 230mm (9")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Motor more durable for heavy duty applications**
  Motor lebih tahan lama untuk aplikasi tugas berat
  马达更耐用

*Side Grip, Wheel Cover, Lock Nut Wrench

218

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**450x250x145mm (17-3/4"x9-7/8"x5-3/4")**
Net Weight Berat Bersih 淨重	**5.68 - 8.04kg (12.5 - 17.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA9060R 230mm (9")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Powerful 2,200W motor**
  Motor berkuasa 2,200W
  强力2,200W马达

*Side Grip, Wheel Cover, Lock Nut Wrench

218

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**450x250x144mm (17-3/4"x9-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**5.52 - 7.88kg (12.8 - 17.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA9060 230mm (9")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Motor more durable for heavy duty applications**
  Motor lebih tahan lama untuk aplikasi tugas berat
  马达更耐用

*Side Grip, Wheel Cover, Lock Nut Wrench

218


Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**450x250x144mm (17-3/4"x9-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**5.50 - 7.86kg (12.1 - 17.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA9050 230mm (9")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Compact gear housing increases maximum cutting depth by 4mm**
  Kotak gear padat untuk meningkatkan kedalaman pemotongan maksimum kepada 4mm
  紧凑的齿轮箱增加最大切割深度至4mm

*Side Grip, Wheel Cover, Lock Nut Wrench

204

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**432x250x132mm (17"x9-7/8"x5-3/16")**
Net Weight Berat Bersih 淨重	**4.64 - 6.94kg (10.2 - 15.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GA9040R 230mm (9")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Superior heavy duty motor with outstanding durability**
  Motor tugas berat unggul dengan ketahanan yang luar biasa
  卓越的耐用性卓越的重型马达

*Side Grip, Wheel Cover, Lock Nut Wrench

204

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,600W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**503x250x140mm (19-3/4"x9-7/8"x5-1/2")**
Net Weight Berat Bersih 淨重	**6.69 - 8.98kg (14.8 - 19.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

GA9020 230mm (9")

Angle Grinder
Pengisar Sudut
角向磨光机



- **Spiral bevel gears more efficient transfer of energy**
  Gear serong lingkaran untuk pemindahan tenaga yang lebih cekap
  螺旋锥齿轮高效输送能源

*Side Grip, Wheel Cover, Lock Nut Wrench

204

Trigger Switch
Suis Pemicu | 扳机开关



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,200W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,000**
Dimensions (L x W x H) Dimensi 体积	**473x249x140mm (18-5/8"x9-3/4"x5-1/2")**
Net Weight Berat Bersih 净重	**5.76 - 8.05kg (12.7 - 17.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

SA5040C 125mm (5")

Angle Sander
Pengampelas Sudut
角向抛光机



- **Electronic current limiter prevents motor burnout due to overloading**
  Pengehad arus electronik mencegah motor dari terbakar yang disebabkan oleh beban lampau
  电子电流限制器可防止超负荷引起的马达烧毁

*Pad, Lock Nut Wrench, Side Grip, Head Cover

318



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
Capacity Kapasiti 能力	**Pad : 115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,000-7,800**
Dimensions (L x W x H) Dimensi 体积	**315x115x121mm (12-3/8"x4-1/2"x4-3/4")**
Net Weight Berat Bersih 净重	**2.5 - 3.7kg (5.5 - 8.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

PK5001C 125mm (5")

Angle Sander
Pengampelas Sudut
角向抛光机



- **Ideal one for effective stone polishing**
  Untuk penggilap batu yang berkesan
  有效的石材抛光

*Rubber Pad, Abrasive Disc, Side Grip, Head Cover, Lock Nut Wrench

318



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
Capacity Kapasiti 能力	**Pad : 115mm (4-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,000-6,800**
Dimensions (L x W x H) Dimensi 体积	**328x80x126mm (12-7/8"x3-1/8"x5")**
Net Weight Berat Bersih 净重	**2.4 - 2.9kg (5.3 - 6.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

GV5010 125mm (5")

Disc Sander
Pelicin Piring
盘式砂光机



- **For faster and easier removal of paint/ rust**
  Untuk penyingkiran cat / karat yang lebih cepat dan mudah
  更快，更容易去除油漆/锈蚀

*Abrasive Disc, Plastic Pad, Side Grip, Hex socket head bolt, Washer, Hex Wrench

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**440W**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**125mm (5")**
Capacity Kapasiti 能力	**Pad : 120mm (4-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,500**
Dimensions (L x W x H) Dimensi 体积	**200x74x181mm (7-7/8"x2-15/16"x7-1/8")**
Net Weight Berat Bersih 净重	**1.2kg (2.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GV6010 150mm (6")

Disc Sander
Pelicin Piring
盘式砂光机



- **Powerful 440W motor for fast material removal**
  Motor berkuasa 440W untuk penyingkiran bahan cepat
  功率强劲的440W马达

*Abrasive Disc, Plastic Pad, Side Grip, Hex socket head bolt, Washer, Hex Wrench

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**440W**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**150mm (6")**
Capacity Kapasiti 能力	**Pad : 120mm (4-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,500**
Dimensions (L x W x H) Dimensi 体积	**200x74x181mm (7-7/8"x2-15/16"x7-1/8")**
Net Weight Berat Bersih 净重	**1.2kg (2.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

GV7000C 180mm (7")

Disc Sander
Pelicin Piring
盘式砂光机



- **Motor-over-pad design for better balance and control**
  Reka bentuk motor-over-pad untuk keseimbangan dan kawalan yang lebih baik
  更好的平衡易于控制

*Abrasive Disc, Rubber Pad, Lock Nut Wrench, Wrench, Side Grip

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**180mm (7")**
Capacity Kapasiti 能力	**Pad : 180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,500-4,700**
Overall Length Panjang Keseluruhan 总长度	**210mm (8-1/4")**
Net Weight Berat Bersih 淨重	**2.1kg (4.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9215SB 150mm (6")

Disc Sander
Pelicin Piring
盘式砂光机



- **Powerful motor in well-balanced body for fast and steady sanding**
  Motor berkuasa dengan badan yang seimbang
  强劲的马达平衡良好及机身

*Abrasive Disc, Rubber Pad, Lock Nut Wrench, Wrench, Side Grip

100



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Wire Cup Brush Berus Wayar Cawan 杯型钢丝刷	**110mm (4-3/8")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**150mm (6")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,500**
Overall Length Panjang Keseluruhan 总长度	**225mm (8-7/8")**
Net Weight Berat Bersih 淨重	**2.9kg (6.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9237C 180mm (7")

Polisher
Penggilap
打蜡机



- **Fast and powerful for clear coat finishes**
  Cepat dan berkuasa untuk kemasan kot yang jelas
  快速清除涂层

*Loop Handle / Side Handle, Hex Wrench, Accessory set

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Capacity Kapasiti 能力	**Wool Pad: 180mm (7")** **Wool Bonnet: 180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,200**
Dimensions (L x W x H) Dimensi 体积	**431x198x187mm** **(17"x7-3/4"x7-3/8")**
Net Weight Berat Bersih 淨重	**3.2 - 3.4kg (7.0 - 7.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

PO5000C 125mm (5")

Random Orbit Sander
Pelicin Orbit
砂光机



- **Wide variety of optional accessories (Pad, Sponge pad, Felt pad, Wool pad)**
  Pelbagai aksesori pilihan (pad, pad sponge, pad felt, pad bulu)
  各种可选配件（垫，海绵垫，毡垫，羊毛垫）

*Side Grip (country-specific), Pad (country-specific), Hex Wrench

318



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Pad Size Saiz Pad 垫大小	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**0 - 6,800**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 13,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 780**
Orbit Diameter Kelajuan Tanpa Beban 回转数	**5.5 mm (7/32")**
Dimensions (L x W x H) Dimensi 体积	**451x123x134mm** **(17-3/4"x4-7/8"x5-1/4")**
Net Weight Berat Bersih 淨重	**2.8 - 3.0kg (6.2 - 6.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

PO6000C 150mm (6")

Random Orbit Sander
Pelicin Orbit
砂光机



- **Wide variety of optional accessories (Pad, Sponge pad, Felt pad, Wool pad)**
  Pelbagai aksesori pilihan (pad, pad sponge, pad felt, pad bulu)
  各种可选配件（垫，海绵垫，毡垫，羊毛垫）

*Side Grip (country-specific), Pad (country-specific), Hex Wrench



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Pad Size Saiz Pad 垫大小	**150mm (6")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**0 - 6,800**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 13,600**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 780**
Orbit Diameter Kelajuan Tanpa Beban 回转数	**5.5mm (7/32")**
Dimensions (L x W x H) Dimensi 体积	**451x148x126mm** **(17-3/4"x5-7/8"x5")**
Net Weight Berat Bersih 淨重	**2.8 - 3.0kg (6.2 - 6.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

PV7000C 180mm (7")

Polisher
Penggilap
抛光机



- **Lightweight for reduced operator fatigue**
  Ringan untuk mengurangkan keletihan pengguna
  轻量不易引起疲劳

*Side Handle, Pad, Wrench


303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Capacity Kapasiti 能力	**Pad : 180mm (7")** **Wool Bonnet: 180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**600 - 2,100**
Overall Length Panjang Keseluruhan 总长度	**210mm (8-1/4")**
Net Weight Berat Bersih 淨重	**2.1kg (4.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DGD800Z

Cordless Die Grinder
Pengisar Tanpa Kord
充电式刻磨机



- **Slide switch with lock-on for operator convenience**
  Suis gelangsar untuk kemudahan pengguna
  滑动开关方便使用者

*Collet Cone, Wrench x2
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

430



Capacity Kapasiti 能力	**Collet : 3mm - 8mm**
Wheel Diameter Diameter Roda 轮片直径	**38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**26,000**
Dimensions (L x W x H) Dimensi 体积	**402x82x118mm** **(15-3/4"x3-1/4"x4-5/8")**
Net Weight Berat Bersih 淨重	**1.7 - 2.2kg (3.8 - 4.9lbs)**

DGD801Z

Cordless Die Grinder
Pengisar Tanpa Kord
充电式刻磨机



- **Round collet nut reduces the risk of damages**
  Nut kolet bulat mengurangkan risiko kerosakan
  圆形的夹头螺母降低了损坏的风险

*Collet Cone, Wrench x2
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

430



Capacity Kapasiti 能力	**Collet : 3mm - 8mm**
Wheel Diameter Diameter Roda 轮片直径	**38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**25,000**
Dimensions (L x W x H) Dimensi 体积	**307x82x118mm** **(12-1/8"x3-1/4"x4-5/8")**
Net Weight Berat Bersih 淨重	**1.5 - 2.0kg (3.3 - 4.3lbs)**

GD0600 6mm (1/4")

Die Grinder
Gerinda Lurus
电磨



- **Large Flush-Mount Paddle Switch for Comfortable Operation**
  Suis Flush-mount mudah digunakan
  大型平装式扳钮开关易于操作

*Wrench x2

325



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**400W**
Capacity Kapasiti 能力	**Collet : 3,6mm or 1/8", 1/4"**
Wheel Diameter Diameter Roda 轮片直径	**38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**25,000**
Dimensions (L x W x H) Dimensi 体积	**358x82x82mm** **(14-1/8"x3-1/4"x3-1/4")**
Net Weight Berat Bersih 淨重	**1.71 - 1.87kg (3.77 - 4.12lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GD0601 6mm (1/4")

Die Grinder
Gerinda Lurus
电磨



- **Powerful 400W motor**
  Motor berkuasa 400W
  强力400W马达

*Wrench x2

325



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**400W**
Capacity Kapasiti 能力	**Collet : 3,6mm or 1/8", 1/4"**
Wheel Diameter Diameter Roda 轮片直径	**38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**25,000**
Dimensions (L x W x H) Dimensi 体积	**359x82x82mm** **(14-1/8"x3-1/4"x3-1/4")**
Net Weight Berat Bersih 淨重	**1.68 - 1.84kg (3.70 - 4.06lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

GD0603 6mm (1/4")

Die Grinder
Gerinda Lurus
电磨



- **Compact and easy handling**
  Padat dan mudah digunakan
  紧凑且易于使用

*Spanner, Wheel points

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**240W**
Capacity Kapasiti 能力	**Collet : 6mm or 1/4"**
Max Wheel Diameter Diameter Roda 轮片直径	**19mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**28,000**
Diameter of Grip Diameter Silinder 圆筒直径	**65mm**
Dimensions (L x W x H) Dimensi 体积	**289x64x67mm (11-3/8"x2-1/2"x2-5/8")**
Net Weight Berat Bersih 净重	**0.98kg (2.16lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GD0800C 8mm (1/4")

Die Grinder
Gerinda Lurus
电磨



- **Electronic Controller for Operator Convenience**
  Pengawal elektronik untuk kemudahan pengguna
  电子控制器方便使用者

*Wrench x2

318



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Capacity Kapasiti 能力	**Collet : 3,6,8mm or 1/8", 1/4"**
Wheel Diameter Diameter Roda 轮片直径	**25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**7,000-28,000**
Dimensions (L x W x H) Dimensi 体积	**371x75x75mm (14-5/8"x2-15/16"x2-15/16")**
Net Weight Berat Bersih 净重	**1.88kg (4.14lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GD0801C 8mm (1/4")

Die Grinder
Gerinda Lurus
电磨



- **Powerful 750W motor for faster material removal**
  Motor berkuasa 750W untuk pengisaran yang lebih cepat
  功率强大的 750W 马达提供更快的研磨

*Side Handle, Wrenches

318



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Capacity Kapasiti 能力	**Collet : 8mm (1/4")**
Max Wheel Diameter Diameter Roda 轮片直径	**25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**7,000-29,000**
Dimensions (L x W x H) Dimensi 体积	**390x75x88mm (15-3/8"x2-15/16"x3-1/2")**
Net Weight Berat Bersih 净重	**1.96 - 1.97kg (4.32 - 4.34lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GD0811C 8mm (1/4")

Die Grinder
Gerinda Lurus
电磨



- **Ideal for grinding internal surfaces, removing paint etc. using with flap wheel**
  Sesuai untuk mengisar permukaan dalaman, cat dan lain-lain
  适用于研磨内表面，使用皮瓣轮去除油漆等

*Side Handle, Wrenches

318



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Capacity Kapasiti 能力	**Collet : 8mm (1/4")**
Max Wheel Diameter Diameter Roda 轮片直径	**50mm (2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**1,800-7,000**
Dimensions (L x W x H) Dimensi 体积	**390x75x88mm (15-3/8"x2-15/16"x3-1/2")**
Net Weight Berat Bersih 净重	**1.99 - 2.00kg (4.39 - 4.41lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GS5000 125mm (5")

Straight Grinder
Pengisar Lurus
直向砂轮机



- **Powerful 750W motor**
  Motor berkuasa 750W
  强力750W马达

*Hex Wrench, Wrenches

204



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
Hole Diameter Diameter Lubang 孔直径	**12.7, 20mm (1/2,13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,600**
Dimensions (L x W x H) Dimensi 体积	**590x189x116mm (23-1/4"x7-7/16"x4-9/16")**
Net Weight Berat Bersih 净重	**5.0 - 5.2kg (11.0 - 11.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

GS6000 150mm (6")

Straight Grinder
Pengisar Lurus
直向砂轮机



- **Powerful 750W motor**
  Motor berkuasa 750W
  强力750W马达

*Hex Wrench, Wrenches

204



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Wheel Diameter Diameter Roda 轮片直径	**150mm (6")**
Hole Dia. Diameter Lubang 孔直径	**12.7, 20mm (1/2,13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,600**
Dimensions (L x W x H) Dimensi 体积	**590x216x130mm (23-1/4"x8-1/2"x5-1/8")**
Net Weight Berat Bersih 淨重	**5.2 - 5.4kg (11.4 - 12.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DTM51RFEX8 / Z

Cordless Multi Tool
Pemotong dan Pengisar Pelbagai Fungsi Tanpa Kord
充电式多功能切割打磨机



- **12 Angle settings at every 30° from 0° to 360°**
  12 tetapan sudut pada setiap 30˚
  每30˚ 12个角度设置

*Oscillating multi tool accessories, Dust Attachment (country-specific), Tool Box (country-specific)

- RFEX8 : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5


18V



Oscillations Per Minute (OPM) Kelajuan Ayunan 摆动速度	**6,000 - 20,000**
Oscillation Angle Sudut Ayunan 摆动角度	**Left/ Right/ Total: 1.6°/ 1.6°/ 3.2°**
Dimensions (L x W x H) Dimensi 体积	**340x80x122mm (13-3/8"x3-1/8"x4-13/16")**
Net Weight Berat Bersih 淨重	**2.0 - 2.4kg (4.4 - 5.3lbs)**

DTM50Z

Cordless Multi Tool
Pemotong dan Pengisar Pelbagai Fungsi Tanpa Kord
充电式多功能切割打磨机



- **High operating efficiency**
  Kecekapan operasi yang tinggi
  高运行效率

*Oscillating multi tool accessories, Hex Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Oscillations Per Minute (OPM) Kelajuan Swing 摆动速度	**6,000-20,000**
Dimensions (L x W x H) Dimensi 体积	**307x80x122mm (12-1/4"x3-1/8"x4-13/16")**
Net Weight Berat Bersih 淨重	**1.8 - 2.2kg (3.9 - 4.8lbs)**

TM30DWAE / WAEX1 / Z

Cordless Multi Tool
Mesin Pemotong Berbilang Fungsi Tanpa Kord
充电式多功能切割打磨机



- **12 Angle settings at every 30° from 0° to 360°**
  12 tetapan sudut pada setiap 30˚
  每30˚ 12个角度设置

*Oscillating multi tool accessories, Dust Attachment (country-specific), Tool Box (country-specific), Hex Wrench

- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- WAEX1 : 1 x Standard Charger, 2 x 2.0Ah Battery, Accessories
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5


12V max



Oscillations Per Minute (OPM) Kelajuan Ayunan 摆动速度	**6,000 - 20,000**
Oscillation Angle Sudut Ayunan 摆动角度	**Left/ Right/ Total: 1.6° / 1.6° / 3.2°**
Max Output Keluaran Maksima 最大输出	**170W**
Dimensions (L x W x H) Dimensi 体积	**277x65x98mm (10-7/8"x2-9/16"x3-7/8")**
Net Weight Berat Bersih 淨重	**1.1 - 1.3kg (2.3 - 2.9lbs)**

TM3000C

Multi Tool
Mesin Pemotong Berbilang Fungsi
多功能切割打磨机



- **Powerful 320W motor with improved performance**
  Motor berkuasa 320W dengan prestasi yang lebih baik
  强力320W马达，改进的性能

*Hex Wrench


459




Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**320W**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**6,000-20,000**
Dimensions (L x W x H) Dimensi 体积	**275x64x92mm (10-7/8"x2-1/2"x3-5/8")**
Net Weight Berat Bersih 淨重	**1.4 - 1.5kg (3.2 - 3.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



Cutting PVC, FRP pipes


Cutting metals


Wood flush cutting


Wood plunge cutting


Deep plunge cutting



Sanding and polishing various materials

Wide selection of accessories available for various application


Pemilihan aksesori yang luas tersedia untuk pelbagai aplikasi
多种选择的配件适合各种用途





Cutting plasterboards



Cutting tiles



Metal flush cutting


Removing mortar, tile adhesive



Flush cutting of nails


Routing joints on wall tiles


Corner cutting


Cutting window putty, silicone


Cutting polystyrene, rubber


Scraping floor tiles

TM3010CX6 / CK

Multi Tool

Mesin Pemotong Berbilang Fungsi
多功能切割打磨机



- **Toolless clamp system for fast accessory installation**
  Sistem pemasangan aksesori tanpa alat
  免工具快速安装与更换配件

*CX6 : Oscillating multi tool accessories
*CK : without accessories

459 mm



For TM3010CX6 only



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**320W**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**6,000-20,000**
Dimensions (L x W x H) Dimensi 体积	**283x68x87mm (11-1/8"x2-11/16"x3-7/16")**
Net Weight Berat Bersih 净重	**1.6 - 1.7kg (3.7 - 3.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

GB602 150mm (6")

Bench Grinder

Pengisar
台式砂轮机



- **Wheel covers have built-in task lights**
  Lampu tugas terbina dalam pelindung roda
  轮罩具有内置任务灯

*Safety Eye Shield, Protection glasses, Wrench x2



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**250W**
Wheel Diameter Diameter Roda 轮片直径	**150mm (6")**
Wheel Width Lebar Roda 轮片宽度	**16mm (5/8")**
Hole Dia. Diameter Lubang 孔直径	**12.7mm (1/2")**
H.P.	**1/3**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,850 (50Hz) / 3,450 (60Hz)**
Dimensions (L x W x H) Dimensi 体积	**375x205x286mm (14-49/64"x8"x11-17/64")**
Net Weight Berat Bersih 净重	**9.31 - 9.08kg (20.02 - 20.52lbs)**

GB801 205mm (8")

Bench Grinder

Pengisar
台式砂轮机



- **Adjustable wheel balance feature reduces vibration**
  Pelarasan imbangan roda mengurangkan getaran
  平衡调整减少振动

*Safety Eye Shield, Protection glasses, Wrench x2



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**550W**
Wheel Diameter Diameter Roda 轮片直径	**205mm (8")**
Wheel Width Lebar Roda 轮片宽度	**19mm (3/4")**
Hole Dia. Diameter Lubang 孔直径	**15.88mm (5/8")**
H.P.	**3/4**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,850 (50Hz)/ 3,450 (60Hz)**
Dimensions (L x W x H) Dimensi 体积	**395x265x333mm (15-9/16"x10-7/16"x13-7/64")**
Net Weight Berat Bersih 净重	**19.91 - 19.63kg (43.89 - 43.28lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

PC5000C 125mm (5")

Concrete Planer
Pengampelas
砂光机



- **Electronic current limiter helps protect the motor from overload**
  Pengehad arus electronik melindungi motor daripada beban lampau
  电子电流限制器有助于防止马达超负荷

*Lock Nut Wrench, Hex Wrench, Dust bag assembly, Brush set

253



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
Hole Dia. Diameter Lubang 孔直径	**22.23mm (7/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**10,000**
Dimensions (L x W x H) Dimensi 体积	**437x235x195mm (17-1/8"x9-1/4"x7-5/8")**
Net Weight Berat Bersih 淨重	**4kg (8.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

PC5001C 125mm (5")

Concrete Planer
Pengampelas
砂光机



- **Soft start suppresses start-up reaction for more precision and longer tool life**
  Penghidupan secara perlahan untuk ketepatan yang lebih baik dan memanjangkan hayat alat
  缓速启动提高准确性和延长工具使用寿命

*Offset Diamond Wheel, Lock Nut Wrench, Hex Wrench, Dust bag assembly, Brush set

253



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,400W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**10,000**
Dimensions (L x W x H) Dimensi 体积	**479x182x195mm (18-13/16"x7-1/8"x5/8")**
Net Weight Berat Bersih 淨重	**4kg (8.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**5m (16.4ft)**

PW5001C 125mm (5")

Stone Polisher
Penggilap Batu
水磨石机



- **Variable speed control dial enables user to match the speed to the application**
  Pilihan kawalan kelajuan berubah untuk pelbagai aplikasi
  变速控制选择适合多种应用

*Rubber Pad, Side Grip, Wrench, Head Cover

318



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Capacity Kapasiti 能力	**Pad : 100-125mm (4-5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,000-4,000**
Overall Length Panjang Keseluruhan 总长度	**359mm (14-1/8")**
Net Weight Berat Bersih 淨重	**2.3 - 2.6kg (5.1 - 5.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft)**

9404 100mm x 610mm (4"x 24")

Belt Sander
Pengampelas
带式砂光机



- **Powerful 1,010W motor for fast material removal**
  Motor berkuasa 1,010W untuk pengisaran yang lebih cepat
  功率强大的 1,010W 马达提供更快的研磨

*Abrasive Belt, Dust bag assembly

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**100 x 610mm (4" x 24")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**210-440m/min (690-1,440ft/min)**
Overall Length Panjang Keseluruhan 总长度	**334mm (13-1/8")**
Net Weight Berat Bersih 淨重	**4.8kg (10.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

9903 76mm x 533mm (3"x 21")

Belt Sander
Pengampelas
带式砂光机



- **Sands wood or metal and removes paint and rust**
  Melicinkan kayu atau logam, menghilangkan cat dan karat
  打磨木头或金属，去除油漆和铁锈

*Abrasive Belt, Dust bag assembly

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**76 x 533mm (3" x 21")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**210 - 440m/min (690 - 1,440 ft/min)**
Overall Length Panjang Keseluruhan 总长度	**296mm (11-5/8")**
Net Weight Berat Bersih 淨重	**4.3kg (9.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

9401 100mm x 610mm (4"x 24")

Belt Sander
Pengampelas
带式砂光机



- **Highly-efficient dust collection system for clean work environment**
  Sistem pengumpulan habuk yang cekap untuk mewujudkan persekitaran kerja bersih
  高效的集尘系统打造清洁工作环境

*Abrasive Belt, Carbon Plate, Step, Dust bag assembly

153

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**940W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**100 x 610mm (4" x 24")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**350m/min (1,150ft/min)**
Overall Length Panjang Keseluruhan 总长度	**374mm (14-3/4")**
Net Weight Berat Bersih 净重	**7.2kg (15.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

9924DB 76mm x 610mm (3"x 24")

Belt Sander
Pengampelas
带式砂光机



- **Powerful 850W for fast material removal**
  Motor berkuasa 750W untuk pengisaran yang lebih cepat
  功率强大的 750W 马达提供更快的研磨

*Abrasive Belt, Carbon Plate, Dust bag assembly

100



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**76 x 610, 620mm (3" x 24, 24-3/8")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**400m/min (1,300ft/min)**
Overall Length Panjang Keseluruhan 总长度	**355mm (14")**
Net Weight Berat Bersih 净重	**4.8kg (10.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

9911 76mm x 457mm (3"x 18")

Belt Sander
Pengampelas
带式砂光机



- **Compact and well balanced for easy operation**
  Padat dan mudah digunakan
  紧凑且易于使用

*Abrasive Belt, Dust bag assembly

411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**650W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**76 x 457mm (3" x 18")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**75 - 270m/min (250 - 900ft/min)**
Overall Length Panjang Keseluruhan 总长度	**262mm (10-3/8")**
Net Weight Berat Bersih 净重	**2.7kg (6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9031 30mm x 533mm (1-3/16"x 21")

Belt Sander
Pengampelas
带式砂光机



- **Versatile for use on wood, metal, and fiberglass materials**
  Digunakan pada bahan kayu, logam, dan gentian kaca
  多用于木材，金属和纤维玻璃材料

*Abrasive Belt x10

411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**550W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**30 x 533mm (1-1/8" x 21")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**200 - 1,000m/min (656 - 3,280ft/min)**
Overall Length Panjang Keseluruhan 总长度	**380mm (15")**
Net Weight Berat Bersih 净重	**2.1kg (4.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

BO3710

Finishing Sander
Pengampelas
砂光机



- **High capacity dust bag with built-in vacuum adaptor for improved dust collection**
  Beg debu kapasiti tinggi dengan penyesuai vakum terbina dalam untuk pengumpulan habuk yang lebih baik
  内置真空适配器的高容量集尘袋可改进集尘效果

*Dust Bag/ Dust Box, Punch Plate, Abrasive Paper

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**190W**
Pad Size Saiz Pad 垫大小	**93 x 185mm (3-5/8" x 7-1/4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**93 x 228mm (3-5/8" x 9")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**11,000**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**22,000**
Orbit Diameter Jejaki Diameter 轨道直径	**2.0mm (1/16")**
Dimensions (L x W x H) Dimensi 体积	**253x92x154mm (10"x3-5/8"x6-1/16")**
Net Weight Berat Bersih 净重	**1.6kg (3.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

9035H

Finishing Sander
Pengampelas
砂光机



- **Rubberized large paper clamp levers for easy installation/ removal of paper**
  Batang pengapit getah yang besar memudahkan pemasangan dan penyingkiran kertas pasir
  大号橡胶夹杆方便安装及取出砂纸

*Abrasive paper x6



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**180W**
Pad Size Saiz Pad 垫大小	**93 x 185mm (3-5/8" x 7-1/4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**93 x 228mm (3-5/8" x 9")**
Orbits Per Minute (OPM) Kelajuan Ayunan 摆动速度	**11,000**
Dimensions (L x W x H) Dimensi 体积	**236x93x146mm (9-1/4"x3-5/8"x5-3/4")**
Net Weight Berat Bersih 淨重	**1.5kg (3.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

BO4901

Finishing Sander
Pengampelas
砂光机



- **Large clamp lever for easy install/ removal of paper**
  Batang pengapit yang besar memudahkan pemasangan dan penyingkiran kertas pasir
  大夹紧杆方便安装及取出砂纸

*Abrasive Paper

419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**330W**
Pad Size Saiz Pad 垫大小	**115 x 229mm (4-1/2" x 9")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**115 x 280mm (4-1/2" x 11")**
Orbits Per Minute (OPM) Kelajuan Ayunan 摆动速度	**10,000**
Overall Length Panjang Keseluruhan 总长度	**289mm (11-3/8")**
Net Weight Berat Bersih 淨重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

9045B 114mm (4-1/2")

Finishing Sander
Pengampelas
砂光机



- **All bearing construction for smooth, long term operation**
  Konstruksi galas yang sesuai untuk operasi lancar dan jangka panjang
  适合平滑及长期运行的轴承结构

*Abrasive paper x10

105



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**520W**
Pad Size Saiz Pad 垫大小	**114 x 234mm (4-1/2" x 9-1/4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**114 x 280mm (4-1/2" x 11")**
Orbits Per Minute (OPM) Kelajuan Ayunan 摆动速度	**10,000**
Overall Length Panjang Keseluruhan 总长度	**240mm (9-1/2")**
Orbit Diameter Jejaki Diameter 轨道直径	**2.4mm (3/32")**
Net Weight Berat Bersih 淨重	**2.6kg (5.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

BO4540

Finishing Sander
Pengampelas
砂光机



- **Compact body is easily maneuvered in and out of corners and tight places**
  Badan padat sesuai digunakan di sudut dan ruang yang sempit
  小巧的机身可轻松使用于角落和狭小的地方

*Abrasive paper x6

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**160W**
Pad Size Saiz Pad 垫大小	**110 x 100mm (4-3/8" x 4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**114 x 140mm (4-1/2" x 5-1/2")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**14,000**
Overall Length Panjang Keseluruhan 总长度	**115mm (4-1/2")**
Net Weight Berat Bersih 淨重	**0.92kg (2.03lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

BO4510H

Finishing Sander
Pengampelas
砂光机



- **Large clamp lever for easy install/ removal of paper**
  Batang pengapit yang besar memudahkan pemasangan dan penyingkiran kertas pasir
  大夹紧杆方便安装及取出砂纸

*Abrasive paper x6



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**170W**
Pad Size Saiz Pad 垫大小	**110 x 100mm (4-5/16" x 3-15/16")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**114 x 140mm (4-1/2" x 5-1/2")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**116x110x129mm (4-9/16"x4-5/16"x5-1/8")**
Net Weight Berat Bersih 淨重	**1.1kg (2.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

BO4556

Finishing Sander
Pengampelas
砂光机



- **14,000OPM for fast and smooth finish sanding**
  14,000OPM untuk pelicinan cepat dan lancar
  14,000OPM可快速平顺的打磨

*Abrasive Paper, Dust Bag/ Dust Box, Punch Plate

419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**200W**
Pad Size Saiz Pad 垫大小	**112 x 102mm (4-3/8" x 4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**114 x 140mm (4-1/2" x 5-1/2")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**14,000**
Dimensions (L x W x H) Dimensi 体积	**131x112x141mm (5-1/8"x4-3/8"x5-9/16")**
Net Weight Berat Bersih 淨重	**1.1kg (2.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

DBO180Z 125mm (5")

Cordless Random Orbit Sander
Tukul Pemutar Skru Bergerudi
Tanpa Kord
充电式冲击螺丝起子电钻



- **Three speed control switch fast, medium and low**
  Suis kawalan tiga kelajuan tinggi, sederhana dan rendah
  三档速度控制开关高，中，低

*Abrasive Disc, Dust Bag / Dust Box
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Pad diameter Panjang Strok 冲程长度	**123mm (4-7/8")**
Abrasive Disc Size	**125mm (5")**
Orbits Per Minute (OPM) Kelajuan Strok 冲程速度	**7,000/ 9,500/ 11,000**
Dimensions (L x W x H) Kapasiti 能力	**175x123x153mm (6-7/8"x4-7/8"x6")**
Net weight Dimensi 体积	**1.4 - 1.7kg (3.0 - 3.7lbs)**
Berat Bersih 淨重	

BO6050J

Random Orbit Sander
Pengampelas
砂光机



- **Slim skirt provides higher work efficiency in tight spaces**
  Kecekapan kerja yang lebih tinggi di ruang yang sempit
  在狭小空间中提供更高的工作效率

*Abrasive Disc, Dust Nozzle, Side Grip, Protector

325



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Pad Diameter Saiz Pad 垫大小	**150mm (6")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**150mm (6")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**1,600 - 6,800**
Sanding Strokes Per Minute (SPM) Menggilap Strok Seminit 每分钟打磨冲程	**3,200 - 13,600**
Pad Speed in Roto-orbit mode (rpm) Kelajuan Pad 垫速度	**140 - 600**
Orbit Diameter Jejaki Diameter 轨道直径	**5.5mm (7/32")**
Dimensions (L x W x H) Dimensi 体积	**330x155x145mm (13"x6-1/8"x5-3/4")**
Net Weight Berat Bersih 淨重	**2.6kg (5.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

BO5031

Random Orbit Sander
Pengampelas
砂光机



- **Smooth finish with variable speed control**
  Kemasan lancar dengan kawalan kelajuan yang Pelbagai
  变速控制

*Abrasive Disc, Dust Bag/ Dust Box

NEW BARU | 新

419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**300W**
Pad Diameter Saiz Pad 垫大小	**123mm (4-7/8")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**4,000-12,000**
Dimensions (L x W x H) Dimensi 体积	**153x123x153mm (6"x4-7/8"x6")**
Net Weight Berat Bersih 淨重	**1.3kg (3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

BO5041

Random Orbit Sander
Pengampelas
砂光机



- **More power for faster sanding and a smooth finish**
  Lebih berkuasa untuk pelicinan cepat dan lancar
  更快速的打磨

*Abrasive Disc, Dust Bag/ Dust Box


NEW BARU | 新

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**300W**
Pad Diameter Saiz Pad 垫大小	**123mm (4-7/8")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**4,000-12,000**
Dimensions (L x W x H) Dimensi 体积	**218x123x153mm (8-5/8"x4-7/8"x6")**
Net Weight Berat Bersih 淨重	**1.4kg (3.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

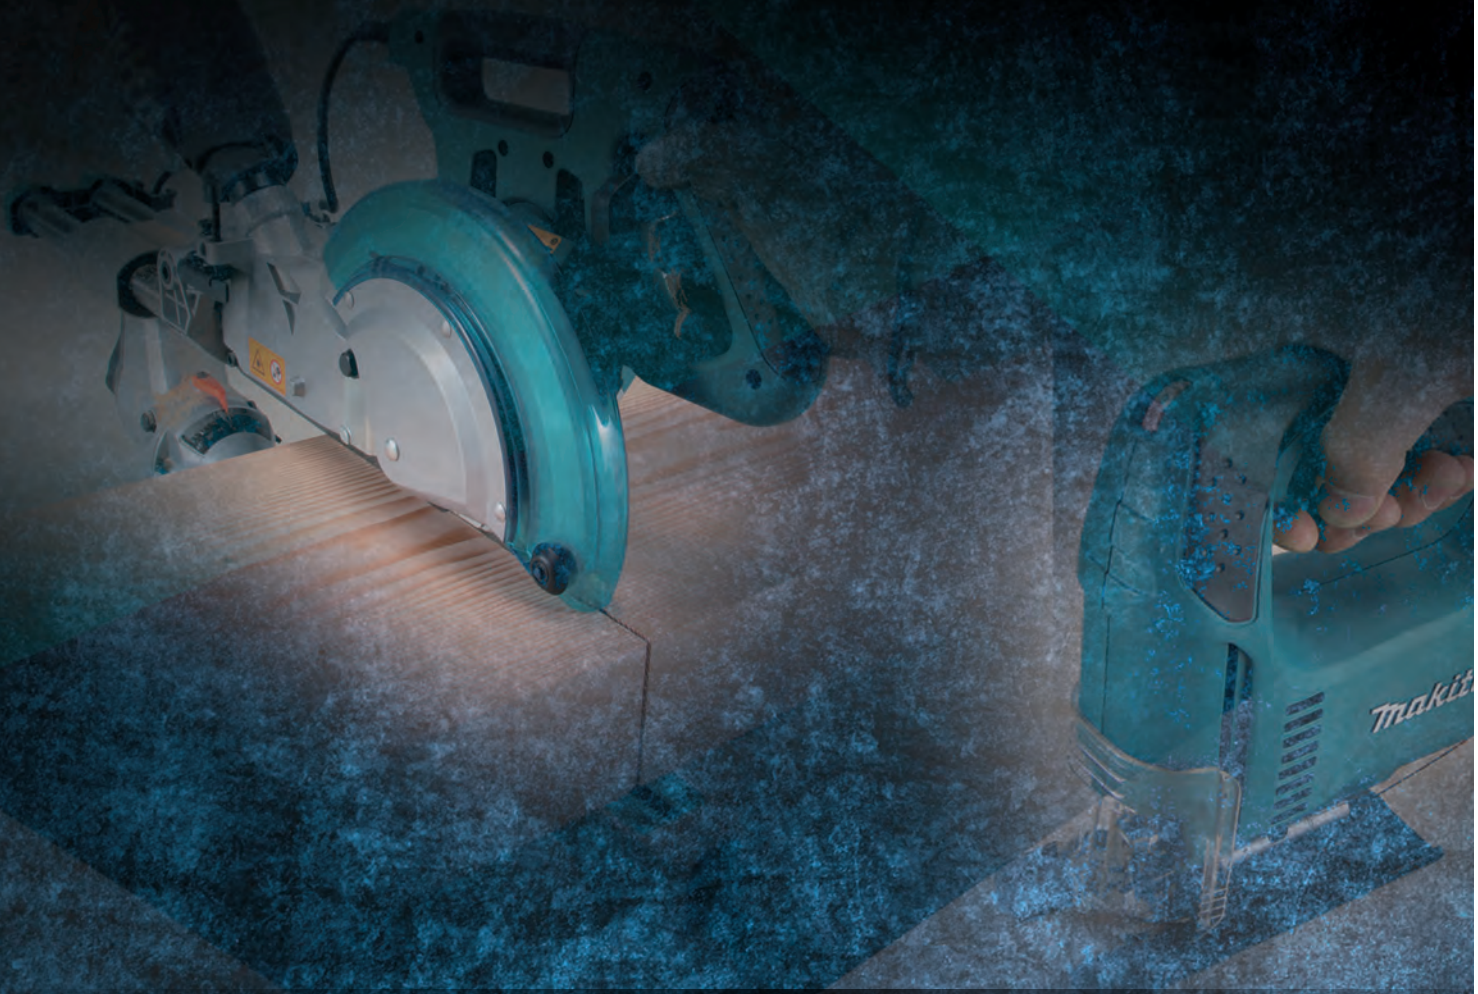

Sawing


Gergaji 锯切



DLS714PM2 / Z 190mm (7-1/2")

Cordless Slide Compound Miter Saw

Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯



- **Large cutting capacity; Crosscuts up to 52 x 300 mm (2-1/16" x 11-3/4") at 90°** Potongan serong sehingga 52 x 300mm (2-1/16"x 11-3/4") pada 90° 在90° 斜角切割处的交叉点高达52 x 300mm (2-1/16"x 11-3/4")

*TCT Saw Blade, Dust Bag, Holder Set, Vertical Vise, Hex Wrench, Triangular Rule

- PM2 : 1 x Two Port Multi Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V X2



Blade Diameter Diameter Bilah 锯片直径	**190mm (7-1/2")**
Miter Angle Sudut Miter 斜接角	**47°L / 57°R**
Bevel Angle Sudut Bevel 斜角	**45°L / 5°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 52 x 300mm (2-1/16" x 11-3/4")** **at 45° left: 40x300mm (1-9/16"x11-3/4")** **at 5° right: 40x300mm (1-9/16"x11-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,700**
Dimensions (L x W x H) Dimensi 体积	**655x430x445mm (25-3/4"x17"x17-1/2")**
Net Weight Berat Bersih 净重	**12.6kg (27.8lbs)**

DLS713RME / Z 190mm (7-1/2")

Cordless Slide Compound Miter Saw

Gergaji Gelongsor Kompaun Miter Tanpa Kord
充电式斜断锯 (滑动复合式)



- **Powerful Makita-built motor**
  Motor Makita yang berkuasa
  Makita强大马达

*TCT Saw Blade, Vertical Vise, Socket Wrench, Triangular Rule, Dust Bag, Holder Set

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

441

18V



Blade Diameter Diameter Bilah 锯片直径	**190mm (7-1/2")**
Miter Angle Sudut Miter 斜接角	**47°L / 57°R**
Bevel Angle Sudut Bevel 斜角	**45°L / 5°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 52 x 300mm (2-1/16" x 11-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,200**
Dimensions (L x W x H) Dimensi 体积	**655x430x454mm (25-3/4"x17"x17-7/8")**
Net Weight Berat Bersih 净重	**12.1kg (26.7lbs)**

DLS600Z 165mm (6-1/2")

Cordless Compound Miter Saw

Gergaji Kompaun Miter Tanpa Kord
充电式斜断锯



- **High accuracy & Lightweight**
  Ketepatan tinggi & ringan
  高精度且轻巧

*TCT Saw Blade, Dust Bag, Vertical Vise, Hex Wrench, Triangular Rule

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

NEW BARU 新



Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Miter Angle Sudut Miter 斜接角	**52°L/ 52°R**
Bevel Angle Sudut Bevel 斜角	**46°L/ 46°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90° Miter: 46 x 92mm (1-13/16" x 3-5/8")** **45° Miter, L/R: 46 x 65mm (1-13/16" x 2-9/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,000**
Dimensions (L x W x H) Dimensi 体积	**340x400x440mm (13-3/8"x15-3/4"x17-1/4")**
Net Weight Berat Bersih 净重	**6.3 - 6.6kg (13.9 - 14.6lbs)**

LS1019L 260mm (10-1/4")

Slide Compound Miter Saw

Gergaji Kompaun Miter
斜断锯



- **Large turn base supports workpiece securely for increased stability**
  Dasar besar untuk menyokong bahan kerja dengan stabil
  大转动底座稳定地支撑工件

*TCT Saw Blade, Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench

153

NEW BARU 新



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Blade Diameter Diameter Bilah 锯片直径	**260mm (10-1/4")**
Bevel Angle Sudut Bevel 斜角	**48°L/ 48°R**
Miter Angle Sudut Miter 斜接角	**60°L/ 60°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**Crown Molding Vertically Nested: 168mm (6-5/8")** **Crown Molding Lying Flat: 248mm (9-3/4")** **Base Board Against Fence: 133mm (5-1/4")** **Base Board Lying Flat: 305mm (12")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,200**
Dimensions (L x W x H) Dimensi 体积	**805x644x660mm (31-3/4"x25-3/8"x26")**
Net Weight Berat Bersih 净重	**26.3kg (57.9lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

LS1219L 305mm (12")

Slide Compound Miter Saw

Gergaji Kompaun Miter
斜断锯



- **Dual dust collection ports provide excellent dust extraction performance**
  Dua pengumpul habuk untuk prestasi pengekstrakan habuk yang sangat baik
  双重集尘口提供出色的除尘性能

*TCT Saw Blade, Vertical Vise, Hex Wrench, Triangular Rule, Dust Bag

153

NEW BARU 新



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Blade Diameter Diameter Bilah 锯片直径	**305mm (12")**
Hole Diameter Diameter Lubang 孔直径	**European Countries: 30mm (1-3/16")** **Others: 25.4mm (1")**
Angle Sudut 角度	**Bevel 48° L / 48° R** **Miter 60° L / 60° R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**Crown Molding Vertically Nested: 203mm (8")** **Crown Molding Lying Flat: 320mm (12-5/8")** **Base Board Against Fence: 171mm (6-3/4")** **Base Board Lying Flat: 416mm (16-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,200**
Dimensions (L x W x H) Dimensi 体积	**898x664x725mm (35-1/4"x26-1/8"x28-1/2")**
Net Weight Berat Bersih 净重	**29.5kg (65.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

LS1216 305mm (12")

Slide Compound Saw
Gergaji Kompaun Miter
斜断锯



- **Exclusive 6 linear ball bearings deliver smooth, solid for accurate cuts**
  Galas bebola 6 linear eksklusif untuk pemotongan tepat
  独有的6个直线球轴承提供平滑，和精确切割

*Carbide-Tipped Saw Blade, Vertical Vise, Socket Wrench, Triangular Rule, Dust Bag, Holder assembly

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Blade Diameter Diameter Bilah 锯片直径	**305mm (12")**
Miter Angle Sudut Miter 斜接角	**52°L/ 60°R**
Bevel Angle Sudut Bevel 斜角	**45°L/ 45°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 107 x 363mm (4-1/4" x 14-1/4")** **45°: 107 x 255mm (4-1/4" x 10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,200**
Dimensions (L x W x H) Dimensi 体积	**721x640x806mm** **(28-3/8"x25-1/4"x31-3/4")**
Net Weight Berat Bersih 净重	**26.6kg (58.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LS1018L 260mm (10-1/4")

Slide Compound Saw
Gergaji Kompaun Miter
斜断锯



- **Large cutting capacity in a compact design and less weight**
  Kapasiti pemotongan besar dalam reka bentuk kompak dan ringan
  设计紧凑，轻量，切割能力大

*TCT Saw Blade, Vertical Vise, Socket Wrench, Triangular Rule, Dust Bag, Holder assembly



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,430W**
Blade Diameter Diameter Bilah 锯片直径	**255 - 260mm (10 - 10-1/4")**
Miter Angle Sudut Miter 斜接角	**47°L/ 60°R**
Bevel Angle Sudut Bevel 斜角	**45°L/ 45°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 91 x 305mm (3-5/8" x 12")** **45°: 91 x 215mm (3-5/8" x 8-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,300**
Dimensions (L x W x H) Dimensi 体积	**825x536x633mm** **(32-1/2"x21-1/8"x25")**
Net Weight Berat Bersih 净重	**20.6kg (45.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LS1040 260mm (10-1/4")

Compound Miter Saw
Gergaji Kompaun Miter
斜断锯



- **Powerful 1,650W direct drive motor for improved performance**
  Motor 1,650W yang berkuasa meningkatkan prestasi
  功率强劲的1,650W直驱马达提高了性能

*Socket Wrench, Dust Bag, Holder x2, Vertical Vise, Triangular Rule

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Blade Diameter Diameter Bilah 锯片直径	**260mm (10-1/4")**
Miter Angle Sudut Miter 斜接角	**45°L/ 52°R**
Bevel Angle Sudut Bevel 斜角	**45°L**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 90.5 x 95mm (3-9/16" x 3-3/4")** **45°: 90.5 x 67mm (3-9/16" x 2-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,600**
Dimensions (L x W x H) Dimensi 体积	**530x476x532mm** **(20-7/8"x18-3/8"x21")**
Net Weight Berat Bersih 净重	**12.4kg (27.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LS0714 190mm (7-1/2")

Slide Compound Saw
Gergaji Kompaun Miter
斜断锯



- **Compact and Lightweight for Increased Jobsite Portability**
  Kompak dan Ringan
  小巧轻便

*Carbide-Tipped Saw Blade, Socket Wrench, Dust Bag, Holder Set, Vertical Vise, Triangular Rule


153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Blade Diameter Diameter Bilah 锯片直径	**190mm (7-1/2")**
Miter Angle Sudut Miter 斜接角	**47°L/ 57°R**
Bevel Angle Sudut Bevel 斜角	**45°L / 5°R**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 52 x 300mm (2-1/16" x 11-3/4")** **45°: 52 x 212mm (2-1/16" x 8-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,000**
Dimensions (L x W x H) Dimensi 体积	**670x430x458mm** **(26-3/8"x17"x18")**
Net Weight Berat Bersih 净重	**13.1kg (28.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LS1440 355mm (14")

Miter Saw
Gergaji Miter
斜断锯



- **Large cutting capacity**
  Kapasiti pemotongan besar
  大切割能力

*Socket Wrench, Vise Assembly, Dust Bag, Holder Set

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,380W**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 122 x 152mm (4-13/16" x 6")** **45°: 122 x 115mm (4-13/16" x 4-1/2")**
Blade Diameter Diameter Bilah 锯片直径	**355mm (14")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,200**
Dimensions (L x W x H) Dimensi 体积	**530x596x435mm** **(20-7/8"x23-1/2"x17-1/8")**
Net Weight Berat Bersih 净重	**34.2kg (75.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

LH1201FL 305mm (12")

Table Top Miter Saw
Gergaji Miter
两用平台斜切锯

- **2 tools in 1 for convenience and versatility**
  Alat 2 dalam 1
  1机2用

*TCT Saw Blade, Vertical Vise, Dust Bag, Rip Fence, Ring, Triangular Rule, Push Stick, Blade Cover, Socket Wrench, Holder Set



2in1



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Blade Diameter Diameter Bilah 锯片直径	**305mm (12")**
Miter Angle Sudut Miter 斜接角	**47°L/ 52°R**
Bevel Angle Sudut Bevel 斜角	**45°L**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 62 x 200mm (2-7/16" x 7-7/8")/ 90°: 95 x 155mm (3-3/4" x 6-1/8")/ 45° Miter, L/R: 62 x 135mm (2-7/16" x 5-5/16")/ 45° Miter, L/R: 95 x 110mm (3-3/4" x 4-5/16")/ 90°, Table saw: 52mm (2-1/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Dimensions (L x W x H) Dimensi 体积	**610x535x692mm (24"x21"x27-1/4")** **Table Size (W x L): 307 x 465mm (12-1/8" x 18-1/4")**
Net Weight Berat Bersih 淨重	**20.9kg (46.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

LH1200FL 305mm (12")

Table Top Miter Saw
Gergaji Miter
两用平台斜切锯



- **2 tools in 1 for convenience and versatility**
  Alat 2 dalam 1
  1机2用

*TCT Saw Blade, Vertical Vise, Dust Bag, Rip Fence, Ring, Triangular Rule, Push Stick, Blade Cover, Socket Wrench, Holder Set



2in1

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Blade Diameter Diameter Bilah 锯片直径	**305mm (12")**
Miter Angle Sudut Miter 斜接角	**47°L/ 52°R**
Bevel Angle Sudut Bevel 斜角	**45°L**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 62 x 200mm (2-7/16" x 7-7/8")/ 90°: 95 x 155mm (3-3/4" x 6-1/8")/ 45° Miter, L/R: 62 x 135mm (2-7/16" x 5-5/16")/ 45° Miter, L/R: 95 x 110mm (3-3/4" x 4-5/16")/ 90°, Table saw: 52mm (2-1/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Dimensions (L x W x H) Dimensi 体积	**610x535x692mm (24"x21"x27-1/4")** **Table Size (W x L): 307x465mm (12-1/8" x 18-1/4")**
Net Weight Berat Bersih 淨重	**20.7kg (45.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

MAXIMUM CUTTING CAPACITY
Kapasiti Pemotongan Maksimum 最大切割能力

Model No. 型号	Base Angle Sudut Pangkalan 底座角度	Blade Angle Left 45° Sudut Bilah 锯片角度	Blade Angle 0° Sudut Bilah 锯片角度	Blade Angle Right 5° Sudut Bilah 锯片角度	Blade Angle Right 45° Sudut Bilah 锯片角度
LS0714	0°	40x300mm	52x300mm	40x300mm	-
	Left / Right 45°	40x212mm	52x212mm	-	-
	-	-	-	-	-
	Right 57°	-	52x163mm	-	-
LS1018L	0°	50x305mm	91x305mm	-	31x305mm
	Left / Right 45°	50x215mm	91x215mm	-	31x215mm
	-	-	-	-	-
	Right 60°	-	91x150mm	-	-
LS1019L	0°	47x305, 61x279mm	71x305, 91x279mm	-	29x305, 43x279mm
	Left / Right 45°	47x215, 61x197mm	71x215, 91x197mm	-	29x215, 43x197mm
	Left / Right 60°	-	71x152, 91x139mm	-	-
	-	-	-	-	-
LS1216	0°	71x363mm	107x363mm	-	54x363mm
	Left / Right 45°	71x255mm	107x255mm	-	54x255mm
	Left / Right 52°	-	107x220mm	-	-
	Right 60°	-	107x178mm	-	-
LS1219L	0°	71x363mm	107x363mm	-	54x363mm
	Left / Right 45°	71x255mm	107x255mm	-	54x255mm
	Left / Right 60°	-	107x178mm	-	-
	-	-	-	-	-
LS1040	0°	48x95mm	90.5x95mm	-	-
	Left / Right 45°	48x67mm	90.5x67mm	-	-
	-	-	-	-	-
	-	-	-	-	-
LH1200FL	0°	64x155mm	95x155mm	-	-
	Left 45°	64x65mm	95x110mm	-	-
	Right 45°	40x125mm	95x110mm	-	-
	Cutting capacity as table saw: 52mm				
LH1201FL	0°	64x155mm	95x155mm	-	-
	Left 45°	64x65mm	95x110mm	-	-
	Right 45°	40x125mm	95x110mm	-	-
	Cutting capacity as table saw: 52mm				

MLT100 260mm (10-1/4")

Table Saw
Gergaji Meja
台锯



- **Right and rear extension table enables greater cutting capacity**
  Meja tambahan kanan dan belakang membolehkan kapasiti pemotongan yang lebih besar
  右侧和后侧延伸台具有更大的切割能力

*Carbide-Tipped Saw Blade, Rip Fence, Miter Gauge, Wrenches, Push Stick, Triangular Rule





Continuous rating input Input Kuasa Berterusan 额定输入功率	**1,500W**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 91mm (3-9/16")** **45°: 63mm (2-1/2")**
Blade Diameter Diameter Bilah 锯片直径	**260mm (10-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,300**
Dimensions (L x W x H) Dimensi 体积	**726x984x333mm** **(28-1/2"x38-3/4"x13-1/8")**
Net weight Berat Bersih 淨重	**34.1kg (75.2lbs)**
Power supply cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

2712 315mm (12-3/8")

Table Saw
Gergaji Meja
台锯



- **Powerful 2,000W motor for fast cutting**
  Motor berkuasa 2,000W untuk pemotongan pantas
  功能强大的2,000W马达快速切割

*Carbide-Tipped Saw Blade, Rip Fence, Miter Gauge, Wrenches, Push Stick, Ring



Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 85mm (3-3/8")** **45°: 58mm (2-1/4")**
Blade Diameter Diameter Bilah 锯片直径	**315mm (12-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**50Hz: 2,950** **60Hz: 3,400**
Bevel Capacity Kapasiti Bevel 斜角容量	**0° - 45°**
Dimensions (L x W x H) Dimensi 体积	**1,670x700x810mm** **(65-3/4"x27-1/2"x32")**
Net weight Berat Bersih 淨重	**54kg (118.9lbs)**
Power supply cord Kabel Wayar 电源线	**3.0m (9.8ft)**



LF1000 260mm (10-1/4")

Flip Over Saw
Gergaji Flip
翻转锯



- **Quick miter saw/ table saw conversion**
  Konversi gergaji miter & gergaji meja
  斜割锯及台锯快速转换

*Carbide-Tipped Saw Blade, Rip Fence, Miter Gauge, Push Stick, Top Cover Assy (Top Blade Guard), Dust Cover, Dust Bag, Wrench 8

Flipper 2 in 1 — 153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 20 x 210mm (13/16" x 8-1/4")** **90°: 68 x 155mm (2-11/16" x 6-1/8")** **45°: 50 x 150mm (2" x 5-7/8")**
Blade Diameter Diameter Bilah 锯片直径	**260mm (10-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,700**
Dimensions (L x W x H) Dimensi 体积	**Miter saw : 660x650x1,220mm** **(26"x25-1/2"x48")** **Table saw: 660x650x1,060mm** **(26"x25-1/2"x41-3/4")**
Net Weight Berat Bersih 淨重	**36.0 kg (79.4 lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5 m (8.2 ft)**

DHS710RM2J / RF2J 190mm (7-1/2")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



- **Lightweight for operator comfort**
  Ringan untuk keselesaan
  轻便，操作舒适

*TCT Saw Blade, Rip Fence (Guide Rule), Hex Wrench, Dust Nozzle (country-specific)

- RM2J : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RF2J : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 — 442




Blade Diameter Diameter Bilah 锯片直径	**190/ 185mm (7-1/2"/ 7-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 68.5/ 66mm** **(2-11/16"/ 2-5/8")** **45°: 49/ 47.5mm** **(1-15/16"/ 1-7/8")** **50°: 44/ 42.5mm** **(1-3/4"/ 1-11/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,800**
Dimensions (L x W x H) Dimensi 体积	**356x217x298mm** **(14"x8-1/2"x11-3/4")**
Net Weight Berat Bersih 淨重	**3.9 - 4.6kg (8.6 - 10.1lbs)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DHS680RMJ / RFJ / Z 165mm (6-1/2")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **High-efficiency BL motor provides higher power**
  Motor BL yang kecekapan tinggi memberikan kuasa yang lebih tinggi
  高效率的BL马达提供更高的功率

*TCT Saw Blade, Hex Wrench, Rip Fence (Guide Rule), Dust Nozzle

- RMJ : 1 x Rapid Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- RFJ : 1 x Rapid Charger, 2 x 3.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

BL MOTOR ADT

Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 57mm (2-1/4")** **45°: 41mm (1-5/8")** **50°: 37mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,000**
Dimensions (L x W x H) Dimensi 体积	**350x170x238mm** **(13-3/4"x6-11/16"x9-3/8")**
Net weight Berat Bersih 净重	**3.0 - 3.3kg (6.6 - 7.3lbs)**

DHS630RME / RFE / Z 165mm (6-1/2")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

441

18V



- **Cut up to 66mm thick wood with a single stroke**
  Memotong ketebalan sehingga 66mm dengan satu strok
  单行程切割厚度达66mm

*TCT Saw Blade, Hex Wrench, Rip Fence (Guide Rule), Dust Nozzle (country-specific)

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 66mm (2-5/8")** **45°: 46mm (1-13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,100**
Dimensions (L x W x H) Dimensi 体积	**346x220x247mm** **(13-5/8"x8-5/8"x9-3/4")**
Net weight Berat Bersih 净重	**3.0 - 3.4kg (6.6 - 7.5lbs)**

DSS610Z 165mm (6-1/2")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

441

18V



- **Built-in dust blower directs sawdust away from cutting line**
  Blower terbina dalam mengarahkan habuk dari garis pemotongan
  内置除尘器将锯末导离切割线

*Carbide-Tipped Saw Blade, Rip Fence (Guide Rule), Hex Wrench

- Z : Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 0-57mm (2-1/4")/** **45°: 0-40mm (1-9/16")** **50°: 0-36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,700**
Dimensions (L x W x H) Dimensi 体积	**347x202x228mm** **(13-5/8"x8"x9")**
Net weight Berat Bersih 净重	**3.0 - 3.4kg (6.7 - 7.5lbs)**

DSS501Z 136mm (5-3/8")

Cordless Circular Saw
Gergaji Piring Tanpa Kord
充电式圆锯



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

430

18V



- **Compact and lightweight design**
  Reka bentuk padat dan ringan
  小巧轻便的设计

*Carbide-Tipped Saw Blade, Hex Wrench, Rip Fence (Guide Rule)

- Z : Without Charger & Battery

Blade Diameter Diameter Bilah 锯片直径	**136mm (5-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 51mm (2")** **45°: 35mm (1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,600**
Dimensions (L x W x H) Dimensi 体积	**364x183x201mm** **(14-3/8"x7-1/4"x7-7/8")**
Net Weight Berat Bersih 净重	**2.4 - 2.7kg (5.3 - 6.0lbs)**

HS6100 165mm (6-1/2")

Circular Saw
Gergaji Piring
圆锯



174



- **Smooth cutting at high rotational speed**
  Pemotongan licin pada kelajuan putaran tinggi
  在高转速下平滑切割

*Carbide-Tipped Saw Blade, Hex Wrench, Rip Fence (Guide Rule), Dust Nozzle

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 54.5mm (2-1/8")/ 45°: 39.5mm (1-9/16")/ 50°: 35.5mm (1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,500**
Dimensions (L x W x H) Dimensi 体积	**297x246x246mm** **(11-3/4"x9-11/16"x9-11/16")**
Net Weight Berat Bersih 净重	**3.5kg (7.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HS6600 165mm (6-1/2")

Circular Saw
Gergaji Piring
圆锯



- **More compact and lightweight design**
  Reka bentuk lebih padat dan ringan
  更小巧轻便的设计

*Rip Fence (Guide Rule), TCT Saw Blade, Hex Wrench

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 54.5mm (2-1/8")** **45°: 37.5mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,200**
Dimensions (L x W x H) Dimensi 体积	**296x230x243mm** **(11-5/8"x9"x9-9/16")**
Net Weight Berat Bersih 淨重	**3.5kg (7.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HS7010 185mm (7-1/4") / 190mm (7-1/2")

Circular Saw
Gergaji Piring
圆锯



- **High Power and Increased Motor-Burnout Resistance**
  Berkuasa Tinggi
  高功率

*TCT Saw Blade, Rip Fence (Guide Rule), Hex Wrench, Dust Nozzle (country-specific)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,600W**
Blade Diameter Diameter Bilah 锯片直径	**185/ 190mm (7-1/4"/ 7-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 65/ 67mm (2-9/16"/ 2-5/8")** **45°: 44/ 45mm (1-3/4"/ 1-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,500**
Dimensions (L x W x H) Dimensi 体积	**300x240x261mm** **(11-3/4"x9-1/2"x10-1/4")**
Net Weight Berat Bersih 淨重	**4.0kg (8.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

HS7600 185mm (7-1/4")

Circular Saw
Gergaji Piring
圆锯



- **Powerful 1,200W motor**
  Motor berkuasa 1,200W
  强力1,200W马达

*TCT Saw Blade, Rip Fence (Guide Rule), Hex Wrench

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Blade Diameter Diameter Bilah 锯片直径	**185mm (7-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 64mm (2-1/2")** **45°: 42mm (1-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,200**
Dimensions (L x W x H) Dimensi 体积	**309x234x255mm** **(12-1/8"x9-1/4"x10")**
Net Weight Berat Bersih 淨重	**3.8kg (8.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

5806B 185mm (7-1/4")

Circular Saw
Gergaji Piring
圆锯



- **Powerful motor for smooth operation even in heavy duty cutting**
  Motor berkuasa untuk operasi lancar walaupun dalam pemotongan tugas berat
  强大的马达即使在重型切割中也可以平稳运行

*Carbide-Tipped Saw Blade, Hex Wrench, Rip Fence (Guide Rule)

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Blade Diameter Diameter Bilah 锯片直径	**185mm (7-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 66mm (2-5/8")** **45°: 44mm (1-11/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,200**
Overall Length Panjang Keseluruhan 总长度	**282mm (11-1/8")**
Net Weight Berat Bersih 淨重	**3.5kg (7.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

5008MG 210mm (8-1/4")

Circular Saw
Gergaji Piring
圆锯



- **Powerful 1,800W motor for proven performance**
  Motor berkuasa 1,800W untuk prestasi yang terbukti
  功率强大的1,800W马达，性能可靠

*TCT Saw Blade, Hex Wrench, Rip Fence (Guide Rule)

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Blade Diameter Diameter Bilah 锯片直径	**210mm (8-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 75.5mm (3")** **45°: 57mm (2-1/4")** **50°: 51.5mm (2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**5,200**
Dimensions (L x W x H) Dimensi 体积	**332x243x277mm** **(13-1/8"x9-9/16"x10-7/8")**
Net Weight Berat Bersih 淨重	**4.8kg (10.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

N5900B 235mm (9-1/4")

Circular Saw
Gergaji Piring
圆锯



- **High power 2,000W to rip through most materials**
  Kuasa tinggi 2,000W untuk pemotongan pelbagai bahan
  大功率2000W可以切割大部分材料

*Carbide-Tipped Saw Blade, Rip Fence (Guide Rule), Wrench 13



153

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 85mm (3-3/8")** **45°: 60mm (2-3/8")** **50°: 53mm (2-1/16")**
Blade Diameter Diameter Bilah 锯片直径	**235mm (9-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,100**
Overall Length Panjang Keseluruhan 总长度	**380mm (15")**
Net Weight Berat Bersih 净重	**6.8kg (14.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**



HS0600 260mm (10-1/4")/ 270mm (10-5/8")

Circular Saw
Gergaji Piring
圆锯



- **Powerful 2,100W motor**
  Motor berkuasa 2,100W
  强力2,100W马达

*TCT Saw Blade, Dust Nozzle (country-specific), Rip Fence (Guide Rule), Hex Wrench, Wrench holder




153

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Blade Diameter Diameter Bilah 锯片直径	**260/ 270mm (10-1/4" / 10-5/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 97/ 101mm (3-13/16" / 4")** **45°: 68/ 71mm (2-11/16" / 2-13/16")** **50°: 61/ 63mm (2-3/8" / 2-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,300**
Dimensions (L x W x H) Dimensi 体积	**418x273x324mm (16-1/2"x10-3/4"x12-3/4")**
Net Weight Berat Bersih 净重	**6.9kg (15.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

5103N 335mm (13-1/8")

Circular Saw
Gergaji Piring
圆锯



- **Smooth cutting at high rotational speed**
  Pemotongan licin pada kelajuan putaran tinggi
  在高转速下平滑切割

*Combination saw blade, Wrench, Hex Wrench, Rip Fence (Guide Rule)



153

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,750W**
Blade Diameter Diameter Bilah 锯片直径	**335mm (13-1/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 128mm (5")** **45°: 91mm (3-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,900**
Overall Length Panjang Keseluruhan 总长度	**505mm (19-7/8")**
Net Weight Berat Bersih 净重	**8.9kg (19.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

5402 415mm (16-5/16")

Circular Saw
Gergaji Piring
圆锯



- **Smooth cutting at high rotational speed**
  Pemotongan licin pada kelajuan putaran tinggi
  在高转速下平滑切割

*Combination saw blade, Wrench, Hex Wrench, Rip Fence (Guide Rule)



153

Blade Diameter Diameter Bilah 锯片直径	**415mm (16-5/16")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 157mm (6-3/16")** **45°: 106mm (4-3/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,200**
Overall Length Panjang Keseluruhan 总长度	**615mm (24-1/4")**
Net Weight Berat Bersih 净重	**12.9kg (28.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DSP600Z 165mm (6-1/2")

Cordless Plunge Cut Saw
Gergaji Piring Tanpa Kord
充电式圆锯



- **Up to 40% Faster Cutting**
  Potongan 40% lebih cepat
  切割速度快40%

*TCT Saw Blade, Hex Wrench

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V X2



Refer Pg. 17
for more information

Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Bevel Capacity Kapasiti Bevel 斜角容量	**-1° - 48°**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 56mm (2-3/16")** **45°: 40mm (1-9/16")** **48°: 38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,500 - 6,300**
Dimensions (L x W x H) Dimensi 体积	**346x241x272mm** **(13-5/8"x9-1/2"x10-3/4")**
Net Weight Berat Bersih 净重	**4.4 - 5.1kg (9.8 - 11.2lbs)**

SP6000J 165mm (6-1/2")

Plunge Cut Circular Saw
Gergaji Piring
圆锯



- **Built-in current limiter helps prevent motor burnout**
  Pengehad arus terbina dalam mencegah motor dari terbakar
  电流限制器有助于防止马达烧毁

*Carbide-Tipped Saw Blade, Hex Wrench, Rip Fence (Guide Rule)

303 mm



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 56mm (2-3/16")** **45°: 40mm (1-9/16")** **48°: 38mm (1-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,000 - 5,800**
Dimensions (L x W x H) Dimensi 体积	**341x225x250mm** **(13-3/8"x8-7/8"x9-7/8")**
Net Weight Berat Bersih 净重	**4.1kg (9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DJV182RME / RFE / Z

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



- **Powerful Brushless DC motor**
  Motor DC tanpa berus yang berkuasa
  强大的无碳刷直流马达

*Jig saw blade set, Cover Plate, Dust Nozzle (country-specific), Anti-Splintering Device, Hex Wrench

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,500**
Dimensions (L x W x H) Dimensi 体积	**266x77x208mm** **(10-1/2"x3"x8-3/16")**
Net Weight Berat Bersih 净重	**2.4 - 2.7kg (5.2 - 5.9lbs)**

DJV181RFE / Z

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



- **Excellent performance provides higher productivity**
  Prestasi cemerlang memberikan produktiviti yang lebih tinggi
  出色的性能提高生产力

*Jig saw blade set, Cover Plate, Dust Nozzle (country-specific), Anti-Splintering Device, Hex Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,500**
Dimensions (L x W x H) Dimensi 体积	**298x77x189mm** **(11-3/4"x3"x7-7/16")**
Net Weight Berat Bersih 净重	**2.3 - 2.6kg (5.0 - 5.7lbs)**

DJV180RFE / Z

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



- **Low vibration and low noise**
  Getaran rendah dan bunyi rendah
  低振动，低噪音

*Jig saw blade set (No. B-10, BR-13, B-22; 2each), Cover Plate, Anti-Splintering Device, Hex Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

440 mm

18V



Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-2,600**
Dimensions (L x W x H) Dimensi 体积	**257x73x208mm** **(10-1/8"x2-7/8"x8-3/16")**
Net Weight Berat Bersih 净重	**2.7 - 3.0kg (6.0 - 6.7lbs)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

JV101DWAE / Z

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



- **Aluminum die-cast base adjusts from 0°-45° right to left**
  Pangkalan aluminium die-cast dilaraskan dari 0° - 45° kanan ke kiri
  铝压铸底座从0° - 45° 从右向左调整

*Jig Saw Blade, Hex Wrench, Guide Rule (country-specific)

- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax



Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood/ Aluminum/ Mild Steel:** **65/ 4/ 2mm (2-9/16" / 5/32" / 1/16")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-2,900**
Dimensions (L x W x H) Dimensi 体积	**232x76x196mm** **(9-1/8"x3"x7-3/4")**
Net Weight Berat Bersih 淨重	**1.8 - 1.9kg (3.9 - 4.3lbs)**

JV103DSMJ / WAJ / Z

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



- **Up to 2.2X Faster Cutting & 2.2X Longer Runtime*1**
  Pemotongan cepat sehingga 2.2X & Lebih tahan lama 2.2X*1
  切割速度快2.2倍，运行时间延长2.2倍*1

*Jig Saw Blade, Hex Wrench, Cover Plate (country-specific), Dust Nozzle (country-specific), Dust Cover (country-specific)

- SMJ : 1 x Speed Charger, 2 x 4.0Ah Battery, 1 x Makpac Connector Box
- WAJ : 1 x Standard Charger, 2 x 2.0Ah Battery, 1 x Makpac Connector Box
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax



Refer Pg. 75
for more information

Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood/ Aluminum/ Mild Steel:** **90/ 20/ 10mm (3-1/2"/ 13/16"/ 3/8")**
Length of Stroke Panjang Strok 冲程长度	**23mm (7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**237x76x206mm** **(9-3/8"x3"x8-1/8")**
Net Weight Berat Bersih 淨重	**1.9 - 2.0kg (4.1 - 4.4lbs)**

JV102DZ

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机

- **Up to 2.2X Faster Cutting & 2.2X Longer Runtime*1**
  Pemotongan cepat sehingga 2.2X & Lebih tahan lama 2.2X*1
  切割速度快2.2倍，运行时间延长2.2倍*1

*Jig Saw Blade, Hex Wrench, Cover Plate (country-specific), Dust Nozzle (country-specific), Dust Cover (country-specific)

- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5
12Vmax



Refer Pg. 75
for more information

Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood/ Aluminum/ Mild Steel:** **90/ 20/ 10mm (3-1/2"/ 13/16"/ 3/8")**
Length of Stroke Panjang Strok 冲程长度	**23mm (7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**237x76x186mm** **(9-3/8"x3"x7-3/8")**
Net Weight Berat Bersih 淨重	**1.8 - 1.9kg (3.9 - 4.2lbs)**

JV100DWE

Cordless Jig Saw
Gergaji Jig Tanpa Kord
充电式线锯机



- **Aluminum die-cast base adjusts from 0°-45° right to left**
  Pangkalan aluminium die-cast dilaraskan dari 0° -45° kanan ke kiri
  铝压铸底座从0° -45° 从右向左调整

*Jig Saw Blade, Hex Wrench, Guide Rule (country-specific)

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Li-ion Ah 1.3
10.8V



Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood/ Aluminum/ Mild Steel:** **65/ 4/ 2mm (2-9/16" / 5/32" / 1/16")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,400**
Dimensions (L x W x H) Dimensi 体积	**231x76x196mm** **(9-1/8"x3"x7-3/4")**
Net Weight Berat Bersih 淨重	**1.7kg (3.7lbs)**

4350CT

Jig Saw
Gergaji Jig
线锯机



- **3 orbital settings plus straight cutting with a powerful 720W motor**
  3 tetapan orbital serta pemotongan lurus dengan motor berkuasa 720W
  强力的720W马达，3个轨道设置与直切割

*Jig saw blade set (No. B-10, BR-13, B-22; 2 each), Hex Wrench, Cover Plate, Anti-Splintering Device

419 W



Continuous Rating Input Input Kuasa Berterusan 額定輸入功率	**720W**
Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 2,800**
Dimensions (L x W x H) Dimensi 体积	**236x73x207mm** **(9-1/4"x 2-7/8"x 8-1/8")**
Net Weight Berat Bersih 淨重	**2.7kg (5.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

4351CT

Jig Saw
Gergaji Jig
线锯机



- **Bevel cuts to 45° right or left and positive stop at 90° for solid cutting performance**
  Potongan serong ke 45 ° kanan atau kiri dan berhenti positif pada 90 ° untuk prestasi pemotongan pepejal
  斜面切削45° 左右，90° 正向切削，切削性能稳定

*Jig saw blade set (No. B-10, BR-13, B-22; 2 each), Hex Wrench, Cover Plate, Anti-Splintering Device

419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Capacity Kapasiti 能力	**Wood: 135mm (5-5/16")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**26 mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**800 - 2,800**
Dimensions (L x W x H) Dimensi 体积	**271x73x187mm** **(10-11/16"x 2-7/8"x 7-3/8")**
Net Weight Berat Bersih 净重	**2.6kg (5.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

JV0600K

Jig Saw
Gergaji Jig
线锯机



- **Toolless blade change system for fast blade installation and removal**
  Penukaran bilah tanpa alat untuk pemasangan bilah cepat
  无需工具更换刀片，可快速安装和拆卸刀片

*Jig Saw Blade, Hex Wrench

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**650W**
Capacity Kapasiti 能力	**Wood: 90mm (3-1/2")** **Steel: 10mm (3/8")**
Length of Stroke Panjang Strok 冲程长度	**23mm (7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**500 - 3,100**
Dimensions (L x W x H) Dimensi 体积	**236x77x199mm** **(9-1/4"x3"x7-7/8")**
Net Weight Berat Bersih 净重	**2.4kg (5.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

4327M

Jig Saw
Gergaji Jig
线锯机



- **High power and Lightweight**
  Kuasa tinggi dan Ringan
  高功率和轻量

*Jig Saw Blade, Hex Wrench

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Wood: 40mm (1-9/16")** **Steel: 6mm (1/4")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**500 - 3,100**
Dimensions (L x W x H) Dimensi 体积	**224x77x197mm** **(8-7/8"x3"x7-3/4")**
Net Weight Berat Bersih 净重	**1.8kg (4.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

4327

Jig Saw
Gergaji Jig
线锯机



- **High power and Lightweight**
  Kuasa tinggi dan Ringan
  高功率和轻量

*Jig Saw Blade, Hex Wrench

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Wood: 65mm (2-9/16")** **Steel: 6mm (1/4")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**500 - 3,100**
Dimensions (L x W x H) Dimensi 体积	**224x77x197mm** **(8-7/8"x3"x7-3/4")**
Net Weight Berat Bersih 净重	**1.9kg (4.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

4300BV

Jig Saw
Gergaji Jig
线锯机



- **Robust construction and strength to cut through a wide range of materials**
  Pembinaan yang kukuh dengan kekuatan untuk memotong pelbagai bahan
  坚固的结构和强度可切割各种材料

*Jig saw blade set, Rip Fence (Guide Rule), Circular Guide, Hex Wrench

51



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**390W**
Capacity Kapasiti 能力	**Wood: 55mm (2-1/8")** **Steel: 6mm (1/4")**
Length of Stroke Panjang Strok 冲程长度	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-3,100**
Overall Length Panjang Keseluruhan 总长度	**225mm (8-7/8")**
Net Weight Berat Bersih 净重	**2.5kg (5.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DJR360RF4 / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Electric 2 speed provides ideal RPM of high speed for wooden cutting and low speed for metal cutting** | 2 kelajuan elektrik menyediakan RPM kelajuan tinggi untuk pemotongan kayu dan kelajuan rendah untuk pemotongan logam | 2速选择，高速适用于木质切割，低速适用于金属切割

*Recipro Saw Blades
- RF4 : 1 x Rapid Charger, 4 x 3.0Ah Battery
- ZX : Without Charger & Battery

Li-ion 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5 Ah
18V X2



Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High/ Low: 0 - 3,000/ 0 - 2,300**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**449x116x243mm** **(17-3/4"x4-9/16"x9-9/16")**
Net Weight Berat Bersih 净重	**4.0 - 4.7kg (8.9 - 10.3lbs)**

DJR187RME / RFE / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **BL Brushless DC motor with high power**
  Motor BL tanpa berus berkuasa tinggi
  BL高功率无碳刷直流马达

*Recipro Saw Blades
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery


Li-ion 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5 Ah
18V



Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**High/ Low: 0 - 3,000 / 0 - 2,300**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**439x83x231mm** **(17-1/4"x3-1/4"x9-1/8")**
Net Weight Berat Bersih 净重	**3.4 - 3.8kg (7.6 - 8.3lbs)**

DJR188Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **High cutting speed (Max 3,000 SPM) provide higher cutting efficiency**
  Kelajuan pemotongan tinggi (Max 3,000 SPM) memberikan kecekapan pemotongan yang tinggi
  高切割速度（最大3,000 SPM）提供更高的切割效率

*Recipro Saw Blades
- Z : Without Charger & Battery


Li-ion 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5 Ah
18V



Length of Stroke Panjang Strok 冲程长度	**20mm (13/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,000**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**BL1815N: 316x81x203mm** **(12-1/2"x3-3/16"x8")** **BL1850B: 316x81x220mm** **(12-1/2"x3-3/16"x8-5/8")**
Net Weight Berat Bersih 净重	**2.6 - 2.9kg (5.7 - 6.4lbs)**

DJR186RME / RFE / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Toolless blade change; redesign of blade clamp makes it easier to remove a blade**
  Penukaran bilah tanpa alat
  无需工具更换刀片

*Recipro Saw Blades
- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery


Li-ion 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5 Ah
441 mm
18V



Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,800**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**486x81x223mm** **(19-1/8"x3-3/16"x8-3/4")**
Net Weight Berat Bersih 净重	**3.5 - 3.8kg (7.6 - 8.3lbs)**

DJR181RFE / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Toolless blade change system enables fast, one-handed blade changes**
  Penukaran bilah tanpa alat
  无需工具更换刀片

*Recipro Saw Blades
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5 Ah
441 mm
18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Length of Stroke Panjang Strok 冲程长度	**28mm (1-1/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,900**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**499x91x234mm** **(19-5/8"x3-5/8"x9-1/4")**
Net Weight Berat Bersih 净重	**3.5kg (7.7lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DJR183Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Dual-position on/off switch allows for either paddle or trigger switch operation**
  Suis dua pemilihan
  2开关选择

*Recipro Saw Blades

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Panjang Strok 冲程长度	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Kelajuan Strok 冲程速度	**13mm (1/2")**
Strokes Per Minute (SPM) Kapasiti 能力	**0-3,000**
Dimensions (L x W x H) Dimensi 体积	**392x81x209mm** **(15-1/2"x3-3/16"x8-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.7kg (3.3 - 3.8lbs)**

JR105DWAE / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Cuts PVC, ABS pipe, EMT, drywall, wood & more**
  Memotong PVC, paip ABS, EMT, drywall, kayu dll
  切割PVC，ABS管，EMT，石膏板，木材及更多

*Recipro Saw Blades, Hex Wrench

- WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5


12V max



Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,300**
Capacity Kapasiti 能力	**Pipe/ Wood: 50/ 50mm (2" / 2")**
Dimensions (L x W x H) Dimensi 体积	**376x66x186mm** **(14-3/4"x2-5/8"x7-3/8")**
Net Weight Berat Bersih 淨重	**1.3 - 1.5kg (2.9 - 3.2lbs)**

JR100DWE

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Dual-position on/off switch design allows for either paddle or trigger switch operation**
  Suis dua pemilihan
  2开关选择

*Recipro Saw Blades

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Li-ion Ah 1.3

10.8V



Capacity Kapasiti 能力	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-3,300**
Dimensions (L x W x H) Dimensi 体积	**355x63x146mm** **(14"x2-1/2"x5-3/4")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**

JR102DWE

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Accepts both Recipro and Jig saw blades**
  Boleh memasang bilah gergaji recipro dan bilah gergaji jig
  可配置线锯片或往复锯片

*Recipro Saw Blades, Hex Wrench

- WE : 1 x Standard Charger, 2 x 1.3Ah Battery

Li-ion Ah 1.3

10.8V



Capacity Kapasiti 能力	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-3,300**
Dimensions (L x W x H) Dimensi 体积	**355x63x146mm** **(14"x2-1/2"x5-3/4")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**

JR3050T

Recipro Saw
Gergaji Resipro
往复锯



- **Ideal for framers, carpenters, electricians, plumbers and general construction**
  Untuk framers, tukang kayu, juruelektrik, tukang paip dan pembinaan umum
  木工，木匠，电工，水管工和一般建筑的理想选择

*Recipro Saw Blades

303 mm



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Length of Stroke Panjang Strok 冲程长度	**28mm (1-1/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,800**
Capacity Kapasiti 能力	**Pipe : 130mm (3-1/2")** **Wood: 255mm (10")**
Overall Length Panjang Keseluruhan 总长度	**452mm (17-3/4")**
Net Weight Berat Bersih 淨重	**3.3kg (7.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

JR3070CT

Recipro Saw
Gergaji Resipro
往复锯



- **Anti-Vibration Technology for 2X Less Vibration**
  Mengurangkan getaran 2X dengan teknologi anti getaran
  2倍减振的防振技术

*Recipro Saw Blades



303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,510W**
Length of Stroke Panjang Strok 冲程长度	**32mm (1-1/4")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,800**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Overall Length Panjang Keseluruhan 总长度	**485mm (19-1/8")**
Net Weight Berat Bersih 净重	**4.6kg (10lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DSD180Z

Cordless Drywall Saw
Gergaji Drywall Tanpa Kord
充电式石膏板切割机



- **Ideal for cutting holes in drywalls when setting ceiling lights, air vents etc**
  Sesuai untuk memotong lubang untuk memasang lampu siling, ventilasi udara dan lain-lain
  适用于干墙，安装天花板灯，通风口等

*Blade, Blade Cover, Base Cover, Hex Wrench

• Z : Without Charger & Battery



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 6,000**
Length of Stroke Panjang Strok 冲程长度	**6mm (1/4")**
Capacity Kapasiti 能力	**Drywall: 30mm (1-3/16")** **Wood: 15mm (9/16")**
Dimensions (L x W x H) Dimensi 体积	**263x79x291mm** **(10-3/8"x3-1/8"x11-3/8")**
Net weight Berat Bersih 净重	**1.7 - 2.0kg (3.8 - 4.5lbs)**

SD100DWAJ / Z

Cordless Drywall Saw
Gergaji Drywall Tanpa Kord
充电式石膏板切割机



- **Ideal for cutting holes in drywalls when setting ceiling lights, air vents etc**
  Sesuai untuk memotong lubang untuk memasang lampu siling, ventilasi udara dan lain-lain
  适用于干墙，安装天花板灯，通风口等

*Blade, Blade Cover, Base Cover, Hex Wrench

• WAJ : 1 x Standard Charger, 2 x 2.0Ah Battery, 1 x Makpac Connector Box
• Z : Without Charger & Battery



Li-ion Ah 4.0 2.0 1.5

12V max



Refer Pg. 74
for more information

Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 6,000**
Length of Stroke Panjang Strok 冲程长度	**6mm (1/4")**
Capacity Kapasiti 能力	**Drywall: 30mm (1-3/16")** **Wood: 15mm (9/16")**
Dimensions (L x W x H) Dimensi 体积	**239x79x266mm** **(9-3/8"x3-1/8"x10-1/2")**
Net Weight Berat Bersih 净重	**1.4 - 1.6kg (3.2 - 3.5lbs)**

SJ401

Scroll Saw
Gergaji Scroll
平台式線鋸機



- **Bevel cuts up to 45° to the left and 15° to the right**
  Pemotongan serong sehingga 45° ke kiri dan 15° ke kanan
  斜角向左切割45°，向右切割15°

*Saw blade x6, Hex Wrench, Blade Change Rod





Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**50W**
Capacity Kapasiti 能力	**Thickness of cut : 50mm (2")** **Throat : 406mm (16")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**400-1,600**
Overall Length Panjang Keseluruhan 总长度	**600mm (23-5/8")**
Net Weight Berat Bersih 净重	**14kg (30.87lbs)**

LB1200F

Band Saw
Gergaji Band
带锯



- **High/ low speed selection for excellent results in both hard and soft wood**
  Pemilihan kelajuan tinggi / rendah untuk kayu keras dan lembut
  高/低速选择，切割硬木和软木

*Band Saw Blades, Rip Fence, Miter Gauge, Push Stick, Nozzle, Hex Wrench, Band Saw Stand






Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Capacity Kapasiti 能力	**Thickness of cut : 165mm (6-1/2")** **Throat : 305mm (12")**
Blade Speed Kelajuan Bilah 锯片速度	**High: (50Hz)800 (60Hz)1,000m ((50 Hz)2,624 (60 Hz) 3,280ft)/ min** **Low: (50Hz)400 (60Hz)500m ((50Hz)1,312 (60Hz) 1,640ft)/ min**
Dimensions (L x W x H) Dimensi 体积	**615x775x1,600mm** **(24-1/4"x30-1/2"x63")**
Net Weight Berat Bersih 净重	**82kg (181.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



Planing | Routering

Pengetam | Tanggam 刨削 | 雕刻

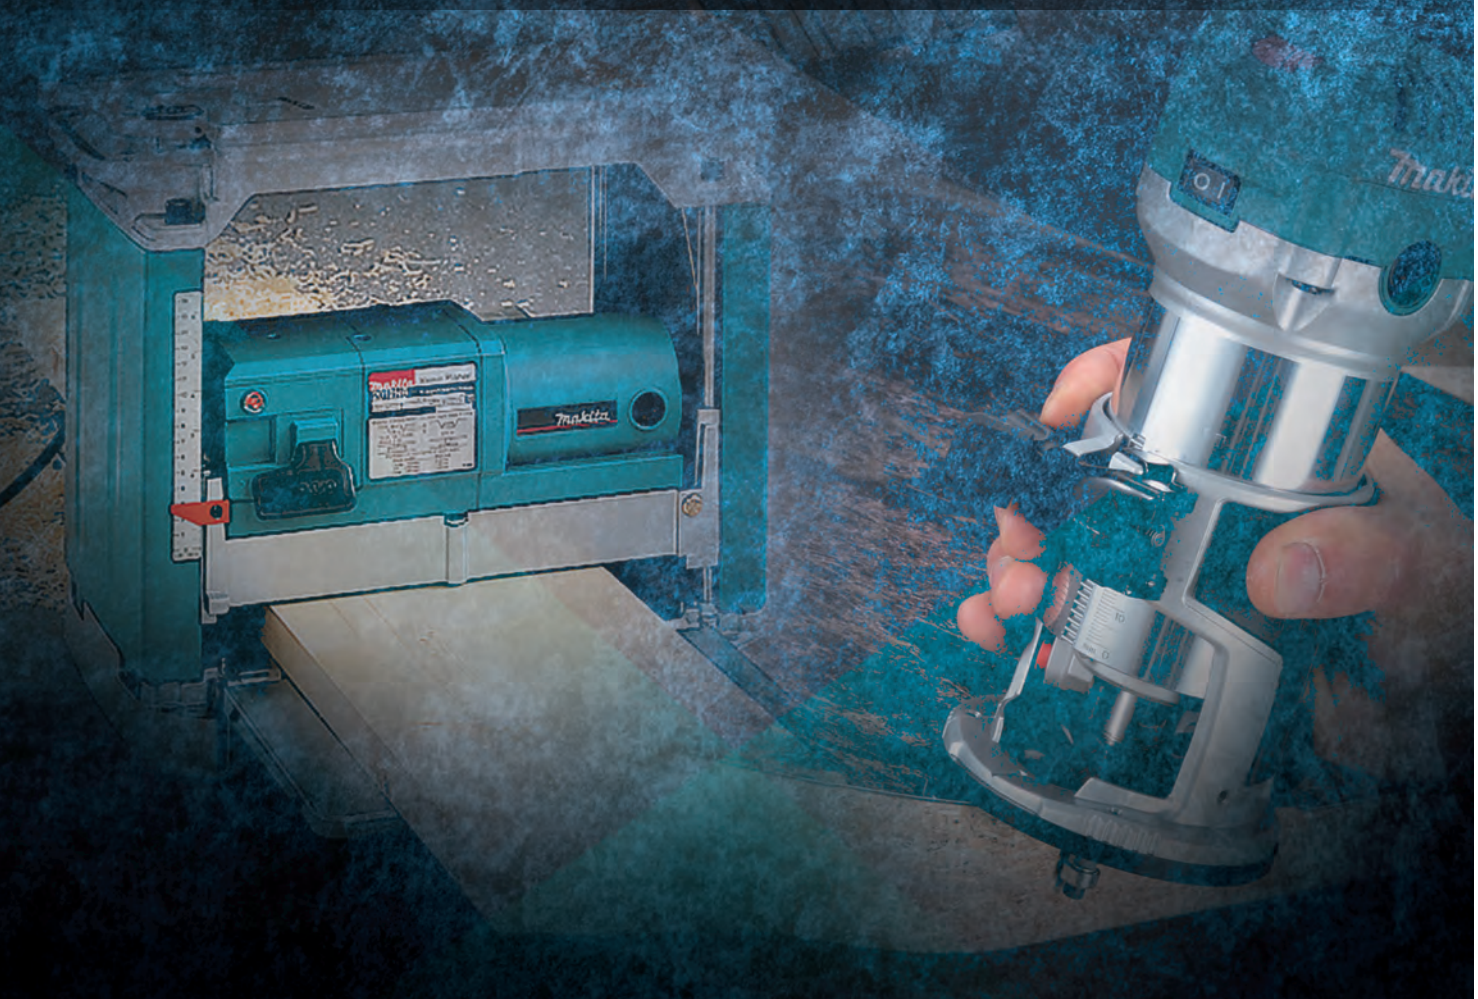

DKP180RFE / Z 82mm (3-1/4")

Cordless Planer
Pengetam Tanpa Kord
充电式电刨



- **Easy blade setting system for fast blade installation**
  Sistem penetapan bilah mudah untuk memasang bilah cepat
  简易刀片设置系统，可快速安装刀片

*Planer Blade, Blade Gauge, Guide Rule, Socket Wrench, Dust Nozzle

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

441



Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削宽度	**2.0mm (5/64")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**14,000**
Dimensions (L x W x H) Dimensi 体积	**333x157x160mm (13-1/8"x6-3/16"x6-5/16")**
Net weight Berat Bersih 淨重	**3.2 - 3.5kg (7.1 - 7.9lbs)**

KP0810 82mm (3-1/4")

Power Planer
Planer Elektrik
电刨



- **Powerful & lightweight**
  Berkuasa & ringan
  强力与轻量

*Blade Gauge, Depth Guide, Guide Rule, Planer Blade, Socket Wrench

132



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**4mm (5/32")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**16,000**
Dimensions (L x W x H) Dimensi 体积	**290x168x176mm (11-3/8"x6-5/8"x6-15/16")**
Net Weight Berat Bersih 淨重	**3.3kg (7.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

KP0800X 82mm (3-1/4")

Power Planer
Planer Elektrik
电刨



- **High power & lightweight**
  Kuasa tinggi & ringan
  高功率与轻量

*Planer Blade, Blade Gauge, Guide Rule, Socket Wrench, Dust Nozzle

411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**620W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**2.5mm (3/32")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**17,000**
Dimensions (L x W x H) Dimensi 体积	**285x158x158mm (11-1/4"x6-1/4"x6-1/4")**
Net Weight Berat Bersih 淨重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

N1900B 82mm (3-1/4")

Power Planer
Planer Elektrik
电刨



- **V-groove on base for easy chamfer cutting**
  V-groove pada dasar untuk pemotongan melencong mudah
  底座上的V型槽，便于倒角切割

*Sharpening Holder Assembly, Blade Gauge, Socket Wrench, Planer Blade, Guide Rule

51



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**580W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**1mm (1/32")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**16,000**
Overall Length Panjang Keseluruhan 总长度	**290mm (11-3/8")**
Net Weight Berat Bersih 淨重	**2.8kg (6.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

1911B 110mm (4-3/8")

Power Planer
Planer Elektrik
电刨



- **Powerful motor in compact and lightweight body**
  Motor berkuasa badan padat dan ringan
  马达功能强大，体积小巧轻便

*Sharpening Holder Assembly, Blade Gauge, Socket Wrench, Planer Blade

106



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**840W**
Planing Width Lebar Pelan 刨削宽度	**110mm (4-3/8")**
Planing Depth Kedalaman Pelan 刨削深度	**2mm (1/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**16,000**
Overall Length Panjang Keseluruhan 总长度	**355mm (14")**
Net Weight Berat Bersih 淨重	**4.1kg (9.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

1805N 155mm (6-1/8")

Power Planer
Planer Elektrik
电刨



- **Rugged aluminum housing and easy depth settings**
  Casing aluminium yang lasak dan penetapan kedalaman yang mudah
  坚固的铝外壳和简单的深度设置

*Sharpening Holder Assembly, Blade Gauge, Socket Wrench, Planer Blade

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,140W**
Planing Width Lebar Pelan 刨削宽度	**155mm (6-1/8")**
Planing Depth Kedalaman Pelan 刨削深度	**2mm (1/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**15,000**
Overall Length Panjang Keseluruhan 总长度	**445mm (17-1/2")**
Net Weight Berat Bersih 净重	**7.9kg (17.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

2012NB 304mm (12")

Planer
Planer Elektrik
电刨



- **Powerful 1,650W motor for improved performance**
  Motor 1,650W yang berkuasa meningkatkan prestasi
  功率强劲的1,650W马达提高了性能

*Socket Wrench, Hex Wrench, Magnetic holder x2

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Cutting Width Lebar Pelan 刨削宽度	**304mm (12")**
Cutting Depth Kedalaman Pelan 刨削深度	**Cutting width 0-150mm: 3mm (1/8")** **Cutting width 150-240mm : 1.5mm (1/16")**
Feed Rate (min) Kadar Suapan 进料速度	**8.5m (27.9ft)**
Table Size (W x L) Saiz Meja 工作台尺寸	**304 x 771mm (12" x 30-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Panjang Keseluruhan 总长度	**483x771x401mm** **(19"x30-3/8"x15-13/16")**
Net Weight Berat Bersih 净重	**27.1 - 27.6kg (59.7 - 60.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

3501N

Groove Cutter
Pemotong alur
沟锯



- **Powerful motor, easy depth adjustment**
  Motor berkuasa, pelarasan kedalaman yang mudah
  强大的马达，容易调整深度

*Shiplapping Scale, Rip Fence (Guide Rule), Dressing Stone, Wrench x2, Saw Blade, Screwdriver, Cutter Blade

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,160W**
Max Cutter Blade Size Saiz Bilah Maksimum 最大锯片尺寸	**Dia. x Width :** **120x36mm (4-3/4"x1-3/8")**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**Cutter/ Saw :** **30mm (1-1/8")/ 65 mm (2-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,500**
Overall Length Panjang Keseluruhan 总长度	**365mm (14-3/8")**
Net Weight Berat Bersih 净重	**7.2kg (15.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

DPJ180Z

Cordless Plate Joiner
Mesin Kayu Tanpa Kord
充电式木工接合机



- **Easy blade setting system for fast blade installation**
  Sistem pemasangan bilah mudah
  刀片易安装系统

*Cutter Blade, Angle Guide, Lock Nut Wrench, Set Plate, Dust Bag

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

430



Blade Diameter Diameter Bilah 锯片直径	**100mm (4")**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**20mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,500**
Dimensions (L x W x H) Dimensi 体积	**351x139x149mm** **(13-3/4"x5-1/2"x5-7/8")**
Net Weight Berat Bersih 净重	**2.8 - 3.1kg (6.2 - 6.8lbs)**

PJ7000


Plate Joiner
Mesin Kerja Kayu
木工接合机



- **Large and easy-to-operate cam locks for fence adjustments**
  Pelarasan pagar yang mudah
  简易栅栏调节

*Cutter Blade, Angle Guide, Dust Bag, Set Plate, Lock Nut Wrench

459



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**701W**
Blade Diameter Diameter Bilah 锯片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**302x139x145mm** **(11-7/8"x5-1/2"x5-3/4")**
Net Weight Berat Bersih 净重	**2.8kg (6.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

3901

Plate Joiner
Mesin Kerja Kayu
木工接合机



- **Designed for making strong plate joints fast**
  Direka untuk penyambungan rata
  用于快速制作坚固的平板接头

*Cutter Blade, Angle Guide, Dust Bag, Set Plate, Lock Nut Wrench

411

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**590W**
Blade Diameter Diameter Bilah 锯片直径	**100mm (4")**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**20mm (3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Overall Length Panjang Keseluruhan 总长度	**307mm (12-1/16")**
Net Weight Berat Bersih 净重	**3.0kg (6.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

DRT50Z 6mm (1/4"), 8mm (3/8")

Cordless Trimmer
Mesin Perapi Tanpa Kord
充电式修边机



- **Faster Trimming than Corded**
  Pemangkasan lebih cepat daripada mesin berkord
  修剪比有线机型更快速

*Collet Cone, Trimmer Base Assembly, Straight Guide Assembly, Templet Guide, Wrench x2, Trimmer Guide

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

NEW BARU | 新




Refer Pg. 58
for more information

Collet Capacity Kapasiti Collet 夹头直径	**6mm, 8mm or 1/4", 3/8"**
No Load Speed (RPM) Kelajuan Strok 回转速	**10,000 - 30,000**
Plunge Capacity Kapasiti Plunge 能力	**Trimmer Base: 0 - 40mm (0" - 1-9/16")** **Plunge Base: 0 - 35mm (0" - 1-3/8")**
Dimensions (L x W x H) Dimensi 体积	**BL1815N: 134x89x208mm (5-1/4"x3-1/2"x8-1/8")** **BL1850B: 134x89x226mm (5-1/4"x3-1/2"x8-7/8")**
Net Weight Berat Bersih 净重	**1.8 - 2.1kg (3.9 - 4.6lbs)**

RT0700C / X2 6mm (1/4"), 8mm (3/8")

Trimmer
Pemangkas
修边雕刻机



- **Powerful 710W motor for improved performance**
  Motor berkuasa 710W untuk prestasi yang lebih baik
  强大710W马达提高了性能

*Collet Cone, Trimmer Base Assembly, Straight Guide Assembly, Templet Guide, Wrench x2, Dust Nozzle (country-specific), Tilt Base Assembly (country-specific), Plunge Base Assembly (country-specific), Offset Base Assembly (country-specific)

411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm, 8mm or 1/4", 3/8"**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**10,000 - 30,000**
Dimensions (L x W x H) Dimensi 体积	**89x89x200mm (3-1/2"x3-1/2"x7-7/8")**
Net Weight Berat Bersih 净重	**1.8 - 2.7kg (3.9 - 6.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

3709 6mm (1/4")

Trimmer
Pemangkas
修边雕刻机



- **530W motor for smooth trimming**
  530W motor untuk pemangkasan yang licin
  530W马达提供平滑的修剪

*Collet Cone, Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit, Chip Deflector, Wrench x2


411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**530W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm or 1/4"**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**30,000**
Dimensions (L x W x H) Dimensi 体积	**82x90x199mm (3-1/4"x3-1/2"x7-7/8")**
Net Weight Berat Bersih 净重	**1.5kg (3.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

RP0900 6mm (1/4"), 8mm (3/8")

Router (Plunge type)
Pemangkas
雕刻机



- **Oversized ball bearing construction for longer tool life**
  Konstruksi galas bebola untuk memanjangkan hayat alat
  超大滚珠轴承结构，延长工具寿命

*Straight Guide, Straight Bit, Collet cone x2, Wrenches

106



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm, 8mm or 1/4", 3/8"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 35mm (0 - 1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**27,000**
Dimensions (L x W x H) Dimensi 体积	**110x256x217mm (4-5/16"x10-3/32"x8-17/32")**
Net Weight Berat Bersih 净重	**2.7kg (6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

RP2301FC 12mm (1/2")

Router (Plunge type)
Pemangkas
雕刻机



- **Powerful 2,100W motor for the most demanding applications**
  Motor 2,100W berkuasa untuk aplikasi yang paling mencabar
  功能强大2,100W马达，适用于要求苛刻的应用

*Straight Guide, Collet Cone, Wrench, Screw M6x135



203



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,100W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm or 1/2"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 70mm (0 - 2-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**9,000 - 22,000**
Dimensions (L x W x H) Dimensi 体积	**155x294x312mm (6-1/8"x11-5/8"x12-1/4")**
Net Weight Berat Bersih 净重	**6.1kg (13.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft.)**

RP1801 12mm (1/2")

Router (Plunge type)
Pemangkas
雕刻机



- **Electric brake for increased operator safety**
  Brake elektrik untuk pengguna keselamatan
  电子自动刹车

*Straight Guide, Collet Cone, Wrench, Screw M6x135




203



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm or 1/2"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 70mm (0 - 2-3/4")**
Base Dia. Diameter Pangkalan 底座直径	**170mm (6-11/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**22,000**
Dimensions (L x W x H) Dimensi 体积	**155x294x312mm (6-1/8"x11-5/8"x12-1/4")**
Net Weight Berat Bersih 净重	**6kg (13.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft.)**

3612BR 12mm (1/2")

Router (Plunge type)
Pemangkas
雕刻机



- **Conveniently located plunge lock lever for efficient operation**
  Pelarasan tuil yang mudah untuk operasi yang cekap
  便利的插入式锁定杆可实现高效操作

*Straight Guide, Templet Guide, Trimmer Guide, Guide Holder, Collet Sleeve (6mm or 1/4"), Collet Sleeve (8mm or 3/8"), Straight Bit, Wrench x2



153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,600W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm or 1/2"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 65mm (0 - 2-9/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**23,000**
Dimensions (L x W x H) Dimensi 体积	**160x276x287mm (6-5/16"x10-7/8"x11-5/16")**
Net Weight Berat Bersih 净重	**5.5kg (12.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

3600H 12mm (1/2")

Router
Pemangkas
雕刻机



- **D-handle design with locking trigger switch for comfort during continuous operation**
  Pemegang-D dengan suis pencetus berkunci untuk keselesaan semasa operasi berterusan
  带锁定扳机开关的D型手柄设计可确保连续操作时的舒适性

*Trimmer Guide, Straight Guide Assembly, Templet Guide, Collet Sleeve (6mm or 1/4"), Collet Sleeve (8mm or 3/8"), Wrench, Straight bit (carbide-tipped)

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,500W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm or 1/2"**
Base Dia. Diameter Pangkalan 底座直径	**160mm (6-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**24,000**
Overall Height Panjang Keseluruhan 总长度	**210mm (8-1/4")**
Net Weight Berat Bersih 净重	**4.4kg (9.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

4403 6mm (1/4")

Sash Router
Pemangkas Sash
窗扇雕刻机



- **Large transparent chip guard for operator's safety**
  Pengawal cip telus yang besar untuk keselamatan pengguna
  大型透明芯片防护罩保证操作者的安全

*Sash router bit (drill point), Angle Gauge, Wrench x2, Oil supply (country-specific), Collet cone (6mm or 1/4")

411



Continuous rating input Input Kuasa Berterusan 额定输入功率	**530W**
Capacity Kapasiti 能力	**Collet : 6mm or 1/4"**
Max Width of Work Lebar Kerja Maksimum 最大工作宽度	**123mm (4-7/8")**
Max Width of Work (45°) Lebar Kerja Maksimum 最大工作宽度	**77mm (3")**
Max Height of Work Ketinggian Kerja Maksimum 最大工作高度	**185mm (7-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**30,000**
Dimensions (L x W x H) Dimensi 体积	**327x350x355mm (12-7/8"x13-13/16"x14")**
Net Weight Berat Bersih 净重	**16kg (35.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Vacuum Cleaner

Pembersih Vakum 吸尘机







DVC260Z / ZX

Cordless Backpack Vacuum Cleaner

Pembersih Vakum Beg Galas Tanpa Kord
充电式背负吸尘机



- **Max suction power 45W**
  45W kuasa sedutan yang kuat 最大吸力45W

*DVC260Z : HEPA filter assembly, Backpack shoulder harness, Floor nozzle, Flexible rubber nozzle, Telescopic pipe assembly, Hose 28mm-1.0M, Bent pipe, Hose band, Filter bag
*DVC260ZX : HEPA filter assembly, Backpack shoulder harness, Hose band, Front cuff 24, Paper filter bag set, Front cuff 22, Hose complete 28mm-1.5M

• Z : Without Charger & Battery • ZX : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Refer Pg. 19
for more information

Capacity Kapasiti 容量	**Filter bag/ Paper dust bag: 2.0L** **Cloth dust bag: 1.5L**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B: High: 60** **with BL1850B: Low: 90**
Max Air Flow Aliran Udara 最大空气流量	**1.5m³/ min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**7.1kPa (710mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High/ Low: 45/ 25W**
Dimensions (L x W x H) Dimensi 体积	**230x152x373mm (9"x6"x14-3/4")**
Net Weight Berat Bersih 净重	**3.8kg (8.5 lbs)**

DVC860LZ

Corded & Cordless Vacuum Cleaner (Wet & Dry)

Pembersih Vakum Kuasa Elektrik Dan Tanpa Kord (Basah dan Kering)
充电式 + 電源驱动吸尘机(干湿两用)



- **Cloth filter type: for both wet & dry vacuum cleaning**
  Jenis penapis kain: untuk menyedut kotoran kering atau lembap
  布类过滤器类型：适用于干和湿集尘清洁

*Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Connection cord (country-specific)

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Refer Pg. 20
for more information

Capacity Kapasiti 尘袋容量	**Dust/ Water: 8/ 6L**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x 2: 65**
Max Air Flow Aliran Udara 最大空气流量	**AC/ DC: 3.6/ 2.1m³/ min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**AC/ DC: 24/ 9kPa**
Suction Power Kuasa Sedutan 吸力	**AC/ DC: 320/ 25 - 70W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm** **(14-3/8"x13-1/8"x14-1/2")**
Net Weight Berat Bersih 净重	**8.6kg (19.0lbs.)**

DVC862LRT2 / Z

Cordless Vacuum Cleaner (Wet & Dry)

Pembersih Vakum Tanpa Kord (Basah dan Kering)
充电式吸尘机(干湿两用)

- **For both wet and dry vacuum cleaning**
  Untuk pembersihan vakum basah dan kering
  适用于干和湿集尘清洁

*Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box

• RT2 : 1 x Rapid Charger, 2 x 5.0Ah Battery
• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Capacity Kapasiti 尘袋容量	**Dust/ Water: 8/ 6L**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x 2: 40**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**9.8kPa**
Suction Power Kuasa Sedutan 吸力	**90W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm** **(14-3/8"x13-1/8"x14-1/2")**
Net Weight Berat Bersih 净重	**7.0kg (15.5lbs.)**

DVC863LRT2 / Z / ZX

Cordless Vacuum Cleaner (Dry)

Pembersih Vakum Tanpa Kord (Kering)
充电式吸尘机(干用)

- **8L Large dust bag capacity enables continuous cleaning work** Kapasiti beg debu 8L membolehkan kerja pembersihan berterusan 8L大容量集尘袋可延续清洁工作

• RT2 : 1 x Rapid Charger, 2 x 5.0Ah Battery
• Z : Without Charger & Battery
*Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box
• ZX : Without Charger & Battery
*Hose, Joint, Plastic Dust Bag x10

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Capacity Kapasiti 尘袋容量	**Dust: 8L**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x 2: 40**
Max Air Flow Aliran Udara 最大空气流量	**2.1m³/min**
Max Sealed Suction Sedutan Terkedap 最大密封吸力	**9.8kPa**
Suction Power Kuasa Sedutan 吸力	**90W**
Dimensions (L x W x H) Dimensi 体积	**366x334x368mm** **(14-3/8"x13-1/8"x14-1/2")**
Net Weight Berat Bersih 净重	**7.7kg (17.1lbs.)**

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DRC200Z

Robotic Cleaner
Pembersih Robotik
充电式智能吸尘机



- **Able to clean an area of 300m² per 120 min with a coverage rate of 80%**
  Boleh membersihkan Kawasan seluas 300m² dalam 120min, meliputi 80% tempat pembersihan
  约120分钟可清洁300平方米的范围，覆盖率为80%

*Wireless remote controller (including two AAA alkaline batteries), Side Brush, Boundary Tape

- Z : Without Charger & Battery

BL MOTOR

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V




Refer Pg. 61
for more information

Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x 2: 200** **with BL1830B x 2: 120**
Max Cleaning Area Kawasan Pembersihan Maksimum 最大清洁面积	**with BL1850B x 2: 500m²** **with BL1830B x 2: 300m²**
Max Running Speed Kelajuan Operasi Maksimum 最大运行速度	**0.3m/ sec**
Dust Box Capacity Kapasiti 容量	**2.5L**
Dimensions (L x W x H) Dimensi 体积	**460x460x180mm** **(18-1/8"x18-1/8"x7-1/8")**
Net Weight Berat Bersih 净重	**7.3kg (16.1lbs)**

DCL500Z

Cordless Cyclone Cleaner
Pembersih Vakum Cyclone
Tanpa Kord
充电式旋风吸尘机



- **HEPA Clean Filter offers maximum performance for residential and commercial applications**
  Penapis Bersih HEPA memberikan prestasi maksimum untuk aplikasi perumahan dan komersil
  HEPA过滤系统为住宅和商业应用提供最佳性能

*Shoulder Belt, Crevice Nozzle, Cleaning Brush, Floor Nozzle, Zoom Pipe, Hose, Hose Hook

- Z: Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Capacity Kapasiti 容量	**250mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1840B: High: 16** **with BL1840B: Low: 40**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**6.6kPa (660mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High: 75W** **Low: 25W**
Dimensions (L x W x H) Dimensi 体积	**352x189x252mm** **(13-7/8"x7-7/16"x9-7/8")**
Net Weight Berat Bersih 净重	**3.6kg (7.9 lbs.)**

DCL501Z

Cordless Cyclone Cleaner
Pembersih Vakum Cyclone
Tanpa Kord
充电式旋风吸尘机



- **Quiet operation for operator comfort**
  Operasi senyap untuk keselesaan pengguna
  静音与舒适的操作

*Shoulder Belt, Crevice Nozzle, Cleaning Brush, Floor Nozzle, Zoom Pipe, Hose, Hose Hook

- Z: Without Charger & Battery

BL MOTOR

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

HEPA filter




Refer Pg. 62
for more information

Capacity Kapasiti 容量	**250mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1060B: High: 35** **with BL1060B: Low: 77**
Max Air Flow Aliran Udara 最大空气流量	**1.2m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**10kPa (1,020mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High: 75W** **Low: 25W**
Dimensions (L x W x H) Dimensi 体积	**352x189x252mm** **(13-7/8"x7-7/16"x9-7/8")**
Net Weight Berat Bersih 净重	**3.1kg (6.8 lbs.)**

DVC350Z

Cordless Vacuum Cleaner
Pembersih Vakum Tanpa Kord
充电式吸尘机



- **Large 3L dust bag capacity**
  Kapasiti beg debu 3L membolehkan pembersihan berterusan
  3L大容量尘袋可延续清洁工作

*Nozzle assembly, Dust bag assembly, Hose, Shoulder Belt

- Z: Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V




Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1030B: High: 13/ Low: 26**
Max Peak Air Flow Aliran Udara 最大空气流量	**3.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.5kPa (560mmH_2O)**
Recoverable Capacity Kapasiti 容量	**Dust: 3.0L (0.8gal)**
Dimensions (L x W x H) Dimensi 体积	**273x195x226mm** **(10-3/4"x7-5/8"x8-7/8")**
Net Weight Berat Bersih 净重	**2.2kg (4.8lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DCL180FRFW / Z / RFB / ZB

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Strong suction power for fast cleaning with more run time**
  Kuasa sedutan yang kuat
  强大的吸力，快速清洁

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- FRFW: 1x Rapid Charger, 1x 3.0Ah Battery (White)
- Z: Without Charger & Battery (Blue)
- RFB: 1x Rapid Charger, 1x 3.0Ah Battery (Black)
- ZB: Without Charger & Battery (Black)

☼ **Only for DCL180FRFW**

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V




Refer Pg. 63
for more information

Capacity Kapasiti 容量	**650mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1030B: 20**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**4.2kPa (428mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**30W**
Dimensions (L x W x H) Dimensi 体积	**999x114x152mm (39-1/4"x4-1/2"x6")**
Net Weight Berat Bersih 淨重	**1.2kg (2.7 lbs)**

DCL182FRFW / FZW

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Improved front cover opens with push button for easier access**
  Penutup depan lebih senang dibuka dengan butang tekan
  前盖一按式开关

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag

- FRFW: 1x Rapid Charger, 1x 3.0Ah Battery (White)
- FZW: Without Charger & Battery (White)

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5


18V



Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1050B: High: 33** **with BL1050B: Low: 66**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.4kPa (551mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**High: 30W** **Low: 11W**
Dimensions (L x W x H) Dimensi 体积	**1,004x115x151mm (39-1/2"x4-1/2"x5-15/16")**
Net Weight Berat Bersih 淨重	**1.3kg (2.8 lbs)**

CL106FDWYW / Z

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Stronger suction power for faster cleaning with more run time**
  Kuasa sedutan yang lebih kuat untuk pembersihan yang lebih cepat dan masa operasi lebih lama
  更强的吸力，更快的清洗，运行时间更持久

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- WYW: 1 x Standard Charger, 1 x 1.5Ah Battery (White)
- Z: Without Charger & Battery (Blue)

☼

Li-ion Ah 4.0 2.0 1.5

12V max



Capacity Kapasiti 容量	**600mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1041B: 42**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.1kPa (316mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**19W**
Dimensions (L x W x H) Dimensi 体积	**958x100x150mm (37-3/4"x3-15/16"x5-7/8")**
Net Weight Berat Bersih 淨重	**1.0kg (2.2 lbs.)**

CL107FDWYW / Z

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **3 mode suction power settings**
  Tetapan kuasa sedutan 3 mod
  3档吸力操作

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag

- WYW: 1 x Standard Charger, 1 x 1.5Ah Battery (White)
- Z: Without Charger & Battery (Blue)

Li-ion Ah 4.0 2.0 1.5

12V max



Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1041B: Max: 20/** **High: 24/ Normal: 50**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**5.0kPa (510mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**Max: 32W/ High: 20W/** **Normal: 5W**
Dimensions (L x W x H) Dimensi 体积	**960x112x150mm (37-3/4"x4-3/8"x5-7/8")**
Net Weight Berat Bersih 淨重	**1.1kg (2.5lbs.)**

CL100DW / Z

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Increased storage capacity for longer time between waste disposal**
  Kapasiti pengumpulan habuk yang lebih besar
  更大集尘容量

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- W: 1 x Standard Charger, 1 x 1.3Ah Battery (White)
- Z: Without Charger & Battery (White)

Li-ion Ah 1.3

10.8V



Capacity Kapasiti 容量	**600mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**12**
Max Air Flow Aliran Udara 最大空气流量	**1.3m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**2.3kPa (235mmH_2O)**
Suction Power Kuasa Sedutan 吸力	**14W**
Dimensions (L x W x H) Dimensi 体积	**966x103x150mm (38-1/32"x4-1/16"x5-7/8")**
Net Weight Berat Bersih 淨重	**0.88kg (1.94lbs)**

* **Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Capsule Type
Jenis kapsul/ 胶囊型



Ergonomic Handle With Easy On/ Off Trigger Switch
Pemegang ergonomik dengan suis pemicu hidup/ mati mudah
符合人体工程学的手柄，扳机开关



Quick Dust Disposal
Pembuangan debu pantas
前盖简易打开/关闭

- Cloth filtration system enables to dispose of dust easily by removing capsule.
- Disposable paper bag is not necessary.
- Sistem penapisan kain membolehkan dibuang habuk dengan mudah dengan mengeluarkan kapsul.
- Beg kertas pakai buang tidak diperlukan.
- 快速除尘系统，清理便捷。
- 无需集尘袋。

DCL180 18V LITHIUM-ION
Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机

Suction Power
Kuasa Sedutan/ 吸力
30W

Large Capacity
Kapasiti Besar/ 最大容量
650mL

Net Weight
Berat Bersih/ 淨重
1.2kg



- **DCL180Z (BLUE)**
  without LED Light
  Tanpa Lampu LED I 无LED灯
- **DCL180FRFW (WHITE)**
  with LED Light
  Dengan Lampu LED I 带LED灯
- **DCL180RFB**
  DCL180ZB (BLACK)
  without LED Light
  Tanpa Lampu LED I 无LED灯



18V

CL106FD 12Vmax LITHIUM-ION
Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机

Suction Power
Kuasa Sedutan/ 吸力
19W

Large Capacity
Kapasiti Besar/ 最大容量
600mL

Net Weight
Berat Bersih/ 淨重
1.0kg



- **CL106FDZ (WHITE)**
  with LED Light
  Dengan Lampu LED I 带LED灯
- **CL106FDWYW (WHITE)**
  with LED Light
  Dengan Lampu LED I 带LED灯



12Vmax

Dust Bag or Paper Filter Type
Beg Debu Atau Penapis Jenis Kertas
布尘袋或纸尘袋型



Switch Button
Butang suis
开关按钮

- High/ Low suction power settings
- Simply push a power on button for continuous use; you do not have to keep on pulling a trigger during use.
- Tetapan kuasa sedutan tinggi/ rendah
- Hanya tekan butang kuasa untuk kegunaan berterusan; anda tidak perlu terus tekan butang semasa digunakan.
- 高/低两档吸力。
- 一按式开关，使用过程中不必继续按着扳机。



Front Cover Easier To Open/ Close
Penutup depan lebih mudah dibuka/ tutup
前盖更容易打开/关闭

- Simply by pushing a button, you can open the front cover for easy dust bag change.
- Hanya dengan menekan butang, anda boleh membuka penutup depan untuk menukar beg habuk dengan mudah.
- 按下开关按钮，打开前盖，简便更换尘袋。

DCL182 18V LITHIUM-ION
Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机

Suction Power
Kuasa Sedutan/ 吸力
30W

Large Capacity
Kapasiti Besar/ 最大容量
500mL

Net Weight
Berat Bersih/ 淨重
1.3kg



- **DCL182FRFW (WHITE)**
  with LED Light
  Dengan Lampu LED I 带LED灯
- **DCL182FZW (WHITE)**
  with LED Light
  Dengan Lampu LED I 带LED灯



18V

CL107FD 12Vmax LITHIUM-ION
Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机

Suction Power
Kuasa Sedutan/ 吸力
32W

Large Capacity
Kapasiti Besar/ 最大容量
500mL

Net Weight
Berat Bersih/ 淨重
1.1kg



- **CL107FDZ (BLUE)**
  with LED Light
  Dengan Lampu LED I 带LED灯
- **CL107FDWYW (WHITE)**
  with LED Light
  Dengan Lampu LED I 带LED灯



12Vmax

CL100D

10.8V LITHIUM-ION

Cordless Cleaner

Pembersih Vakum Tanpa Kord
充电式便携吸尘机

Suction Power
Kuasa Sedutan/ 吸力
14W

Large Capacity
Kapasiti Besar/ 最大容量
600mL

Net Weight
Berat Bersih/ 淨重
0.88kg

CL100DW (WHITE)
without LED Light
Tanpa Lampu LED I 无LED灯

CL100DZ (WHITE)
without LED Light
Tanpa Lampu LED I 无LED灯





10.8V

CL070D

7.2V LITHIUM-ION

Cordless Cleaner

Pembersih Vakum Tanpa Kord
充电式便携吸尘机

Suction Power
Kuasa Sedutan/ 吸力
14W

Large Capacity
Kapasiti Besar/ 最大容量
600mL

Net Weight
Berat Bersih/ 淨重
0.81kg

CL070DZ (White)
without LED Light
Tanpa Lampu LED I 无LED灯





7.2V

CL111D

BUILT-IN LITHIUM-ION BATTERY
(Bateri Litium-Ion Terbina Dalam | 内置锂电池)

Cordless Cleaner

Pembersih Vakum Tanpa Kord
充电式便携吸尘机

Suction Power
Kuasa Sedutan/ 吸力
21W

Large Capacity
Kapasiti Besar/ 最大容量
560mL

Net Weight
Berat Bersih/ 淨重
0.94kg

CL111DWI (IVORY)
without LED Light
Tanpa Lampu LED I 无LED灯

CL111DWR (RED)
without LED Light
Tanpa Lampu LED I 无LED灯



BUILT-IN LITHIUM-ION BATTERY
(Bateri Litium-Ion Terbina Dalam
内置锂电池)

CL102D

10.8V LITHIUM-ION

Cordless Cleaner

Pembersih Vakum Tanpa Kord
充电式便携吸尘机


Suction Power
Kuasa Sedutan/ 吸力
14W

Large Capacity
Kapasiti Besar/ 最大容量
500mL

Net Weight
Berat Bersih/ 淨重
1.1kg

CL102DW (WHITE)
without LED Light
Tanpa Lampu LED I 无LED灯

CL102DZ (WHITE)
without LED Light
Tanpa Lampu LED I 无LED灯

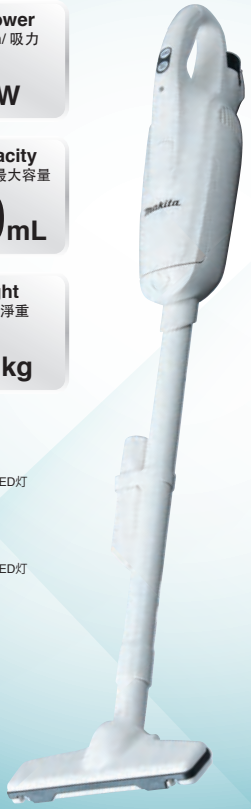



10.8V

CL104D

BUILT-IN LITHIUM-ION BATTERY
(Bateri Litium-Ion Terbina Dalam | 内置锂电池)

Cordless Cleaner

Pembersih Vakum Tanpa Kord
充电式便携吸尘机

Suction Power
Kuasa Sedutan/ 吸力
20W

Large Capacity
Kapasiti Besar/ 最大容量
500mL

Net Weight
Berat Bersih/ 淨重
1.1kg

CL104DWYX (BLUE)
without LED Light
Tanpa Lampu LED I 无LED灯

CL104DWY (WHITE)
without LED Light
Tanpa Lampu LED I 无LED灯



BUILT-IN LITHIUM-ION BATTERY
(Bateri Litium-Ion Terbina Dalam
内置锂电池)

CL105D

BUILT-IN LITHIUM-ION BATTERY
(Bateri Litium-Ion Terbina Dalam | 内置锂电池)

Cordless Cleaner

Pembersih Vakum Tanpa Kord
充电式便携吸尘机

Suction Power
Kuasa Sedutan/ 吸力
20W

Large Capacity
Kapasiti Besar/ 最大容量
500mL

Net Weight
Berat Bersih/ 淨重
1.1kg

CL105DWX (BLUE)
without LED Light
Tanpa Lampu LED I 无LED灯

CL105DW (WHITE)
without LED Light
Tanpa Lampu LED I 无LED灯



BUILT-IN LITHIUM-ION BATTERY
(Bateri Litium-Ion Terbina Dalam
内置锂电池)

CL102DW / Z

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Quick clean-ups with strong suction power**
  Pembersihan cepat dengan kuasa sedutan yang kuat
  强大吸力快速清理

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag

- DW: 1 x Standard Charger, 1 x 1.3Ah Battery (White)
- Z: Without Charger & Battery (White)

Li-ion Ah 1.3
10.8V



Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**High: 13** **Low: 21**
Max Air Flow Aliran Udara 最大空气流量	**1.1m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**2.7kPa (275mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**High: 14W** **Low: 6W**
Dimensions (L x W x H) Dimensi 体积	**984x113x150mm** **(38-3/4"x4-7/16"x5-7/8")**
Net Weight Berat Bersih 净重	**1.1kg (2.4lbs)**

CL111DWI / WR

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **LED light indicates when to charge battery**
  Lampu amaran pengecasan LED
  LED充电指示灯

*Nozzle for Flooring & Carpet, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- WI: 1 x Standard Charger, build in 1.5Ah Battery (Ivory)
- WR: 1 x Standard Charger, build in 1.5Ah Battery (Red)


Li-ion Ah 1.5
10.8V
With Built-in Battery
Dengan Bateri Terbina Dalam
内置電池



Capacity Kapasiti 容量	**560mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**12**
Max Air Flow Aliran Udara 最大空气流量	**1.4m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.4kPa (350mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**21W**
Dimensions (L x W x H) Dimensi 体积	**906x102x109mm** **(35-3/4"x4"x4-1/4")**
Net Weight Berat Bersih 净重	**0.94kg (2.1lbs.)**

CL104DWYX / WY

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Increased storage capacity for longer time between waste disposal**
  Kapasiti pengumpulan habuk yang lebih besar
  更大集尘容量

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag

- WYX: 1 x Standard Charger, build in 1.5Ah Battery (Blue)
- WY: 1 x Standard Charger, build in 1.5Ah Battery (White)

Li-ion Ah 1.5
10.8V
With Built-in Battery
Dengan Bateri Terbina Dalam
内置電池



Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**Turbo/ High/ Low: 10/ 15/ 30**
Max Air Flow Aliran Udara 最大空气流量	**1.1m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.3kPa (340mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Turbo/ High/ Low: 20/ 14/ 5W**
Dimensions (L x W x H) Dimensi 体积	**983x113x136mm** **(38-3/4"x4-7/16"x5-3/8")**
Net Weight Berat Bersih 净重	**1.1kg (2.3lbs)**

CL105DW / WX

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Strong suction power of 20W**
  Kuasa menyedut 20W
  20W强劲吸力

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag

- W: 1 x Standard Charger, build in 1.3Ah Battery (White)
- WX: 1 x Standard Charger, build in 1.3Ah Battery (Blue)

Li-ion Ah 1.3
10.8V
With Built-in Battery
Dengan Bateri Terbina Dalam
内置電池



Capacity Kapasiti 容量	**Dust Bag: 500mL** **Paper Pack: 330mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**Turbo/ High/ Low: 7/ 10/ 20**
Max Air Flow Aliran Udara 最大空气流量	**1.1m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**3.3kPa (340mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**Turbo/ High/ Low: 20/ 14/ 5W**
Dimensions (L x W x H) Dimensi 体积	**983x113x136mm** **(38-3/4"x4-7/16"x5-3/8")**
Net Weight Berat Bersih 净重	**1.1kg (2.3lbs)**

CL070DZ

Cordless Cleaner
Pembersih Vakum Tanpa Kord
充电式便携吸尘机



- **Increased storage capacity for longer time between waste disposal**
  Kapasiti pengumpulan habuk yang lebih besar
  更大集尘容量

*Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

- Z: Without Charger & Battery (White)

Li-ion Ah 1.5
7.2V



Capacity Kapasiti 容量	**600mL**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**8**
Max Air Flow Aliran Udara 最大空气流量	**1.2m³/min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**1.8kPa (180mmH$_2$O)**
Suction Power Kuasa Sedutan 吸力	**14W**
Dimensions (L x W x H) Dimensi 体积	**966x103x142mm** **(38-1/32"x4-1/16"x5-5/8")**
Net Weight Berat Bersih 净重	**0.81kg (1.8lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Automatic Self-cleaning Filtration System achieved by two filter units

Sistem Penapis Penyucian Automatik 自动清洗过滤系统

Constantly high suction power throughout operation because dust is removed from Prefilters every 10 seconds during operation

Kuasa penyedut yang berterusan sepanjang operasi kerana habuk dikeluarkan dari penapis setiap 10 saat semasa operasi

在整个运行过程中吸力保持在较高的水平，因为在运行过程中，每10秒就会从过滤器中除去灰尘




Automatic self-cleaning filter (VC1310L, VC2510L, VC3210L)

Sistem Penapis Penyucian Automatik 自动清洗过滤系统

obtained by Triple filter structure composed of : Powder filter + Damper + Prefilter

Kuasa penyedutan yang berterusan sepanjang operasi kerana habuk dikeluarkan dari Prefilters setiap 10 saat semasa operasi

由三重过滤器结构得到：粉末过滤器+阻尼器+预过滤器

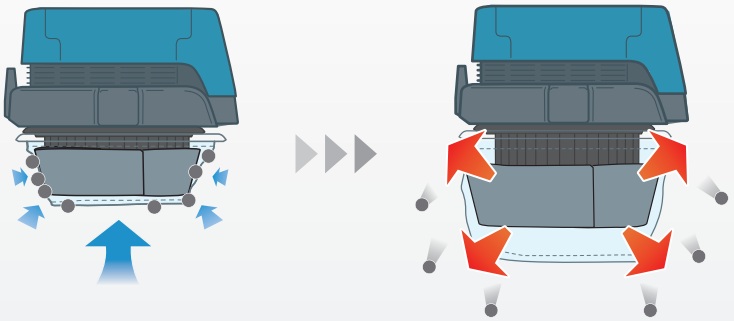

When the power is switched on, Prefilter collapses into itself to compress Damper, and fits closely over Damper and Powder filter.
Apabila kuasa dihidupkan, Prefilter runtuh ke dalamnya untuk memampatkan Damper, dan sesuai dengan penapis Damper dan Serbuk.
当接通电源时，Prefilter会自行折叠以压缩阻尼器，并紧密贴合阻尼器和粉末过滤器。

When the power is switched off, Damper expands back to its original size and shakes off dust from Prefilter automatically with its expanding power.
Apabila kuasa dimatikan, Damper mengembang kembali ke saiz asalnya dan mengelakkan habuk dari Prefilter secara automatik dengan kuasa yang berkembang.
当电源关闭时，阻尼器膨胀回到其原始尺寸，并通过扩展的功率自动将Prefilter的灰尘抖落。



Allows for
Membolehkan untuk 允许:

- **Constantly high suction power**
  Kuasa sedutan yang tinggi 持续高吸力
- **Easy filter cleaning simply by tapping dust off of Prefilter**
  Pembersihan penapis mudah hanya dengan mengetuk habuk Prefilter 只需轻敲Prefilter上的灰尘即可轻松过滤清洁
- **Quiet cleaning because Damper and Prefilter make no noise**
  Pembersihan senyap kerana Damper dan Prefilter tidak membuat bunyi bising 安静的清洁，因为阻尼器和预滤器没有噪音

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

VC3211M

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)



- **32L Large dust bag capacity enables continuous cleaning work**
  Kapasiti debu 32L besar boleh membersih secara berterusan
  32L大容量尘袋可延续清洁工作

NEW BARU | 新

*Hose, Front Cuffs (22, 24, 38), Belt Hook, Hose Band, Cap, Poly bag set

Dust Class M
Debu Kelas M | 集尘等级M
WET Basah 湿
DRY Kering 干

173



Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,050W**
Max Peak Air Flow Aliran Udara 最大空气流量	**2.0m³/ min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**22.0kPa (2,240 mmH$_2$O)**
Tank Capacity Kapasiti 容量	**Dust : 32L** **Water : 27L**
Dimensions (L x W x H) Dimensi 体积	**552x398x685mm** **(21-3/4"x15-5/8"x27")**
Net Weight Berat Bersih 净重	**16.9kg (37.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

VC2211M

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)



- **Approved for Dust Class M in accordance with the EU standard**
  Diluluskan oleh piawaian EU untuk menyedut debu kelas M
  依欧盟标准，集尘等级M

NEW BARU | 新

*Hose, Front Cuffs (22, 24, 38), Belt Hook, Hose Band, Cap, Poly bag 800 x 650, Poly bag set (include 10pcs of Poly bag 800 x 650)

Dust Class M
Debu Kelas M | 集尘等级M
WET Basah 湿
DRY Kering 干

173



Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,050W**
Max Peak Air Flow Aliran Udara 最大空气流量	**2.0m³/ min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**22.0kPa (2,240 mmH$_2$O)**
Tank Capacity Kapasiti 容量	**Dust : 22L** **Water : 17L**
Dimensions (L x W x H) Dimensi 体积	**552x398x569mm** **(21-3/4"x15-5/8"x22-3/8")**
Net Weight Berat Bersih 净重	**16.3kg (35.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

VC3210L

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)



- **For both wet and dry vacuum cleaning**
  untuk menyedut kotoran kering atau lembap
  适用于干和湿集尘清洁

*Hose, Holder 10-33, Front Cuffs (22, 24, 38), Poly bag set

Dust Class L
Debu Kelas L | 集尘等级L
WET Basah 湿
DRY Kering 干

173



Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,050W**
Max Peak Air Flow Aliran Udara 最大空气流量	**2.0m³/ min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**22.0kPa (2,240 mmH$_2$O)**
Tank Capacity Kapasiti 容量	**Dust : 32L** **Water : 27L**
Dimensions (L x W x H) Dimensi 体积	**552x398x685mm** **(21-3/4"x15-5/8"x27")**
Net Weight Berat Bersih 净重	**14.5kg (32.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

VC2510L

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)



- **For both wet and dry vacuum cleaning**
  untuk menyedut samaada kotoran kering atau lembap
  适用于干和湿集尘清洁

*Hose, Holder 10-33, Front Cuffs (22, 24, 38), Poly bag set

Dust Class L
Debu Kelas L | 集尘等级L
WET Basah 湿
DRY Kering 干

173



Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,050W**
Max Peak Air Flow Aliran Udara 最大空气流量	**2.0m³/ min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**22.0kPa (2,240 mmH$_2$O)**
Tank Capacity Kapasiti 容量	**Dust : 25L** **Water : 14L**
Dimensions (L x W x H) Dimensi 体积	**432x416x451mm** **(17"x16-3/8"x17-3/4")**
Net Weight Berat Bersih 净重	**10.5kg (23.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

VC1310LX1

Vacuum Cleaner (Wet & Dry)
Pembersih Vakum (Basah Dan Kering)
吸尘机(干湿两用)



- **For both wet and dry vacuum cleaning**
  untuk menyedut samaada kotoran kering atau lembap
  适用于干和湿集尘清洁

*Hose, Holder 10-33, Front Cuffs (22, 24, 38), Poly bag set

Dust Class L
Debu Kelas L | 集尘等级L
WET Basah 湿
DRY Kering 干

173



Continuous Rating Input Kuasa Sedutan 额定输入功率	**1,050W**
Max Peak Air Flow Aliran Udara 最大空气流量	**2.0m³/ min**
Max Sealed Suction (water column) Sedutan Terkedap (Turus Air) 最大密封吸力(水柱)	**22.0kPa (2,240 mmH$_2$O)**
Tank Capacity Kapasiti 容量	**Dust : 13L** **Water : 7L**
Dimensions (L x W x H) Dimensi 体积	**366x334x420mm** **(14-3/8"x13-1/8"x16-1/2")**
Net Weight Berat Bersih 净重	**9.6kg (21.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Vacuum Cleaner Accessories
Aksesori Pembersih Vakum
吸尘机配件

For Cleaning/ Untuk Pembersihan/ 用于清洁

Model DVC860L, DVC861L, DVC862L, DVC863L



Model DVC350



Model DVC260



Model Makita all Cordless Cleaners
Semua Pembersih Vakum Tanpa Kord
全部充电式便携吸尘机



Model DCL 501



Hose connection 38mm
Sambungan Hos | 软管链接

Hose connection 28mm
Sambungan Hos | 软管链接

A. Hose 38mm
Hos | 软管



A. Hose 28mm
Hos | 软管



Bending pipe assembly
Pemasangan Paip Lenturan
弯管组件



Hose | Hos | 软管



B. Bending pipe
Paip Lenturan | 弯管



C1. Straight pipe
Paip Lurus | 直管

K. Front cuffs 38
Belenggu Depan | 接管组



K. Front cuffs 22
Belenggu Depan | 接管组



C1. Straight pipe
Paip Lurus | 直管



C2. Straight pipe
Paip Lurus | 直管



D. Flexible hose
Hos Fleksibel | 软管

C1. Straight pipe
Paip Lurus | 直管



E1. Nozzle assembly
Komponen Muncung
吸嘴组件



F. Round brush
Berus Bulat | 圆刷




G. Corner nozzle
Muncung Sudut
角落吸嘴







E2. Nozzle assembly
Komponen Muncung
吸嘴组件



H. Shelf brush
Berus Rak
扁毛刷



F. Round brush
Berus Bulat
圆刷



G. Sash nozzle
Muncung Rata
扁吸嘴



I. Free nozzle
Muncung Getah Fleksibel | 弹性吸嘴

Nozzle assembly
Komponen Muncung
吸嘴组件



Crevice nozzle | Hos | 软管













J. Anchor nozzle set
Set Muncung Penambat
锥形集尘嘴



I. Free nozzle
Muncung Getah Fleksibel
弹性吸嘴



For Dust Collecting/ Untuk Pengumpulan Habuk/ 用于集尘

Model DVC860L, DVC861L, DVC862L, DVC863L, DVC350, DVC340, DVC260







A. Hose 28mm
Hos | 软管



Front cuffs
Belenggu Depan | 接管组



Attachments
Lampiran | 附件





Vacuum Cleaner Accessories
Aksesori Pembersih Vakum
吸尘机配件

Although type B hose can be connected with power tools, Front cuffs and joint are required for some power tools.
A: For power tools
B: For cleaning
C: Anti-static
D: Non anti-static

Walaupun hos jenis B boleh dihubungkan dengan alat kuasa, lengan depan dan sendi diperlukan untuk beberapa alat kuasa.
A: Untuk alat kuasa
B: Untuk pembersihan
C: Anti statik
D: Bukan anti statik

虽然B型软管可以与电动工具连接，但一些电动工具需要前袖口和接头。
A：用于电动工具
B：清洗
C：防静电
D：非防静电



Hose
Hos
软管

A

Size Saiz 尺寸 (mm)	Length Panjang 长度 (m)	Type Jenis 类型	With Front Cuffs Dengan Cuffs Depan 与前袖口	Part No. No. Bahagian 零件号码
Model/ Model/ 型号: **DVC860L, DVC861L, DVC862L, DVC863L, *DVC260**				
28	1.5	A	38	152992-0
28	1.5	A	22, 38	A-34235
28	2.5	A	22, 24, 38	195437-5
28	3.5	A	22, 24, 38	195433-3
28	5.0	A	22, 24, 38	195436-7
28	5.0	A	22, 38	A-34229
38	2.5	B	38	195434-1
38	5.0	B	38	195435-9



Bending Pipe
Paip Lenturan
弯管

B

Type Jenis 类型	Part No. No. Bahagian 零件号码
With 38mm Hose, Aluminium	192562-3



Straight Pipe
Paip Lurus
直管

C1

Type Jenis 类型	Part No. No. Bahagian 零件号码
With 38mm Hose, Aluminium	192563-1
Pipe length is variably adjustable from 500 to 850mm	198559-0
-	123584-2
-	192563-1



Straight Pipe
Paip Lurus
直管

C2

Colour Warna 颜色	Part No. No. Bahagian 零件号码
Ivory	451424-7
Blue	451244-9
White	451241-5
Black	456587-4



Flexible Hose
Hos Fleksibel
软管

D

Type Jenis 类型	Colour Warna 颜色	Part No. No. Bahagian 零件号码
Superior in flexibility and for the cleaning of the small place in the car Unggul dalam fleksibiliti untuk pembersihan tempat kecil di dalam kereta 优越的灵活性和清洁汽车上的小地方	Ivory	191496-7
	Blue	198541-9
	Red	198542-7
	Black	197561-0



Nozzle Assembly
Komponen Muncung
吸嘴组件

E1

Model Model 型号	Type Jenis 类型	Dry/ Wet Kering/ Basah 干/ 湿	Part No. No. Bahagian 零件号码
DCL180	*Flooring & carpet	Dry	198184-7
-	Universal Type	Dry/ Wet	195551-7
DVC860L	Compact Type A	Dry	195549-4
DVC860L	Compact Type B	Wet	195550-9
VC1310L	Wide Type	Wet	A-47846
-	Flooring & carpet	-	198183-9
-	Rug & Carpet	-	122291-4

E2

Type Jenis 类型	Colour Warna 颜色	Part No. No. Bahagian 零件号码
Flooring & Carpet	White	198029-9
Flooring & Carpet	White	198532-0
DX S For Rug/ Carpet	Ivory	198150-4
DX S For Rug/ Carpet	Blue	198523-1
DX S For Rug/ Carpet	Red	198524-9
DX S For Rug/ Carpet	White	198525-7
DX S For Rug/ Carpet	Black	198526-5
DX S For Rug/ Carpet	Ivory	197032-7
DX S For Rug/ Carpet	White	197035-1
DX S For Rug/ Carpet	Black	197563-6
Rug & Carpet	Black	197562-8
Rug & Carpet	Ivory	122291-4
Standard	Ivory	123485-4
Standard	Blue	123488-8
Standard	White	123486-2
Standard	Black	123539-7




Round Brush
Berus Bulat
圆刷

F

	Type Jenis 类型	Colour Warna 颜色	Part No. No. Bahagian 零件号码
1	38mm	Black	191657-9
2	Makita all cordless cleaner, Except DCL500	Ivory	A-37471
2	-	Ivory	198548-5
2	-	Ivory	193792-9
2	-	Blue	198549-3
2	-	Red	198550-8
2	-	Black	198551-6
2	-	Black	197559-7



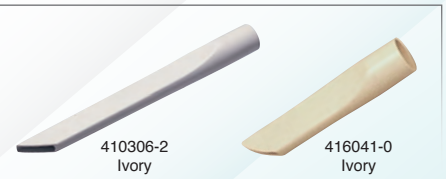

Corner Nozzle, Sash Nozzle
Muncung Sudut, Muncung Rata
角落吸嘴, 扁吸嘴

G

Colour Warna 颜色	Part No. No. Bahagian 零件号码
Ivory	410306-2
Ivory	416041-0
Blue	451243-1
White	451240-7
Black	456586-6


Vacuum Cleaner Accessories
Aksesori Pembersih Vakum
吸尘机配件



Shelf Brush
Berus Rak
扁毛刷

H


Colour Warna 颜色	Part No. No. Bahagian 零件号码
Ivory	191724-0
Blue	198534-6
Red	198535-4
Black	198536-2
Black	197560-2



Free Nozzle
Muncung Getah Fleksibel
弹性吸嘴

I

Colour Warna 颜色	Part No. No. Bahagian 零件号码
Grey	197900-4
Grey	197781-6



Anchor Nozzle Set
Set Muncung Penambat
锥形集尘嘴

J

Type Jenis 类型	Part No. No. Bahagian 零件号码
Use with Hose Inner Dia. 28mm (Front cuffs 22)	192236-6



Front Cuffs & Joint
Belenggu Depan Dan Sendi
接管组及接管

K

Type Jenis 类型	Part No. No. Bahagian 零件号码
Hose joint	192247-1
Front cuffs 22	195547-8
Front cuffs 24	195546-0
Front cuffs 38	195545-2
Front cuffs 22-38	195548-6



Cleaning Set
Set Pembersihan
清洁套装

Model Model 型号	Part No. No. Bahagian 零件号码
DVC860L, DVC861L, DVC862L, DVC863L	195439-1



Nozzle Assembly
Muncung Pemasang
吸嘴组件

Size Saiz 尺寸 (mm)	Type Jenis 类型	Part No. No. Bahagian 零件号码
220	Standard equipment	132025-7
430	-	134182-7



Paper Filter
Penapis Kertas
纸制尘袋

Per pkg. Per Pakej 单一包装	Part No. No. Bahagian 零件号码
5	194566-1
10	194565-3



Dust Bag
Beg Habuk
集尘袋

Part No./ No. Bahagian/ 零件号码
166043-3
166084-9
166119-6
143677-9
122918-6



Filter & Pre Filter
Penapis Dan Penapis Depan
过滤器和前置过滤器

	Type Jenis 类型	Part No. No. Bahagian 零件号码
1	Filter	443060-3
2	Pre Filter	451208-3
3	High Performance Filter	455176-2



Hose Stand
Rak Hos
软管架

Part No./ No. Bahagian/ 零件号码
197323-6






Others

Lain-lain 其他

SK209GDZ

Rechargeable Green Multi Line Laser
Mesin Garis Laser Tanpa Kord
充电式激光水平仪



- **Horizontal line - 2-Vertical line - 2-Vertical line/ horizontal line**
  Garisan mendatar, 2 garisan menegak, 2 garisan menegak/ mendatar
  水平线，2垂直线，2垂直线/水平线

*Laser Viewing Glass, Shoulder Strap, Storage Case

• Z : Without Charger & Battery

CXT XPT

Li-ion Ah 4.0 2.0 1.5

12V max



Refer Pg. 82
for more information

Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**±1mm / 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**±2°**
Laser Fan Angle Sudut Peminat Laser 激光扇角	**Horizontal: 110°** **Vertical: 130°**
Number of Laser Lines Bilangan Garisan Laser 激光线数量	**3**
Laser Type Jenis Laser 激光类型	**Laser class 2: 515nm**
Tripod Thread Tripod 脚架	**5/8"**
Protection Class Tahap Perlindungan 保护等级	**IP54**
Operating Time (Approx. Hours) Masa Operasi 操作时间	**15-40**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 122x110x225mm**
Net Weight Berat Bersih 净重	**1.5 - 1.6kg (3.3 - 3.5lbs)**

SK312GDZ

Rechargeable Green Multi Line Laser
Mesin Garis Laser Tanpa Kord
充电式激光水平仪

- **Horizontal line - Horizontal/ vertical line - 3-Vertical line/ horizontal line**
  Garisan mendatar - Garisan mendatar / menegak - Garisan 3-menegak / garis mendatar
  水平线 - 水平/垂直线 - 3-垂直线/水平线

*Laser Viewing Glass, Shoulder Strap, Storage Case

• Z : Without Charger & Battery

CXT XPT

Li-ion Ah 4.0 2.0 1.5

12V max



Refer Pg. 82
for more information

Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**±1mm/ 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**±2°**
Laser Fan Angle Sudut Peminat Laser 激光扇角	**Horizontal: 110°** **Vertical: 130°**
Number of Laser Lines Bilangan Garisan Laser 激光线数量	**3**
Laser Type Jenis Laser 激光类型	**Laser class 2: 515nm**
Tripod Thread Tripod 脚架	**5/8"**
Protection Class Tahap Perlindungan 保护等级	**IP54**
Operating Time (Approx. Hours) Masa Operasi 操作时间	**10-28**
Dimensions (L x W x H) Dimensi 体积	**BL1021B: 122x110x225mm**
Net Weight Berat Bersih 净重	**1.5 - 1.6kg (3.3 - 3.5lbs)**

SK104Z

Cross Line Laser
Laser Garis Salib
十字线激光



- **Accuracy +/- 3mm @ 10m**
  Ketepatan +/- 3mm @ 10m
  精确度+/- 3mm @ 10m

*Wall Mount Bracket, Target Plate, AA Battery, Pouch with strap



Measuring Range Jarak Mengukur 测量范围	**Up to: 15m** **w/ detector up to: 60m**
Leveling Accuracy Menunjukkan Ketepatan 指示精确度	**±3mm/ 10m**
Self-leveling Range Julat Indikasi Menegak 垂直指示范围	**4+-1°**
Laser Fan Angle Sudut Peminat Laser 激光扇角	**Horizontal: 180°** **Vertical: 180°**
Number of Laser Bilangan Garisan Laser 激光线数量	**points: 4** **lines: 2**
Laser Type Jenis Laser 激光类型	**Laser class 2: 635nm**
Tripod Thread Tripod 脚架	**1/4"**
Protection Class Tahap Perlindungan 保护等级	**IP54**
Net Weight Berat Bersih 净重	**0.53kg (1.17lbs)**







LD030P
LD050P
LD080P / PI

Laser Distance Measure
Langkah Jarak Laser | 激光测距

- **LD030P - Measuring distance operating range up to 30m**
  Mengukur jarak operasi jarak sehingga 30m
  测量距离可达30米
  *AAA Alkaline Dry Battery 1.5V x2, Pouch

- **LD050P - Measuring distance operating range up to 50m**
  Mengukur jarak operasi jarak sehingga 50m
  测量距离可达50米
  *AAA Alkaline Dry Battery 1.5V x2, Carrying strap, Target Plate

- **LD080P / PI - Measuring distance operating range up to 80m**
  Mengukur jarak operasi jarak sehingga 80m
  测量距离可达80米
  *AAA Alkaline Dry Battery 1.5V x2, Carrying strap, Target Plate



LD030P



LD050P



LD080P / PI

Measuring Range Jarak Mengukur 测量范围	**LD030P - 0.2-30m** **LD050P - 0.05-50m** **LD080P / PI - 0.05-80m**
Typical Measuring Tolerance Toleransi Mengukur Biasa 典型的测量公差	**±2.0mm/ 10m**
Max Measuring Tolerance Toleransi Mengukur Maksimum 最大测量公差	**±3.0mm/ 10m**
Diameter of Laser Point Diameter Titik Laser 激光点的直径	**6mm/ 10m**
Laser Type Jenis Laser 激光类型	**Laser class 2: 635nm**
Dimensions (H x D x W) Dimensi 体积	**117x53x25mm** **(4.5"x2.14"x1")**
Net Weight Berat Bersih 净重	**LD030P / LD050P - 0.1kg (0.22lbs)** **LD080P / PI - 0.14kg (0.31lbs)**
Power Supply Bekalan Kuasa 电源	**Cell battery : AAA 1.5V x 2pcs**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HG6031V

Heat Gun
Pistol Udara Panas
热风枪



- **9-temperature settings (50 - 600°C) for a variety of applications**
  9 tetapan suhu (50 - 600°C) sesuai untuk pelbagai aplikasi
  9个温度设定（50 - 600° C）适合于各种用途

*Glass protection nozzle, Reflector nozzle, Reduction nozzle, Wide slot nozzle, Scraper



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Air Temperature (°C) / Flow (L/min) Suhu Udara 气温	**Switch 1: 50 - 400 / 250** **Switch 2: 100 - 600 / 500**
Dimensions (L x W x H) Dimensi 体积	**257x85x206mm** **(10-1/8"x3-3/8"x8-1/8")**
Net Weight Berat Bersih 淨重	**0.67kg (1.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

HG6030

Heat Gun
Pistol Udara Panas
热风枪



- **Cooling mode for rapid cooling on nozzle change**
  Mod penyejukan untuk penukaran muncung
  冷却模式使喷嘴更换快速


*Glass protection nozzle, Reflector nozzle, Reduction nozzle, Wide slot nozzle, Scraper



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Air Temperature (°C) / Flow (L/min) Suhu Udara 气温	**Switch 1: 50 / 250** **Switch 2: 300 / 250** **Switch 3: 600 / 500**
Dimensions (L x W x H) Dimensi 体积	**233x80x208mm** **(9-1/8"x3-1/8"x8-3/16")**
Net Weight Berat Bersih 淨重	**0.57kg (1.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

HG5030

Heat Gun
Pistol Udara Panas
热风枪



- **2 temperature settings (350 and 500°C)**
  2 tetapan suhu (350 dan 500°C)
  2个温度设定 (350和500°C)

*Glass protection nozzle, Reflector nozzle, Reduction nozzle, Wide slot nozzle, Scraper



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,600W**
Air Temperature (°C) / Flow (L/min) Suhu Udara 气温	**Switch 1: 350 / 300** **Switch 2: 500 / 500**
Dimensions (L x W x H) Dimensi 体积	**233x80x208mm** **(9-1/8"x3-1/8"x8-3/16")**
Net Weight Berat Bersih 淨重	**0.56kg (1.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

HG5012

Heat Gun
Pistol Udara Panas
热风枪



- **2 temperature settings (350 and 500°C)**
  2 tetapan suhu (350 dan 500°C)
  2个温度设定 (350和500° C)

*Glass protection nozzle, Wide slot nozzle, Reflector nozzle

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,600W**
Air Temperature (°C) Suhu Udara 气温	**High/ Low: 500/ 350**
Air Flow Aliran Udara 空气流量	**High/ Low: 500/ 350L/min**
Dimensions (L x W x H) Dimensi 体积	**230x80x240mm** **(9"x3-1/8"x9-1/2")**
Net Weight Berat Bersih 淨重	**0.58kg (1.3lbs)**

DPT353Z

Cordless Pin Nailer
Mesin Pemaku Tanpa Kord
充电式打钉机



- **Shoots 6,400 nails on a single full BL1860B charge**
  Memaku 6,400 paku dengan satu BL1860B yang penuh caj
  使用一个完整充电的BL1860B电池可射击6,400枚钉子

*Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench

• Z : Without Charger & Battery

Li-ion AR 6.0 5.0 4.0 3.0 2.0 1.5

18V




Capacity Staple 钉种	**Length: 15, 18, 25, 30, 35mm** **(5/8", 11/16", 1", 1-3/16", 1-3/8")** **Dia.: 0.6 mm (1/32")** **Gauge: 23 Ga**
Magazine Capacity Bilangan Staples 装钉个数	**120**
Dimensions (L x W x H) Dimensi 体积	**257x79x226mm** **(10-1/8"x3-1/8"x8-7/8")**
Net weight Berat Bersih 淨重	**2.0 - 2.3kg (4.4 - 5.1lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

PT354DZ

Cordless Pin Nailer
Mesin Pemaku Tanpa Kord
充电式打钉机



- **Ergonomically designed handle with soft grip provides increased comfort**
  Pemegang yang direka secara ergonomik untuk keselesaan yang lebih tinggi
  最理想人体工学把手

*Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench

• Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5

12Vmax



Refer Pg. 78
for more information

Capacity Kapasiti 能力	**Length: 15, 18, 25, 30, 35mm (5/8", 11/16", 1", 1-3/16", 1-3/8")** **Dia.: 0.6mm (1/32")** **Gauge: 23Ga**
Magazine Capacity Bilangan Staples 装钉个数	**120**
Dimensions (L x W x H) Dimensi 体积	**231x66x226mm (9-1/8"x2-5/8"x8-7/8")**
Net Weight Berat Bersih 淨重	**1.8 - 2.0kg (4.0 - 4.4lbs)**

DST221Z

Cordless Stapler
Stapler Tanpa Kord
充电式钉枪



- **Compact and powerful stapler can drive a wide range of 10mm staple lengths**
  Stapler yang padat dan berkuasa
  紧凑而强劲的钉枪

*Safety Goggles, Hook

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Staple Staple 钉种	**Width: 10mm (3/8")** **Length: 10, 13, 16, 19, 22mm (3/8", 1/2", 5/8", 3/4", 7/8")** **Gauge: 0.6 x 1.2mm (1/32" x 1/16")**
Magazine Capacity Bilangan Staples 装钉个数	**98**
Dimensions (L x W x H) Dimensi 体积	**251x91x212mm (9-7/8"x3-5/8"x8-3/8")**
Net weight Berat Bersih 淨重	**2.1 - 2.4kg (4.7 - 5.3lbs)**

ST113DWAJ / Z

Cordless Stapler
Stapler Tanpa Kord
充电式钉枪



- **Compact and lightweight for reduced operator fatigue**
  Kompak dan ringan untuk mengurangkan keletihan pengguna
  小巧轻便，减少疲劳

*Safety Goggles, Belt Clip

• WAJ : 1 x Standard Charger, 2 x 2.0Ah Battery, 1 x Makpac Connector Box

• Z : Without Charger & Battery

Li-ion Ah 4.0 2.0 1.5

12Vmax



Staple Staple 钉种	**Width: 10mm (3/8")** **Length: 7 - 10mm(9/32" - 3/8")** **Gauge: 0.5 x 0.7mm**
Magazine Capacity Bilangan Staples 装钉个数	**150 (max 160)**
Dimensions (L x W x H) Dimensi 体积	**211x81x159mm (8-5/16"x3-3/16"x6-1/4")**
Net Weight Berat Bersih 淨重	**1.3kg (2.9lbs.)**

HS100

Hammer Tacker
Alat Manual Memaku Mesin
手動工具敲釘機



Capacity Kapasiti 能力	**Width: 12mm** **Length: 6 - 10mm**
Magazine Capacity Bilangan Staples 装钉个数	**144**
Dimensions (L x W x H) Dimensi 体积	**281mm**
Net Weight Berat Bersih 淨重	**0.5kg**

UB1103

Blower
Mesin Blower
吹风机



- **Two tools in one; quickly converts to a vacuum for added versatility**
  Alat 2 dalam 1, vakum dan blower untuk fleksibiliti tambahan
  一机2用，集尘与吹风

*Nozzle, Dust Bag

303 MW



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**600W**
Max Air Volume Isipadu Angin Maksimum 最大风量	**0 - 4.1m³/min**
Max Air Velocity Velositi Angin Maksimum 最大风速	**0 - 91m/s**
Air Pressure Tekanan Udara 气压	**0 - 5.7kPa**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 16,000**
Dimensions (L x W x H) Dimensi 体积	**479x185x178mm (18-7/8"x7-1/4"x7")**
Net Weight Berat Bersih 淨重	**1.9 - 2.2kg (4.3 - 4.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 規格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



Outdoor Power Equipment

Alatan Kerja Luar 园林•户外



A wide variety of Lithium-ion Garden Tools



DUR364LPM4 / RM2 / Z

Cordless Grass Trimmer
Pemotong Rumput tanpa Kord
充电式割草机



- **2-Speed options allows the operator to match speed to application**
  Pilihan 2-kelajuan memudahkan pengguna
  2档变速方便使用者

*Safety Goggles, Nylon Cutting Head, Accessory Bag, Hex Wrench

- PM4 : 1 x Two Port Multi Rapid Charger, 4 x 4.0Ah Battery
- RM2 : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V X2



Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 350mm (13-3/4")** **Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 6,500/ 5,000**
Spindle Size Saiz Spindel 主轴尺寸	**M8 x 1.25RH**
Dimensions (L x W x H) Dimensi 体积	**1,754x310x229mm** **(69"x12-1/4"x9")**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**with BL1850B: 100**
Net Weight Keberatan 净重	**3.6 - 4.4kg (8.0 - 9.7lbs)**

DUR182LRF / Z

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機



- **BL motor for faster cutting**
  BL Motor untuk pemotongan lebih cepat
  无碳刷马达加快切割速度

*Safety Goggles, Band Assembly, Nylon Cutting Head, Accessory Bag, Hex Wrench

- RF : 1 x Rapid Charger, 1 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V


WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 300mm (11-3/4")** **Metal Blade: 230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,500 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25 LH**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**w/ BL1830B: 90**
Dimensions (L x W x H) Dimensi 体积	**1,843x287x253mm** **(72-1/2"x11-1/4"x10")**
Net Weight Berat Bersih 净重	**3.6kg (8.0lbs)**

DUR187LRFE / Z

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機



- **4 Mode rotation selection: 3 stages + ADT mode**
  Pemilihan 4 mod putaran: 3 tahap + mod ADT
  4模式旋转选择：3阶段+ ADT模式

*Safety Goggles, Shoulder Harness, Nylon Cutting Head, Plastic Blade, Accessory Bag, Hex Wrench

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 300mm (11-3/4")** **Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Medium/ Low/ ADT Mode:** **6,000/ 5,000/ 4,000/ 4,000 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25LH**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**Nylon Cutting Head, BL1860B: 168** **Plastic Blade, BL1860B: 219**
Dimensions (L x W x H) Dimensi 体积	**1,791x258x232mm** **(70-1/2"x10-1/8"x9-1/8")**
Net Weight Berat Bersih 净重	**3.4 - 3.7kg (7.5 - 8.2lbs)**

DUR188URFE

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機

- **Plastic triple blade for heavy duty operation**
  Bilah plastik triple untuk operasi berat
  塑料三叶刀片以便重型操作

*Safety Goggles, Shoulder Harness, Nylon Cutting Head, Plastic Blade, Accessory Bag, Hex Wrench, Cap

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 300mm (11-3/4")** **Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Medium/ Low/ ADT Mode:** **6,000/ 5,000/ 4,000/ 4,000 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25LH**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**Nylon Cutting Head, BL1860B: 168** **Plastic Blade, BL1860B: 219**
Dimensions (L x W x H) Dimensi 体积	**1,791x600x472mm** **(70-1/2"x23-5/8"x18-5/8")**
Net Weight Berat Bersih 净重	**3.5 - 3.8kg (7.7 - 8.3lbs)**

DUR188LRFE / Z

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機

- **Plastic triple blade for heavy duty operation**
  Bilah plastik triple untuk operasi berat
  塑料三叶刀片以便重型操作

*Safety Goggles, Shoulder Harness, Nylon Cutting Head, Plastic Blade, Accessory Bag, Hex Wrench, Cap

- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 300mm (11-3/4")** **Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Medium/ Low/ ADT Mode:** **6,000/ 5,000/ 4,000/ 4,000 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25 LH**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**Nylon Cutting Head, BL1860B: 168** **Plastic Blade, BL1860B: 219**
Dimensions (L x W x H) Dimensi 体积	**1,791x258x232mm** **(70-1/2"x10-1/8"x9-1/8")**
Net Weight Berat Bersih 净重	**3.7 - 4.0kg (8.1 - 8.8lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DUR189Z

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V



- **Comfortable short telescopic pipe provides easy handling in tight spaces**
  Paip teleskopik pendek mudah diguna dalam ruang yang ketat
  舒适的短伸缩管可在狭小的空间内轻松使用

*Single harness, Nylon Cutting Head, Plastic Blade, Safety Goggles, Accessory Bag, Hex Wrench


• Z : Without Charger & Battery

BL MOTOR ADT

Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 300mm (11-3/4")** **Plastic Blade: 255mm (10")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Medium/ Low/ ADT Mode:** **6,000/ 5,000/ 4,000/ 4,000 - 6,000**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25RH**
Dimensions (L x W x H) Dimensi 体积	**1,518-1,618x258x369mm** **(59-3/4" - 63-3/4"x10-1/8"x14-1/2")**
Net Weight Berat Bersih 淨重	**3.1 - 3.4kg (6.8 - 7.5lbs.)**

DUR184LZ

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草機



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



- **Low noise level for improved user comfort**
  Bunyi rendah untuk keselesaan pengguna
  低噪音

*Safety Goggles, Single harness, Nylon Cutting Head, Accessory Bag, Hex Wrench

• Z : Without Charger & Battery

BL MOTOR XPT

No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High/ Low: 6,000/ 5,000**
Cutting Width Lebar Keratan 切割宽度	**Trimmer Head: 300mm (11-3/4")**
Spindle Size Saiz Spinde 主轴尺寸	**M8 x 1.25RH**
Max Output Keluaran Maksima 最大输出	**250W**
Max Run Time (min) Masa Berguna Maksimum 最长运行时间	**w/ BL1850B: 80**
Dimensions (L x W x H) Dimensi 体积	**1,534-1,634x258x417mm** **(60-1/2" - 64-1/2"x10-1/8"x16-3/8")**
Net weight Berat Bersih 淨重	**3.1 - 3.4kg (6.8 - 7.5lbs)**

UR100DSME 160mm (6-5/16")

Cordless Grass Trimmer
Pemotong Rumput Tanpa Kord
充电式割草机



Li-ion Ah 4.0 2.0 1.5
12Vmax



- **Well balanced design with fully adjustable features to suit any operator**
  Reka bentuk yang seimbang dengan ciri pelarasan memudahkan pengguna
  良好平衡设计且具有调整功能易于使用

*Safety Goggles (country-specific), Shoulder Belt, Nylon Cutting Head, Nylon Cord, Plastic Blade, Accessory Bag, Hex Wrench

• SME : 1 x Speed Charger, 2 x 4.0Ah Battery

CXT XPT

Cutting Width Lebar Keratan 切割宽度	**Nylon Cutting Head: 260mm (10")** **Plastic Blade: 230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**Nylon Cutting Head: 9,000** **Plastic Blade: 10,000**
Spindle Size Saiz Spindel 主轴尺寸	**M8 x 1.25RH**
Dimensions (L x W x H) Dimensi 体积	**835 - 1,185x267x210 - 315mm** **(32-7/8 - 46-2/3"x10-1/2"x8-1/4 - 12-1/3")**
Net Weight Berat Bersih 淨重	**2.1 - 2.3kg (4.4 - 4.9lbs.)**

ER2600L 25.7mL 2-stroke

Petrol String Trimmer
Pemotong Rumput Petrol
汽油割草机

2st




- **Equipped with Easy Start system for faster and easier starting**
  Sistem permulaan mudah
  轻松启动系统

*Nylon Cutting Head, + Screwdriver, Hex Wrench, Socket Wrench, Accessory Bag

Displacement Sesaran 排量	**25.7mL**
Engine Power Kuasa Enjin 发动机功率	**0.83kW/ 1.2PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.6L**
Spindle Size Saiz Spindel 主轴尺寸	**M8 x 1.25RH**
Dimensions (L x W x H) Dimensi 体积	**1,645x220x510mm** **(64-3/4"x8-5/8"x20")**
Net Weight Berat Bersih 淨重	**4.6kg (10.2lbs)**

EBH340U 33.5mL 4-stroke

Petrol Brushcutter
Pemotong Rumput Petrol
汽油割草机



- **Meets all environmental standards**
  Memenuhi standard mesra alam
  符合所有环保标准

*Blade, Hex Wrench, Oil Bottle (country-specific)



MM4

Displacement Sesaran 排量	**33.5mL**
Engine Power Kuasa Enjin 发动机功率	**1.07kW/ 1.5PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.65L**
Spindle Size Saiz Spindel 主轴尺寸	**M10 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,900x645x510mm** **(74-3/4"x25-3/8"x20")**
Net Weight Berat Bersih 淨重	**7.5kg (16.5lbs)**

*** Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

EM2654LH 25.4mL 4-stroke

Petrol Brushcutter
Pemotong Rumput Petrol
汽油割草机

- **No oil mixing needed. Lower emissions**
  Tanpa pencampuran petrol, perlepasan asap lebih rendah
  无需汽油混合，降低排气

*Shoulder Harness, Metal Blade / Nylon Cutting Head (country-specific), Blade cover (for the product with metal blade), Oil Bottle (country-specific), Box Driver, Hex Wrench, Accessory Bag



Displacement Sesaran 排量	**25.4mL**
Max Output Keluaran Maksima 最大输出	**0.77kW (1.1HP) @ 7,000RPM**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.6L (20.3 oz.)**
Oil Tank Capacity Kapasiti Tangki Minyak 润滑油箱	**0.08L (2.7 oz.)**
Cutting Width Lebar Keratan 切割宽度	**Metal Blade: 230mm (9-1/16")** **Nylon Cutting Head: 420mm (16-1/2")**
Spindle Size Saiz Spindel 主轴尺寸	**M10 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,765x368x293mm (69-1/2"x14-1/2"x11-1/2")**
Net Weight Berat Bersih 净重	**5.2kg (11.5lbs)**

EM2511LH 24.5mL 4-stroke

Petrol Brushcutter
Pemotong Rumput Petrol
汽油割草机

- **420mm cutting width with nylon cutting head for user convenience**
  Kepala memotong nilon dengan lebar pemotongan 420mm untuk kemudahan pengguna
  尼龙切割头，切割宽度420mm，方便使用

*Shoulder Strap, Metal Blade / Nylon Cutting Head (country-specific), Blade cover (for the product with metal blade), Protector, Oil Bottle (country-specific), Box Driver, Hex Wrench, Accessory Bag



Displacement Sesaran 排量	**24.5mL**
Max Output Keluaran Maksima 最大输出	**0.71kW (0.97 HP) @ 7,000RPM**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.5L (16.9oz.)**
Oil Tank Capacity Kapasiti Tangki Minyak 润滑油箱	**0.08L (N/Aoz.)**
Cutting Width Lebar Keratan 切割宽度	**Metal Blade: 230mm (9-1/16")** **Nylon Cutting Head: 420mm (16-1/2")**
Spindle Size Saiz Spindel 主轴尺寸	**M10 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,766x368x286mm (69-1/2"x14-1/2"x11-1/4")**
Net weight Berat Bersih 淨重	**5.4kg (11.9lbs)**

RBC411U 40.2mL

Petrol Brushcutter
Pemotong Rumput Petrol
汽油割草机



- **Powerful and reliable 40.2mL engine**
  Enjin 40.2mL yang kuat dan boleh dipercayai
  强力可靠的40.2mL引擎

*Metal Blade/ Nylon Cutting Head (country-specific), Protector, Harness, Tool set



Displacement Sesaran 排量	**40.2mL**
Engine Power Kuasa Enjin 发动机功率	**1.40kW/ 2.0PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1.1L**
Spindle Size Saiz Spindel 主轴尺寸	**M10 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,710x670x430mm (67-1/2"x26-3/8"x17")**
Net Weight Berat Bersih 淨重	**7.3kg (16.1lbs)**

EM3400U 34.0mL

Petrol Brushcutter
Pemotong Rumput Petrol
汽油割草机



- **Waist cushion for added comfort in long continuous operation**
  Kusyen pinggang untuk keselesaan tambahan dalam operasi berterusan yang panjang
  腰部靠垫在长时间连续操作中增加了舒适感


*Metal Blade, Nylon Cutting Head, Protector, Blade Cover, Accessory Bag, Shoulder harness with double shoulder strap, Socket Wrench, Hex Wrench



Displacement Sesaran 排量	**34.0mL**
Engine Power Kuasa Enjin 发动机功率	**1.15kW/ 1.6PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.75L**
Spindle Size Saiz Spindel 主轴尺寸	**M10 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,815x650x435mm (71-1/2"x25-1/2"x17-1/8")**
Net Weight Berat Bersih 淨重	**6.4kg (14.1lbs)**

EM3400L 34.0mL

Petrol Brushcutter
Pemotong Rumput Petrol
汽油割草机



- **Lightweight for reduced operator fatigue**
  Ringan untuk mengurangkan keletihan pengguna
  轻量，减少使用者的疲劳

*Nylon Cutting Head, Protector, Accessory Bag, Shoulder harness with single shoulder strap, Socket Wrench, Hex Wrench




Displacement Sesaran 排量	**34.0mL**
Engine Power Kuasa Enjin 发动机功率	**1.15kW/ 1.6PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.75L**
Spindle Size Saiz Spindel 主轴尺寸	**M10 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,815x330x270mm (71-1/2"x13"x10-5/8")**
Net Weight Berat Bersih 淨重	**6.2kg (13.7lbs)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

EM2600U 25.7mL 2-stroke

Petrol Brushcutter
Pemotong Rumput Petrol
汽油割草机



- **Primer bulb and choke for easy starting**
  Mudah dihidupkan
  易于启动

*Star blade, Nylon Cutting Head, Socket Wrench, + Screwdriver, Hex Wrench, Shoulder harness with single shoulder strap, Accessory Bag






Displacement Sesaran 排量	**25.7mL**
Engine Power Kuasa Enjin 发动机功率	**0.83kW/ 1.2PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.6L**
Spindle Size Saiz Spindel 主轴尺寸	**M8 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**1,770x610x410mm (69-3/4"x24"x16-1/8")**
Net Weight Berat Bersih 净重	**5kg (11lbs)**

EM4350RH 43.0mL 4-stroke

Backpack Petrol Brushcutter
Pemotong Rumput Beg Galas Petrol
背负式汽油割草机



- **4-stroke engine requires no fuel mix**
  Enjin 4-strok tidak memerlukan campuran minyak
  四冲程发动机不需要混合燃料

*Metal Blade / Nylon Cutting Head (country-specific), Protector, Blade cover (for the product with metal blade), Tool set, Accessory Bag, Oil bottle without oil or containing 100mL engine oil






Displacement Sesaran 排量	**43.0mL**
Engine Power Kuasa Enjin 发动机功率	**1.5kW/ 2.1PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.8L**
Spindle Size Saiz Spindel 主轴尺寸	**M10 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**358x280x587mm (14-1/8"x11"x23-1/8")**
Net Weight Berat Bersih 净重	**12.1kg (26.7lbs)**

EBH340R 33.5mL 4-stroke

Backpack Petrol Brushcutter
Pemotong Rumput Beg Galas Petrol
背负式汽油割草机



- **Powerful fuel efficient 33.5cc MM4 commercial duty engine**
  Enjin berat komersial MM4 33.5cc
  强力的33.5cc MM4商用引擎

*Blade, Tool set, Oil Bottle (country-specific)






Displacement Sesaran 排量	**33.5mL**
Engine Power Kuasa Enjin 发动机功率	**1.07kW/ 1.45PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.65L**
Spindle Size Saiz Spindel 主轴尺寸	**M10 x 1.25LH**
Dimensions (L x W x H) Dimensi 体积	**400x325x395mm (15-3/4"x12-3/4"x15-1/2")**
Net Weight Berat Bersih 净重	**9.8kg (21.6lbs)**

DUX60ZM3 / Z

Cordless Multi Function Power Head
Powerhead Pelbagai Fungsi Tanpa Kord | 充电式多功能动力头



- **Multi-tool system consisting of power head and versatile optional attachments is ideal for a wide range of applications**
  Boleh disambungkan dengan pelbagai alat kepala
  能接驳多款工具头

• ZM3 : (Without Charger & Battery) Brushcutter Attachment EM403, Nylon Cutting Head, 3 Tooth Blade, 3 Tooth Blade Cover, Tool bag, Box Wrench 17, Metal Blade Fixing Tool (Clamp Washer, Nut, Cup)
• Z : Without Charger & Battery






Refer Pg. 23
for more information

No Load Speed (RPM) Kelajuan Tanpa Beban 回转速	**High: 0 - 9,700/ Medium: 0 - 8,200 Low: 0 - 5,700**
Dimensions (L x W x H) Dimensi 体积	**1,011x320x216mm (39-3/4"x12-5/8"x8-1/2")**
Net Weight Berat Bersih 净重	**4.1 - 8.7kg (8.9 - 19.2lbs)**

EX2650LH 25.4mL 4-stroke

Multi Function Power Head
Powerhead Pelbagai Fungsi
多功能动力头



- **Makita Mini 4-Stroke motors offer cleaner exhaust emissions and reduced fuel consumption**
  Motor Mini 4-Stroke Makita mengurangkan pelepasan asap dan penggunaan bahan api
  Makita 迷你四冲程马达降低废气排放和减少燃料消耗

*Harness, Socket Wrench, Hex Wrench, Oil set, Accessory Bag





Displacement Sesaran 排量	**25.4mL**
Engine Power Kuasa Enjin 发动机功率	**0.77kW/ 1.1PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.6L**
Dimensions (L x W x H) Dimensi 体积	**975x323x241mm (38-3/8"x12-3/4"x9-1/2")**
Net Weight Berat Bersih 净重	**4.6kg (10lbs)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DUC353Z 350mm (14")

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯



- **Cordless Chain Saw DUC353 Efficiency Similar to 30ml Class Engine Chain Saw**
  Kecekapan Gergaji Rantai Batery DUC353 Setanding Dengan Gergaji Rantai Bermotor 30ml Kelas
  充电式链锯DUC353效率似30ml级发动机链锯

*Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific)

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V X2



Refer Pg. 21
for more information

Guide Bar Length Panjang Batang Gergaji 切割长度	**350mm (14")**
Chain Pitch Kerapatan Rantai 链条齿距	**9.5mm (3/8")**
Chain Gauge Ketebalan Rantai 链条厚度	**1.1/ 1.3mm (0.043" / 0.050")**
Chain Speed Kelajuan Rantai 链条速度	**0 - 20m/s (0 - 1,200m/min) (0 - 3,940FPM)**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**200mL (N/A US oz)**
Dimensions (L x W x H) Dimensi 体积	**773x215x235mm (30-1/2"x8-1/2"x9-1/4")**
Net Weight Keberatan 净重	**4.7kg (10.4 lbs)**

DUC252PM4 / RF2 / Z 250mm (10")

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯



- **Low noise level and zero emissions for operator comfort**
  Bunyi rendah & tanpa perlepasan asap untuk keselesaan pengguna
  低噪音且无排气

*Saw Chain, Guide Bar, Guide Bar Cover, Spike Bumper

- PM4 : 1 x Two Port Multi Rapid Charger, 4 x 4.0Ah Battery
- RF2 : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V X2

442



Guide Bar Length Panjang Batang Gergaji 切割长度	**250mm (10")**
Chain Pitch Kerapatan Rantai 链条齿距	**3/8"**
Chain Gauge Ketebalan Rantai 链条厚度	**1.3mm (0.05")**
Chain Speed Kelajuan Rantai 链条速度	**8.3m/s (500m/min) (1,650FPM)**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**85mL (2.9US oz)**
Dimensions (L x W x H) Dimensi 体积	**545x234x198mm (21-1/2"x9-1/4"x7-3/4")**
Net Weight Keberatan 净重	**4.1 - 4.7kg (9.0 - 10.3lbs)**

DUC122RME / Z 115mm (4-1/2")

Cordless Chain Saw
Gergaji Rantai Tanpa Kord
充电式链锯



- **Low noise & zero emissions for operator comfort**
  Bunyi rendah dan tanpa perlepasan asap untuk keselesaan pengguna
  低噪音，无排气，操作舒适

*Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), File

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

430



Guide Bar Length Panjang Batang Gergaji 切割长度	**115mm (4-1/2")**
Chain Pitch Kerapatan Rantai 链条齿距	**1/4"**
Chain Gauge Ketebalan Rantai 链条厚度	**1.3mm (0.05")**
Chain Speed Kelajuan Rantai 链条速度	**5.0m/s (300m/min) (980FPM)**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**80mL (2.7 US oz)**
Dimensions (L x W x H) Dimensi 体积	**422x195x215mm (16-5/8"x7-5/8"x8-1/2")**
Net weight Keberatan 净重	**2.6kg (5.7lbs)**



UC3551A 350mm (14") | UC4051A 400mm (16")

Electric Chain Saw
Gergaji Rantai
电链锯



- **Fast and efficient cutting**
  Pemotongan cepat dan cekap
  快速高效的切割

*Saw Chain, Guide Bar Cover, Hook complete

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Chain Speed per Minute Kelajuan Rantai 链条速度	**870m (2,900ft)**
Guide Bar Length Panjang Batang Gergaji 切割长度	**UC3551A - 350mm (14")** **UC4051A - 400mm (16")**
Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.3mm (0.050")**
Dimensions (L x W x H) Dimensi 体积	**505x200x220mm (19-7/8"x7-7/8"x8-5/8")**
Net Weight Berat Bersih 净重	**UC3551A - 5.5kg (12.1lbs)** **UC4051A - 5.6kg (12.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**0.3m (0.98ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

UC3530A 350mm (14")

Electric Chain Saw
Gergaji Rantai
电链锯



- **Enhanced protection against chain oil leakage**
  Peningkatan perlindungan terhadap kebocoran minyak rantai
  加强保护，防止漏油

*Saw Chain, Guide Bar, Guide Bar Cover, Hook complete

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Chain Speed per Minute Kelajuan Rantai 链条速度	**800m (2,600 ft)**
Guide Bar Length Panjang Batang Gergaji 切割长度	**350mm (14")**
Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.3" or 0.050"**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.14L**
Dimensions (L x W x H) Dimensi 体积	**492x201x220mm** **(19-3/8"x7-7/8"x8-5/8")**
Net Weight Berat Bersih 净重	**5.1kg (11.3lbs)**
Power Supply Cord Kabel Wayar 电源线	**0.3m (0.98ft)**

UC3541A 350mm (14") | UC4041A 400mm (16")

Electric Chain Saw
Gergaji Rantai
电链锯



- **Zero emissions and reduced maintenance**
  Penyelenggaraan tanpa perlepasan asap & dikurangkan
  无排气及降低保养少维护

*Saw Chain, Guide Bar Cover, Hook complete

132



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Chain Speed per Minute Kelajuan Rantai 链条速度	**870m (2,900ft)**
Guide Bar Length Panjang Batang Gergaji 切割长度	**UC3541A - 350mm (14")** **UC4041A - 400mm (16")**
Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.1mm (0.043")/** **1.3mm (0.050")**
Dimensions (L x W x H) Dimensi 体积	**455x245x200mm** **(17-7/8"x9-5/8"x7-7/8")**
Net Weight Berat Bersih 净重	**4.7 - 4.9kg (10.4 - 10.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**0.3m (0.98ft)**

UC3520A 350mm (14") | UC4020A 400mm (16")

Electric Chain Saw
Gergaji Rantai
电链锯



- **High torque delivered by powerful motor**
  Tork tinggi disampaikan oleh motor berkuasa
  强力的马达提供高扭力

*Saw Chain, Guide Bar Cover, Hook complete

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

132



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Chain Speed per Minute Kelajuan Rantai 链条速度	**800m (2,620ft)**
Guide Bar Length Panjang Batang Gergaji 切割长度	**UC3520A - 350mm (14")** **UC4020A - 400mm (16")**
Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.1mm (0.043")/** **1.3mm (0.050")**
Dimensions (L x W x H) Dimensi 体积	**436x244x200mm** **(17-1/8"x9-5/8"x7-7/8")**
Net Weight Berat Bersih 净重	**4.6kg (10.2lbs)**
Power Supply Cord Kabel Wayar 电源线	**0.3m (0.98ft)**

5016B 405mm (16")

Electric Chain Saw
Gergaji Rantai
电链锯



- **Compact and lightweight design**
  Reka bentuk padat dan ringan
  小巧轻便的设计

*Saw Chain, Oil supply 100ml, Socket Wrench, File, Screwdriver

WHILE STOCKS LAST
Sementara stok masih ada
售完即止


153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,300W**
Chain Speed per Minute Kelajuan Rantai 链条速度	**400m (1,310ft)**
Guide Bar Length Panjang Batang Gergaji 切割长度	**405mm (16")**
Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.3" or 0.050"**
Overall Length Panjang Keseluruhan 总长度	**750mm (29-1/2")**
Net Weight Berat Bersih 净重	**5.8kg (12.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

UC4030A 400mm (16")

Electric Chain Saw
Gergaji Rantai
电链锯



- **Excellent in heavy duty application**
  Cemerlang dalam aplikasi tugas berat
  优秀的重载应用程序

*Saw Chain, Guide Bar, Guide Bar Cover, Hook complete

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Chain Speed per Minute Kelajuan Rantai 链条速度	**800m (2,600ft)**
Guide Bar Length Panjang Batang Gergaji 切割长度	**400mm (16")**
Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.3" or 0.050"**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.14L**
Dimensions (L x W x H) Dimensi 体积	**492x201x220mm** **(19-3/8"x7-7/8"x8-5/8")**
Net Weight Berat Bersih 净重	**5.2kg (11.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**0.3m (0.98ft)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

EA3201S40B 400mm (16")

Petrol Chain Saw
Gergaji Rantai
汽油链锯



- **Touch & stop switch system keeps spark plug from getting wet**
  Sistem suis mengelakkan palam cucuh daripada menjadi basah
  可防止火花塞受潮的开关系统

*Guide Bar, Saw Chain, Guide Bar Cover, Steel spike bumper, Socket Wrench, Screwdriver

CATALYTIC CONVERTER



Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.1mm (0.043")/ 1.3mm (0.050")**
Displacement Sesaran 排量	**32mL**
Engine Power Kuasa Enjin 发动机功率	**1.35kW/ 1.9PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.4L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.28L**
Dimensions (L x W x H) Dimensi 体积	**405x269x273mm (16"x10-5/8"x10-3/4")**
Power Head Weight Berat Kepala Kuasa 动力头重量	**4.2kg (9.3lbs.)**

EA3502S40B 400mm (16")

Petrol Chain Saw
Gergaji Rantai
汽油链锯

- **External access holes allow easy carburetor adjustment**
  Lubang akses luar membolehkan pelarasan karburetor mudah
  外部进入孔允许简单的化油器调整

*Saw Chain, Guide bar (carving bar or sprocket nose bar), Guide Bar Cover, Socket Wrench, - Screwdriver



Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.1mm (0.043")/ 1.3mm (0.050")**
Displacement Sesaran 排量	**35.0mL**
Engine Power Kuasa Enjin 发动机功率	**1.7kW/ 2.4PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.4L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.29L**
Dimensions (L x W x H) Dimensi 体积	**415x247x273mm (16-3/8"x9-3/4"x10-3/4")**
Net Weight Berat Kepala Kuasa 动力头重量	**4.4kg (9.7lbs)**

EA4301F45B 450mm (18")

Petrol Chain Saw
Gergaji Rantai
汽油链锯

- **Increased output power**
  Peningkatan kuasa output
  增加输出功率

*Saw Chain, Guide Bar, Guide Bar Cover, Socket Wrench, Hex Wrench, Screwdriver



Saw Chain Rantai 链条	**Pitch : 0.325" or 3/8"** **Gauge: 1.3mm (0.050")**
Displacement Sesaran 排量	**42.4mL**
Engine Power Kuasa Enjin 发动机功率	**2.2kW/ 3.0PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.48L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.28L**
Dimensions (L x W x H) Dimensi 体积	**416x248x279mm (16-3/8"x9-3/4"x11")**
Power Head Weight Berat Kepala Kuasa 动力头重量	**4.8kg (10.5lbs.)**

EA6100P60E 600mm (24")

Petrol Chain Saw
Gergaji Rantai
汽油链锯

- **Up to 20% less fuel consumption and lower emissions**
  Penggunaan bahan api kurang sehingga 20% dan pelepasan asap yang lebih rendah
  燃料消耗降低20%，排放气降低

*Saw Chain, Guide Bar Cover, Wrenches

STRATIFIED SCAVENGING



Saw Chain Rantai 链条	**Pitch : 0.325 or 3/8"** **Gauge: 1.5mm (0.058")**
Displacement Sesaran 排量	**60.7mL**
Engine Power Kuasa Enjin 发动机功率	**3.4kW/ 4.6PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.8L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.48L**
Dimensions (L x W x H) Dimensi 体积	**435x243x312mm (17-1/8"x9-9/16"x12-1/4")**
Power Head Weight Berat Kepala Kuasa 动力头重量	**6.0kg (13.2lbs.)**

EA7900P60E 600mm (24")

Petrol Chain Saw
Gergaji Rantai
汽油链锯

- **Adjustable automatic chain lubrication with large oil reservoir**
  Pelarasan pelinciran rantai automatik dengan takungan minyak yang besar
  可调自动链条润滑

*Saw Chain, Guide Bar, Guide Bar Cover, Socket Wrench

SCAVENGING LOSSES REJECTION




Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.5mm (0.058")**
Displacement Sesaran 排量	**79mL**
Engine Power Kuasa Enjin 发动机功率	**4.3kW/ 5.8PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.75L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.42L**
Power Head Weight Berat Kepala Kuasa 动力头重量	**6.3kg (13.8lbs.)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DCS430-45 450mm (18")

Petrol Chain Saw
Gergaji Rantai
汽油链锯



- **Anti-vibration design**
  Reka bentuk anti-getaran
  防振设计

*Saw Chain, Guide Bar Cover, Wrenches






Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.5mm (0.058")**
Displacement Sesaran 排量	**43mL**
Engine Power Kuasa Enjin 发动机功率	**2.0kW/ 2.8PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.56L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.28L**
Power Head Weight Berat Kepala Kuasa 动力头重量	**4.5kg (9.9lbs.)**

DCS4610-40 400mm (16")

Petrol Chain Saw
Gergaji Rantai
汽油链锯



- **Large tank caps for easy filling of fuel & chain oil**
  Tangki besar untuk mengisi minyak dengan mudah
  大容量的油箱盖，方便填充燃油和链条油

*Saw Chain, Guide Bar Cover, Wrench





Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.5mm (0.058")**
Displacement Sesaran 排量	**45.1mL**
Engine Power Kuasa Enjin 发动机功率	**1.7kW/ 2.3PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.37L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.25L**
Power Head Weight Berat Kepala Kuasa 动力头重量	**4.75kg (10.5lbs.)**

DCS520-53 530mm (21")

Petrol Chain Saw
Gergaji Rantai
汽油链锯



- **Automatic adjustable chain oilier**
  Pelarasan minyak rantai automatik
  自动调节链条油

*Saw Chain, Guide Bar Cover, Wrenches





Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.5mm (0.058")**
Displacement Sesaran 排量	**52mL**
Power Rating Kuasa Enjin 发动机功率	**2.4kW**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.56L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.28L**
Power Head Weight Berat Kepala Kuasa 动力头重量	**4.5kg (9.9lbs.)**

DCS6401-50 500mm (20")

Petrol Chain Saw
Gergaji Rantai
汽油链锯



- **Vibration damping with tough, long-life steel springs**
  Getaran redaman dengan pegas keluli yang tahan lama
  减震，坚韧，而耐久的 钢弹簧

*Saw Chain, Guide Bar Cover, Wrenches





Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.5mm (0.058")**
Displacement Sesaran 排量	**64mL**
Engine Power Kuasa Enjin 发动机功率	**3.5kW/ 4.8PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.75L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.42L**
Power Head Weight Berat Kepala Kuasa 动力头重量	**6.3kg (13.89lbs.)**

DCS7301-60 600mm (24")

Petrol Chain Saw
Gergaji Rantai
汽油链锯



- **Improved air filtration through the Air master air filter system**
  Penapis udara yang lebih baik
  改进的空气过滤系统改善空气过滤

*Saw Chain, Guide Bar Cover, Wrenches






Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.5mm (0.058")**
Displacement Sesaran 排量	**72.6mL**
Engine Power Kuasa Enjin 发动机功率	**4.2kW/ 5.7PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.75L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.42L**
Power Head Weight Berat Kepala Kuasa 动力头重量	**6.3kg (13.89lbs.)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DCS7901-70 700mm (28")

Petrol Chain Saw
Gergaji Rantai
汽油链锯



- **Improved air filtration through the Air master air filter system**
  Penapis udara yang lebih baik
  改进的空气过滤系统改善空气过滤


*Saw Chain, Guide Bar Cover, Wrenches



Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.5mm (0.058")**
Displacement Sesaran 排量	**78.5mL**
Engine Power Kuasa Enjin 发动机功率	**4.6kW/ 6.3PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.75L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.42L**
Power Head Weight Berat Kepala Kuasa 动力头重量	**6.3kg (13.89lbs.)**

DCS9010-76 740mm (29")

Petrol Chain Saw
Gergaji Rantai
汽油链锯



- **Heavy timber saw for the hardest working for professionals**
  Gergaji kayu berat untuk profesional
  适合专业人员的重型木锯

*Saw Chain, Guide Bar Cover, Wrench, Screwdriver



Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.5mm (0.058")**
Displacement Sesaran 排量	**90mL**
Engine Power Kuasa Enjin 发动机功率	**4.9kW/ 6.7PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.4L**
Power Head Weight Berat Kepala Kuasa 动力头重量	**8.2kg (18.1lbs.)**

EA3110T30B 300mm (12")

Petrol Chain Saw
Gergaji Rantai
汽油链锯



- **Compact and lightweight body for better handling**
  Padat dan ringan
  小巧轻便的机身易于操纵

*Guide Bar, Saw Chain, Guide Bar Cover, Socket Wrench, + Screwdriver, - Screwdriver



Saw Chain Rantai 链条	**Pitch : 3/8"** **Gauge: 1.3mm (0.050")**
Displacement Sesaran 排量	**30.1mL**
Engine Power Kuasa Enjin 发动机功率	**1.0kW/ 1.4PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.24L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.18L**
Dimensions (L x W x H) Dimensi 体积	**259x236x217mm** **(10-1/4"x9-1/4"x8-1/2")**
Power Head Weight Berat Kepala Kuasa 动力头重量	**3.2kg (7.0lbs.)**

DCS231T 250mm (10")

Petrol Chain Saw
Gergaji Rantai
汽油链锯

- **Fast acceleration and low emissions**
  Pelepasan asap yang rendah
  低排气

*Saw chain, Guild Bar, Guide Bar Cover, Tool Set



Bar Length Panjang Batang Gergaji 切割长度	**25cm**
Displacement Sesaran 排量	**22.2mL**
Engine Power Kuasa Enjin 发动机功率	**0.74kW**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.2L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.19L**
Power Head Weight Berat Kepala Kuasa 动力头重量	**2.5kg**

EA5600F53G 530mm (21")

Petrol Chain Saw
Gergaji Rantai
汽油链锯



- **Excellent air filter system for reduced maintenance**
  Sistem penapis udara yang sangat baik untuk mengurangkan penyelenggaraan
  卓越的空气过滤系统，减少维修

*Saw Chain, Guide Bar, Guide Bar Cover, Socket Wrench, Slotted screwdriver (country-specific)



Saw Chain Rantai 链条	**Pitch : 3/8" or 0.325"** **Gauge: 1.3mm (0.050")/ 1.5mm (0.058")**
Displacement Sesaran 排量	**55.7mL**
Engine Power Kuasa Enjin 发动机功率	**3.0kW/ 4.1PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.6L**
Chain Oil Tank Volume Tangki Minyak Pelincir 链油箱	**0.3L**
Dimensions (L x W x H) Dimensi 体积	**430x237x297mm** **(17"x9-3/8"x11-5/8")**
Net Weight Berat Bersih 净重	**5.8kg (12.8lbs.)**

***Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DJR183Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Dual-position on/off switch allows for either paddle or trigger switch operation**
  Suis dua pemilihan
  2开关选择

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Capacity Panjang Strok 冲程长度	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Kelajuan Strok 冲程速度	**13mm (1/2")**
Strokes Per Minute (SPM) Kapasiti 能力	**0-3,000**
Dimensions (L x W x H) Dimensi 体积	**392x81x209mm** **(15-1/2"x3-3/16"x8-1/4")**
Net weight Berat Bersih 淨重	**1.5 - 1.7kg (3.3 - 3.8lbs)**

*Recipro Saw Blades

• Z : Without Charger & Battery

JR105DWAE / Z

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Cuts PVC, ABS pipe, EMT, drywall, wood & more**
  Memotong PVC, paip ABS, EMT, drywall, kayu dll
  切割PVC，ABS管，EMT，石膏板，木材及更多

Li-ion Ah 4.0 2.0 1.5

12V max




Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,300**
Capacity Kapasiti 能力	**Pipe/ Wood: 50/ 50mm (2" / 2")**
Dimensions (L x W x H) Dimensi 体积	**376x66x186mm** **(14-3/4"x2-5/8"x7-3/8")**
Net Weight Berat Bersih 淨重	**1.3 - 1.5kg (2.9 - 3.2lbs)**

*Recipro Saw Blades, Hex Wrench

• WAE : 1 x Standard Charger, 2 x 2.0Ah Battery
• Z : Without Charger & Battery

JR100DWE

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Dual-position on/off switch design allows for either paddle or trigger switch operation**
  Suis dua pemilihan
  2开关选择

Li-ion Ah 1.3

10.8V



Capacity Kapasiti 能力	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-3,300**
Dimensions (L x W x H) Dimensi 体积	**355x63x146mm** **(14"x2-1/2"x5-3/4")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**

*Recipro Saw Blades

• WE : 1 x Standard Charger, 2 x 1.3Ah Battery

JR102DWE

Cordless Recipro Saw
Gergaji Resipro Tanpa Kord
充电式往复锯



- **Accepts both Recipro and Jig saw blades**
  Boleh memasang bilah gergaji recipro dan bilah gergaji jig
  可配置线锯片或往复锯片

Li-ion Ah 1.3

10.8V




Capacity Kapasiti 能力	**Pipe : 50mm (2")** **Wood: 50mm (2")**
Length of Stroke Panjang Strok 冲程长度	**13mm (1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0-3,300**
Dimensions (L x W x H) Dimensi 体积	**355x63x146mm** **(14"x2-1/2"x5-3/4")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**

*Recipro Saw Blades, Hex Wrench

• WE : 1 x Standard Charger, 2 x 1.3Ah Battery

EY2650H25H 25.4mL 4-stroke

Telescopic Petrol Pole Saw
Rantai Cawangan Teleskopik Tinggi
伸缩式高枝链锯



- **Ideal for pruning and limbing in tall trees or hard to reach areas**
  Sesuai untuk pemangkasan pokok-pokok yang tinggi
  适合修剪和砍伐高大树木



Displacement Sesaran 排量	**25.4mL**
Engine Power Kuasa Enjin 发动机功率	**0.77kW/ 1.1PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.6L**
Guide Bar Length Panjang Batang Gergaji 切割长度	**255mm (10")**
Saw Chain Rantai 链条	**Gauge: 1.3mm (0.050")** **Pitch: 3/8"**
Dimensions (L x W x H) Dimensi 体积	**2,720x223x240mm** **(107"x8-3/4"x9-1/2")**
Net Weight Berat Bersih 淨重	**7.2kg (16.0lbs)**

*Blade Cover, Tool set, Oil set

MM4

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

EE2650H 25.4mL 4-stroke

Petrol Edger
Pemotong Rumput Petrol
汽油草坪修边机



- **Plate on gear housing for protection against contact to concrete**
  Plat pada gear untuk perlindungan daripada tersentuh konkrit
  防止与混凝土接触的齿轮箱

*Blade, Socket Wrench, Hex Wrench, Accessory Bag, Oil Bottle (country-specific)



Displacement Sesaran 排量	**25.4mL**
Engine Power Kuasa Enjin 发动机功率	**0.77kW/ 1.1PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.6L**
Dimensions (L x W x H) Dimensi 体积	**1,773x242x315mm (69-3/4"x9-1/2"x12-3/8")**
Net Weight Berat Bersih 净重	**6.6kg (14.6lbs)**

ETR2500 24.5mL

Petrol Edging Trimmer
Pemotong Rumput Petrol
汽油草坪修边机



- **Very powerful 2-stroke engine**
  Enjin 2-strok yang berkuasa
  强大的二冲程引擎


*Single harness, Tool set



Displacement Sesaran 排量	**24.5mL**
Engine Power Kuasa Enjin 发动机功率	**0.73kW/ 0.99PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.5L**
Dimensions (L x W x H) Dimensi 体积	**1,760x395x220mm (69-1/4"x15-1/2"x8-5/8")**
Net Weight Berat Bersih 净重	**5.1kg (12.1lbs)**

EN4951SH 25.4mL 4-stroke

Petrol Pole Hedge Trimmer
Tinggi Pemangkas Tanaman Pagar Petrol
汽油高枝篱笆剪



- **Can be folded in the 180° position for easy transport and storage**
  Boleh dilipat di kedudukan 180 ° untuk memudahkan pengangkutan dan penyimpanan
  可以在180° 的位置折叠，便于运输和储存


*Blade Cover, Socket Wrench, Hex Wrench, Accessory Bag, Oil set (inc. 80mL oil), Shoulder Strap, Safety Goggles, End Cover



Displacement Sesaran 排量	**25.4mL**
Engine Power Kuasa Enjin 发动机功率	**0.77kW/ 1.1PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.6L**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,200**
Blade Length Panjang Batang Gergaji 切割长度	**490mm (19-1/4")**
Dimensions (L x W x H) Dimensi 体积	**2,050x221x241mm (80-1/2"x8-3/4"x9-1/2")**
Net Weight Berat Bersih 净重	**6.6kg (14.6lbs)**

PTR2500 24.5mL

Petrol Pole Trimmer
Tinggi Pemangkas Tanaman Pagar Petrol
汽油高枝篱笆剪



- **Very powerful 2-stroke engine**
  Enjin 2-strok yang berkuasa
  强大的二冲程引擎

*Single harness, Tool set



Displacement Sesaran 排量	**24.5mL**
Engine Power Kuasa Enjin 发动机功率	**0.73kW/ 0.99PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.65L**
Dimensions (L x W x H) Dimensi 体积	**2,400x350x220mm (94-1/2"x13-3/4"x8-5/8")**
Net Weight Berat Bersih 净重	**6.1kg (13.4lbs)**

DUH651Z 650mm (25-1/2")

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar tanpa Kord
充电式篱笆修剪机



- **5-Position rotating rear handle for increased comfort during vertical and angle trimming**
  Pemegang boleh diputar untuk memudahkan kerja yang berlainan
  可旋转手柄方便不同场合工作

*Blade Cover

• Z : Without Charger & Battery

Li-ion 18V X2 | 6.0 | 5.0 | 4.0 | 3.0 | 2.0 | 1.5 | 442 mm




Blade Length Panjang bilah 刀片长度	**650mm (25-1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,000 - 3,600**
Tooth Spacing Selang Gigi 牙齿间隔	**36mm (1-7/16")**
Dimensions (L x W x H) Dimensi 体积	**1,135x225x200mm (44-3/4"x8-7/8"x7-7/8")**
Net Weight Keberatan 净重	**4.7 - 5.5kg (10.3 - 12.0lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DUH523RME / RFE / Z 520mm (20-1/2")

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar tanpa Kord
充电式篱笆修剪机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



- **Delivers 2,700 SPM for increased cutting speed**
  Menyampaikan 2,700 SPM untuk meningkatkan kelajuan pemotongan
  提供2,700 SPM提高切割速度

*Blade Cover

- RME : 1 x Rapid Charger, 2 x 4.0Ah Battery
- RFE : 1 x Rapid Charger, 2 x 3.0Ah Battery
- Z : Without Charger & Battery

Blade Length Panjang bilah 刀片长度	**520mm (20-1/2")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,700**
Tooth Spacing Selang Gigi 牙齿间隔	**26mm (1")**
Dimensions (L x W x H) Dimensi 体积	**938x195x193mm (37"x7-5/8"x7-5/8")**
Max Output Keluaran Maksima 最大输出	**210W**
Net weight Berat Bersih 淨重	**3.0 - 3.4kg (6.7 - 7.5lbs)**

EH7500SX 750mm (29-1/2")

Petrol Hedge Trimmer
Pemangkas Tanaman Pagar Petrol
汽油篱笆修剪机



2st CATALYTIC CONVERTER



- **Blade teeth with 3 sharpened edges**
  Bilah gigi dengan 3 ketajaman
  有3个锋利边缘的刀刃

*Blade Cover, Socket Wrench, Hex Wrench

Blade Length Panjang Bilah 锯片长度	**750mm (29-1/2")**
Displacement Sesaran 排量	**22.2mL**
Engine Power Kuasa Enjin 发动机功率	**0.68kW/ 1.0PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.4L**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4390**
Tooth Spacing Selang Gigi 牙齿间隔	**35mm (1-3/8")**
Dimensions (L x W x H) Dimensi 体积	**1,150x323x212mm (45-1/4"x12-3/4"x8-3/8")**
Net Weight Berat Bersih 淨重	**4.9kg (10.8lbs)**

EH6000W 600mm (23-5/8")

Petrol Hedge Trimmer
Pemangkas Tanaman Pagar Petrol
汽油篱笆修剪机



2st CATALYTIC CONVERTER



- **The lightest 22.2cc petrol hedge trimmer with double-sided blade**
  Petrol 22.2cc trimmer yang paling ringan dengan bilah berbilang segi
  最轻的22.2cc双面刀片汽油绿篱机

*Blade Cover, Socket Wrench, Hex Wrench

Blade Length Panjang Bilah 锯片长度	**600mm (23-5/8")**
Displacement Sesaran 排量	**22.2mL**
Engine Power Kuasa Enjin 发动机功率	**0.68kW/ 1.0PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.4L**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4390**
Tooth Spacing Selang Gigi 牙齿间隔	**35mm (1-3/8")**
Dimensions (L x W x H) Dimensi 体积	**1,119x262x216mm (44"x10-3/8"x8-1/2")**
Net Weight Berat Bersih 淨重	**5kg (11lbs)**

HTR7610 750mm (29-1/2")

Petrol Hedge Trimmer
Pemangkas Tanaman Pagar Petrol
汽油篱笆修剪机



WHILE STOCKS LAST
Sementara stok masih ada
售完即止



- **Wide-trigger control and soft grip for comfortable operation**
  pencetus dan genggaman lembut untuk operasi yang selesa
  宽触发控制和柔软的握柄舒适操作

*Blade Cover, Tool set

Blade Length Panjang Bilah 锯片长度	**750mm (29-1/2")**
Displacement Sesaran 排量	**24.5mL**
Engine Power Kuasa Enjin 发动机功率	**0.73kW/ 0.99PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.6L**
Dimensions (L x W x H) Dimensi 体积	**1,041x280x258mm (41"x11"x10-1/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**3,600**
Net Weight Berat Bersih 淨重	**5.4kg (11.9lbs)**

HTR5600 560mm (22")

Petrol Hedge Trimmer
Pemangkas Tanaman Pagar Petrol
汽油篱笆修剪机



WHILE STOCKS LAST
Sementara stok masih ada
售完即止



- **Very powerfull 2-stroke engine**
  Enjin 2-strok yang berkuasa
  强力的二冲程引擎


*Blade Cover, Tool set

Blade Length Panjang Bilah 锯片长度	**560mm (22")**
Displacement Sesaran 排量	**24.5mL**
Engine Power Kuasa Enjin 发动机功率	**0.73kW/ 0.99PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.6L**
Tooth Spacing Selang Gigi 牙齿间隔	**28mm (1-1/8")**
Dimensions (L x W x H) Dimensi 体积	**840x246x225mm (33"x9-11/16"x8-7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**3,600**
Net Weight Berat Bersih 淨重	**5.1kg (11.2lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HTR4901 490mm (19-1/4")

Petrol Hedge Trimmer
Pemangkas Tanaman Pagar Petrol
汽油篱笆修剪机



- **Rear handle swivels 180 degree, making vertical trimming easier**
  Pemegang berpusing 180° untuk pemangkasan menegak lebih mudah
  后把手可旋转180°，使垂直修剪更容易

*Blade Cover, Tool set

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Blade Length Panjang Bilah 锯片长度	**490mm (19-1/4")**
Displacement Sesaran 排量	**21mL**
Engine Power Kuasa Enjin 发动机功率	**0.62kW/ 0.84PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.4L**
Tooth Spacing Selang Gigi 牙齿间隔	**29mm (1-1/8")**
Dimensions (L x W x H) Dimensi 体积	**1,060x255x220mm (41-3/4"x10"x8-5/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4,000**
Net Weight Berat Bersih 净重	**4.7kg (10.4lbs)**

EH5000W 500mm (19-3/4")

Petrol Hedge Trimmer
Pemangkas Tanaman Pagar Petrol
汽油篱笆修剪机



- **Rotatable handle is convenient for various style operation**
  Pemegang berputar mudah untuk pelbagai operasi
  可旋转的手柄方便各种操作

*Blade Cover, Socket Wrench, Hex Wrench

2st CATALYTIC CONVERTER



Blade Length Panjang Bilah 锯片长度	**500mm (19-3/4")**
Displacement Sesaran 排量	**22.2mL**
Engine Power Kuasa Enjin 发动机功率	**0.68kW/ 1.0PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.4L**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**4390**
Tooth Spacing Selang Gigi 牙齿间隔	**35mm (1-3/8")**
Dimensions (L x W x H) Dimensi 体积	**1,014x262x216mm (40"x10-3/8"x8-1/2")**
Net Weight Berat Bersih 净重	**4.8kg (10.5lbs)**

DUM604Z 160mm (6-5/16")

Cordless Grass Shear
Pemotong Rumput tanpa Kord
充电式割草機



- **2 in 1: trimmer and shear blade can be attached**
  2 dalam 1 untuk penukaran bilah
  2合1：可更换剪切刀片

*Grass Receiver, Blade Cover

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V
2in1



NEW BARU 新

Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**15, 20, 25mm (9/16", 13/16", 1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**BL1850B: 200**
Dimensions (L x W x H) Dimensi 体积	**337x177x131mm (13-1/4"x7"x5-1/8")**
Net Weight Berat Bersih 净重	**1.4 - 1.8kg (3.2 - 4.0 lbs)**

DUM168Z 160mm (6-5/16")

Cordless Grass Shear
Pemotong Rumput tanpa Kord
充电式割草機



- **2 in 1: trimmer and shear blade can be attached**
  2 dalam 1 untuk penukaran bilah
  2合1：可更换剪切刀片

*Base Frame, Blade Cover

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5
18V
2in1



Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**10, 20, 30mm (3/8", 13/16", 1-3/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**BL1850B: 200**
Dimensions (L x W x H) Dimensi 体积	**353x176x130mm (13-7/8"x6-15/16"x5-1/8")**
Net Weight Berat Bersih 净重	**1.4kg (3.0lbs.)**

UH201DWAX / Z 200mm (7-7/8")

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆修剪机



- **Dual blade action cuts quickly with a shearing effect**
  Pemotongan cepat dengan dua bilah
  双刀片迅速切割

*Blade Cover, Chip Receiver

- WAX : 1 x Standard Charger, 1 x 2.0Ah Battery, 1x Grass Shear Blade
- Z : Without Charger & Battery

CXT XPT

Li-ion Ah 4.0 2.0 1.5
12V max
2in1
NEW BARU 新



*Only for UH201DWAX

Grass Shear Blade




Blade Length Panjang Bilah 刀片长度	**200mm (7-7/8")**
Tooth Spacing Selang Gigi 牙齿间隔	**26mm (1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**BL1041B: 90/ BL1021B: 45/ BL1016: 35 min**
Dimensions (L x W x H) Dimensi 体积	**504x120x131mm (19-7/8"x4-3/4"x5-1/8")**
Net Weight Berat Bersih 净重	**1.3 - 1.5kg (2.8 - 3.3lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

UM600DWA / Z 160mm (6-5/16")

Cordless Grass Shear
Pemotong Rumput Tanpa Kord
充电式割草机



- **2 in 1: Both trimmer blade and shear blade can be attached**
  Penukaran bilah 2 dalam 1
  2合1可更换剪切刀片

*Grass Receiver, Blade Cover

- WA : 1 x Standard Charger, 1 x 2.0Ah Battery
- Z : Without Charger & Battery

CXT XPT

Li-ion Ah 4.0 2.0 1.5

12V max

2in1



Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**15, 20, 25mm (9/16", 13/16", 1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**BL1041B: 90/ BL1021B: 45/ BL1016: 35 min**
Dimensions (L x W x H) Dimensi 体积	**329x177x131mm (13"x7"x5-1/8")**
Net Weight Berat Bersih 净重	**1.3 - 1.5kg (2.8 - 3.3lbs)**

UH200DW 200mm (7-7/8")

Cordless Hedge Trimmer
Pemangkas Tanaman Pagar Tanpa Kord
充电式篱笆修剪机



- **2 in 1: Both trimmer blade and shear blade can be attached**
  Penukaran bilah 2 dalam 1
  2合1可更换剪切刀片

*Blade Cover, Chip Receiver

- W : 1 x Standard Charger, 1 x 1.3Ah Battery

Li-ion Ah 1.3

10.8V

2in1



Blade Length Panjang Bilah 刀片长度	**200mm (7-7/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Dimensions (L x W x H) Dimensi 体积	**460x120x130mm (18-1/8"x4-3/4"x5-1/8")**
Net Weight Berat Bersih 净重	**1.1 - 1.2kg (2.5 - 2.6lbs)**

UM164DW 160mm (6-5/16")

Cordless Grass Shear
Pemotong Rumput Tanpa Kord
充电式割草機



- **Dual blade action cuts quickly with a shearing effect**
  Pemotongan cepat dengan dua bilah
  双刀片迅速切割

*Base Frame, Blade Cover

- W : 1 x Standard Charger, 1 x 1.3Ah Battery

Li-ion Ah 1.3

10.8V

2in1



Cutting Width Lebar Keratan 切割宽度	**160mm (6-5/16")**
Depth Adjustment Pelarasan Kedalaman 深度调整	**10, 15, 25mm (3/8", 9/16", 1")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**2,500**
Dimensions (L x W x H) Dimensi 体积	**292x178x130mm (11-1/2"x7"x5-1/8")**
Net weight Berat Bersih 淨重	**1.1 - 1.2kg (2.5 - 2.6lbs)**

Powerful, Lightweight and Very Low Noise Level Blower

Peniup Berkuasa Tinggi, Ringan Dan Bunyi Sangat Rendah/ 强大，轻便极低噪音级鼓风机

DUB362
Cordless Blower
Penghembus Kabus Tanpa Kord
充电式吹风机

Low Noise
Bunyi Yang Rendah/ 低噪声
96dB

Max Air Volume
Isipadu Angin Maksimum
最大风量
13.4m³/min



DUB362RM2 / Z

Cordless Blower
Mesin Blower tanpa Kord
充电式吹风机



- **6-stage air velocity/volume selection dial with variable speed control trigger/** Dail pilihan kelajuan udara/ isi padu 6 tahap dengan picu pengawal kelajuan/ 6档风速控制

*Shoulder Belt, Nozzle

- RM2 : 1 x Rapid Charger, 2 x 4.0Ah Battery
- Z : Without Charger & Battery

BL MOTOR XPT

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x 2: 85**
Max Air Volume Isipadu Angin Maksimum 最大风量	**13.4m³/min (473CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**54m/s (120MPH)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,400 - 21,500**
Dimensions (L x W x H) Dimensi 体积	**830/880/930x205x295mm (32-3/4"/34-3/4"/36-5/8"x8-1/8"x11-5/8")**
Net Weight Berat Bersih 淨重	**3.5kg (7.7lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DUB361Z

Cordless Blower
Mesin Blower tanpa Kord
充电式吹风机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 — 430 MW



- **Long blowing nozzle with curved tip for optimal blowing performance/** Muncung peniup panjang dengan hujung lengkung untuk prestasi tiupan optima/ 弯尖喷咀，卓越吹风性能

*Shoulder Belt, Nozzle

• Z : Without Charger & Battery

Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1840B x 2: 73**
Max Air Volume Isipadu Angin Maksimum 最大风量	**High: 4.4m³/min (155CFM)** **Low: 2.6m³/min (92CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**High: 93m/s (208MPH)** **Low: 57m/s (128MPH)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**High: 17,000** **Low: 10,000**
Dimensions (L x W x H) Dimensi 体积	**905x141x194mm** **(35-5/8"x5-5/8"x7-5/8")**
Net Weight Berat Bersih 净重	**2.6kg (5.9lbs)**

DUB183Z

Cordless Blower
Mesin Penghembus Tanpa Kord
充电式吹风机



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5 — 18V



- **Long blowing nozzle with curved tip for optimal blowing performance**
  Muncung peniup panjang dengan hujung lengkung untuk prestasi tiupan optima
  弯尖喷咀，卓越吹风性能

*Garden Nozzle

• Z: Without Charger & Battery

Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1830B: 11**
Air Volume Isipadu Angin 风量	**2.6 m³/min**
Air Speed Kelajuan Angin 风速	**52 m/s**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-18,000**
Dimensions (L x W x H) Dimensi 体积	**845x155x212mm** **(33-1/4"x6-1/8"x8-3/8")**
Net Weight Berat Bersih 净重	**1.7kg (3.8lbs)**



Powerful Fuel Efficient 75.6mL MM4 Commercial Duty Engine

Kecekapan bahan api berkuasa 75.6mL MM4 enjin komersil/ 强力燃油效率75.6mL MM4商用发动机

EB7660TH

Petrol Blower 75.6mL 4-Stroke
Penghembus Kabus Menggunakan Petrol
背负式汽油吹风机

Max Air Volume
Isipadu Angin Maksimum
最大风量
20 m³/min

Max Air Velocity
Velositi Angin Maksimum
最大风速
92 m/s

EB7660TH 75.6mL 4-Stroke

Petrol Blower
Penghembus Kabus Menggunakan Petrol
背负式汽油吹风机






- **Powerful fuel efficient 75.6mL MM4 commercial duty engine**
  Enjin komersial MM4 75.6mL yang cekap
  强力工业用途四冲程吹风机

*Oil Bottle (country-specific), Socket Wrench, Flexible Pipe, Swivel Pipe, Hose Clamp, End nozzle, Flat Nozzle, Long Pipe, Short Pipe, Accessory Bag, Cable Holder

Displacement Sesaran 排量	**75.6mL**
Power Rating Kuasa 额定功率	**3.0kW (4.1PS)**
Max Air Volume Isipadu Angin Maksimum 最大风量	**20m³/min (706CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**92m/s (205MPH)**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1.9L (64oz.)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800 - 7,200**
Max Torque Pemutaran Tenaga Maksimum 最大扭力	**4.7N·m**
Dimensions (L x W x H) Dimensi 体积	**332x460x480mm** **(13-1/8"x18-1/8"x18-7/8")**
Net Weight Berat Bersih 净重	**10.9kg (24.1lbs)**

EB7650TH 75.6mL 4-Stroke

Petrol Blower
Penghembus Kabus Menggunakan Petrol
背负式汽油吹风机



WHILE STOCKS LAST
Sementara stok masih ada
售完即止



- **4-stroke engine requires no fuel mix. 4-stroke for low noise and low emission**
  Enjin 4 strok tidak perlu campuran minyak senyap dan perlepasan asap rendah
  四冲程引擎，无需混合燃料，低噪音，无排气

*Oil bottle set, Socket Wrench, Driver, Flexible Pipe, Swivel Pipe, Hose Clamp, End nozzle x2, Flat Nozzle, Long Pipe

Displacement Sesaran 排量	**75.6mL**
Power Rating Kuasa 额定功率	**2.7kW (3.7PS)**
Max Air Volume Isipadu Angin Maksimum 最大风量	**19m³/min (682CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**90m/s (201MPH)**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1.9L (64oz.)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800 - 7,100**
Max Torque Pemutaran Tenaga Maksimum 最大扭力	**4.4N·m**
Dimensions (L x W x H) Dimensi 体积	**332x460x480mm** **(13-1/8"x18-1/8"x18-7/8")**
Net Weight Berat Bersih 净重	**10.8kg (23.8lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

EB5300TH 52.5mL 4-Stroke

Petrol Blower
Penghembus Kabus Menggunakan Petrol
背负式汽油吹风机



- **Heavy duty anti-vibration mounts between frame and engine for improved operator comfort**
  Bertugas berat dan anti getaran
  强力，低振动和舒适的设计

*Oil bottle set, Box Wrench, Driver, Flexible Pipe, Swivel Pipe, Hose Clamp, End nozzle, Flat Nozzle, Long Pipe, Short Pipe, Accessory Bag, Cable Holder



Displacement Sesaran 排量	**52.5mL**
Power Rating Kuasa 额定功率	**1.8kW (2.5PS)**
Max Air Volume Isipadu Angin Maksimum 最大风量	**15m³/min (516CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**98m/s (220MPH)**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1.8L (61oz.)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800 - 6,400**
Max Torque Pemutaran Tenaga Maksimum 最大扭力	**3.0N·m**
Dimensions (L x W x H) Dimensi 体积	**320x450x475mm (12-5/8"x17-3/4"x18-3/4")**
Net Weight Berat Bersih 淨重	**8.9kg (19.7lbs.)**

BHX2500 24.5mL 4-stroke

Petrol Blower
Penghembus Kabus Menggunakan Petrol
汽油吹风机



- **4-stroke engine requires no fuel mix. 4-stroke for low noise and low emission**
  Enjin 4 strok tidak perlu campuran minyak senyap dan perlepasan asap rendah
  四冲程引擎，无需混合燃料，低噪音，无排气

*Pipe, Nozzle, Socket Wrench



Displacement Sesaran 排量	**24.5mL**
Power Rating Kuasa 额定功率	**0.81kW**
Max Air Volume Isipadu Angin Maksimum 最大风量	**10.1m³/min (356CFM)**
Max Air Velocity Velositi Angin Maksimum 最大风速	**65m/s (145MPH)**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.52L (17.6oz.)**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,500 - 7,800**
Dimensions (L x W x H) Dimensi 体积	**350x231x368mm (13.8"x9.1"x14.5")**
Net Weight Berat Bersih 淨重	**4.5kg (9.8lbs)**



Excellent spray range up to 16m (52ft) horizontally

Pelbagai semburan yang sangat baik sehingga 16m (52 kaki) secara mendatar
优秀的喷雾范围水平长达16米(52英尺)

MM4

16m Spray Range
Julat Spray
喷雾范围

1.8L Fuel Tank Capacity
Kapasiti Tangki
油箱容量

PM7650H 75.6mL 4-stroke

Mist Blower
Penyembur Petrol
汽油喷雾器



- **Excellent spray range performance up to 16m (52 ft) horizontally**
  Semburan yang berprestasi tinggi sehingga 16m (52 kaki) secara mendatar
  优秀的喷射性能水平置高达16米(52英尺)

*Oil Bottle (country-specific), Hand Strap, Screwdriver, Diffusion cover, Hose Clamp, Flexible Pipe, Straight Pipe



Displacement Sesaran 排量	**75.6mL**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1.8L**
Max Air Volume Isipadu Angin Maksimum 最大风量	**14.1m³/min (497CFM)** **The velocity of the wind (w/o blower pipes) 85m/s**
Dimensions (L x W x H) Dimensi 体积	**420x440x595mm (16-1/2"x17-1/4"x23-1/2")**
Net Weight Keberatan 净重	**13.9kg (30.6lbs)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



DLM431Z 430mm (17")

Cordless Lawn Mower
Mesin Pemotong Rumput tanpa Kord
充电式手推割草机



- **Large 50L capacity grass basket reduces the need for emptying**
  Kapasiti besar 50L
  50L大容量

*Blade, Socket Wrench

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Blade Type Jenis Bilah 刀片类型	**2 Tooth, Rotary Type**
Cutting Width Lebar Keratan 切割宽度	**430mm (17")**
Cutting Height Ketinggian Pemotongan 切割高度	**20 - 75mm (13/16" - 2-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**50L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,600**
Recommended Mowing Area Julat Memotong Yang Disyorkan 推荐的割草范围	**with BL1850B x2: 475 - 950m²**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1850B x2: 30**
Wheel Size Saiz Roda 轮片尺寸	**Front/ Rear:** **140/ 160mm (5-1/2 / 6-5/16")**
Dimensions (L x W x H) Dimensi 体积	**1,450-1,490x460x950-1,020mm** **(57-58-3/4"x18-1/8"x37-1/2"-40-1/4")**
Net Weight Keberatan 净重	**17.8 - 18.4kg (39.2 - 40.6lbs)**

DLM380Z 380mm (15")

Cordless Lawn Mower
Mesin Pemotong Rumput tanpa Kord
充电式手推割草机



- **Zero emissions and reduced maintenance**
  Tanpa perlepasan asap
  无排气

*Blade, Wrench

• Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Blade Type Jenis Bilah 刀片类型	**2 Tooth, Rotary Type**
Cutting Width Lebar Keratan 切割宽度	**380mm (15")**
Cutting Height Ketinggian Pemotongan 切割高度	**25 - 75mm (1" - 2-15/16")**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**40L**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,700**
Recommended Mowing Area Julat Memotong Yang Disyorkan 推荐的割草范围	**with BL1830B x2: 270 - 540m²**
Continuous Use (min.) Penggunaan Berterusan 连续使用时间(分钟)	**with BL1830B x2: 17**
Wheel Size Saiz Roda 轮片尺寸	**Front/ Rear: 140/ 190mm** **(5-1/2 / 7-1/2")**
Dimensions (L x W x H) Dimensi 体积	**1,145x465x1,023-1,070mm** **(45"x18-1/4"x40-1/4"-42")**
Net Weight Keberatan 净重	**14.5kg (32.0lbs)**

ELM4612X 460mm (18-1/8")

Electric Lawn Mower
Mesin Pemotong Rumput
电手推割草机

- **Cutting height can be adjusted at 8 stages**
  Pelarasan Ketinggian pemotongan 8 tahap
  调整切割高度8阶段


*Blade



Cutting Width Lebar Keratan 切割宽度	**460mm (18-1/8")**
Cutting Height Ketinggian Pemotongan 切割高度	**20-75mm (13/16"- 2-15/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,900**
Recommended Mowing Area up to Julat memotong yang disyorkan 推荐的割草范围	**800m²**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**60L**
Dimensions (L x W x H) Dimensi 体积	**825x540x355mm** **(32-1/2"x21-1/4"x14")**
Net Weight Berat Bersih 淨重	**29.5kg (65.0lbs)**

ELM3711X 370mm (14-1/2")

Electric Lawn Mower
Mesin Pemotong Rumput
电手推割草机



- **Silent and NO emission**
  Senyap dan tanpa perlepasan asap
  低噪音，无排气

*Blade



Cutting Width Lebar Keratan 切割宽度	**370mm (14-1/2")**
Cutting Height Ketinggian Pemotongan 切割高度	**20,40,55mm** **(13/16, 1-9/16, 2-3/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,900**
Recommended Mowing Area up to Julat memotong yang disyorkan 推荐的割草范围	**500m²**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**35L**
Dimensions (L x W x H) Dimensi 体积	**662x412x312mm** **(26"x16-1/2"x12-5/8")**
Net Weight Berat Bersih 淨重	**14.8kg (32.6lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

ELM3311X 330mm (13")

Electric Lawn Mower
Mesin Pemotong Rumput
电手推割草机

- **Wheels tucked under body to enhance performance**
  Wheels terletak di bawah badan untuk meningkatkan prestasi
  轮子隐藏在机身下提高性能



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,100W**
Cutting Width Lebar Keratan 切割宽度	**330mm (13")**
Cutting Height Ketinggian Pemotongan 切割高度	**20,40,55mm (13/16, 1-9/16, 2-3/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,900**
Recommended Mowing Area up to Julat memotong yang disyorkan 推荐的割草范围	**400m²**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**27L**
Dimensions (L x W x H) Dimensi 体积	**621x376x312mm (24-1/2"x14-3/4"x12-1/4")**
Net Weight Berat Bersih 淨重	**13.0kg (28.7lbs)**

PLM5120N2 510mm (20")

Petrol Lawn Mower
Mesin Pemotong Rumput
汽油手推割草机

- **4-stroke engine requires no fuel mix**
  Enjin 4 strok tidak perlu campuran minyak
  四冲程引擎，无需混合燃料

*Blade, Box Wrench, Side Discharge Channel



Engine Enjin 发动机	**B&S625E R/S, 150mL**
Engine power Kuasa Enjin 发动机功率	**2.2kW/ N/A PS**
Cutting Width Lebar Keratan 切割宽度	**510mm (20")**
Cutting Height Ketinggian Pemotongan 切割高度	**25 - 70mm (1" - 2-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800**
Recommended mowing area up to Julat Memotong yang Disyorkan 推荐的割草范围	**1,500m²**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.8L (N/A oz.)**
Oil Tank Capacity Kapasiti Tangki Minyak 润滑油箱	**0.47L (N/A oz.)**
Dimensions (L x W x H) Dimensi 体积	**850x560x375mm (33-1/2"x22"x14-3/4")**
Net weight Berat Bersih 淨重	**25.5kg (57.3lbs.)**

PLM5120 510mm (20")

Petrol Lawn Mower
Mesin Pemotong Rumput
汽油手推割草机

- **4-stroke engine requires no fuel mix**
  Enjin 4 strok tidak perlu campuran minyak
  四冲程引擎，无需混合燃料

*Blade, Box Wrench, Side Discharge Channel

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Engine Enjin 发动机	**B&S625E, 190mL**
Engine power Kuasa Enjin 发动机功率	**2.4kW/ N/A PS**
Cutting Width Lebar Keratan 切割宽度	**510mm (20")**
Cutting Height Ketinggian Pemotongan 切割高度	**25, 31, 40, 53, 70mm (1", 1-1/4", 1-9/16", 2-1/16", 2-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800**
Recommended mowing area up to Julat Memotong yang Disyorkan 推荐的割草范围	**2,200m²**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1.0L (N/A oz.)**
Dimensions (L x W x H) Dimensi 体积	**800x550x380mm (31-1/2"x21-5/8"x15")**
Net weight Berat Bersih 淨重	**28kg (61.7lbs.)**

PLM4621N 460mm (18-1/8")

Petrol Lawn Mower
Mesin Pemotong Rumput
汽油手推割草机

- **Powerful engine with ready start function for easy start**
  Enjin yang berkuasa
  功能强力的引擎

*Blade, Mulch plug

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Engine Enjin 发动机	**B&S650 R/S, 190mL**
Cutting Width Kuasa Enjin 发动机功率	**460mm (18-1/8")**
Cutting Height Lebar Keratan 切割宽度	**25, 31, 43, 56, 70mm (1, 1-1/4, 1-11/16, 2-3/16, 2-3/4")**
No Load Speed (RPM) Ketinggian Pemotongan 切割高度	**2,800**
Propelling Speed Memperkenalkan Kelajuan 推动速度	**3.6km/h**
Recommended Mowing Area up to Julat Memotong yang Disyorkan 推荐的割草范围	**1,400m²**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**60L**
Dimensions (L x W x H) Dimensi 体积	**810x560x440mm (31-8/9"x22"x17-1/3")**
Net Weight Berat Bersih 淨重	**33.8kg (74.5lbs)**

PLM4620N2 460mm (18-1/8")

Petrol Lawn Mower
Mesin Pemotong Rumput
汽油手推割草机

- **Brake for maximum productivity and increased operator safety**
  Brek untuk produktiviti maksimum dan peningkatan keselamatan pengguna
  电刹车器增加使用者的安全

*Blade, Box Wrench, Mulch plug



Engine Enjin 发动机	**B&S625E R/S, 150mL**
Engine Power Kuasa Enjin 发动机功率	**2.2kW/ N/A PS**
Cutting Width Lebar Keratan 切割宽度	**460mm (18-1/8")**
Cutting Height Ketinggian Pemotongan 切割高度	**25 - 70mm (1" - 2-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**2,800**
Recommended Mowing Area up to Julat Memotong yang Disyorkan 推荐的割草范围	**1,200m²**
Grass Box Capacity Kapasiti Kotak Rumput 草箱容量	**60L**
Fuel Tank Capacity Tangki Minyak 油箱容量	**Fuel: 0.8L (N/A oz.)** **Oil: 0.47L (N/A oz.)**
Dimensions (L x W x H) Dimensi 体积	**800x540x400mm (31-1/2"x21-1/4"x15-3/4")**
Net Weight Berat Bersih 淨重	**27.6kg (60.9lbs.)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Environment-Friendly and Cost-Saving 4-Stroke Engine

Enjin 4-strok yang mesra alam dan menjimatkan kos 环保，省钱的四冲程引擎



Low-vibration system with damper springs to absorb vibration from engine to integrated front and rear handles

Getaran rendah 低振动

Easy start-up with Automatic decompression, Primer pump and on/ off choke combination switch with automatic half-throttle lock

Mudah dihidupkan 轻松启动

Casters for moving convenience

Casters untuk kemudahan bergerak 移动方便的脚轮







EK7651H / X1 355mm (14")

Power Cutter
Pemotong Kuasa
汽油切断机



- **Save cost of the power cutter with fuel savings alone**
  Kos bahan yang rendah
  节省燃油

• X1 : Come with Diamond Wheel

EK7651H
WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Wheel Diameter Diameter Roda 轮片直径	**355mm (14")**
Engine Enjin 发动机	**75.6mL**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**122mm (4-13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,300**
Circumferential Speed Kelajuan 圆周速度	**80m/s**
Engine Power Kuasa Enjin 发动机功率	**3.0kW/ 4.1PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1.1L**
Dimensions (L x W x H) Dimensi 体积	**780x310x455mm (30-3/4"x12-1/4"x17-7/8")**
Net Weight Berat Bersih 净重	**14.2kg (31.3lbs)**

EK6101 355mm (14")

Power Cutter
Pemotong Kuasa
汽油切断机



- **Smaller hub and drive wheel for increases maximum cutting depth**
  Hab kecil dan roda pemacu untuk meningkatkan pemotongan kedalaman maksimum
  较小的轮毂和驱动轮可增加最大切割深度

*Cutting Disc, Wrenches, Screwdriver



Wheel Diameter Diameter Roda 轮片直径	**355mm (14")**
Engine Enjin 发动机	**61mL**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**130mm (5-1/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,400**
Circumferential Speed Kelajuan 圆周速度	**80m/s**
Engine Power Kuasa Enjin 发动机功率	**3.2kW/ 4.4PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.7L**
Overall Length Dimensi 体积	**730mm (28-3/4")**
Net Weight Berat Bersih 净重	**8.8kg (19.4lbs)**

EK7301 355mm (14")

Power Cutter
Pemotong Kuasa
汽油切断机

- **High performance and powerful Engine**
  Enjin berprestasi tinggi dan berkuasa
  高性能和强力的引擎




Wheel Diameter Diameter Roda 轮片直径	**355mm (14")**
Engine Enjin 发动机	**73mL**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**122mm (4-13/16")**
Circumferential Speed Kelajuan 圆周速度	**80m/s**
Engine Power Kuasa Enjin 发动机功率	**3.8kW/ 5.1PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1.1L**
Dimensions (L x W x H) Dimensi 体积	**770x290x370mm (30-1/4"x11-3/8"x14-1/2")**
Net Weight Berat Bersih 净重	**10.1kg (22.3lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

EK8100 405mm (16")

Power Cutter
Pemotong Kuasa
汽油切断机



- **2-mass dampening system provide reduced vibration to operator**
  Getaran rendah
  减少的振动



Wheel Diameter Diameter Roda 轮片直径	**405mm (16")**
Engine Enjin 发动机	**81mL**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**147mm (5-3/4")**
Circumferential Speed Kelajuan 圆周速度	**80m/s**
Engine Power Kuasa Enjin 发动机功率	**4.2kW/ 5.6PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1.1L**
Overall Length Dimensi 体积	**830mm (32-3/4")**
Net Weight Berat Bersih 淨重	**10.6kg (23.4lbs)**

DPC6430 300mm (12")

Power Cutter
Pemotong Kuasa
汽油切断机



- **Cooling of engine improved by bigger air intake area**
  Penyejukan enjin kawasan pengaliran udara yang lebih besar
  通过更大的进气面积改善发动机冷却



Wheel Diameter Diameter Roda 轮片直径	**300mm (12")**
Engine Enjin 发动机	**64mL**
Max Cutting Depth Kedalaman Pemotongan Maksimum 最大切割深度	**97mm (3-13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,300**
Circumferential Speed Kelajuan 圆周速度	**80m/s**
Engine Power Kuasa Enjin 发动机功率	**3.3kW/ 4.5PS**
Fuel Tank Capacity Tangki Minyak 油箱容量	**1.1L**
Overall Length Dimensi 体积	**770mm (30-1/4")**
Net Weight Berat Bersih 淨重	**9.4kg (20.7lbs)**

EPH1000X 33.5mL 4-stroke

Pump
Pam
汽油水泵



- **High pressure water pump for Spraying and Splashing Water**
  Pam air tekanan tinggi
  高压水泵喷洒和溅水

*Hose, Strainer, Hose Coupling, Hose Band, Delivery Hose, 2 way adjustable nozzle, Tool set



Displacement Sesaran 排量	**33.5mL**
Suction & Discharge Diameter Sedutan dan Diameter Paip 吸管与排管直径	**25.4mm (1")**
Total Head Mesin 机头	**45m (148ft)**
Max Pumping Capacity Kapasiti Pemomputan Maksimum 最大泵水能力	**130L/min (34gal/min)**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.65L**
Dimensions (L x W x H) Dimensi 体积	**358x234x348mm (14-1/8"x9-1/4"x13-3/4")**
Net Weight Berat Bersih 淨重	**7.5kg (16.6lbs)**

EW2051H 169mL 4-stroke

Pump
Pam
汽油水泵

- **4-stroke for low noise and low emission**
  4-lejang untuk bunyi rendah dan pelepasan asap yang rendah
  四冲程低噪音，低排气

*Hose coupling, Hose band, Strainer, Hex Wrench

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Displacement Sesaran 排量	**169mL**
Suction & Discharge Diameter Sedutan dan Diameter Paip 吸管与排管直径	**50mm (2")**
Max Pumping Capacity Kapasiti Pemomputan Maksimum 最大泵水能力	**700L/min (23,700gal/min)**
Total Head Mesin 机头	**23m (75ft)**
Fuel Tank Capacity Tangki Minyak 油箱容量	**3.2L**
Max Suction Head Mesin Sedutan 吸头	**8m (26ft)**
Engine Model Enjin 发动机	**EX16**
Dimensions (L x W x H) Dimensi 体积	**527x368x417mm (20-3/4"x14-1/2"x16-3/8")**
Net Weight Berat Bersih 淨重	**24.9kg (54.9lbs)**

EW3051H 169mL 4-stroke

Pump
Pam
汽油水泵

- **With Oil level sensor to protect the engine**
  Dengan sensor tahap minyak untuk melindungi enjin
  用油位传感器保护引擎

*Hose coupling, Hose band, Strainer, Hex Wrench

WHILE STOCKS LAST
Sementara stok masih ada
售完即止




Displacement Sesaran 排量	**169mL**
Suction & Discharge Diameter Sedutan dan Diameter Paip 吸管与排管直径	**80mm (3")**
Max Pumping Capacity Kapasiti Pemomputan Maksimum 最大泵水能力	**1,000L/min (33,800gal/min)**
Total Head Mesin 机头	**23m (75ft)**
Fuel Tank Capacity Tangki Minyak 油箱容量	**3.2L**
Max Suction Head Mesin Sedutan 吸头	**8m (26ft)**
Engine Model Enjin 发动机	**EX17**
Dimensions (L x W x H) Dimensi 体积	**527x368x417mm (20-3/4"x14-1/2"x16-3/8")**
Net Weight Berat Bersih 淨重	**26.1kg (57.6lbs)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因辖往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HW1300

High Pressure Washer
Pembersih Tekanan Tinggi
高压清洗机



- **Eco-friendly for reduced water**
  Mesra alam dengan pengurangan kegunaan air
  环保与减少用水量

*Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10m, Water Hose Connector, Foam Nozzle, Connector



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Max Pressure Tekanan Maksimum 最大水压	**13MPa (130bar, 1,885PSI)**
Max Flow Rate Aliran Air Maksimum 最大流量	**420L/h**
Max Input Temperature Ketahanan Suhu Air 最大输入温度	**40°C (104°F)**
High Pressure Hose Length Hos Tekanan 高压软管长度	**10m (33ft.)**
Dimensions (L x W x H) Dimensi 体积	**292x358x830mm (11-1/2"x14-1/8"x32-3/4")**
Net Weight Berat Bersih 净重	**12.7kg (28.0lbs.)**
Power Supply Cord Kabel Wayer 电源线	**5.0m (16.4ft.)**

HW1200

High Pressure Washer
Pembersih Tekanan Tinggi
高压清洗机

- **Uses up to 80% less water than a garden hose while delivering up to 50X the pressure**
  Memberikan tekanan 50 kali ganda lebih daripada hos biasa dan menjimatkan 80% penggunaan air berbanding dengan hos biasa
  用水量比园艺胶管少80%，同时可提供高达50倍的水压力

*Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10m, Water Hose Connector, Foam Nozzle, Connector




Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,800W**
Max Pressure Tekanan Maksimum 最大水压	**12MPa (120bar, 1,740PSI)**
Max Flow Rate Aliran Air Maksimum 最大流量	**420L/h**
Max Input Temperature Ketahanan Suhu Air 最大输入温度	**40°C (104°F)**
High Pressure Hose Length Hos Tekanan 高压软管长度	**10m (33 ft.)**
Dimensions (L x W x H) Dimensi 体积	**292x358x830mm (11-1/2"x14-1/8"x32-3/4")**
Net Weight Berat Bersih 净重	**11.0kg (24.3lbs.)**
Power Supply Cord Kabel Wayer 电源线	**5.0m (16.4ft.)**



Various options
Pelbagai pilihan 各种选择





*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

HW151

High Pressure Washer
Pembersih Tekanan Tinggi
高压清洗机

- **Powerful, large operating range and efficient cleaning performance**
  berkuasa, pembersihan yang lebih luas, dan prestasi pembersihan yang cekap
  高效率的清洁性能

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Continuous Rating Input Kuasa 额定输入功率	**2,500W**
Max Pressure Tekanan Maksimum 最大水压	**15MPa (150bar, 2,175PSI)**
Max Flow Rate Aliran Air Maksimum 最大流量	**500L/h**
Motor Type Jenis Motor 马达类型	**Induction**
Max Input Temperature Ketahanan Suhu Air 最大输入温度	**50°C (122°F)**
High Pressure Hose Length Hos Tekanan 高压软管长度	**10m (33ft.)**
Net Weight Berat Bersih 淨重	**26.9kg (59.3lbs.)**

HW121

High Pressure Washer
Pembersih Tekanan Tinggi
高压清洗机

- **Made for frequent usage on larger, dirty or very dirty areas**
  Sesuai untuk pembersihan kerap di tempat yang luas dan kotoran yang degil
  适用于清洗较大的面积和极度肮脏的地方

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



Continuous Rating Input Kuasa 额定输入功率	**2,100W**
Max Pressure Tekanan Maksimum 最大水压	**13MPa (130bar, 1,885PSI)**
Max Flow Rate Aliran Air Maksimum 最大流量	**390L/h**
Motor Type Enjin 马达类型	**Induction**
Max Input Temperature Ketahanan Suhu Air 最大输入温度	**50°C (122°F)**
High Pressure Hose Length Hos Tekanan 高压软管长度	**8m (26.3ft.)**
Net Weight Berat Bersih 淨重	**17.8kg (39.2lbs.)**

HW111

High Pressure Washer
Pembersih Tekanan Tinggi
高压清洗机

- **Lightweight and compact power washer for home use**
  Ringan dan padat, sesuai untuk kegunaan rumah
  轻量家用高压清洗机

WHILE STOCKS LAST
Sementara stok masih ada
售完即止




Continuous Rating Input Kuasa 额定输入功率	**1,700W**
Max Pressure Tekanan Maksimum 最大水压	**11MPa (110bar, 1,595PSI)**
Max Flow Rate Aliran Air Maksimum 最大流量	**370L/h**
Motor Type Enjin 马达类型	**Universal**
Max Input Temperature Ketahanan Suhu Air 最大输入温度	**50 °C (122 °F)**
High Pressure Hose Length Hos Tekanan 高压软管长度	**5.5m (18ft.)**
Net Weight Berat Bersih 淨重	**7.4kg (16.3lbs.)**



DVF154Z 15L

Cordless Garden Sprayer
Penyembur Taman Tanpa Kord
充电式花园喷雾器



- **Reduced running cost with Li-ion battery**
  Mengurangkan kos operasi dengan bateri Li-ion
  使用锂电池达至降低运行成本

*Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Spray Pipe Holder, Shoulder Harness

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Max Pressure Tekanan Maksimum 最大水压	**0.3MPa (3 kgf/cm²)**
Chemical tank Tangki kimia 化学箱容量	**15L**
Dimensions (L x W x H) Dimensi 体积	**345x235x525mm (13-5/8"x9-1/4"x20-3/4")**
Net weight Berat Bersih 淨重	**4.1 - 4.4kg (9.1 - 9.7lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

DVF104Z 10L

Cordless Garden Sprayer
Penyembur Taman Tanpa Kord
充电式花园喷雾器



Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



- **Environment-friendly with no emission and extremely low noise**
  Mesra alam tanpa pelepasan asap dan bunyi rendah
  环保，无排气，低噪音


*Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Spray Pipe Holder, Shoulder Harness

- Z : Without Charger & Battery

Max Pressure Tekanan Maksimum 最大水压	**0.3MPa (3 kgf/cm²)**
Chemical Tank Tangki kimia 化学箱容量	**10L**
Dimensions (L x W x H) Dimensi 体积	**315x225x415mm (12-3/8"x8-7/8"x16-3/8")**
Net weight Berat Bersih 净重	**3.8 - 4.1kg (8.4 - 9.1lbs)**

EVH2000 24.5mL 4-stroke

Sprayer
Penyembur Taman
汽油花园喷雾器




- **Large chemical tank for long spraying work**
  Tangki kimia besar untuk kerja semburan lama
  大型化学品罐适合长时间喷洒工作



Displacement Sesaran 排量	**24.5mL**
Fuel Tank Capacity Tangki Minyak 油箱容量	**0.5L**
Max Pressure Tekanan Maksimum 最大水压	**2.5MPa (25 kgf/cm²)**
Chemical Tank Tangki Kimia 化学箱容量	**20L**
Dimensions (L x W x H) Dimensi 体积	**380x420x635mm (15"x16-1/2"x25")**
Net Weight Berat Bersih 净重	**9.1 kg (20.1lbs)**

DUP361Z

Cordless Pruning Shear
Gunting Pemangkas tanpa Kord
充电式电剪



- **Extra sharp, Made-in-Japan forged blade**
  Bilah tajam khas asli dari Jepun
  日本原装特别锋利的刀片

*Oil supply (country-specific), Wrench set, Diamond File, Cord Holder, Holster, Harness, Arm Band, Tool bag, Shear Blade

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5



Refer Pg. 22
for more information

Max Output Keluaran Maksima 最大输出	**200W**
Capacity Kapasiti 能力	**Max cutting : 33mm** **Max blade opening: 54mm**
Dimensions (L x W x H) Dimensi 体积	**305x43x106mm (12"x1-11/16"x4-3/16")**
Net Weight Keberatan 净重	**0.8kg (1.8lbs)**

Two variations





Carrier set Jenis rak 货架型
Part No. 199116-7



Bucket set Jenis baldi 货斗型
Part No. 198494-2

BL MOTOR
Motor tanpa berus
无碳刷马达

XPT EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术

Able to climb a slope gradient of
Pergerakan atas kecerunan maksimum
最大爬坡能力
12°



* Performance may vary depending on weight of load and slope of terrain
Prestasi mungkin berbeza bergantung kepada berat barang dan kecerunan tanah 搬运车性能可能因装载量和地形坡度而异

DCU180Z

Battery Powered Wheelbarrow
Gergaji Rantai Tanpa Kord
充电式链锯



- **Ideal for use at urban construction sites and on farms**
  Sesuai digunakan di tapak pembinaan atau ladang
  适合在建筑工地或农场使用

*Lock Key, Support Legs, Wrenches

- Z : Without Charger & Battery

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

18V



Refer Pg. 64
for more information

Max Run Time (min) Masa Operasi Maksimum 最长使用时间	**BL1860B: 120**
Max Load Capacity Kapasiti berat maksimum 最重载量	**130kg (290lbs.)**
Traveling Speed Kelajuan Perjalanan 行驶速度	**Forward, High/ Low: 0 - 3.5/ 0 - 1.5km/h** **Reverse: 0 - 1 km/h**
Max Climbing Capacity Pergerakan atas kecerunan maksimum 最大爬坡能力	**12°**
Dimensions (L x W x H) Dimensi 体积	**When carrier is installed/ During operation: 1,315x1,060x900mm (51-3/4"x41-3/4"x35-1/2")** **When carrier is installed/ When stored: 1,110x820x820mm (43-3/4"x32-1/4"x32-1/4")** **When bucket is installed/ During operation: 1,310x820x900 mm (51-1/2"x32-1/4"x35-1/2")** **When bucket is installed/ When stored: 1,110x820x820mm (43-3/4"x32-1/4"x32-1/4")**
Net weight Keberatan 净重	**39.3 - 44.8kg (86.5 - 98.7lbs)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



Accessories

Aksesori 配件



Drill Chuck Assembly
Perhimpunan Drill Chuck
钻夹头装配

Type Jenis 类型	Part No. No. Bahagian 零件号码
For Impact Driver	
Connect Bit 6.35-48 Keyless NZ	192121-3
Connect Bit 6.35-48 NZ	192173-4
Connect Bit 6.35-48 NZ	191880-6




Adjustable Locator
Pencari Laras
可调定位器


Part No. No. Bahagian 零件号码
Without Bit
194280-9



192440-7
Straight Head
Kepala Lurus
直向夹头



135183-8
Angle Head
Kepala Sudut
角向夹头



135201-2
Angle Wrench Head
Kepala Perengkuh Angle
角向扳手夹头




192439-2
Ratchet Head
Kepala Ratchet
星形夹头

Straight Head, Angle Head, Angle Wrench Head,Ratchet Head
Kepala Lurus, Kepala Sudut, Kepala Perengkuh Angle, Kepala Ratchet
直向夹头，角向夹头，角向扳手夹头，星形夹头

Type Jenis 类型	Part No. No. Bahagian 零件号码
NZ	192440-7
-	135183-8
9.5mm (3/8")	135201-2
-	192439-2



Socket
Soket
插座



Socket Adapter
penyesuai soket
插座适配器

Ratchet Head Adapter
Penyesuai Ketua Ratchet
棘轮头适配器

Type Jenis 类型	Size Saiz 尺寸 (mm)	Part No. No. Bahagian 零件号码
Socket	17 x 31 (A x L)	134743-3
Socket	19 x 33 (A x L)	134744-1
Socket adapter	9.5mm (3/8")	134745-9
Socket adapter	12.7mm (1/2")	134746-7

DUP360

Diamond File
Fail Berlian
钻石档案

Part No. No. Bahagian 零件号码
794530-8



Shoulder Strap For Carrying Case
Tali Bahu Untuk Menjalankan Kes
手提箱肩带

Part No. No. Bahagian 零件号码
166070-0

Designed to protect the battery cartridge from dust and dripping water in outdoor applications or harsh environments.

Direka untuk melindungi kartrij bateri dari habuk dan air menetes dalam aplikasi luaran atau persekitaran yang keras.

旨在保护电池盒免受户外应用或恶劣环境中的灰尘和滴水。

Battery Model/ Model Bateri/ 电池型号:
BL1830B, BL1840B, BL1850B

Model/ Model/ 型号:
DTD148, DTS141, DDF458, DHP458





Battery Protector
Pelindung Bateri
电池保护器

Part No. No. Bahagian 零件号码
195798-3

Battery Model/ Model Bateri/ 电池型号:
BL1830B, BL1840B, BL1850B





Battery Protector
Pelindung Bateri
电池保护器

Part No. No. Bahagian 零件号码
194649-7

Enables to hook the machine quickly on a snap hook of waist belt

Membolehkan untuk memasang mesin dengan cepat pada cangkuk tali pinggang

使机器能够快速地钩在腰带的扣钩上

Model/ Model/ 型号:
DDF454, DHP454, DTD129, DTD134, DTD136, DTD137, DTD145, DTD146, DTD147, DTD148, DTP140, DTS130, DTW152





Tool Catcher Set
Set Alat Penangkap
夹具套装

Part No. No. Bahagian 零件号码
197043-2



Socket Adapter
Adaptor Soket/ 套筒接合器

Model Model 型号	Square Drive Pemandu Square 方形驱动	Part No. No. Bahagian 零件号码
Impact Driver	1-2"	A-32415

Anti Kick Back Head Assembly
Perhimpunan Ketua Anti Kick Back
反踢背头组装

Model Model 型号	Type Jenis 类型	Part No. No. Bahagian 零件号码
BFT Series	NZ	195232-3

Anti Kick Back Head Set
Set kepala belakang Anti Kick
反踢背部头套


Model Model 型号	Type Jenis 类型	Part No. No. Bahagian 零件号码
BFL Series	-	195620-4
BFL Series	-	195621-2

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



Torque Adjust Tool
Selesaikan Alat Torque
扭矩调整工具

Model Model 型号	Part No. No. Bahagian 零件号码
BFL200FZ	765027-4

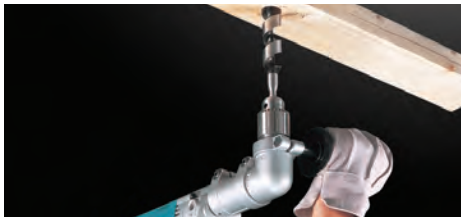

For drilling in close quarters, incorners, between joists and studs.

Untuk penggerudian di tempat yang rapat, incorners, antara gelut dan kancing.

用于近距离钻孔，硬木，托梁和螺柱之间的钻孔。




Angle Attachment
Lampiran Sudut
角度附件

Model Model 型号	No Load Speed Tiada Beban Beban 无负载转速	Part No. No. Bahagian 零件号码
DS4012	High: 800rpm Low: 350rpm	STEX122177

(With pin and O ring)
For narrow places

(Dengan cincin pin dan O)
Untuk tempat sempit

(附短轴和O形圈)
狭窄的地方




Extension Bar
Batang Sambungan
延伸杆

Model Model 型号	Size Saiz 尺寸 (mm)	L (mm)	Part No. No. Bahagian 零件号码
Impact Wrench	1/2"	100	134874-8
	1"	200	134870-6

(With pin and O ring)
For use in tight areas where the tool cannot be held in line with bolt or nut

(Dengan cincin pin dan O)
Untuk digunakan di kawasan yang ketat di mana alat itu tidak boleh dipegang sejajar dengan bolt atau kacang

(带针和O形圈)
用于狭窄区域，其中工具不能与螺栓或螺母保持一致



Universal Joint
Universal Bersama
万向节


Model Model 型号	Size Saiz 尺寸 (mm)	L (mm)	Part No. No. Bahagian 零件号码
Impact Wrench	1/2"	84	134877-2

(With pin and O ring)
(Dengan cincin pin dan O)
(带针和O形圈)



Bit Adapter Assembly
Perhimpunan Adapter Bit
位适配器组件

Model Model 型号	Size Saiz 尺寸 (mm)	Part No. No. Bahagian 零件号码
6904VH	1/2"	134873-0



Socket Bit
Mata soket
套筒维头

Bolt Size Saiz Bolt 螺栓尺寸	A (mm)	L (mm)	Type Jenis 类型	Part No. No. Bahagian 零件号码
M4	7	55	NZ	784402-5
M5	8	55	NZ	784403-3
M6	10	55	NZ	784405-9
M8	13	55	NZ	784408-3
M8	14	55	NZ	784409-1

For Driving Ground Rods

Untuk Memancing Rods

用于驱动地面杆



Ground Rod Adapter
Adaptor Rod Ground
接地棒适配器

Model Model 型号	Part No. No. Bahagian 零件号码
HM0810TA, HR4030C	A-47276

Chuck adapter assembly and drill chuck

Pemasangan penyesuai Chuck dan gerudi chuck

卡盘适配器组件和钻夹头



Drill Chuck Assembly (13mm)
Perhimpunan Gerudi Chuck (13mm)
钻夹头 (13mm)

Shank Shank 柄	Type Jenis 类型	Part No. No. Bahagian 零件号码
SDS-MAX	Keyless	122829-5

Use it with the impact wrench for removing SDS-MAX bit stuck on rebar in concrete

Gunakannya dengan sepana kesan untuk mengeluarkan sedikit SDS-MAX yang tersangkut pada rebar dalam konkrit

使用冲击扳手去除混凝土中钢筋的SDS-MAX位




Drill Bit Remover Set
Set Gerudi Pembersihan
钻头卸妆组

Part No. No. Bahagian 零件号码
195870-1

Dust collecter assembly
Protects operator from dust and debris


Perhimpunan pemungut habuk
Melindungi pengendali dari habuk dan serpihan

除尘器组件
保护操作者免受灰尘和碎屑的伤害



Dust Cup
Piala Debu
灰尘杯

Bit Diameter Diameter Mata 钻头直径 (mm)	Part No. No. Bahagian 零件号码
12 - 16	421664-1



Dust Cup Set
Set Piala Debu
灰尘套装

Model Model 型号	Part No. No. Bahagian 零件号码
Use with grip base set/ Gunakan dengan set asas cengkaman/ 使用夹具底座	
BHR202, BHR241, BHR262, DHR263, HR2470, HR2810	194580-7
Use with dust cup set/ Gunakan dengan set cawan debu/ 使用防尘杯套装	
DHR165	194581-5
DHR202, BHR262/T, DHR241, DHR263, DHR264, HR2470	194582-3



Oil Supply & Grease Vessel
Bekalan Minyak & Kapal Grease
供油和油脂船

Model Model 型号	Contents Kandungan 内容	Part No. No. Bahagian 零件号码
HM1306	Oil 100ml	181118-7
Hammers	Grease 30g	181490-7
18-24mm Hammers	Grease 30g	183477-5
Hammers (for bit)	Grease 100ml	194683-7

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Accessories
Aksesori 配件

Hammer Service Kit
Kit Khidmat Hammer
锤子服务套件

Model Model 型号	Part No. No. Bahagian 零件号码
HK1820	195194-5
HM0810TA	193242-4
HM0870C, HM0871C	195113-1
HM1203C, HM1205C, HM1213C, HM1214C	195114-9
HM1307C, HM1307CB, HM1317C, HM1317CB	195103-4
HM1801, HM1810	195205-6
HM1812, HM1802	197127-6
HR1830	195198-7
HR2020	193606-2
HR2810	195206-4
HR2470	195263-2
HR3200C	195199-5
HR4001C, HR4002, HR4010C, HR4011C	195195-3
HR4003C, HR4013C	196532-4
HR4030C	195207-2
HR5201C, HR5210C, HR5211C	195191-1
HR5212C, HR5202C	196865-7
HM1306	195212-9
DHR202, DHR241	195193-7
BHR261/T, BHR262/T	195189-8
DHR242	195833-7

For accurate square cutting operations
Untuk operasi pemotongan persegi tepat
用于精确的方形切割操作

Model/ Model/ 型号: **2107F**



Portable Band Saw Stand, Cover & Fluorescent light set
Band mudah alih melihat bingkai, penutup dan lampu pendarfluor
便携式带锯架, 荧光灯组

Description Penerangan 描述	Part No. No. Bahagian 零件号码
Portable band saw stand and Cover set	196326-7


Model/ Model/ 型号:
DPB181, DPB180, 2107F



Cutting Wax
Memotong Lilin
切蜡

Part No. No. Bahagian 零件号码
191897-9


Two per set in blister pack
Dua set dalam pek lepuh
两个每套在泡罩包装



Shear Blade
Bilah Ricih
剪切刀片

Model Model 型号	Part No. No. Bahagian 零件号码
JS1600, JS1602	191383-0
JS1601, DJS160, DJS161	792533-6
JS1000, DJS100, DJS101	792536-0
JS3200, JS3201	792287-5

Model/ Model/ 型号:
JS1300, DJS130



Side Blade
Ricih Sisi Bilah
侧剪切刀片

Direction Arah 方向	Part No. No. Bahagian 零件号码
R	792742-7
L	792743-5



Center Blade
Ricih Tengah Bilah
中剪切刀片

Model Model 型号	Application Aplikasi 用途	Part No. No. Bahagian 零件号码
DJS130, JS1300	18Ga	792744-3
JS1601, DJS160, DJS161	-	792534-4
JS1000, DJS100, DJS101	-	792537-8

For setting shear blades at the proper gap
Untuk menetapkan bilah ricih pada jurang yang betul
用于将剪切刀片设置在适当的间隙处




Thickness Gauge
Tolok Ketebalan
塞规

Model Model 型号	Part No. No. Bahagian 零件号码
JS3200, JS3201	762007-1
JS1660, JS1601, DJS160, DJS161	762013-6



Punch
Kuasa Menumbuk
电冲剪

Model Model 型号	Part No. No. Bahagian 零件号码
JN1601, DJN161, DJN160	A-83951
JN3200, JN3201	792728-1



Die
Mati
冲模

Model Model 型号	Part No. No. Bahagian 零件号码
JN1601, DJN161, DJN160	A-15051
JN3200, JN3201	792292-2



Spindle thread: M14 x 2 (DIN)
Super flange 47
Model/ Model/ 型号: **115mm, 125mm, 150mm, 180mm, 230mm Angle Grinder (Except GA4541/C, GA5041/C)**



Toolless Lock Nut
Nut kunci tanpa alat
无螺丝锁螺母
Model/ Model/ 型号: **GA4540/C, GA5040/C, GA6040/C, GA4541/C, GA5041/C 180mm, 230mm Angle Grinder**



Ezynut

Super Flange 47 & Toolless Lock Nut
Super Flange 47 Dan Kacang Skru Mengunci
超级法兰47和无螺丝锁螺母

Description Penerangan 描述	Part No. No. Bahagian 零件号码
Super flange 47	192227-7
Toolless lock nut	195354-9

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



Lock nut wrench
Lock nut release socket
(Square drive : 12.7mm)

Sepana kacang kunci
Soket pelepas kacang kunci
(Pemanduan Square: 12.7mm)

锁紧螺母扳手
分离套筒
(方形驱动 : 12.7mm)



Lock Nut Wrench, Lock Nut Release Socket

Mengunci Kunci Kacang, Lepaskan Soket Lock Nut
锁紧螺母扳手, 锁紧螺母释放插座

Type Penerangan 描述	Model Model 型号	Size Saiz 尺寸 (mm)	Part No. No. Bahagian 零件号码
Lock nut release socket	180/ 230mm	35	194305-9

For cut-off wheel
For diamond wheel
For wire cup brush

Untuk roda cut-off
Untuk roda berlian
Untuk berus cawan wayar

对于切断轮
对于金刚石砂轮
用于电线杯刷



Wheel Cover For Cut-off Wheel And Brush Cover For Wire Cup Brush

Perlindungan Roda Untuk Roda Cut-off Dan Berus Berus Untuk Wire Cup Wire
车轮盖用于切割轮和电线杯刷

Type Jenis 类型	Destination Tujuan 目的	Part No. No. Bahagian 零件号码
100mm		
for wire cup brush	-	192454-6
for wire bevel brush	-	192412-2
125mm		
for cut-off/diamond wheel	IEC	122911-0
for cut-off/diamond wheel	IEC	122905-5



Dust Cover Set, Dust Collect Brush

Set Habuk, Habuk Mengumpul Berus
防尘套, 除尘刷

Model Model 型号	Description Penerangan 描述	Part No. No. Bahagian 零件号码
PW5000C, PK5001C	Dust cover set	194233-8
PW5000C, PK5001C	Dust collect brush	443121-9

For dust collection *Economy type
Untuk pengumpulan habuk *Jenis ekonomi
用于集尘 *经济型



Dust Collecting Wheel Guard

Debu Mengumpul Pengawal Roda
集尘轮防护罩

Model Model 型号	Type Jenis 类型	Part No. No. Bahagian 零件号码
100mm Models (except N9500N)	A	192475-8
115, 125mm Models	A	192618-2
115, 125mm Models	B (W/O Joint)	192972-4
115, 125mm Models	B (With Joint)	192968-5
180mm Models	B	194303-3
230mm Models	B	194044-1

Model/ Model/ 型号:
GV5010, GV6010



Plastic Pad 120

Pad plastik 120
塑料垫120

Size Saiz 尺寸	Part No. No. Bahagian 零件号码
Plastic pad 120	743025-8

Hook & Loop Type
Cangkuk dan gelung jenis
钩环类型

Pad

Pad
垫

Model Model 型号	Size Saiz 尺寸	Part No. No. Bahagian 零件号码
SA4540C, SA4542C	115mm	743062-2
SA4540C, SA4542C	125mm	743060-6



Rubber Pad

Pad Getah
橡胶垫

Model Model 型号	Outer Diameter Diameter luar 外径 (mm)	Part No. No. Bahagian 零件号码
125mm Angle Grinder	115mm	743015-1
PK5001C, PK5011C	115mm	743015-1
GV6010	147mm	743033-9
150mm Angle Grinder	125mm	743016-9
180mm Angle Grinder	170mm	743012-7
180mm Disc Sander / Polisher	170mm	743008-8



Sanding Lock Nut

Mengunci Kacang Kunci
砂光锁紧螺母

Spindle Thread Thread Spindle 主轴螺纹	Part No. No. Bahagian 零件号码
100mm Angle Grinder	
M10 x 1.5	224502-4
115mm, 125mm, 150mm, 180mm, 230mm Angle Grinder	
M14 x 2 (DIN)	224515-5



Dust Cover Attachment Set

Set Lampiran Pelindung Debu
防尘罩附件套件

Model Model 型号	Part No. No. Bahagian 零件号码
GA5010, GA5020/C, GA6010, GA6020/C	194482-7
GA5011, GA5021/C, GA6011, GA6021/C, GA7010C, GA7012C, GA9010C, GA9012C	193956-5
GA7020/R/S, GA7021, GA9020/R/S, GA7030/R/S, GA7031, GA7040R/S, GA9030/R/S, GA9040R/S, SA7021, SA9031	194289-1
GA7050/R, GA9050/R,GS5000,GS6000	195059-1


For centering pads
Untuk pad tengah
对中心垫



Sleeve 18

Lengan 18
袖18

Part No. No. Bahagian 零件号码
9237C/CB, 9227C/B, PV7000C, SA7000C
262542-4



Vise Holder Set

Kerusi Vise
虎钳座

Part No. No. Bahagian 零件号码
GD0800/C, GD0801C, GD0810C, GD0811C
193141-0

* **Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Accessories
Aksesori 配件



Carbon Plate
Plat Karbon
碳板

Model Model 型号	Part No. No. Bahagian 零件号码
9401, 9402	423029-3
9404	193201-8



Cork Rubber Plate
Cork Plat Getah
软木橡胶板

Model Model 型号	Part No. No. Bahagian 零件号码
9401, 9402, 9403	421093-8
9404	193202-6



Steel Plate
Pinggan Besi
钢板

Model Model 型号	Part No. No. Bahagian 零件号码
9404	151751-9
9924DB	341705-6




Belt Sander Stand
Mengempelas Rak Tali Pinggang
皮带砂光机架

Model Model 型号	Part No. No. Bahagian 零件号码
9404, 9902, 9903, 9920	193055-3
9924DB	STEX122299



Sanding Shoe Assembly
Perhimpunan Kasut Sanding
砂光装置

Model Model 型号	Part No. No. Bahagian 零件号码
9404	193072-3
9902, 9903	193070-7



Punch Plate
Plat Berlubang
穿孔板

Model Model 型号	Part No. No. Bahagian 零件号码
BO3700, BO3710	192989-7
BO4900	192523-3



Pad Complete
Pad Lengkap
垫

Model Model 型号	Part No. No. Bahagian 零件号码
BO3710, BO3711	194929-1
BO3710, BO3711	194930-6
BO4901	193523-6
BO4901	193521-0



Stand B
Berdiri B
斜断锯台架B

Model Model 型号	Part No. No. Bahagian 零件号码
All Slide Compound saw	194043-3





Stand A
Berdiri A
台锯台架A

Model Model 型号	Part No. No. Bahagian 零件号码
MLT100	JM27000300





Guide Rail
Panduan Laluan
导轨

Length Panjang 长度 (m)	Part No. No. Bahagian 零件号码
1.4	194368-5
1.9	194925-9
3.0	194367-7



Sanding Belt
Tali Pinggang Pelelas
带锯砂带

Size Saiz 尺寸 (mm)	Grit Pasir 粒度	Per pkg. Per Pakej 单一包装	Part No. No. Bahagian 零件号码
20 x 2240	#80	5	B-42581
20 x 2240	#120	5	B-42597

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。



Clamp Set
Set Pengapit
固定架

Part No. No. Bahagian 零件号码
194385-5




Chamfering Rule Assembly
Perhimpunan Peraturan Chamfering
倒角规则

Model Model 型号	Part No. No. Bahagian 零件号码
KP0810/C	122791-4

- **Premium quality**
- **Select cut size**
- **High strenght**
- **Finely ground edges**
- **Compressed beachwood**

- Kualiti premium
- Pilih saiz potong
- Kekuatan tinggi
- Tepi yang halus
- Kayu pantai yang dimampatkan

- 优质
- 选择裁切尺寸
- 高强度
- 细磨边缘
- 压缩沙滩木



Biscuit
Memasukkan Kayu
木工接合机镶片

Model Model 型号	Type Penerangan 描述	L x W (mm)	Part No. No. Bahagian 零件号码
3901	#0	47 x 15	A-16922
3901	#10	53 x 19.5	A-16938
3901	#20	60 x 23.5	A-16944



Guide Rail Adapter Set
Set Penyesuai Kereta Api Panduan
导轨适配器组


Model Model 型号	Part No. No. Bahagian 零件号码
3612BR, RP0900, RP1800, RP2301FC, *RT0700C	194579-2

B: For chamfering C: Fine depth adjustment
B: Untuk chamfering C: Pelarasan kedalaman halus
B：倒角 C：精深调整



Trimmer Base Assembly
Pemasangan Pangkalan Pemangkas
修边底板组件

Model Model 型号	Type Penerangan 描述	Part No. No. Bahagian 零件号码
3709	B, C	194269-7



Carbon Brush
Berus Karbon
碳刷

High Volt Carbon Brush No. Nombor Berus Karbon Voltan Tinggi 高电压碳刷型号	Part No. No. Bahagian 零件号码
1	181019-9
51	181021-2
55	181026-2
64	191627-8
65	191628-6
70	191914-5
85	191998-3
100	181030-1
106	181410-1
132	191972-1
153	181044-0
154	181047-4
165	191936-5
203	191953-5
253	194547-5
303	191963-2
325	194074-2
411	191940-4
415	191950-1
419	191962-4
459	194722-3

Low Volt Carbon Brush No. Nombor Berus Karbon Voltan Rendah 低电压碳刷型号	Part No. No. Bahagian 零件号码
1	181019-9
76	191947-0
75	191956-9
75	191956-9
76	191947-0
70	191914-5
75	191956-9
124	191945-4
107	181437-1
132	191972-1
154	181047-4
154	181047-4
166	191968-2
203	191953-5
253	194547-5
303	191963-2
311	191979-7
325	194074-2
408	191938-1
401	191910-3
407	191927-6
458	194721-5

Auto Cut-out Carbon Brush
Pemotongan Automatik Berus Karbon
自动切割碳刷

High Volt Carbon Brush No. Nombor Berus Karbon Voltan Tinggi 高电压碳刷型号	Part No. No. Bahagian 零件号码
105	181038-5
113	191904-8
155	181048-2
173	195483-8
175	195844-2
204	191957-7
327	194285-9
318	191978-9
350	194160-9

Low Volt Carbon Brush No. Nombor Berus Karbon Voltan Rendah 低电压碳刷型号	Part No. No. Bahagian 零件号码
105	181038-5
113	191904-8
155	181048-2
172	195100-0
175	195844-2
204	191957-7
304	191961-6
318	191978-9
350	194160-9

Carbon Brush For Cordless Tool
Berus Karbon Untuk Alat Tanpa Kord
充电工具碳刷

High Volt Carbon Brush No. Nombor Berus Karbon Voltan Tinggi 高电压碳刷型号	Part No. No. Bahagian 零件号码
424	191966-6
430	191971-3
434	193466-2
440	194427-5
441	194435-6
442	194928-3
448	196854-2

Low Volt Carbon Brush No. Nombor Berus Karbon Voltan Rendah 低电压碳刷型号	Part No. No. Bahagian 零件号码
424	191966-6
430	191971-3
434	193466-2
440	194427-5
441	194435-6
442	194928-3
448	196854-2

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。


Makita
mt
GENERAL

DRILLING | FASTENING
Gerudi | Pengetat 钻孔 | 紧固



M6501G 6.5mm (1/4")

High Speed Drill
Gerudi Kelajuan Tinggi
高速钻

- **Ideal for drilling smaller holes in wood & steel**
  Sesuai untuk pengerudian lubang lebih kecil pada bahan kayu atau logam
  适合用于木材和钢材上钻孔

*Chuck Key

85



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**230W**
Capacity Kapasiti 能力	**Steel: 6.5mm (1/4")** **Wood: 9mm (11/32")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 4,500**
Dimensions (L x W x H) Dimensi 体积	**203x63x171mm** **(8"x2-1/2"x6-3/4")**
Net Weight Berat Bersih 淨重	**0.95kg (2.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

M0600G 10mm (3/8")

Drill
Gerudi
电钻

- **Powerful 350W motor for continuous operation**
  Motor berkuasa 350W untuk operasi berterusan
  强力350W马达可持续运作

*Chuck Key, Chuck Key Holder

64



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**350W**
Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 20mm (13/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**230x66x176mm** **(9"x2-5/8"x6-15/16")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M6001G 10mm (3/8")

Drill
Gerudi
电钻

- **Powerful 450W motor for continuous operation**
  Motor berkuasa 450W untuk operasi berterusan
  强力450W马达可持续运作

*Chuck Key

85



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Capacity Kapasiti 能力	**Steel: 10mm (3/8")** **Wood: 25mm (1")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**229x64x175mm** **(9"x2-1/2"x6-7/8")**
Net Weight Berat Bersih 淨重	**1.3kg (2.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

M6200G 13mm (1/2")

Drill
Gerudi
电钻

- **Powerful 800W motor with variable speed for improved mixing and drilling performance**
  Motor berkuasa 800W dengan Pilihan kawalan kelajuan berubah untuk prestasi pencampuran dan penggerudian yang lebih baik
  强力800W马达配备变速控制功率提高混合和钻孔性能

*Chuck Key, Top Grip

303



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Capacity Kapasiti 能力	**Steel: 13mm (1/2")** **Wood: 36mm (1-7/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 700**
Dimensions (L x W x H) Dimensi 体积	**267x86x388mm** **(10-1/2"x3-3/8"x15-1/4")**
Net Weight Berat Bersih 淨重	**2.7kg (6.0lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

* **Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

M6600G / XG

Mixer
Pengadun
搅拌机

- **Powerful 800W motor for improved mixing and drilling performance**
  Motor berkuasa 800W untuk prestasi pencampuran dan penggerudian yang lebih baik
  强力800W马达提高混合和钻孔性能

*Mixing Blade, Shaft (country-specific), Top Grip (country-specific), D-Handle (country-specific), Wrenches



303

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Blade Diameter Diameter Bilah 锯片直径	**165mm (6-1/2")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 700**
Dimensions (L x W x H) Dimensi 体积	**280x86x388mm (11"x3-3/8"x15-1/4")**
Net Weight Berat Bersih 淨重	**3.4kg (7.4lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

IMPACT DRILLING
Gerudi | 石工鑽孔



M8103G 13mm (1/2")

Hammer Drill
Gerudi Tukul
冲击电钻

- **2-mode operation for hammering with rotation or rotation only**
  Operasi 2 mod, penukulan dengan putaran atau hanya putaran
  2档模式变换，旋转并锤击或仅旋转

*Chuck Key, Side Grip, Chuck Key Holder

2 modes



85

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**430W**
Capacity Kapasiti 能力	**Concrete: 13mm (1/2")** **Steel: 13mm (1/2")** **Wood: 18mm (11/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 33,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**255x72x193mm (10"x2-13/16"x7-5/8")**
Net Weight Berat Bersih 淨重	**1.8kg (3.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M0801G 16mm (5/8")

Hammer Drill
Gerudi Tukul
冲击电钻

- **2-mode operation for hammering with rotation or rotation only**
  Operasi 2 mod, penukulan dengan putaran atau hanya putaran
  2档模式变换，旋转并锤击或仅旋转

*Chuck Key, Side Grip,

2 modes



85

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**500W**
Capacity Kapasiti 能力	**Concrete: 16mm (5/8")** **Steel: 13mm (1/2")** **Wood: 20mm (13/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 48,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,200**
Dimensions (L x W x H) Dimensi 体积	**261x69x195mm (10-1/4"x2-3/4"x7-5/8")**
Net Weight Berat Bersih 淨重	**1.7kg (3.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M8100G 16mm (5/8")

Hammer Drill
Gerudi Tukul
冲击电钻

- **2-mode operation for hammering with rotation or rotation only**
  Operasi 2 mod, penukulan dengan putaran atau hanya putaran
  2档模式变换，旋转并锤击或仅旋转

*Chuck Key, Side Grip, Depth Gauge

2 modes



85

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**430W**
Capacity Kapasiti 能力	**Concrete: 13mm (1/2")** **Steel: 13mm (1/2")** **Wood: 18mm (11/16")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 33,000**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 3,000**
Dimensions (L x W x H) Dimensi 体积	**255x72x193mm (10"x2-13/16"x7-5/8")**
Net Weight Berat Bersih 淨重	**1.8kg (3.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

M8700G 22mm (7/8")

Rotary Hammer
Tukul Putar
电锤

- **2-mode operation for hammering with rotation or rotation only**
  Operasi 2 mod, penukulan dengan putaran atau hanya putaran
  2档模式变换，旋转并锤击或仅旋转

*Side Grip, Depth Gauge

2 modes

459



WHILE STOCKS LAST
Sementara stok masih ada
售完即止

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**710W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009: 1.9J** **Our experimental conditions: N/A J**
Capacity Kapasiti 能力	**Concrete: 22mm (7/8")** **Core Bit: 54mm (2-1/8")** **Diamond Core Bit (Dry Type): 65mm (2-9/16")** **Steel: 13mm (1/2")** **Wood: 32mm (1-1/4")**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**0 - 4,350**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 1,100**
Dimensions (L x W x H) Dimensi 体积	**362x71x194mm** **(14-1/4"x2-13/16"x7-5/8")**
Net Weight Berat Bersih 净重	**2.5 - 2.9kg (5.6 - 6.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**4.0m (13.1ft.)**

M8701X3G

Combination Hammer
Tukul Kombinasi
冲击电钻电锤

- **3-mode operating - rotation only, hammering with rotation, hammering only**
  Operasi 3 mod: hanya putaran, penukulan dengan putaran, hanya penukulan
  3档模式变换: 仅旋转，旋转并锤击，仅锤击

*Side grip, Depth gauge, Drill Chuck, Bull Point Chisel Set

3 modes

459



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**800W**
Impact Energy Kekuatan Impak 单次最大锤击力	**EPTA-Procedure 05/2009 : 2.3J** **Our experimental conditions : 2.5J**
Capacity Kapasiti 能力	**Concrete : 26mm (1")** **Steel : 13mm (1/2")/ Wood : 32mm (1-1/4")**
Impacts per minute (ipm) Impak Per Minit 冲击数	**0-4,500**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0-1,200**
Dimensions (L x W x H) Dimensi 体积	**362x71x194mm** **(14-1/4"x2-13/16"x7-5/8")**
Net Weight Berat Bersih 净重	**2.7kg (6.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**5.0m (16.4ft)**

M8600G 17mm (11/16") Hex Shank

Demolition Hammer
Tukul Elektrik
电动鎚

- **Satisfactory chipping performance**
  Prestasi penyerpihan yang memuaskan
  卓越碎击性能

*Bull Point, Side Grip, Bit Grease

105



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Impact Energy Kekuatan Impak 单次最大锤击力	**7.2J**
Impacts Per Minute (IPM) Impak Per Minit 冲击数	**2,900**
Dimensions (L x W x H) Dimensi 体积	**406x99x232mm** **(16"x3-7/8"x9-1/8")**
Net Weight Berat Bersih 净重	**5.4kg (12lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**



* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

ANGLE GRINDER

Pengisar Sudut | 角向磨光机

WHEEL DIAMETER
Diameter Roda | 轮片直径
4"
(100mm)



325



M9509G | M9513G 100mm (4")

Angle Grinder
Pengisar Sudut | 角向磨光机

- **Powerful 850W motor for the most demanding applications**
  Motor berkuasa 850W untuk aplikasi yang paling mencabar
  强力850W马达适合严峻使用

*Side Grip, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**M9509G - 276x118x101mm (10-7/8"x4-5/8"x4")**
	M9513G - 273x118x101mm (10-3/4"x4-5/8"x4")
Net Weight Berat Bersih 净重	**1.8kg (3.9lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

459



M9506G | M9512G 100mm (4")


Angle Grinder
Pengisar Sudut | 角向磨光机

- **Powerful 720W motor for the most demanding applications**
  Motor berkuasa 720W untuk aplikasi yang paling mencabar
  强力720W马达适合严峻使用

*Side Grip, Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**M9506G - 261x118x101mm (10-1/4"x4-5/8"x4")**
	M9512G - 258x118x101mm (10-1/8"x4-5/8"x4")
Net Weight Berat Bersih 净重	**1.6kg (3.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

459

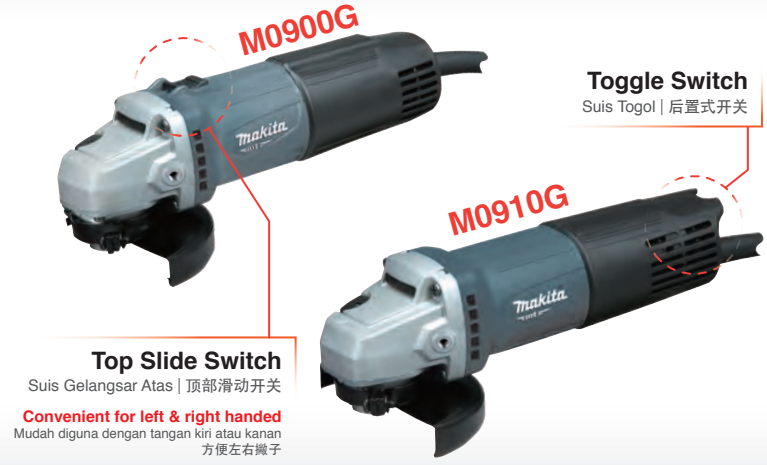

M0900G | M0910G 100mm (4")

Angle Grinder
Pengisar Sudut | 角向磨光机

- **High performance and durability**
  Prestasi dan ketahanan tinggi
  高性能与持久耐用

*Lock Nut Wrench

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**540W**
Wheel Diameter Diameter Roda 轮片直径	**100mm (4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**M0900G - 251x118x97mm (9-7/8"x4-5/8"x3-13/16")**
	M0910G - 251x118x93mm (9-7/8"x4-5/8"x3-5/8")
Net Weight Berat Bersih 净重	**1.6kg (3.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

ANGLE GRINDER

Pengisar Sudut | 角向磨光机

WHEEL DIAMETER
Diameter Roda | 轮片直径
5"
(125mm)

CUTTING



M9511G 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机

- **Slimmer barrel grip with easy gripping and handling**
  Memberikan prestasi kawalan unggul dan keselesaan
  提供更优异的控制性能和舒适度

*Side Grip, Lock Nut Wrench



325 mm

Slide Switch
Suis Gelangsar | 滑动开关

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**850W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**276x140x111mm (10-7/8"x5-1/2"x4-3/8")**
Net Weight Berat Bersih 净重	**2.0kg (4.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M9508G 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机

- **Compact and lightweight for high production work**
  Kompak dan ringan untuk kerja pengeluaran yang tinggi
  紧凑轻巧型，更有效率地工作

*Side Grip, Lock Nut Wrench



459 mm

Slide Switch
Suis Gelangsar | 滑动开关

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**720W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**261x140x111mm (10-1/4"x5-1/2"x4-3/8")**
Net Weight Berat Bersih 净重	**1.9kg (4.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M9503G 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机

- **Ideal for welders, fabricators, masons, maintenance/ repair and more**
  Ideal untuk pengimpal, fabrikasi, tukang batu, penyelenggaraan/ pembaikan dan banyak lagi
  适用于焊工，制造商，泥瓦匠，维修与修理等

*Side Grip, Lock Nut Wrench

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



411 mm

Top Slide Switch
Suis Gelangsar Atas
顶部滑动开关

Convenient for left & right handed
Mudah diguna dengan tangan kiri atau kanan | 方便左右撇子

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**570W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**270x140x110mm (10-5/8"x5-1/2"x4-5/16")**
Net Weight Berat Bersih 净重	**2.0kg (4.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M9002G 125mm (5")

Angle Grinder
Pengisar Sudut
角向磨光机

- **High performance and durability**
  Prestasi dan ketahanan tinggi
  高性能与持久耐用

*Side Grip, Lock Nut Wrench



303 mm

Trigger Switch
Suis Pemicu | 扳机开关

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Wheel Diameter Diameter Roda 轮片直径	**125mm (5")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**11,000**
Dimensions (L x W x H) Dimensi 体积	**361x140x124mm (14-1/4"x5-1/2"x4-7/8")**
Net Weight Berat Bersih 净重	**2.8kg (6.1lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

* **Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.**
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

M9000G 180mm (7")

Angle Grinder
Pengisar Sudut
角向磨光机

- **Powerful 2,000W motor for the most demanding applications**
  Motor berkuasa 2,000W untuk aplikasi yang paling mencabar
  强力2.000W马达适合严峻使用

WHEEL DIAMETER
Diameter Roda | 轮片直径
7" (180mm)

*Side Grip, Lock Nut Wrench

204



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**180mm (7")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500**
Dimensions (L x W x H) Dimensi 体积	**466x200x138mm (18-3/8"x7-7/8"x5-7/16")**
Net Weight Berat Bersih 淨重	**5.4kg (12.0lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

M9001G 230mm (9")

Angle Grinder
Pengisar Sudut
角向磨光机

- **Powerful 2,000W motor for the most demanding applications**
  Motor berkuasa 2,000W untuk aplikasi yang paling mencabar
  强力2.000W马达适合严峻使用

WHEEL DIAMETER
Diameter Roda | 轮片直径
9" (230mm)

*Side Grip, Lock Nut Wrench

204



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**230mm (9")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**6,600**
Dimensions (L x W x H) Dimensi 体积	**466x250x138mm (18-3/8"x9-7/8"x5-7/16")**
Net Weight Berat Bersih 淨重	**5.7kg (12.6lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

SANDING
Pelicin | 研磨



M9400G 100mm (4")

Belt Sander
Pengampelas
带式砂光机

- **Powerful 940W motor for faster material removal**
  Motor berkuasa 940W untuk pengisaran yang lebih cepat
  功率强大的940W马达提供更快的研磨

*Abrasive Belt, Dust Bag, Carbon Plate, Step

153



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**940W**
Belt Size Saiz Tali Pinggang 皮带尺寸	**100 x 610mm (4" x 24")**
Belt Speed Kelajuan Tali Pinggang 皮带速度	**380m/min (1,250ft/min)**
Dimensions (L x W x H) Dimensi 体积	**354x175x169mm (14"x6-7/8"x6-5/8")**
Net Weight Berat Bersih 淨重	**6.2kg (13.7lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

M9204G 125mm (5")

Random Orbit Sander
Pengampelas
砂光机

- **Available with dust bag and also connectable to vacuum cleaners without adapter**
  Dengan beg debu dan juga boleh disambungkan ke pembersih vakum tanpa penyesuai
  配有防尘袋且可连接到没有连接器的吸尘器

*Dust Bag, Abrasive Paper

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

419



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**240W**
Pad Size Saiz Pad 垫大小	**123mm (4-7/8")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**12,000**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**24,000**
Orbit Diameter Jejaki Diameter 轨道直径	**2.8mm (1/8")**
Dimensions (L x W x H) Dimensi 体积	**153x123x144mm (6"x4-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**1.2kg (2.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

M9202G

Random Orbit Sander
Pengampelas
砂光机

- **Rocker on/off switch for efficient operation**
  Suis gelangsar untuk operasi yang cekap
  滑动式按钮开关有效操作

*Abrasive Disc

419 mm



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**240W**
Pad Size Saiz Pad 垫大小	**123mm (4-7/8")**
Abrasive Disc Size Saiz Cakera 磨盘尺寸	**125mm (5")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**12,000**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**24,000**
Orbit Diameter Jejaki Diameter 轨道直径	**2.8mm (1/8")**
Dimensions (L x W x H) Dimensi 体积	**127x123x142mm (5"x4-7/8"x5-5/8")**
Net Weight Berat Bersih 淨重	**1.1kg (2.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M9200G

Finishing Sander
Pengampelas
砂光机

- **14,000OPM for fast and smooth finish sanding**
  14,000OPM untuk pelicin dengan cepat
  14000OPM用于快速研磨

*Abrasive paper

419 mm



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**180W**
Pad Size Saiz Pad 垫大小	**112 x 102mm (4-3/8" x 4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**114 x 140mm (4-1/2" x 5-1/2")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**14,000**
Dimensions (L x W x H) Dimensi 体积	**110x112x133mm (4-5/16"x4-3/8"x5-1/4")**
Net Weight Berat Bersih 淨重	**0.9kg (2lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M9201G

Finishing Sander
Pengampelas
砂光机

- **Compact and lightweight body for better handling**
  Padat dan ringan
  小巧轻便的机身易于操纵

*Abrasive Paper

64 mm



Continuous Rating input Input Kuasa Berterusan 额定输入功率	**180W**
Pad Size Saiz Pad 垫大小	**93 x 185mm (3-5/8" x 7-1/4")**
Abrasive Paper Size Saiz Kertas Pasir 砂纸尺寸	**93 x 228mm (3-5/8" x 9")**
Orbits Per Minute (OPM) Bilangan Putaran 轨道转数	**12,000**
Dimensions (L x W x H) Dimensi 体积	**214x92x147mm (8-3/8"x3-5/8"x5-3/4")**
Net Weight Berat Bersih 淨重	**1.4kg (3.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

METAL CUTTING
Pemotong Logam | 金属切割



M2400G 355mm (14")

Portable Cut-off
Mesin Pemotong
型材切割机

- **Powerful 2,000W motor**
  Motor berkuasa 2,000W
  强力2,000W马达

*Abrasive Cut-Off Wheel, Socket Wrench

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

203 mm



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**355mm (14")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Dimensions (L x W x H) Dimensi 体积	**500x280x620mm (19-3/4"x11"x24-3/8")**
Net Weight Berat Bersih 淨重	**15.7kg (34.6lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

M2401G 355mm (14")

Portable Cut-off
Mesin Pemotong
型材切割机

- **Large cutting capacity; Cuts up to 127mm (5") round and 102mm (4") x 194mm (7-5/8") rectangular**
  Kapasiti pemotongan tinggi
  切割能力高

*Abrasive Cut-Off Wheel, Hex Wrench



203

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**2,000W**
Wheel Diameter Diameter Roda 轮片直径	**355mm (14")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**3,800**
Dimensions (L x W x H) Dimensi 体积	**500x280x620mm (19-3/4"x11"x24-3/8")**
Net Weight Berat Bersih 净重	**13.7kg (30.2lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft.)**

SAWING
Gergaji | 锯切



M5801G 185mm (7-1/4")

Circular Saw
Gergaji Piring
圆锯

- **High performance and durability**
  Prestasi dan ketahanan tinggi
  高性能兼耐用

*TCT Saw Blade, Guide Rule, Hex Wrench



203

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,050W**
Blade Diameter Diameter Roda 轮片直径	**185mm (7-1/4")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 66mm (2-5/8")** **45°: 44mm (1-3/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,900**
Dimensions (L x W x H) Dimensi 体积	**284x231x243mm (11-1/8"x9-1/8"x9-9/16")**
Net Weight Berat Bersih 净重	**3.5kg (7.7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

M2300G 255mm (10")

Compound Miter Saw
Gergaji Kompaun Miter
斜断锯

- **Powerful 1,500W motor**
  Motor berkuasa 1,500W
  强力1,500W马达

*Wrench, Dust Bag, Triangular Rule, Vise Assembly, Set Plate

Part No. JM23000123



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,500W**
Blade Diameter Diameter Bilah 锯片直径	**255mm (10")**
Miter Angle Sudut Miter 斜接角	**45°L/ 45°R**
Bevel Angle Sudut Bevel 斜角	**45°L**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90° Miter: 75 x 130mm (2-15/16" x 5-1/8")** **45° Miter, L/R: 75 x 90mm (2-15/16" x 3-9/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**4,200**
Dimensions (L x W x H) Dimensi 体积	**610x485x515mm (24"x19-1/8"x20-1/4")**
Net Weight Berat Bersih 净重	**14.7kg (32.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.5m (8.2ft)**

M4301G

Jig Saw
Gergaji Jig
线锯机

- **Powerful 450W motor**
  Motor berkuasa 450W
  强力450W马达

*Jig Saw Blade, Hex Wrench



64

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**450W**
Max Cutting Capacity at 90° Kapasiti Pemotongan Maksimum 最大切割能力	**Wood: 65mm (2-9/16")** **Steel: 6mm (1/4")**
Length of Stroke Panjang Strok 冲程长度	**18mm (11/16")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 3,100**
Dimensions (L x W x H) Dimensi 体积	**214x75x202mm (8-3/8"x2-15/16"x8")**
Net Weight Berat Bersih 净重	**1.9kg (4.1lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

M4501G

Recipro Saw
Gergaji Resipro
往复锯

303

- **Powerful 1,010W motor for improved performance**
  Motor berkuasa 1,010W untuk prestasi lebih baik
  强劲的1,010W马达提高性能

*Recipro saw blade set (country-specific)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,010W**
Length of Stroke Panjang Strok 冲程长度	**28mm (1-1/8")**
Strokes Per Minute (SPM) Kelajuan Strok 冲程速度	**0 - 2,800**
Capacity Kapasiti 能力	**Pipe : 130mm (5-1/8")** **Wood: 255mm (10")**
Dimensions (L x W x H) Dimensi 体积	**457x98x170mm** **(18"x3-7/8"x6-11/16")**
Net Weight Berat Bersih 净重	**3.2kg (7lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M0400G 110mm (4-3/8")

Cutter
Pemotong
切割机

303

- **Powerful 1,200W motor**
  Motor berkuasa 1,200W
  强力1,200W马达

*Wrench, Hex Wrench
(*tool does not come with diamond wheel)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Blade Diameter Diameter Bilah 锯片直径	**110mm (4-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 32mm (1-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**13,800**
Dimensions (L x W x H) Dimensi 体积	**224x195x164mm** **(8-7/8"x7-5/8"x6-1/2")**
Net Weight Berat Bersih 净重	**2.5kg (5.6lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

M4100G 110mm (4-3/8")

Cutter
Pemotong
切割机

WHILE STOCKS LAST
Sementara stok masih ada
售完即止

303

- **Compact and lightweight for reduced operator fatigue**
  Kompak dan ringan untuk mengurangkan keletihan pengguna
  小巧轻便，减少疲劳

*Wrench, Hex Wrench, Water Supply Set
(*tool does not come with diamond wheel)



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,200W**
Blade Diameter Diameter Bilah 锯片直径	**110mm (4-3/8")**
Max Cutting Capacity Kapasiti Pemotongan Maksimum 最大切割能力	**90°: 32mm (1-1/4")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**13,000**
Dimensions (L x W x H) Dimensi 体积	**227x209x166mm** **(8-15/16"x8-1/4"x6-1/2")**
Net Weight Berat Bersih 净重	**2.9kg (6.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

PLANING | ROUTERING
Pengetam | Tanggam 刨削 | 雕刻



M1100G 82mm (3-1/4")

Planer
Planer
电刨

NEW
BARU!新

303

- **Easy blade setting system for fast blade installation**
  Sistem pemasangan bilah mudah
  刀片易安装系统

*Planer Blade, Sharpening Holder Assembly (for resharpenable blade), Blade Gauge, Socket Wrench, Guide Rule



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**750W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**3mm (1/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**18,000**
Dimensions (L x W x H) Dimensi 体积	**390x175x140mm** **(15-3/8"x6-7/8"x5-1/2")**
Net Weight Berat Bersih 净重	**4.6kg (10.2lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

M1901G 82mm (3-1/4")

Planer
Planer
电刨

- **High performance and durability**
  Prestasi dan ketahanan tinggi
  高性能兼耐用

*Planer Blade, Sharpening Holder Assembly (for resharpenable blade), Blade Gauge, Socket Wrench, Guide Rule (country-specific)

WHILE STOCKS LAST
Sementara stok masih ada
售完即止



411

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**580W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**2mm (1/16")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**16,000**
Dimensions (L x W x H) Dimensi 体积	**285x157x160mm (11-1/4"x6-3/16"x6-5/16")**
Net Weight Berat Bersih 淨重	**2.8 - 2.9kg (6.1 - 6.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M1902G 82mm (3-1/4")

Planer
Planer
电刨

- **Compact design at only 285mm (11-1/4") long**
  Reka bentuk yang padat
  机身紧凑

*Planer Blade, Sharpening Holder Assembly (for resharpenable blade), Blade Gauge, Hex Wrench, Guide Rule (country-specific)



411

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**580W**
Planing Width Lebar Pelan 刨削宽度	**82mm (3-1/4")**
Planing Depth Kedalaman Pelan 刨削深度	**1mm (1/32")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**16,000**
Dimensions (L x W x H) Dimensi 体积	**285x157x160mm (11-1/4"x6-3/16"x6-5/16")**
Net Weight Berat Bersih 淨重	**2.7kg (5.8lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M3600G 12mm (1/2")

Router
Pemangkas
雕刻机

- **Conveniently located plunge lock lever for efficient operation**
  Pelarasan tuil yang mudah untuk operasi yang cekap
  便利的插入式锁定杆可实现高效操作

*Straight Guide, Templet Guide, Guide Holder, Collet Sleeve, Straight Bit, Wrench



203

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**1,650W**
Collet Capacity Kapasiti Collet 夹头直径	**12mm or 1/2"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 60mm (0 - 2-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**22,000**
Dimensions (L x W x H) Dimensi 体积	**284x148x300mm (11-1/8"x5-7/8"x11-3/4")**
Net Weight Berat Bersih 淨重	**5.5kg (12.2lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

M3601G 6mm, 8mm, 1/4", 3/8"

Router
Pemangkas
雕刻机

- **Powerful 900W motor**
  Motor berkuasa 900W
  强力900W马达

*Straight Guide, Straight Bit, Wrench



106

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**900W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm, 8mm or 1/4", 3/8"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 35mm (0 - 1-3/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**27,000**
Dimensions (L x W x H) Dimensi 体积	**256x110x218mm (10-1/8"x4-5/16"x8-5/8")**
Net Weight Berat Bersih 淨重	**2.7kg (6.0lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M3700G 6mm (1/4")

Trimmer
Pemangkas
修边雕刻机

- **Compact and lightweight body for better handling**
  Padat dan ringan
  小巧轻便的机身易于操纵

*Trimmer Guide, Straight Guide, Templet Guide, Straight Bit, Chip Deflector, Wrench



411

Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**530W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm or 1/4"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 42mm (0 - 1-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**35,000**
Dimensions (L x W x H) Dimensi 体积	**82x90x199mm (3-1/4"x3-1/2"x7-7/8")**
Net Weight Berat Bersih 淨重	**1.4kg (3.1lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

*Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

M3701G 6mm (1/4")

Trimmer
Pemangkas
修边雕刻机

- **Aluminium housing for higher durability**
  Cangkang aluminium untuk ketahanan yang lebih tinggi
  铝外壳更高的耐用性

*Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit, Chip Deflector, Wrench

411



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**530W**
Collet Capacity Kapasiti Collet 夹头直径	**6mm or 1/4"**
Plunge Capacity Kapasiti Plunge 能力	**0 - 42mm (0 - 1-5/8")**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**35,000**
Dimensions (L x W x H) Dimensi 体积	**82x90x199mm (3-1/4"x3-1/2"x7-7/8")**
Net Weight Berat Bersih 净重	**1.6kg (3.4lbs.)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

DUST EXTRACTION
Pengekstrakan Debu | 除尘



M4000G

Blower
Mesin Blower
吹风机

- **Compact and lightweight increased operator comfort**
  Kompak dan ringan operasi yang selesa
  小巧轻便操作舒适

*Nozzle assembly, Sash Nozzle

85



Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**530W**
Air Volume Isipadu Angin 风量	**1.2-2.9m³/min**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**8,500 - 16,000**
Dimensions (L x W x H) Dimensi 体积	**427x161x212mm (16-3/4"x6-3/8"x8-3/8")**
Net Weight Berat Bersih 净重	**1.5kg (3.4lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft)**

M4001G

Blower
Mesin Blower
吹风机

- **Two tools in one; quickly converts to a vacuum for added versatility**
  Alat 2 dalam 1, vakum dan blower untuk fleksibiliti tambahan
  一机2用，集尘与吹风

*Nozzle, Dust Bag

303




Continuous Rating Input Input Kuasa Berterusan 额定输入功率	**600W**
Max Air Volume Isipadu Angin Maksimum 最大风量	**0 - 4.1m³/min**
Max Air Velocity Velositi Angin Maksimum 最大风速	**0 - 91m/s**
Air Pressure Tekanan Udara 气压	**0 - 5.7kPa**
No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	**0 - 16,000**
Dimensions (L x W x H) Dimensi 体积	**480x185x178mm (18-7/8"x7-1/4"x7")**
Net Weight Berat Bersih 净重	**1.9 - 2.0kg (4.3 - 4.5lbs)**
Power Supply Cord Kabel Wayar 电源线	**2.0m (6.6ft.)**

* Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. 注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

Carbon Brush List

Berus Karbon 碳刷表



Carbon Brush Berus Karbon 碳刷型号	Part Number Nombor Bahagian 零件号码	Applicable Model Model yang berkenaan 适用型号											
CB-51	181021-2	4300BV	6016	N1900B									
CB-64	191627-8	4327 M9201G	4327M	6413	BO3710	BO4540	BO5041	GD0603	GV5010	GV6010	JV0600K	M0600G	M4301G
CB-65	191628-6	6905B											
CB-85	191998-3	HP1630	M0801G	M4000G	M6001G	M6501G	M8100G	M8103G					
CB-100	181030-1	4105KB	6906	9215SB	9924DB								
CB-106	181410-1	1911B	M3601G	RP0900									
CB-132	191972-1	KP0810	UC3520A	UC3541A	UC4020A	UC4041A							
CB-153	181044-0	1805N 6910 UC3530A	2012NB 9401 UC3551A	2416S HS0600 UC4030A	3501N LF1000 UC4051A	3600H LS0714	3612BR LS1019L	4107R LS1040	5008MG LS1219L	5016B LS1440	5103N M9400G	5201N N5900B	5402 TW1000
CB-174	196018-8	HS6100											
CB-203	191953-5	LC1230	LW1400	LW1401	M2400G	M2401G	M3600G	M5801G	RP1801	RP2301FC			
CB-253	194547-5	GA6020C	PC5000C	PC5001C									
CB-303	191963-2	2107F GA5020 M4100G	4100NH GA6010 M4501G	4100NH2 GV7000C M6200G	4100NH3 HS6600 M6600G	4131 HS7600 M9002G	5806B JN3201 PV7000C	6924N JR3050T SP6000J	9237C JR3070CT UB1103	9404 JS3201 UT1305	9903 M0400G UT2204	CA5000X M1100G	GA5010 M4001G
CB-318	191978-9	9563C SA5040C	9565CR SG1251J	GA4040C	GA4041C	GA4541C	GA5041C	GD0800C	GD0801C	GD0811C	PK5001C	PO5000C	PW5001C
CB-325	194074-2	9553HBG GA5040 HR2810	9553HNG GA6040 M9509G	9556HNG/ HN/NB GD0600 M9511G	9556HPG/ PB GD0601 M9513G	9557HNG/ NBG HR2230	9557PB HR2320T	9558HNG/ NBG HR2470	9558PB HR2611FT	BO6050J HR2630	GA4040 HR2631FT	GA4540 HR2650	GA4540R HR2651
CB-411	191940-4	3709 M3701G	4403 M9503G	6922NB RT0700C	9031 TD0101F	9911 TW0200	DS4012 TW0350	DS5000	JN1601	KP0800X	M1901G	M1902G	M3700G
CB-419	191962-4	4350CT HR1830	4351CT HR2020	BO4556 JS1300	BO4901 M9200G	BO5031 M9202G	DA3010F M9204G	FS2300 TD0100	FS2500	FS2700	FS4200	FS6300	HP2050
CB-459	194722-3	GA4030 JS1602	GA4030R M0900G	GA4031 M0910G	GA4034 M8700G	GA4530 M8701X3G	GA4530R M9506G	GA5030 M9508G	GA5030R M9512G	GA5034 PJ7000	HR1840 TM3000C	HR1841F TM3010C	JS1601
CB-500	JM23000123	M2300G											
Auto Cut-out Carbon Brush													
CB-105	181038-5	9045B	HM0810TA	M8600G									
CB-155	181048-2	HM1201											
CB-173	195483-8	VC1310L	VC2211M	VC2510L	VC3210L	VC3211M							
CB-175	195844-2	HM1203C	HM1213C	HM1214C	HM1307C	HM1317C	HR5202C	HR5212C					
CB-204	191957-7	4112HS M9000G	4114S M9001G	GA7020	GA7040R	GA7050	GA9020	GA9040R	GA9050	GS5000	GS6000	HM1306	HM1810
CB-218	197129-2	GA7060	GA7060R	GA7061R	GA7062	GA7063R	GA9060	GA9060R	GA9061R	GA9062			
CB-350	194160-9	HK1820	HM0870C	HM0871C	HR3200C	HR3210C	HR3530	HR4001C	HR4002	HR4003C	HR4013C	HR4030C	
Carbon Brush for Cordless tool													
CB-430	191971-3	DCO180 DUC122	DGA402	DGA452	DGD800	DGD801	DJN161	DJS101	DJS161	DPB180	DPJ180	DSS501	DUB361
CB-440	194427-5	DCS550	DDA351	DDF456	DDF458	DDF482	DFR550	DHP458	DHP482	DJS130	DJV180	DSC162	DSC191
CB-441	194435-6	DHR202	DHR241	DHS630	DJR181	DJR186	DKP180	DSS610	DTW450				
CB-442	194928-3	DHR263	DHS710	DUC252	DUH651								
CB-448	196854-2	DTD149	DTD152	DTW251									

Safety Precautions

Amaran keselamatan 安全须知

When using electric tools, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following.

Apabila menggunakan alat kuasa, langkah keselamatan asas harus sentiasa diikuti untuk mengurangkan risiko kebakaran, kejutan elektrik dan kecederaan peribadi, termasuk yang berikut.
使用电动工具时，应始终遵循基本的安全预防措施，以降低火灾，触电和人身伤害的风险，包括以下内容。

KEEP WORK AREA CLEAN.
PASTIKAN TEMPAT KERJA SENTIASA KEMAS 保持工作环境清洁

• Cluttered areas and benches invite injuries.

CONSIDER WORK AREA ENVIRONMENT.
PERSEKITARAN KERJA SELAMAT 确保工作环境安全

• Don't use power tools in damp or wet locations. Keep work area well lit.
• Don't expose power tools to rain. Don't use power tool in presence of flammable liquids or gases.

KEEP CHILDREN AWAY.
JAUHI DARIPADA CAPAIAN KANAK-KANAK 远离儿童

• All visitors should be kept away from work area.
• Don't let visitors touch the tool or extension cord.

STORE IDLE TOOLS.
SIMPANKAN ALAT KERJA 工作完毕把工具收起

• When not in use, tools should be stored in a dry, high of locked up place, out of reach of children.

DON'T FORCE THE TOOL.
MENGGUNA ALAT DENGAN CARA YANG BETUL 不要强制使用工具

• It will do the job better and safer at the rate for which it was intended.

USE THE RIGHT TOOL.
MENGGUNAKAN ALAT YANG BETUL 使用正确的工具

• Don't force small tools or attachments to do the job of a heavy-duty tool.
• Don't use tools for purposes not intended.

DRESS PROPERLY.
BERPAKAIAN DENGAN SESUAI 穿着正确

• Don't wear loose clothing or jewelry. They can be caught in moving parts.
• Rubber gloves and non-skid footwear are recommended when working outdoors. Wear protective hair covering to contain long hair.

USE SAFETY GLASSES.
GUNAKAN CERMIN MATA KESELAMATAN 使用安全眼镜

• Also use face or dust mask if the cutting operation is dusty.

DON'T ABUSE THE CORD.
JANGAN MENYALAHGUNAKAN KORD KUASA 滥用电源线

• Never carry the tool by the cord or yank it to disconnect it from the socket.
• Keep the cord away from heat, oil, and sharp edges.

SECURE WORK.
BEKERJA DENGAN SELAMAT 安全的工作

• Use clamps or a vise to hold the work. It's safer than using your hand and it frees both hands to operate the tool.

DON'T OVERREACH.
BERDIRI TEGAS APABILA MENGGUNAKAN ALAT 工作时身体要站稳

• Keep proper footing and balance at all times.

MAINTAIN TOOLS WITH CARE.
PEMELIHARAAN ALAT 小心保养工具

• Keep cutting tools sharp and clean for better and safer performance. Follow instructions for lubrication and changing accessories. Inspect tool cord periodically and if damaged, have it repaired by an authorized service facility. Inspect extension cords periodically and replace, if damaged. Keep handles dry, clean and free from oil and grease.

DISCONNECT TOOLS.
PASTIKAN SAMBUNGAN ELEKTRIK DIPUTUSKAN 截断电源

• When not in use, before servicing and when changing accessories such as blades, bits and cutters.

REMOVE ADJUSTING KEYS AND WRENCHES.
PASTIKAN PEMASANGAN SIAP SEBELUM KERJA BERMULA 取下调整钥匙和扳手

• Form the habit of checking to see that keys and adjusting wrenches are removed from the tool before turning it on.

AVOID UNINTENTIONAL STARTING.
ELEKKAN PENGHIDUPAN SECARA TIDAK SENGAJA 意外启动

• Don't carry a plugged-in tool with a finger on the switch.
• Ensure switch is OFF when plugging in.

USE OUTDOOR EXTENSION CORDS.
GUNAKAN KORD SAMBUNGAN LUAR 使用户外延伸线

• When tool is used outdoors, use only extension cords intended for outdoor use.

STAY ALERT.
SENTIASA BERJAGA-JAGA 保持警惕

• Watch what you are doing. Use common sense. Don't operate tool when you are tired.

CHECK DAMAGED PARTS.
SEMAK BAHAGIAN ALAT YANG ROSAK 检查工具损坏的部件

• Before further use of the tool, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment of moving parts, free running of moving parts, breakage of parts, mounting and any other conditions that may affect its operation. A guard or other part that is damaged should be properly repaired or replaced by an authorized service center unless otherwise indicated in this instruction manual. Have defective switches replaced by an authorized service facility. Don't use the tool if the switch does not turn it on and off.

GUARD AGAINST ELECTRIC SHOCK.
ELEKKAN KEJUTAN ELEKTRIK 防止电击


• Avoid body contact with earthed or grounded surfaces (e.g. pipes, radiators, ranges, refrigerators).

REPLACEMENT PARTS.
MENGGANTIKAN BAHAGIAN ALAT 更换配件

• When servicing a tool, use only identical replacement parts.

VOLTAGE WARNING.
AMARAN VOLTAN 电压警告

• Before connecting the tool to a power source (receptacle, outlet, etc.) Be sure the voltage supplied is the same as that specified on the nameplate of the tool. A power source with voltage greater than that specified for the tool can result in SERIOUS INJURY to the user V as well as damage to the tool. If in doubt, DO NOT PLUG IN THE TOOL. Using a power source with voltage less than the nameplate rating is harmful to the motor.







Note Nota 注意

• Makita reserves the right to change specifications of parts and accessories without notice.


• Items of standard equipment and specifications may vary by country or area.

• Net weight and dimensions may differ by the type of battery.

• Standard export color for motor housing is Makita industrial green (blue).


• Please state required voltage when ordering. These offers are subject to availability in each country. Actual product color may differ slightly from color reproduced here.

• Weight data in this catalogue is the value measured by us according to EPTA Procedure 01/ 2003.



Guarantee Jaminan 保证

Every Makita tool is thoroughly inspected and tested before leaving the factory. It is guaranteed against defective workmanship and materials. Should any trouble develop, return the COMPLETE tool prepaid to Makita or point of purchase. If inspection shows trouble is caused by defective workmanship of material, all repairs will be made without charge. The guarantee does not apply where repairs have been made or attempted by others; repairs are due to normal wear; the tool has been abused or in an accident; misuse is evident
– caused by overloading the tool beyond its capacity, use of the tool after partial failure or use with improper accessories.



12 MONTHS* WARRANTY

Waranti 12 bulan • 12个月保修期

* Applicable on all Makita Tools, except heat gun (period of 6 months warranty)

* Untuk semua Makita Tool, kecuali Heat Gun (waranti 6 bulan) I *有效于所有 Makita 工具，热风机除外（享有6个月保修）

Makita Standard Warranty

Piawaian Waranti Makita • Makita 保修服务说明

Every Makita Product is thoroughly inspected and tested before leaving the factory. Subject to the following terms and conditions, the Product (Tool, Battery, Charger) is warranty against defective materials and manufacturing defects for a period of **twelve (12) months from the date of purchase (applicable for purchases made from 1st October 2017 onwards)** as evidenced from the sale or tax invoice (with tool serial number) and Makita Authorised Service Centre or Makita Service Centre undertakes, at our option, to repair or replace, free of charge.

Conditions of warranty

This warranty will NOT cover or shall be null & void in any of the following events even during the warranty period:-

1. Damage resulting from normal wear and tear (Carbon brush/ holder/ cap, switch, gear, grinding/ cutting wheels, bits, saw blades, etc.,)
2. Damage resulting from use of improper accessories, non genuine replacement parts, disassembly, tampering, alteration and repairing in any way that affects its performance.
3. Damage resulting from negligence, accident, disaster, improper storage or maintenance, abuse and misuse in evident caused by overloading the tool beyond its capacity.
4. Abnormal voltage or the usage of generator, wrong usage not in accordance with the Operating Manual.
5. If the serial number on the tool, seal on the battery and charger has been defaced or removed.
6. If the receipt or invoice that display the date of purchase could not be present.

Setiap produk Makita diperiksa dan diuji dengan teliti dari kilang. Waranti produk (Alat, Bateri, Pengecas Bateri) tertakluk kepada terma dan syarat berikut, sekiranya terdapat kecacatan pada bahan atau kerosakan disebabkan pembuatan dari kilang dalam tempoh 12 bulan bermula dari tarikh pembelian (untuk pembelian bermula dari 1hb Oktober 2017), dengan bukti pembelian pada resit atau invois bercukai (dengan nombor siri alat), terikat kepada keputusan Pusat Servis diiktiraf oleh Makita atau Pusat Servis Makita untuk membaiki secara percuma.

Syarat-syarat waranti

Waranti ini TIDAK akan meliputi atau akan dibatalkan & tidak sah sekiranya berlaku salah satu kejadian yang berikut semasa berada dalam tempoh waranti:-

1. Kerosakan akibat daripada haus dan lusuh biasa (karbon/ pemegang/ tukup, suis, gear, cakera mencanai/ memotong, mata gerudi, bilah gergaji, dll.,)
2. Kerosakan akibat daripada penggunaan aksesori yang tidak sesuai, alat ganti yang tidak asli, pembukaan, perbuatan merosakkan, pengubahan dan pembaikan yang mempengaruhi prestasinya.
3. Kerosakan akibat kecuaian, kemalangan, bencana, penyimpanan atau penyelenggaraan yang tidak wajar, penyalahgunaan yang jelas disebabkan oleh beban yang melebihi kemampuannya.
4. Voltan tidak normal atau penggunaan penjana, cara penggunaan yang salah dan tidak mengikuti Manual Operasi.
5. Jika nombor siri pada alat, balut/ cap pada bateri dan pengecas tercacat atau ditanggalkan.
6. Jika resit atau invois yang memaparkan tarikh pembelian tidak dapat ditunjukkan.

每个 Makita 产品生产制造都经过彻底检查和测试并严格把关确认品质。根据以下保修条件，产品保修(工具，电池，充电器)涵盖材质和生产上的瑕疵，于销售单据(附上工具生产编号)与税收发票上所显示的购买日期起十二(12)个月内(从1-10-2017选购开始)，以 **Makita** 授权服务中心或 **Makita** 服务中心的判断为准而提供无收费维修。

保修规定

Makita 均不承担基于以下违反保修行为而造成的产品故障、工作异常或损坏的责任。

1. 正常消耗零件。(例如：碳刷/支架/盖，开关，齿轮，研磨/切割片，钻头，锯片等)。
2. 使用不正确的配件，更换非原装零件，拆除和改造等任何影响其性能而引起的损坏。
3. 因人为疏忽，意外，灾难，不正确的保管或保养，滥用和误用，超出工具负荷能力等原因导致的损坏。
4. 使用非工具所规定电压和发电机，未按说明书安装及使用工具。
5. 工具上的编号，电池和充电器上的印章已被污损或除去。
6. 无法提供销售单据或税收发票。

** Makita reserved the rights of amend conditions of warranty without prior notice. In the event of differences arising between the English, Bahasa Malaysia and Chinese versions, the English version shall prevail.
Makita berhak untuk meminda syarat-syarat waranti pada bila-bila masa tanpa sebarang notis. Jika terdapat perbezaan antara bahasa, maka maklumat versi Bahasa Inggeris harus digunapakai.
Makita 保留修改保修规定的權利，恕不另行通知。如果内容有任何差异或不一致，概以英文版本为准。

Please visit our website for Authorised Service Centre details

Sila layari laman web kami untuk maklumat Pusat Servis Diiktiraf

请游览我们的网页查询授权服务中心详情

www.makita.my/authorised-service-center

SERVICES • SERVIS • 客户服务 www.makita.my/authorised-service-center	**PRODUCT RANGE** • RANGKAIAN PRODUK • 产品系列 www.makita.my/product-range	**ACCESSORIES** • AKSESORI • 配件 www.makita.my/accessories-range
PROMOTION • PROMOSI • 优惠 www.makita.my/promotions	**ABOUT US** • MENGENAI KAMI • 公司简介 www.makita.my/about-us	**LATEST INFO** • INFO TERKINI • 最新情报 www.makita.my/latest-news/



THE CORDLESS TOOLS COMPANY

TRADEMARK | Tanda Dagangan | 商标

Makita® Makita® Makita® mt LXT CXT MM4 DXT

Tanda dagang di atas telah dipatenkan oleh Perbadanan Harta Intelek Malaysia. Makita Power Tools (Malaysia) Sdn. Bhd. berhak untuk mengambil tindakan undang-undang bagi mana-mana pelanggaran tanda dagang di atas, termasuk perkilangan, borong atau menjual sama ada mesin atau aksesori yang dicetak dengan tanda di atas tanpa mendapat kebenaran Makita Power Tools (Malaysia) Sdn. Bhd

上述商标已经在马来西亚知识产权公司办理注册专利。对于任何侵犯上述商标专用权之行为，包括未经许可制造，批发或零售附有上述商标之电动工具及配件，本公司必定追究法律责任。

Above trademarks have been patented at the Intellectual Property Corporation of Malaysia. Makita Power Tools (Malaysia) Sdn. Bhd. reserves the right to take legal action for any infringement of the above trademarks, including manufacturing, wholesale or selling either the power tools or accessories printed with the above trademarks without getting permission of Makita Power Tools (Malaysia) Sdn. Bhd.

*__In the event of differences arising between the English, Bahasa Malaysia and Chinese versions, the English version shall prevail.__
Jika terdapat perbezaan antara bahasa, maka maklumat versi Bahasa Inggeris harus digunapakai. 如果内容有任何差异或不一致，概以英文版本为准。

*__Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ depending on the type of battery(ies) used. All pictures shown are for illustration purposes only.__
Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja.
注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考。

makita®

Makita Power Tools (Malaysia) Sdn. Bhd. (1031615-M)

HQ & Service Centre
总部和服务与展示中心
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor, Malaysia.
Tel: 03-8023 0824 I Fax: 03-8022 1448

Johor (Johor Bahru) Service Centre
柔佛(新山)服务与展示中心
No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya, 81100 Johor Bahru, Johor.
Tel: 07-364 9406 I Fax: 07-364 9407

Sarawak (Kuching) Service Centre
砂拉越(古晋)服务与展示中心
No.7, Lot 3330, Jalan Wan Alwi, Lorong 3A,
Taman Linang/ Suboh, 93350 Kuching Sarawak.
Tel: 082-503 361 I Fax: 082-505 361

Sabah Warehouse
沙巴仓库
Kolombong, Inanam,
Kota Kinabalu, Sabah.

www.makita.my
makita@makita.my

PRINTED IN MALAYSIA 2018/A8