








# Best in class\*1 higher tightening torque 108<sub>Nm</sub> | Best in class\*1 faster tightening speed

## Runtime per charge\*2

Wood screw  $0.4.2 \times 75$ mm,

## Approx.

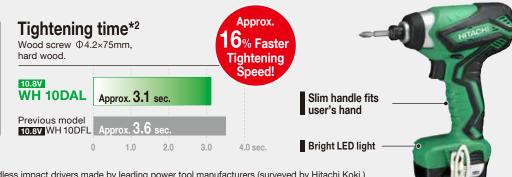

- \*1 : As of August 2014. Among the 10.8V cordless impact drivers made by leading power tool manufacturers (surveyed by Hitachi Koki.)
- \*2 : The values are for purpose of reference. They may vary according to the drilled material and operating conditions.

## Hitachi Cordless Impact Driver 10.87 WH 10DAL

### **Specifications**

Model		WH 10DAL		
Capacity	Bolt	5 - 12mm (3/16 - 15/32")		
	High Tension Bolt	5 - 10mm (3/16 - 3/8")		
	Machine Screw	4 - 8mm (5/32 - 5/16")		
Drive		6.35mm (1/4") Hex Bit Shank		
Tightening Torque		108Nm (955inlbs.)		
Battery Voltage		10.8V		
No Load Speed		0 - 2,700/min		
Full Load Impact Rate		0 - 3,200/min		
Overall Length		151mm (5-15/16")		
Weight*1		1.0kg (2.2lbs.) with BCL 1015		
Standard Accessories		2 Batteries (BCL 1015), Charger (UC 10SL2), Driver Bit, Battery Cover, Carrying Case		

#### **Charging Time**

	Charger		
Voltage	Туре	Capacity*2	UC 10SL2
10.8V	BCL 1015	1.5Ah	Apprpx. 30min.

- \*1. Weight according to EPTA-Procedure 01/2003.
- \*2. The figure of battery capacity is a nominal value.



Distributed by:			
Distributed by.			

Hitachi Koki Co., Ltd.

www.hitachi-koki.com