



CorePro LED candles and lusters

Corepro lustre ND 5.5-40W E14 840 P45 CL

The CorePro LEDcandles and lusters are designed for retrofit replacement of incandescent lamps, and are particularly attractive for chandeliers. They are compatible with fixtures with an E14 holder for candles and E14 or E27 holders for lusters, and are available in either warm white, white or cool daylight color temperatures. LED lamps deliver huge energy savings and minimize maintenance cost. The CorePro LED candles and lusters are perfect for your basic lighting needs. They provide the beautiful light and dependable performance you expect from LED at an affordable price.

Product data

General Information

Cap-Base	E14 [E14]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	5.5-40W

Light Technical

Color Code	840 [CCT of 4000K]
Luminous Flux (Nom)	520 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	94.55 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical

Input Frequency	50 to 60 Hz
Power (Nom)	5.5 W
Lamp Current (Nom)	50 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V

Temperature

T-Case Maximum (Nom)	85 °C
----------------------	-------

Controls and Dimming


Dimmable	No
----------	----

CorePro LED candles and lusters

Mechanical and Housing	
Bulb Finish	Clear
Approval and Application	
Energy Efficiency Label (EEL)	A+
Energy Consumption kWh/1000 h	6 kWh
Product Data	
Full product code	871869654344300

Order product name	Corepro lustre ND 5.5-40W E14 840 P45 CL
EAN/UPC - Product	8718696543443
Order code	929001206102
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001206102
Net Weight (Piece)	0.040 kg


Dimensional drawing




Product	D	C
Corepro lustre ND 5.5-40W E14 840 P45 CL	45 mm	88 mm

LED ND 5.5-40W E14 840 P45 CL

Photometric data



General Uniform Lighting




CorePro LEDlustre 40W E14 840 CL P45

CorePro LEDlustre 40W E14 840 CL P45


CorePro LED candles and lusters

Photometric data

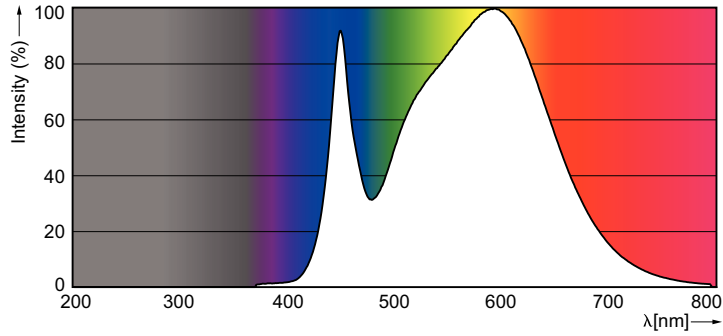


SDPO_LEDLSR_0006-Spectral Power distribution

Lifetime

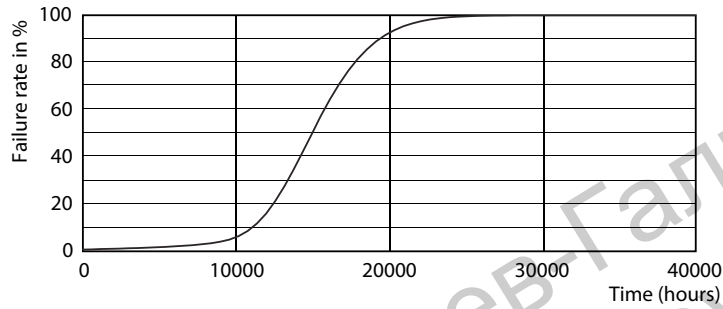

LEDbulb 60W E14 827 FR B38

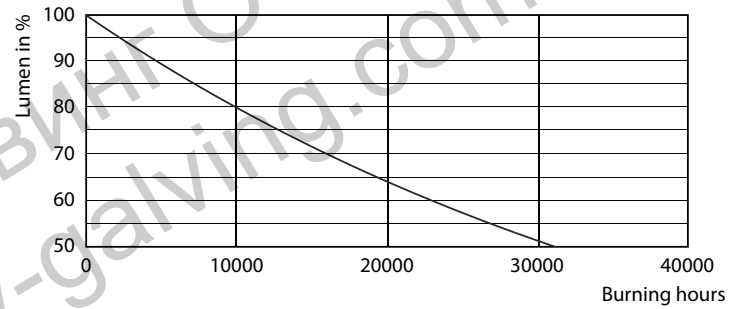

LEDbulb 60W E14 827 FR B38

