


APDatec 81

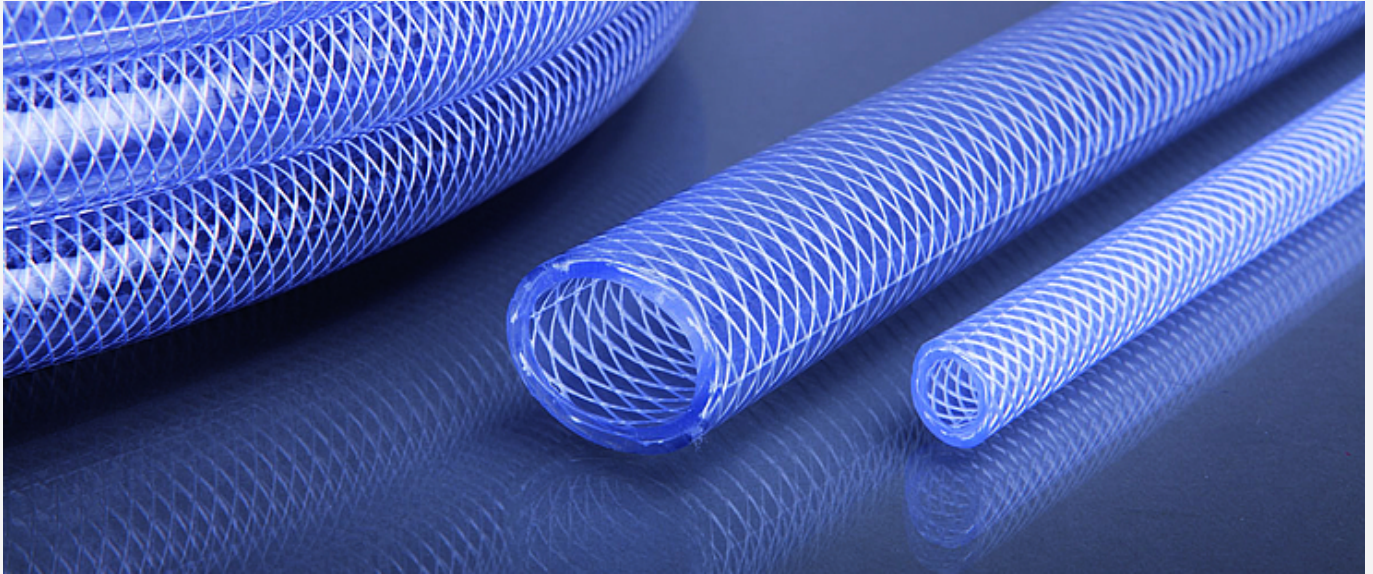

Multi-layer PVC pressure hose with highly tear-resistant polyester fabric insert. Transparent, flexible and completely phthalate-free. The hose is approved for 20% alcohol content and protected from weather influences. Also available with Storz coupling (SK article).

For transport of liquid food according to EU 10/2011 A, B, C. Used for Air-pressure, in the chemical industry and for general industriell applications

Material

Soft-PVC

Yarn

Polyester fabric

Colour

transparent

Temperature

-20°C/+65°C

Durability

refer to Soft PVC

Imprint

with imprint

Food approval

conformity to EU 10/2011 A, B, C,

REACH

conformity to 1907/2006/EC

RoHS

Conformity to Guideline 2015/863 (RoHs 3)

important advices

For proper use of our products please note

Interesting facts about hoses

All technical Data are according to ISO-Standard and at 20 °C ambient and medium temperature, technical changes reserved.

APDatec 81

Nr.	Inside Diameter in mm	Outside Diameter in mm	Wall Thickness	kg/100 m	Bending Radius	Working Pressure bar	Bursting Pressure bar	Length in m
81 004 30	4	10	3	8,4	15	28	84	50
81 005 30	5	11	3	9,6	18	28	84	50
81 006 25	6	11	2,5	8,2	25	20	60	50
81 006 30	6	12	3	10,8	25	25	75	50
81 008 30	8	14	3	10	30	24	72	50
81 009 25	9	14	2,5	11,5	30	12	36	50
81 009 30	9	15	3	14,4	35	22	66	50
81 010 30	10	16	3	15,6	40	21	63	50
81 012 30	12	18	3	18	55	17	51	50
81 012 45	12	21	4,5	29,7	55	17	51	50
81 013 30	13	19	3	19,2	70	15	45	50
81 013 35	13	20	3,5	23,1	72	16	48	50
81 015 30	15	21	3	21,6	75	15	45	50
81 016 35	16	23	3,5	27,3	75	15	45	50
81 016 40	16	24	4	32	75	15	45	50
81 019 30	19	25	3	25,4	125	10	30	50
81 019 35	19	26	3,5	31,5	130	10	30	50
81 019 40	19	27	4	36,8	130	11	33	25
81 025 40	25	33	4	46,4	200	9	27	25
81 025 45	25	34	4,5	53,1	220	8	24	25
81 030 40	30	38	4	54,4	250	7	21	25
81 032 50	32	42	5	74	310	8	24	25
81 038 50	38	48	5	86	420	6	18	25
81 045 50	45	55	5	100	550	4	12	25
81 050 50	50	60	5	110	650	4	12	25
81 050 80	50	66	8	178	650	4	12	25
81 125 30	12,5	18,5	3	18,6	70	15	45	50