

Sales document **MASTER cut 2600** 

## The machine table

## The right tool

If the project is to succeed, the **right tool** for every step of the work is an absolute basic requirement.

For ambitious users in particular, this means equipping their workshop with various power tools: Hand-held circular saws and jigsaws are obligatory, but circular table saws, cross-cut saws, mitre saws and routers are also needed for many projects.

## Stationary use

For the **stationary use** of the various power tools, one needs a machine table that serves on the one hand as a **machine support** and on the other hand allows the workpieces to be **guided**.

Many of these tables are only designed for a single machine type, often they are limited to the use of machines from a single manufacturer or series. Thus, in the worst case, the user has to purchase a separate stationary device **for each application**.





## The problems

This creates various problems for the user and the retail trade:

- The user must have a sufficiently large workshop to be able to use and store the various stationary machines.
- High costs are created, which
  - increase the entry threshold for the end consumer,
  - Iower the willingness to buy and
  - reduce customer satisfaction.
- Stationary devices are mostly designed for workshop use and can only be used mobile to a very limited extent.

## The solution

The **MASTER cut 2600** from wolfcraft is a multifunctional machine table that combines 6 functions in a single product.

The MASTER cut 2600 can be individually adapted to the respective needs of the user and serves as a **workstation**, **milling** and **sawing table** at the same time.

Thanks to its lightweight yet sturdy aluminium construction, the MASTER cut 2600 is extremely mobile and can be used outside the workshop with minimal effort. In addition, it can be stored in an extremely space-saving upright position when folded.

The MASTER cut 2600 is therefore the most versatile of the multifunctional machine tables and leaves nothing to be desired.



## ■ 6 functions



Workstation

Table saw

Jigsaw table

Cross-cut and mitre saw table

in conjunction with optional accessories:



Milling table

<u>ð</u>

# Station for guided hand-held circular saw

## New edition of a success story

The **MASTER cut 2600** is the top model in the MASTER cut series that has been completely redesigned. It follows in the footsteps of its predecessor, the MASTER cut 2500, which is the market leader in machine tables, is extremely popular and receives excellent ratings from users. It owes this success above all to its **unsurpassed versatility** and **wide range of functions**.

Nevertheless, there was potential for improvement due to changing needs of the machine market and users:

- The machine table functions have been adapted for the requirements of new devices and compatibility has been extended
- Improvements in details and accessories make the MASTER cut 2600 more comfortable, safer and more versatile
- Clear positioning and differentiation from the other MASTER series facilitate the purchase decision for the user





## ■ The MASTER range

Compact clamping tables



Mobile workbenches



Multifunctional machine tables



Individual workbenches



## MASTER cut 2600

### Worktop

- Dimensions:
- Material:
- Max. load:

MDF

1035 x 695 x 22 mm

up to 120 kg

#### **Bores**

- Mount for milling stop (Art.no. 6901 000)
- Mount for mitre saw
- 20 mm round holes
  for all clamping elements with 20 mm standard
  mounting (e.g. wolfcraft accessories such as
  workbench clamps (Art.no. 3036 000) and quick
  clamps (Art.no. 6176 000))



Ô







The mark of seponable forestry FSC\* C008243





### Base frame

Material frame:

10

- Material legs:
- Table legs:
- Foot:

- Aluminium
- Steel
- foldable
- height adjustable





#### The new machine plate

The machine plate of the MASTER cut 2600 is used to mount circular hand saws, jigsaws and routers.


It has been redesigned from the ground up and brings the individual needs of users and the requirements of modern power tools down to a common denominator. The new machine plate is safer, more stable and more level than all previous models.

### Adjust and secure

To achieve a **level transition** to the work surface at all times, the height of the machine plate can be conveniently adjusted from above via 4 adjusting screws.

The corresponding holes in the machine plate are then used for **secure bolting** to the table.

If required, there are two additional adjustment positions on the underside for fine adjustment of the machine plate.

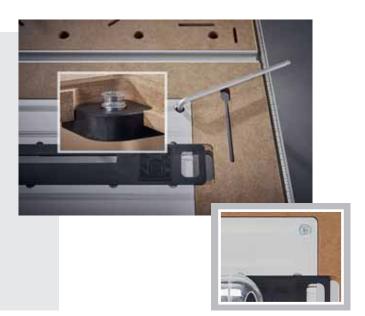





### Stable, level and highly compatible

Auch die Unterseite der Maschinenplatte wurde neu gestaltet.

The underside of the machine plate has also been redesigned.

The new, profiled channels run the entire length of the plate and give it stability. Thus, they ensure a **level working surface** even when working with heavy machines and enable **straight cuts** with a **clean cutting pattern**.

At the same time, they offer many mounting options for different machines and ensure the **greatest possible compatibility** with manufacturers and models.

## Features




### Angle stop

- for mitre cuts
- freely adjustable to angles of 0-60° on both sides
  - Lasered angle scale for best possible legibility

#### **Rip fence**

- for parallel cuts
- up to a cutting width of 570 mm

The stop bar supplied is used with both, angle stop and rip fence.

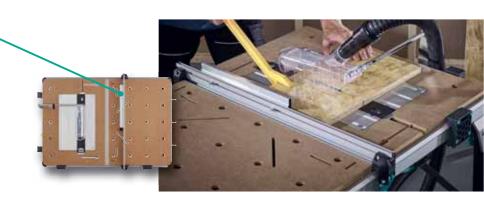



### 4 clamping blocks

- 2 small and 2 large clamping blocks included
- for the secure and powerful fixing of workpieces
- stands for free-standing storage in folded state (horizontal and vertical possible)







### 4 clamping jaws

- as a stopper when placing workpieces
- as a clamping and spreading aid for working with one-hand clamps







#### **Protective cover**

- for safe use of circular hand saws and jigsaws
- with suction device for standard vacuum cleaners
- quick mounting via practical eccentric lever

#### 2 split inserts

- 1 x for hand-held circular saws
- 1 x for routers / jigsaws
- incl. 2 insert rings for different router diameters



#### Storage

- incl. 3 hooks for attaching accessories and tools
- freely positionable on the narrow sides of the MASTER cut 2600






#### Safety switch

- for safe operation of power tools with
  230 V
- incl. switch-on terminal for switching machines without switch lockout



### **Pushing stick**

for safe workpiece feeding



### Mounting material included


- Mounting material is included for:
  - circular hand saws
  - jigsaws
  - cross-cut saws


## MASTER cut 2600 in detail

### **Function Workstation**

- large worktop (dimensions: 1,035 x 695 mm) made of 22 mm thick MDF with clamping and fastening options.
- sturdy and stable: stable base made of steel and aluminium, can be loaded up to 120 kg, height-adjustable foot
- mobile: can be used anywhere and stored in a space-saving way
- comfortable working height of 863 mm
- foldable legs for working on the floor
- clamping blocks (2 small and 2 large included)
  - for powerful fixing of workpieces with clamps to the table profile
  - allow free-standing storage in folded position
  - holders for storing clamping jaws and Allen key
- clamping jaws (4 pieces included)
  - as stoppers when placing workpieces
  - as a clamping and spreading aid for working with one-hand clamps
- bores
  - for mounting the parallel milling fence (Art.no. 6901000)
  - for fastening cross-cut and mitre saws
  - for holding clamping elements with 20 mm mounting





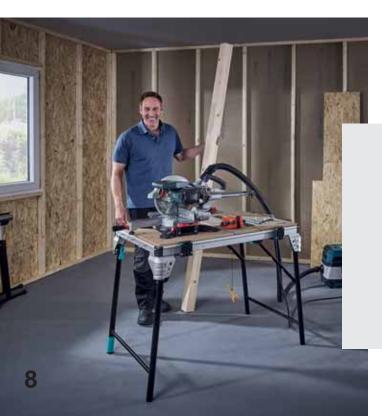



### Function Cross-cut and mitre saw table

- thanks to the multifunctional hole pattern of the table top, compatible with standard cross-cut and mitre saws
- includes mounting material for cross-cut and mitre saws





### **Function Circular table saw**

- ideal for smaller workpieces that can be pushed across the table
- rip fence
  - parallel cuts up to a cutting width of 570 mm •
  - clampable on both sides and with variably positionable stop bar ٠
- angle stop
  - mitre cuts from 0° to +/-60°.
  - special fence guide with spring-loaded compensating and sliding elements
  - lasered scale for best possible legibility
- machine fitting hand-held circular saws
  - cutting depth max. 70 mm •
  - saw blade diameter max. 200 mm
  - base plate max. 240 x 360 mm
  - distance from saw blade to end of motor housing max. 225 mm
  - battery-powered machines and submersible saws are not permitted
- with separately available removable riving knife also compatible with machines without riving knife (Art.no. 6916 000 / 6917 000)
- includes mounting material for hand-held circular saws







### **Function Jigsaw table**

easy guiding of the cut due to fixation of the jigsaw in the table

max.

max.

max.

- ideal for curved cuts on irregularly shaped workpieces
- clear view of the cutting line
- easy workpiece guidance by hand
- machine fitting jigsaws
  - base plate max. 90 x 200 mm
  - battery-powered machines are not permitted
- includes mounting material for jigsaws

1 | max. 90 mm 200 mm max.


## MASTER cut 2600 in detail




### **Function Milling table**

- parallel milling fence (optional accessory, Art.no. 6901 000)
  - turns the MASTER cut 2600 into a fully-fledged milling table
  - rotary knobs and adjustable fence for quick, tool-free attachment to the tabletop
  - adjustable fence for adaptation to different cutter sizes
  - connection for regular vacuum cleaners for dust-free work
  - Please note: The milling table may only be used with the parallel milling fence (Art.no. 6901 000)!
- machine fitting routers
  - machines with max. 230 V / max. 1.800 W
  - base plate diameter max. 180 mm
  - base plate height max. 40 mm
  - cutter diameter max. 27 mm
  - battery-powered machines are not permitted
- includes mounting material for routers







### Function Station for guided hand-held circular saw

- Guide rail FKS 145 (optional accessory, Art.no. 6913 000)
  - allows cutting of large workpieces on the table
  - total length of 145 cm for cuts up to 110 cm
  - divisible for cuts up to 55 cm and space-saving storage
  - plastic carriage with honeycomb structure and three adjusting screws for optimum stability and easy adjustment
  - alignment aid for setting up the hand-held circular saw parallel to the guide rail without measuring
  - rubber lip reduces tear-out and marks the cutting edge for exact results
  - notches on the guide rail automatically open and close the protective bonnet of the hand-held circular saw when it is moved in and out for maximum safety
  - high-quality aluminium design ensures durability
  - for mounting on the MASTER cut 2600 we recommend the screw clamp set (Art.no. 6897 000, page 13)
- machine fitting circular hand saws
  - cutting depth 40 70 mm
  - saw blade diameter 130 200 mm
  - base plate min. 78 x 210 mm
  - base plate max. 256 x 385 mm

### **Machine plate**

- for mounting circular hand saws, jigsaws and (with the appropriate accessories) routers.
- safety locking of the plate in the table for a secure hold
- · four screws for convenient height adjustment of the plate to the table
- fine adjustment via two additional adjustment options from below
- · compatible with many machines regardless of manufacturer with universal mounting material

#### Safety switch and switch-on terminal

- switch-on terminal for fixing the switch-on button so that machines run continuously.
- machine is then plugged into the safety switch so that machines can be switched on and off quickly and safely without having to reach under the table

#### Protective cover with dust extraction

- for the safe use of circular hand saws and jigsaws
- protective bonnet is mounted on the table with a practical eccentric lever
- includes dust extraction for commercially available hoovers for low-dust work
- velcro strap for positioning the vacuum cleaner hose on the protective hood bracket so that the hose and protective bonnet remain in the correct position

#### **2 Split inserts**

- for safe work with mounted machines
- 1 insert for circular hand saws
  - holds back the machine's pendulum protection bonnet for undisturbed working
- 1 insert for jigsaws and routers
  - incl..2 insert rings for different cutter diameters when working with routers

#### **Pushing stick**

• for safely pushing narrow workpieces past the saw blade without danger to fingers

#### **Screw hooks**

- 3 hooks for storing accessories and tools
- freely positionable on the narrow sides of the MASTER cut 2600
- safe working due to free work surface





#### 6916 000 / 6917 000

**Optimal additions** 

from the wolfcraft range

#### **Riving knives**

- for the use of hand-held circular saws without riving knife
  - 6916 000: saw blade diameter max. 159 mm
  - 6917 000: saw blade diameter 160 200 mm

Attention: Circular hand saws without riving knife may only be installed in the MASTER cut 2600 in conjunction with riving knife Art.no. 6916 000 or 6917 000.

#### 6899 000

#### Machine plate and mounting set

- the machine plate of the MASTER cut 2600 as a separate accessory and spare part
- allows the MASTER cut 2600 to be quickly converted to another function by replacing the machine plate
- mounting material included

#### 6166 000

#### 4 Clamping jaws with coating tips

- compatible with all 20 mm bores for flexible flat and round clamping
- practical, double-sided support surfaces for a variety of work
  - one pointed support each for workpieces during painting
  - one flat side each for use as anti-slip support
- high-quality plastic design for long service life



#### 6176 000

#### 2 Quick clamps

- compatible with 20 mm bores for extended clamping possibilities
- suitable for workpieces up to 35 mm thick and round material up to Ø 35 mm
- high-quality aluminium design

#### 3036 000

#### PRO 65-150-W Work table clamp

- compatible with all 20 mm bores, 120 mm clamping width for a wide range of fixing options for workpieces up to 90 kg clamping force
- high quality glass fibre reinforced plastic and hardened steel for long life
- rubberised clamping jaws with V-groove for gentle clamping and secure fixing of round material





#### 3457 000 / 3032 000

#### **One-hand clamp PRO**

- comfortable clamping and opening with one hand
- large clamping surfaces with cross-groove
- clamping force up to 90 kg (3457 000) / 120 kg (3032 000)
  - clamping width up to 300 mm (3457 000) / 450 mm (3032 000)

#### 6102 300

#### Tri-function work support stand

- 3-in-1-function:
  - ball support for feeding and moving the workpiece in all directions
  - roll support for feeding with longitudinal cuts
  - fixed support for supporting long work pieces
- stepless height adjustment for flexible adaptation to the required working height
- space-saving storage through folding function
- versatile, as compatible with all standard machine tables and workbenches



|            | #  |          |   |
|------------|--|----------|---|
|            | 3036000  | ~        | ~ |
| EHZ PRO 65 | <b>3456000</b> (65/150 mm)<br><b>3457000</b> (65/300 mm)   | ~        | ~ |
| EHZ Easy   | 3020000 (75/150 mm)<br>3021000 (75/300 mm)<br>3023000 (75/500 mm)  | ~        | ~ |
| EHZ PRO    | 3030000 (100/150 mm)<br>3031000 (100/300 mm)<br>3032000 (100/450 mm)<br>3033000 (100/700 mm)<br>3034000 (100/915 mm) |          | ~ |
|            | 6176000  | <b>v</b> |   |
| <b>**</b>  | 6166000  | ~        |   |
| ***        | 6172000  | <b>v</b> |   |

## Compatibility



## Accessories for the FKS 145

#### 6914 000

## Extension-Set for FKS 145 for work on very long workpieces

- extension of the guide rail to 255 cm for 220 cm max. cutting length
- also multiple extendable



#### 6897 000

#### Mounting set for FKS 145

- 2 clamps for mounting the FKS 145 guide rail for circular saws on the MASTER cut 2600 and MASTER work 1600 tables
- extra high clamping range



## Merchandising

## 9904 151 (D)

## 9904 157 (F)

## Table display

for placement on sample product / shelf / sales counter

#### Design

- printed on one side
- with double-wing stand on the rear side
- Material: 3 mm Forex

#### Dimensions

• unfolded (W x H x D): 400 x 600 x 300 mm

#### Notes

- No additional fixing material required
- order via separate order number







## 9925 052

## Shelf stairs for placement on sample product / shelf / sales areas

#### Design

- CNC milled
- Colour: light brown
- Material: MDF

#### Dimensions

• (W x H x D): 250 x 40 x 370 mm

#### Application

• The shelf stair insert is suitable for presenting the accessory item (6901000).

#### Notes

• order via separate order number

## Merchandising

#### 9904 100

Presentation stand for placement with product sample / shelf / sales counter or next to the goods

#### Design

- Connector system / CNC-milled with rounded edges
- Colour: anthracite
- Material: MDF

#### Dimensions

• installed (W x H x D): 390 x 1.170 x 390 mm

#### Application

- can be used in various ways with additional display accessories:
  - with info-panel D (9904161) or F (9904167)
  - with monitor
- The wire mesh (9995013) is suitable for the presentation of Accessories (6916000, 6166000, 6172000, 6176000, 6174000, 3036000)
- The wire mesh (9995013) and the hooks for the wire mesh (9995011) must be ordered separately

#### Notes

- No additional fixing material for the wire mesh and the monitor required
- order via separate order number
- Attention: The monitor can be requested via the marketing dept.!









## Order data

#### **MASTER cut 2600 and accessories**

| Art.no. | Description                                 | EAN-Code<br>4006885… | OU |
|---------|---|----------------------|----|
| 6918000 | 1 MASTER cut 2600 EU                        | 691803               | 1  |
| 6916000 | 1 Riving knife 159 mm                       | 691605               | 1  |
| 6917000 | 1 Riving knife 160-200 mm                   | 691704               | 1  |
| 6899000 | 1 Machine plate for MASTER cut 2600         | 689909               | 1  |
| 6166000 | 4 Clamping jaws with coating tips           | 616608               | 1  |
| 6176000 | 2 Quick clamps                              | 617605               | 1  |
| 3036000 | 1 Work table clamp PRO 65-150 W             | 303607               | 1  |
| 3457000 | 1 One hand clamp EHZ PRO 65-150             | 345706               | 1  |
| 3032000 | 1 One hand clamp EHZ PRO 100-450            | 303201               | 1  |
| 6102300 | 1 Tri-function work support stand           | 610231               | 1  |
| 6913000 | 1 FKS 145 Guide rail for circular hand saws | 691308               | 1  |
| 6914000 | 1 Extension set for FKS 145                 | 691407               | 1  |
| 6897000 | 1 Mounting set for FKS 145                  | 689701               | 1  |

## Merchandising

| Art.no. | Description  | EAN-Code<br>4006885… | OU |
|---------|--|----------------------|----|
| 9904151 | 1 Table display MASTER cut 2600 (D)                            | 016972               | 1  |
| 9904157 | 1 Table display MASTER cut 2600 (F)                            | 016989               | 1  |
| 9904100 | 1 Presentation stand   | 016811               | 1  |
|         | In combination with info-display / with info-display + monitor |                      |    |
| 9904161 | 1 Info-display MASTER cut 2600 (D) for presentation stand      | 016996               | 1  |
| 9904167 | 1 Info-display MASTER cut 2600 (F) for presentation stand      | 017009               | 1  |
|         | In combination with wire mesh / with wire mesh + monitor       |                      |    |
| 9995013 | 1 Wire mesh 1.164 x 124 mm                                     | 919686               | 1  |
| 9995011 | 1 Double hook 100 mm for wire mesh 40 mm                       | 907386               | 5  |

Note: The monitor can be requested via the marketing dept.



#### wolfcraft GmbH

Wolffstraße 1 56746 Kempenich Germany

Customer Service Tel: 0049 (0) 2655 51 280 Fax: 0049 (0) 2655 502 180 E-Mail: customerservice@wolfcraft.com

Technical Support Fax: 0049 (0) 2655 502 080 E-Mail: technical.service@wolfcraft.com