


Помпа бензинова за поливни води Honda WX10





Honda WX10 е бензинова помпа с капацитет 130 литра сладка вода в минута, която изпомпва през 1-инчова тръба. Оборудвана е с 4-тактов OHV двигател Honda GX250, има налягане 3,6 bar и може да работи 80 мин. Предназначена е за отводняване, напояване и универсално почистване. Използва се широко за изпомпване при наводнения и с повдигане на всмукателна глава от 7 метра, често се използва за източване на наводнени изби, мазета или лодки.

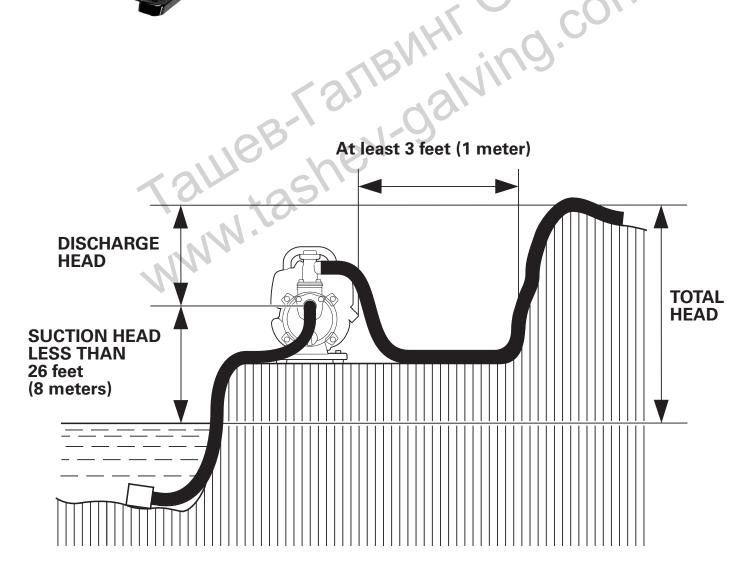





TECHNICAL INFORMATION

Specifications

Dimensions and weight

Model	WX10T		
Description code	WAGT		
Туре	A	C, C1	
Length	13.4 in (340 mm)		
Width	8.7 in (220 mm)		
Height	11.6 in (295 mm)		
Dry mass [weight]	13.4 lbs (6.1 kg)		

Engine design and performance

Engine design and performance		
Model	GX25T	
Engine type	4-stroke, overhead camshaft, single cylinder	
Displacement [bore × stroke]	1.53 cu-in (25.0 cm ³) [1.38 × 1.02 in (35.0 × 26.0 mm)]	
Engine oil capacity	2 oz (0.08 L)	
Fuel tank capacity	0.140 US gal (0.53 L)	
Cooling system	Forced air	
Ignition system	Transistor magneto	
PTO shaft rotation	Counterclockwise	

Tune-up Specifications

Spark plug gap	0.024 – 0.028 in (0.6 – 0.7 mm)	Refer to page 38.
Idle speed	4,100 ± 200 rpm	
Valve clearance (cold)	Intake: 0.08 ± 0.02 mm Exhaust: 0.11 ± 0.02 mm	See your authorized Honda dealer.
Other specifications	No other adjustments needed.	

Pump

Suction port diameter	1.0 in (25 mm)
Discharge port diameter	1.0 in (25 mm)
Total head (maximum)	121 ft (37 m)
Suction head (maximum)	26 ft (8 m)
Discharge capacity (maximum)	32 US gal (120 L)
	per minute
Self-priming time	80 seconds at 16.4 ft (5 m)