
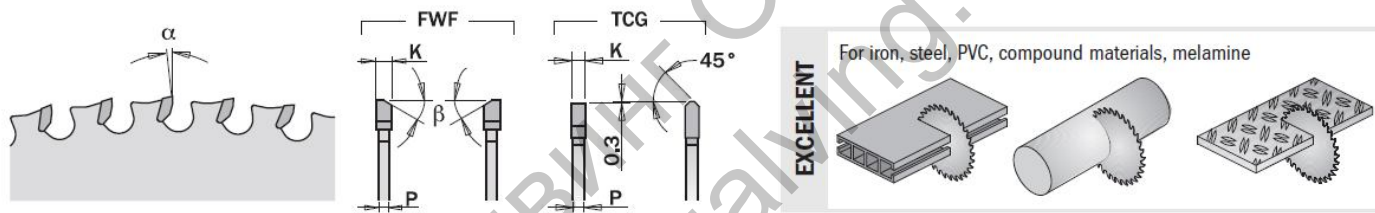


Dry cutter saw blades

226

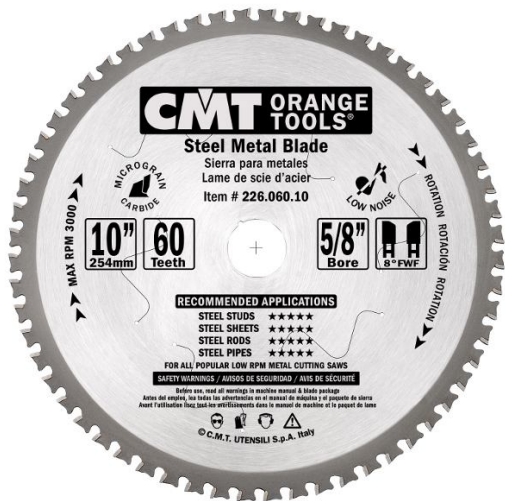

For crosscutting on different kinds of materials.
MACHINES: dry-cutter and mitre saws without lubrication.
MATERIAL: for ferrous materials and constructional steel.
WARNING: not recommended for non-ferrous metals, wood, glass, concrete, plastic.

 Tungsten carbide Tipped

 Low noise saw blade

 Cardboard box for saw blades

| D mm | B mm | RPM | RPM max | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|------|------------|----|---------|---------|----------|---------|-------------|
| 136,5* | 10 | 5500 | 10900 | 30 | 1,5 | 1,2 | 0° | TCG | 226.030.05 |
| 136,5* | 20 | 5500 | 10900 | 30 | 1,5 | 1,2 | 0° | TCG | 226.030.05H |
| 160 | 20 | 4700 | 9300 | 30 | 2,0 | 1,6 | 0° | TCG | 226.030.06H |
| 165 | 15,87<> | 4600 | 9000 | 36 | 1,5 | 1,2 | 0° | TCG | 226.036.06 |
| 165 | 20 | 4700 | 9300 | 36 | 1,5 | 1,2 | 0° | TCG | 226.036.06H |
| 184 | 15,87<> | 4100 | 8000 | 48 | 2,0 | 1,6 | 0° | TCG | 226.048.07 |
| 190 | 30 | 4000 | 8000 | 40 | 2,0 | 1,6 | 0° | TCG | 226.040.07M |
| 210 | 15,87<> | 3600 | 7300 | 48 | 2,2 | 1,8 | 0° | TCG | 226.048.08 |
| 210 | 30 | 3600 | 7300 | 48 | 2,2 | 1,8 | 0° | TCG | 226.048.08M |
| 235 | 30 | 3200 | 6400 | 48 | 2,2 | 1,8 | 0° | TCG | 226.048.09M |
| 254 | 15,87 | 3000 | 5900 | 48 | 2,2 | 1,8 | 0° | 8° FWF | 226.048.10 |
| 254 | 15,87 | 3000 | 5900 | 60 | 2,2 | 1,8 | 0° | 8° FWF | 226.060.10 |
| 254** | 30 | 3000 | 5900 | 60 | 2,2 | 1,8 | 0° | 8° FWF | 226.060.10M |
| 305 | 25,4 | 2500 | 4900 | 60 | 2,2 | 1,8 | 0° | 8° FWF | 226.060.12 |
| 305 | 25,4 | 2500 | 4900 | 80 | 2,2 | 1,8 | 0° | 8° FWF | 226.080.12 |
| 305** | 30 | 2500 | 4900 | 80 | 2,2 | 1,8 | 0° | 8° FWF | 226.080.12M |
| 355 | 25,4 | 2100 | 4200 | 80 | 2,2 | 1,8 | 0° | 8° FWF | 226.080.14 |
| 355 | 25,4 | 2100 | 4200 | 90 | 2,2 | 1,8 | 0° | 8° FWF | 226.090.14 |
| 355** | 30 | 2100 | 4200 | 90 | 2,2 | 1,8 | 0° | 8° FWF | 226.090.14M |

* Non-low noise

** Saw blade in cardboard box

Ташев-Галвинг ООД
www.tashev-galving.com