



CorePro LEDlinear MV

CorePro LED linear R7S 118mm 14-100W 830 D

CorePro R7S is a retrofit replacement for traditional double-ended linear R7S lamps. Its 'light all around' design delivers light just like a halogen lamp. Within the range you can choose dimmable products which have deep dimming function that enables a cozy ambience when using a dimmable fixture.

Product data

General Information		Warm Up Time to 60% Light (Nom)	
Cap-Base	R7S [R7s]	Warm Up Time to 60% Light (Nom)	0.5 s
EU RoHS compliant	Yes	Power Factor (Nom)	0.8
Nominal Lifetime (Nom)	15000 h	Voltage (Nom)	220-240 V
Switching Cycle	50000X	Temperature	
Technical Type	14-100W	T-Case Maximum (Nom)	90 °C
Light Technical		Controls and Dimming	
Color Code	830 [CCT of 3000K]	Dimmable	Yes
Luminous Flux (Nom)	1600 lm	Approval and Application	
Color Designation	White (WH)	Energy Efficiency Label (EEL)	A+
Correlated Color Temperature (Nom)	3000 K	Energy Saving Product	Yes
Luminous Efficacy (rated) (Nom)	114.29 lm/W	Suitable For Accent Lighting	No
Color Consistency	<6	Energy Consumption kWh/1000 h	14 kWh
Color Rendering Index (Nom)	80	Product Data	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Full product code	871869657879700
Operating and Electrical		Order product name	CorePro LED linear R7S 118mm 14-100W 830 D
Input Frequency	50 to 60 Hz	EAN/UPC - Product	8718696578797
Power (Nom)	14 W	Order code	929001243702
Lamp Current (Nom)	74 mA	Numerator - Quantity Per Pack	1
Wattage Equivalent	100 W	Numerator - Packs per outer box	10
Starting Time (Nom)	0.5 s		

CorePro LEDlinear MV

Material Nr. (12NC)	929001243702
Net Weight (Piece)	0.095 kg



Dimensional drawing

C

Product	D	C
CorePro LED linear R7S 118mm 14-100W 830 D	29 mm	118 mm


Linear 220V 15W-100W1500lm 3000K R7S Dim

Photometric data

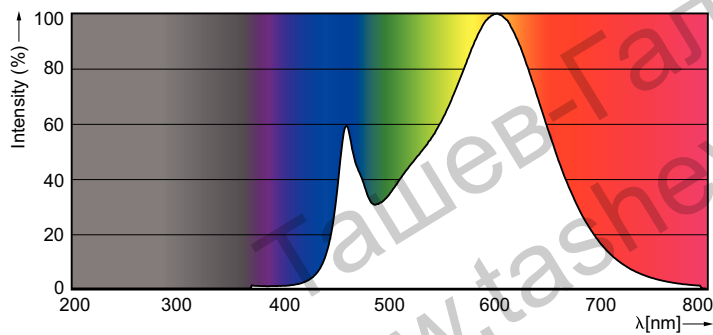

LED Lamps, CorePro R7S 118mm 14-100W /830 D

LED Lamps, CorePro R7S 118mm 14-100W /830 D



LED Lamps, CorePro R7S 118mm 14-100W /830 D