



MASTER TL-E Circular Super 80

TL-E 22W/840 1CT/12

Low-pressure mercury discharge lamps with a circular 26 mm tube

Ташев-Галвинг ООД
www.tashev-galving.com

PHILIPS

Product data

• General Information

Cap-Base	G10Q [G10q]
Bulb Shape	C-T9 [C-T 29 mm (C-T9)]
Life To 50% Failures (Nom)	13000 h
LSF 2000 h Rated	80 %
LSF 4000 h Rated	74 %
LSF 6000 h Rated	70 %
LSF 8000 h Rated	67 %

• Light Technical

Colour Code	840 [CCT of 4000K (841)]
Luminous Flux (Nom)	1300 lm
Luminous Flux (Rated) (Nom)	1300 lm
Colour Designation	Cool White (CW)
Chromaticity	381
Coordinate X (Nom)	
Chromaticity	379
Coordinate Y (Nom)	
Colour Temperature, horizontal (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	59 lm/W
Colour Rendering Index horiz (Nom)	85
Depreciation 2000 hrs	90 %
LLMF 4000 h Rated	87 %
Depreciation 5000 hrs	85 %
LLMF 8000 h Rated	84 %

• Operating and Electrical

Power (Rated) (Nom)	22 W
---------------------	------

Lamp Current (Nom)	0.400 A
Voltage (Nom)	62 V

• Temperature

Design Temperature (Nom)	25 °C
--------------------------	-------

• Controls and Dimming

Dimmable	Yes
----------	-----

• Approval and Application

Energy Efficiency Label	B
Mercury (Hg) Content (Nom)	8 mg
Energy Consumption kWh/1000 h	24 kWh

• Product Data


Full product code	872790084050600
Order product name	TL-E 22W/840 1CT/12
EAN/UPC - Product	8727900840506
Order code	84050600
Numerator -	1
Quantity Per Pack	
Numerator - Packs per outer box	12
Material Nr. (12NC)	928026284070
Net Weight (Piece)	0.110 kg
ILCOS Code	FSC-22/40/1B-E-G10q-29/210

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

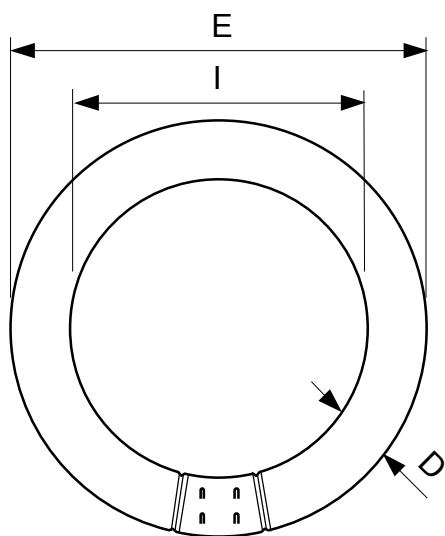



G10q, C-T9

TL-E 22W/840

Product	D	D	E	E	I	I
TL-E 22W/840 1CT/12	30.9 mm	26.2 mm	205.0 mm	213.5 mm	149.1 mm	155.6 mm



Photometric data

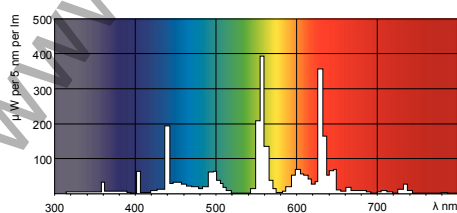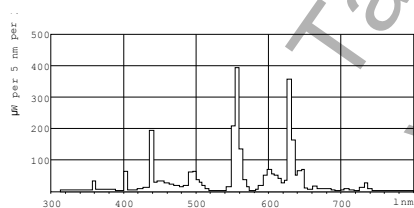

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change

Ташев-Галвинг ООД
www.tashev-galving.com