


TRMS 600A_{AC} MINI CURRENT CLAMP METER


DCM300MINI



Residential



Industry

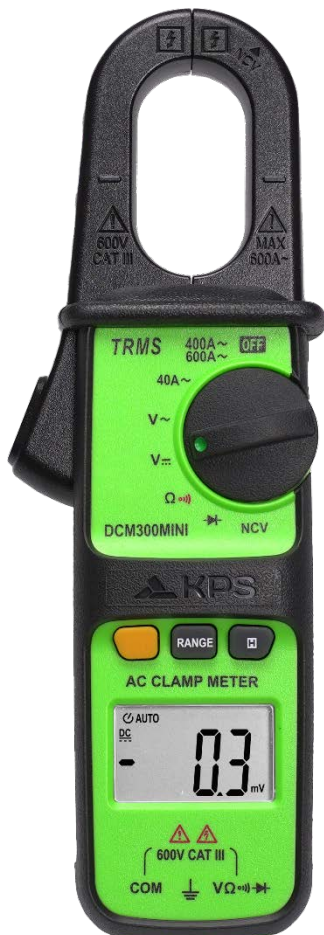

Key Features :

- TRMS
- Display with 4000 counts
- Current up to 600A ac
- Measurements also in Voltage ac/dc, Resistance,
- Non Contact Voltage detection
- Auto ranging
- Auto Power Off
- Safety rating: CATIII 600V

CE UK
CA



TRMS



DCM300MINI

TRMS 600AAC MINI CURRENT CLAMP METER

General	
Display	4000 counts
Sampling rate	3 times/sec
Auto power off	✓
Hold	✓
Auto-ranging	✓
Low Battery Indication	✓
Jaw opening size	Φ26mm/1.0"
Drop test	4 feet drop test
Dimensions	210 x 69x 41 mm (8.2x 2.7 x 1.6 in)
Weight	about 247g(8.7oz)
Power Supply	3x1.5V AAA Batteries
Standars	EC 61010-1, IEC/EN61010-2-032
Safety rating	CAT III 600V/CAT IV 300V
Accessories included	Batteries, Manual, Carrying pouch

DCM300MINI

TRMS 600AAC MINI CURRENT CLAMP METER

Specs		
FUNCTION	RANGE	RESOLUTION
TRMS	✓	
AC Current	40.00A/400.0A/600A AC	0.01A/0.1A/1A
AC Voltage	400.0mV/4.000V/40.00V/400.0V/600V	0.1mV/0.001V/0.01V/0.1V/1V
DC Voltage	400.0mV/4.000V/40.00V/400.0V/600V	0.1mV/0.001V/0.01V/0.1V/1V
Resistance	400.1Ω/4.000kΩ/40.00kΩ/400.0kΩ /4.000MΩ/40.00MΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ /0.001MΩ/0.01MΩ
Continuity and Diode Test		✓
VoltSense (NCV)		High Sensitivity(80V-600V) Low Sensitivity(160V-600V)

Product Code Information	
SKU	KPSDCM300MINICBINT
EAN code	8435394788913
UPC code	810053678906
Pcs/export carton	36