



DSS Series 2M

IDROPULTRICI ALTA PRESSIONE
high pressure washer



porta accessori integrato
built-in
accessory holders

battistrada
in gomma
rubber wheels

avvolgitubo statico
static hose reel

interruttore rotativo a 3 posizioni
off/Eco Speed/Full Speed
3 positions rotative switch
off/Eco Speed/Full Speed

sgancio tubo AP facilitato
easy HP hose release




Caratteristiche Generali

- Carrello a 2 ruote completo di manico con avvolgitubo statico per tubo AP (6m)
- Pompa a 3 pistoni assiali comandati dal piattello oscillante, testa in alluminio
- Pistoni in acciaio inox temperato
- Valvola di sicurezza automatica con azzeramento della pressione nella testa pompa
- Motore universale con protezione termica
- Lunghezza cavo elettrico 5m

General Features

- Two-wheel trolley with handle and hose reel (6m HP hose)
- 3 Axial stainless steel pistons wobble-plate pump
- Tempered stainless steel pistons
- Automatic by-pass valve with pump head pressure discharge
- Single-phase universal motor with thermal protector
- Electric cable length 5m

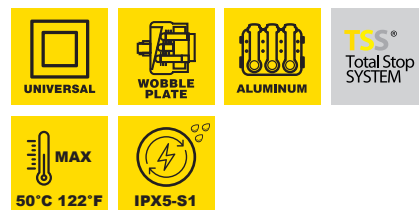

MOD	COD	MAX		MAX					KG NET	
		bar	psi	l/h	gph	kW	rpm	Hz	V	kg
2M	15018	160	2300	460	122	2,2	3400	50-60	220-240~	10,3



Accessori standard Standard accessories

